

TR 907FC-570-14

Medium Frequency Thyristor

Properties

- Amplifying gate
- High operational capability
- Optimized turn-on and turn-off parameters
- High operating frequency

Applications

- Power switching applications

Key Parameters

V_{DRM} , V_{RRM}	= 1 400	V
I_{TAV}	= 568	A
I_{TSM}	= 11.0	kA
V_{TO}	= 2.311	V
r_T	= 0.365	mΩ
t_q	= 8.0	μs

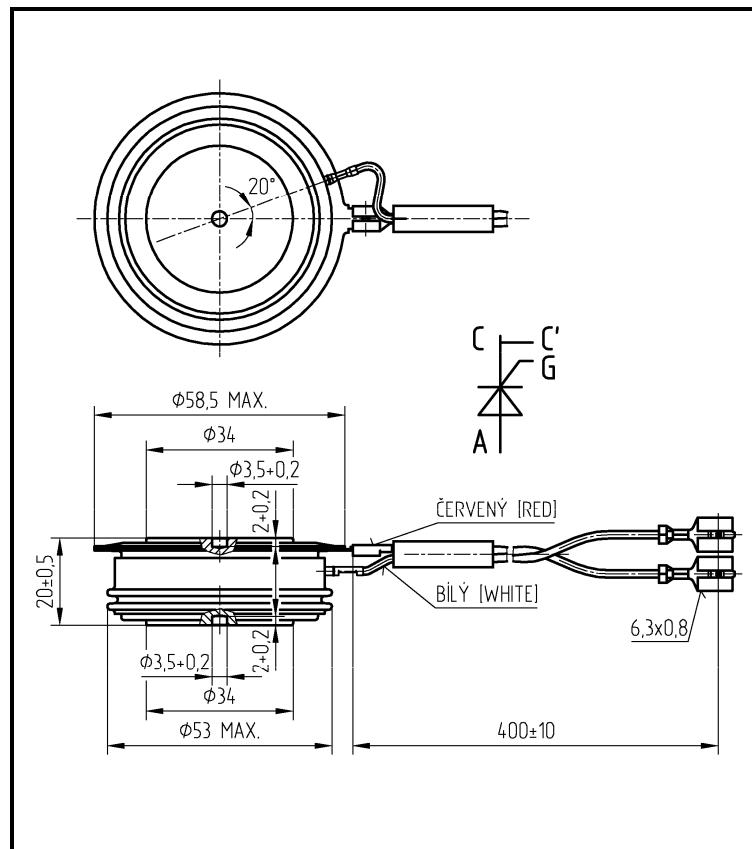
Types

	V_{RRM} , V_{DRM}
TR 907FC-570-14	1 400 V
TR 907FC-570-12	1 200 V
TR 907FC-570-10	1 000 V

Conditions: $T_j = -40 \div 125^\circ\text{C}$,
half sine waveform,
 $f = 50 \text{ Hz}$, note 1

Mechanical Data

F_m	Mounting force	$10 \pm 2 \text{ kN}$
m	Weight	0.20 kg
D_s	Surface creepage distance	13 mm
D_a	Air strike distance	8 mm



Maximum Ratings			Maximum Limits	Unit
V_{RRM}	Repetitive peak reverse and off-state voltage	TR 907FC-570-14	1 400	V
V_{DRM}	$T_j = -40 \div 125^\circ\text{C}$, note 1	TR 907FC-570-12	1 200	
		TR 907FC-570-10	1 000	
I_{TRMS}	RMS on-state current $T_c = 70^\circ\text{C}$, half sine waveform, $f = 50\text{ Hz}$		892	A
I_{TAVm}	Average on-state current $T_c = 70^\circ\text{C}$, half sine waveform, $f = 50\text{ Hz}$		568	A
I_{TSM}	Peak non-repetitive surge half sine pulse, $V_R = 0\text{ V}$	$t_p = 10\text{ ms}$ $t_p = 8.3\text{ ms}$	11 000 11 750	A
$\int t$	Limiting load integral half sine pulse, $V_R = 0\text{ V}$	$t_p = 10\text{ ms}$ $t_p = 8.3\text{ ms}$	605 000 573 000	A^2s
$(di_T/dt)_{cr}$	Critical rate of rise of on-state current $I_T = I_{TAVm}$, half sine waveform, $f = 50\text{ Hz}$, $V_D = 2/3 V_{DRM}$, $t_r = 0.3\text{ }\mu\text{s}$, $I_{GT} = 2\text{ A}$		800	$\text{A}/\mu\text{s}$
$(dv_D/dt)_{cr}$	Critical rate of rise of off-state voltage $V_D = 2/3 V_{DRM}$		1 000	$\text{V}/\mu\text{s}$
P_{GAVm}	Maximum average gate power losses		3	W
I_{FGM}	Peak gate current		10	A
V_{FGM}	Peak gate voltage		12	V
V_{RGM}	Reverse peak gate voltage		10	V
$T_{jmin} - T_{jmax}$	Operating temperature range		-40 \div 125	$^\circ\text{C}$
$T_{stgmin} - T_{stgmax}$	Storage temperature range		-40 \div 125	$^\circ\text{C}$


Unless otherwise specified $T_j = 125^\circ\text{C}$

Note 1: De-rating factor of 0.13% V_{RRM} or V_{DRM} per $^\circ\text{C}$ is applicable for T_j below 25 $^\circ\text{C}$

Characteristics		Value			Unit
		min.	typ.	max.	
V_{TM}	Maximum peak on-state voltage $I_{TM} = 1\ 500\ A$			2.860	V
V_{To} r_T	Threshold voltage Slope resistance $I_{T1} = 895\ A, I_{T2} = 2\ 686\ A$			2.311 0.365	V mΩ
I_{DM}	Peak off-state current $V_D = V_{DRM}$			70	mA
I_{RM}	Peak reverse current $V_R = V_{RRM}$			70	mA
t_{gd}	Delay time $T_j = 25\ ^\circ C, V_D = 0.4\ V_{DRM}, I_{TM} = I_{TAVm},$ $t_r = 0.3\ \mu s, I_{GT} = 2\ A$			2.0	μs
t_{q1}	Turn-off time $I_T = 500\ A, di_T/dt = -50\ A/\mu s,$ $V_R = 100\ V, V_D = 2/3\ V_{DRM},$ $dv_D/dt = 50\ V/\mu s$	group of t_q B C D		8.0 10.0 12.5	μs
Q_{rr}	Recovery charge <i>the same conditions as at t_{q1}</i>			80	μC
I_{rrM}	Reverse recovery current <i>the same conditions as at t_{q1}</i>			60	A
I_H	Holding current	$T_j = 25\ ^\circ C$ $T_j = 125\ ^\circ C$		250 150	mA
I_L	Latching current	$T_j = 25\ ^\circ C$ $T_j = 125\ ^\circ C$		1\ 500 1\ 000	mA
V_{GT}	Gate trigger voltage $V_D = 12V, I_T = 4\ A$	$T_j = -40\ ^\circ C$ $T_j = 25\ ^\circ C$ $T_j = 125\ ^\circ C$	0.25	4 3 2	V
I_{GT}	Gate trigger current $V_D = 12V, I_T = 4\ A$	$T_j = -40\ ^\circ C$ $T_j = 25\ ^\circ C$ $T_j = 125\ ^\circ C$	10	1000 500 300	mA

Unless otherwise specified $T_j = 125\ ^\circ C$

<i>Thermal Parameters</i>		<i>Value</i>	<i>Unit</i>
R_{thjc}	Thermal resistance junction to case <i>double side cooling</i>	32.0	K/kW
	<i>anode side cooling</i>	52.0	
	<i>cathode side cooling</i>	83.0	
R_{thch}	Thermal resistance case to heatsink <i>double side cooling</i>	10.0	K/kW
	<i>single side cooling</i>	20.0	

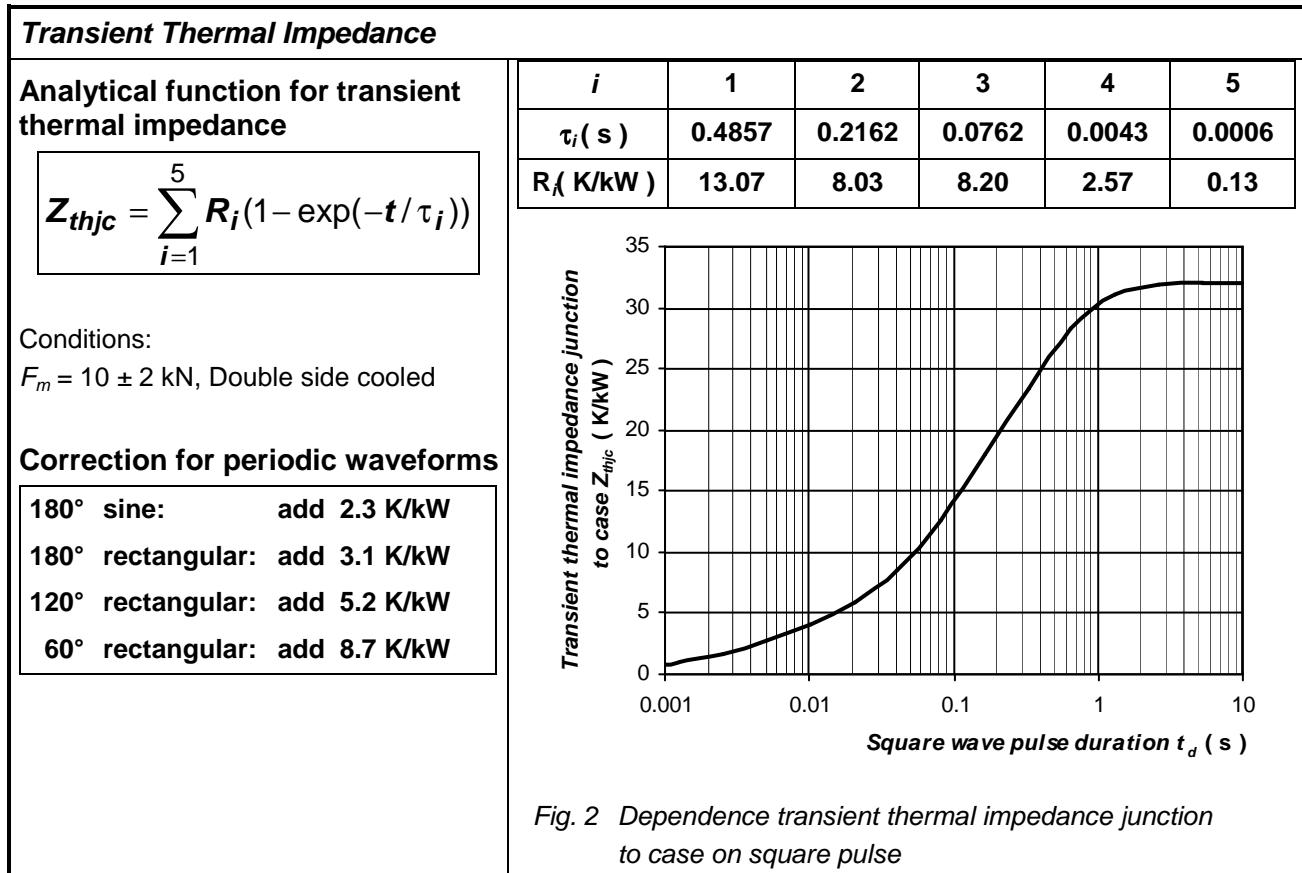

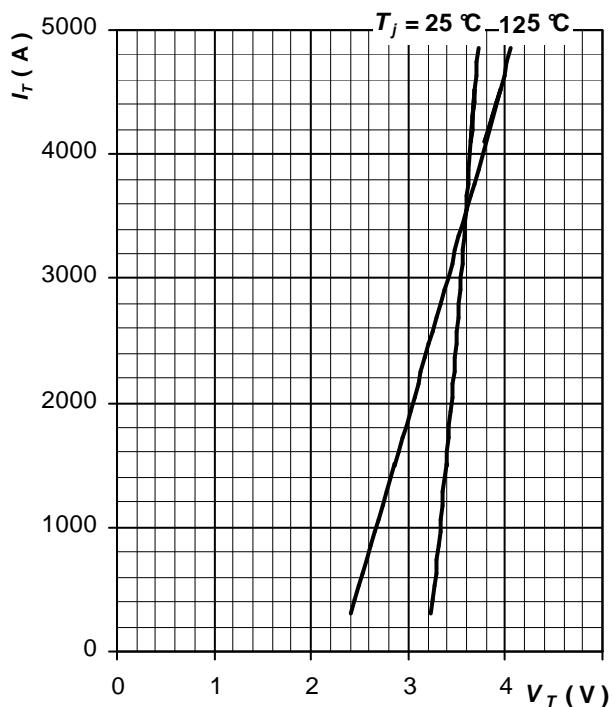
On-State Characteristics

Fig. 3 Maximum on-state characteristics


Gate Trigger Characteristics

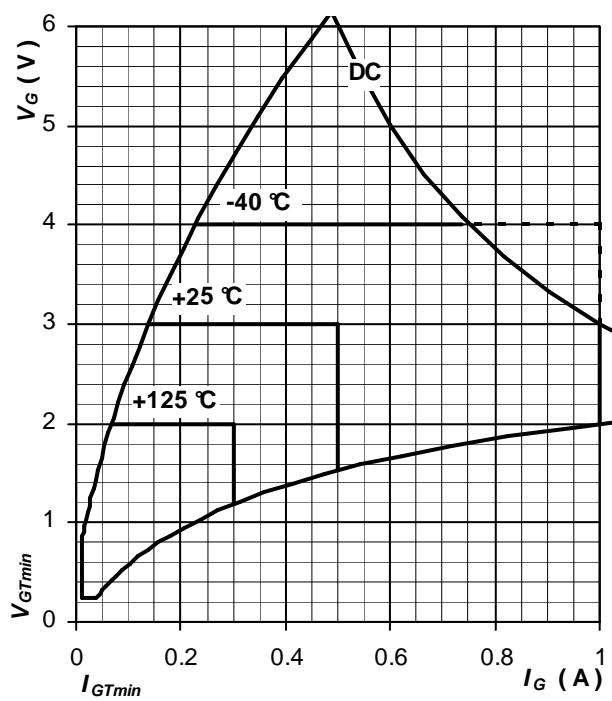Fig. 4 Gate trigger characteristics

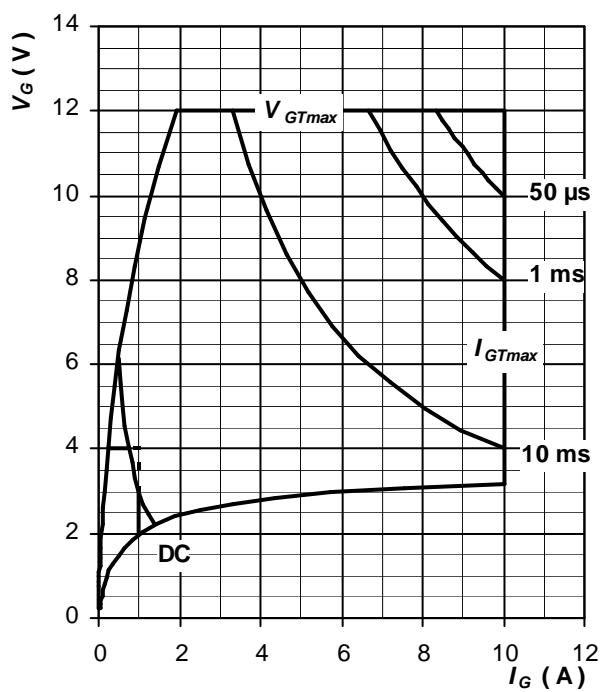


Fig. 5 Maximum peak gate power loss

Surge Characteristics

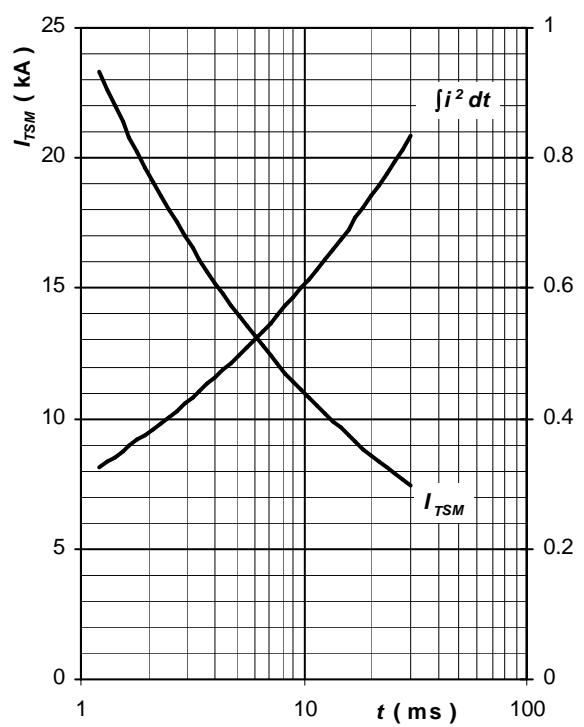


Fig. 6 Surge on-state current vs. pulse length,
half sine wave, single pulse,
 $V_R = 0 \text{ V}$, $T_j = T_{jmax}$

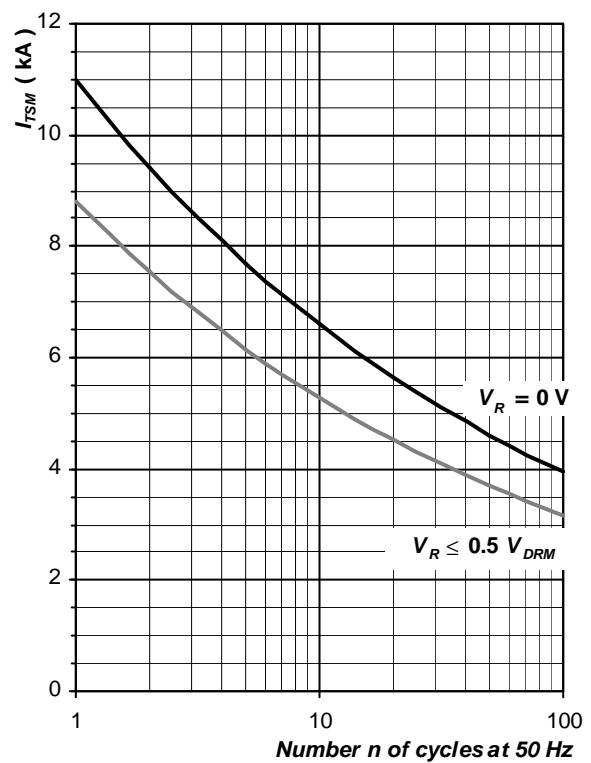


Fig. 7 Surge on-state current vs. number
of pulses, half sine wave, $T_j = T_{jmax}$

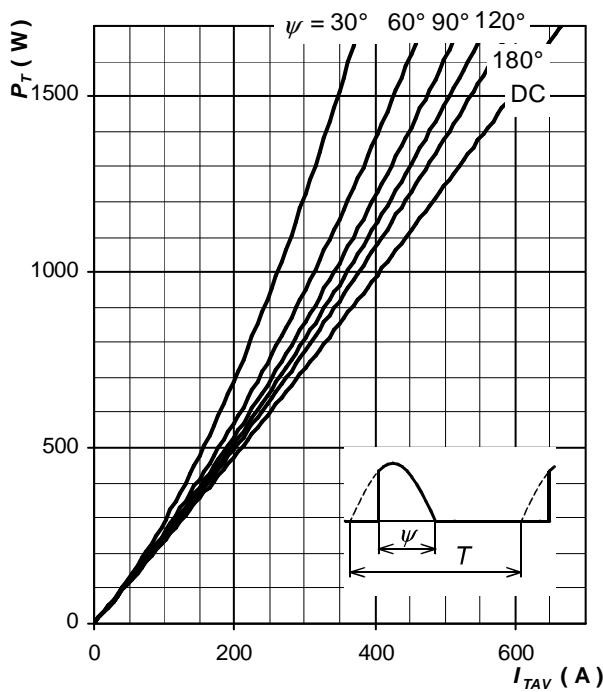
Power Loss and Maximum Case Temperature Characteristics


Fig. 8 On-state power loss vs. average on-state current, sine waveform, $f = 50$ Hz, $T = 1/f$

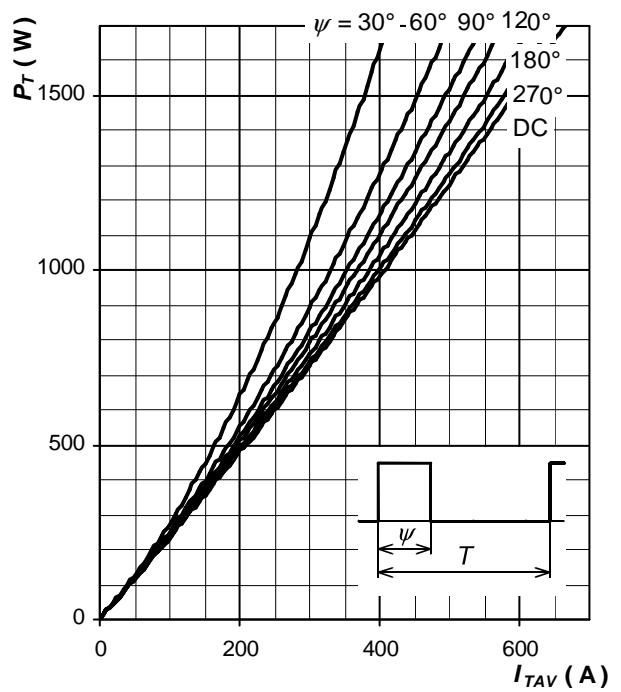


Fig. 9 On-state power loss vs. average on-state current, square waveform, $f = 50$ Hz, $T = 1/f$

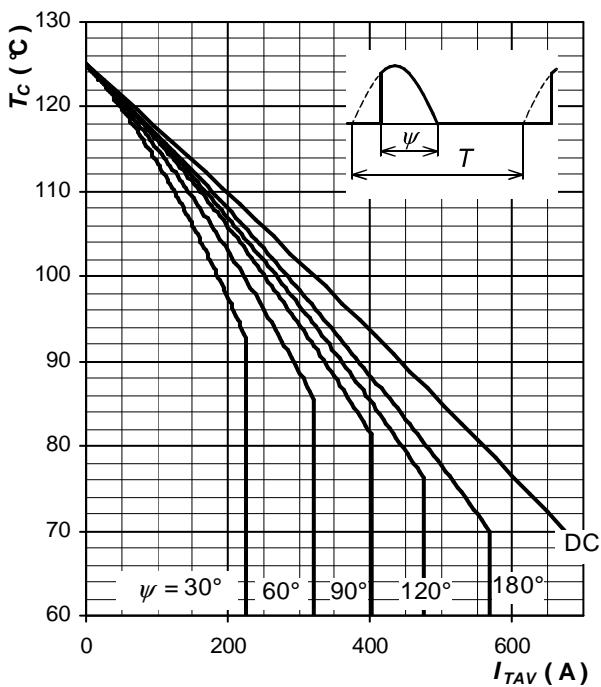


Fig. 10 Max. case temperature vs. aver. on-state current, sine waveform, $f = 50$ Hz, $T = 1/f$

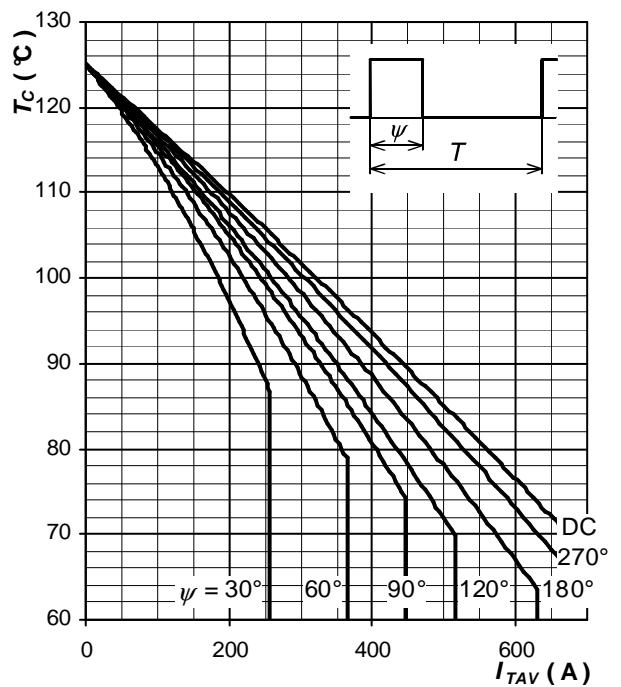


Fig. 11 Max. case temperature vs. aver. on-state current, square waveform, $f = 50$ Hz, $T = 1/f$

Note 2: Figures number 8 ÷ 11 have been calculated without considering any turn-on and turn-off losses. They are valid for $f = 50$ or 60 Hz operation.

Turn-off Time, Parameter Relationship

Maximum values of turn-off time at application specific conditions are given by using this formula:

$$t_q = t_{q1} \cdot \frac{t_q}{t_{q1}}(T_j) \cdot \frac{t_q}{t_{q1}}(dv_D/dt) \cdot \frac{t_q}{t_{q1}}(-di_T/dt)$$

where:

t_{q1} is turn-off time at standard conditions,
see section "Characteristics"

$\frac{t_q}{t_{q1}}(T_j)$ is factor to be taken from fig. 12

$\frac{t_q}{t_{q1}}(dv_D/dt)$ is factor to be taken from fig. 13

$\frac{t_q}{t_{q1}}(-di_T/dt)$ is factor to be taken from fig. 14

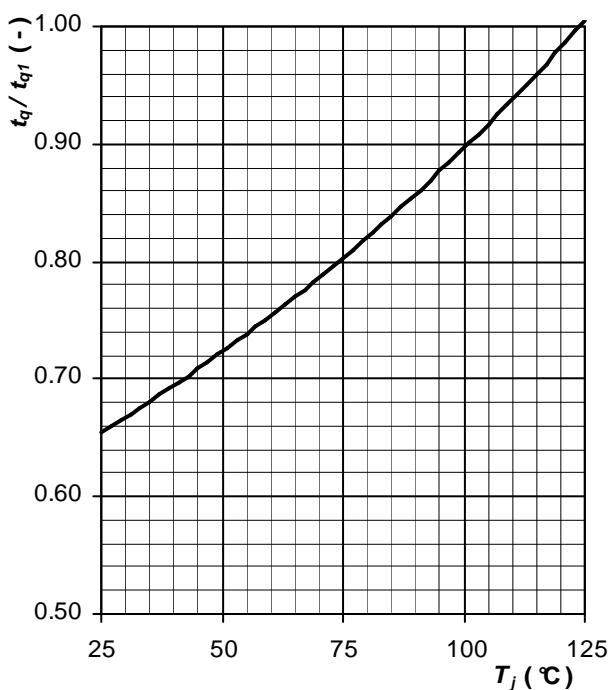


Fig. 12 Normalised maximum turn-off time
vs. junction temperature

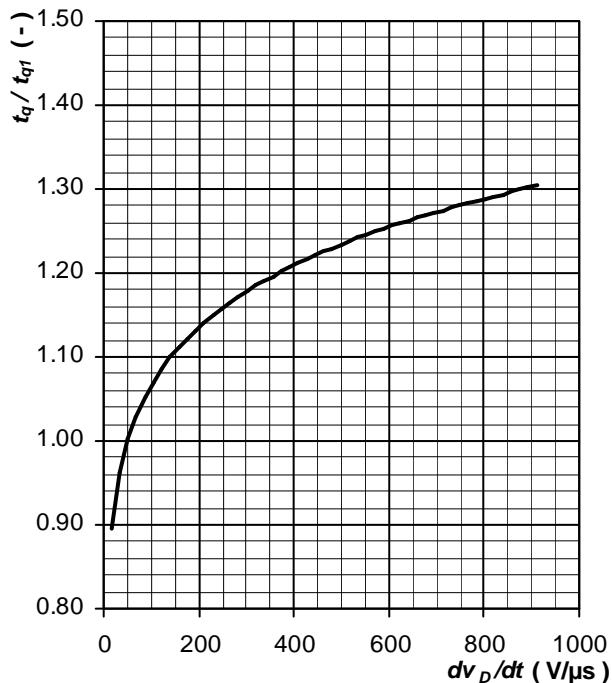


Fig. 13 Normalised maximum turn-off time
vs. rate of rise of off-state voltage

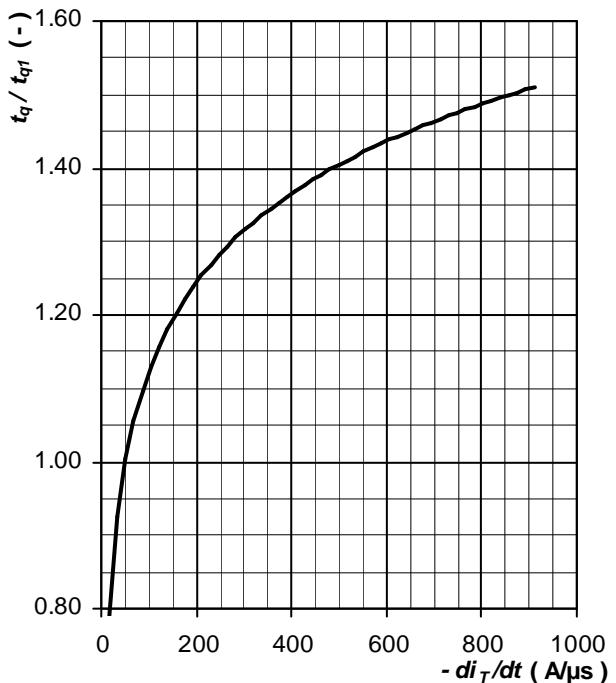


Fig. 14 Normalised maximum turn-off time
vs. rate of fall of on-state current

Turn-on Characteristics

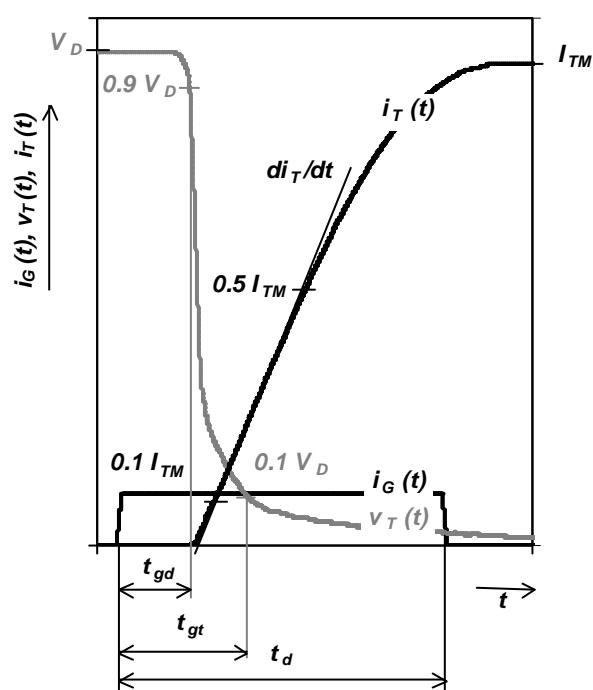


Fig. 15 Typical waveforms and definition of symbols at turn-on of a thyristor

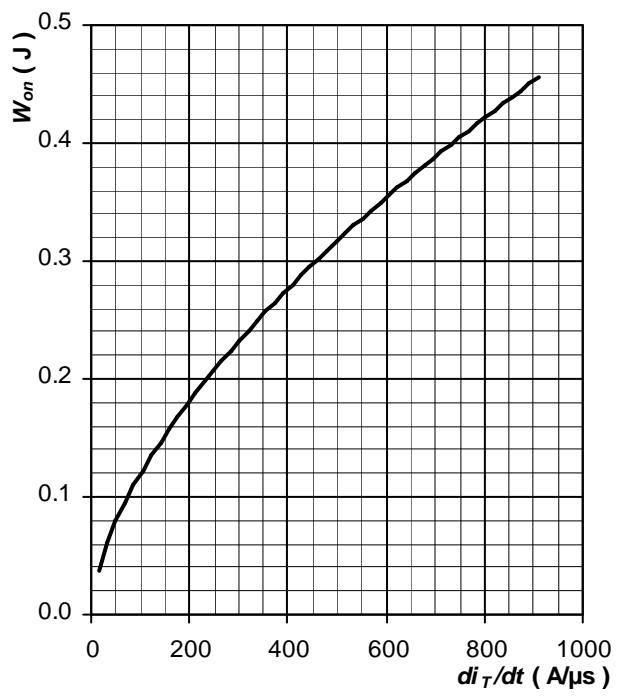


Fig. 16 Maximum turn-on energy per pulse vs. rate of rise on-state current, $T_j = T_{jmax}$

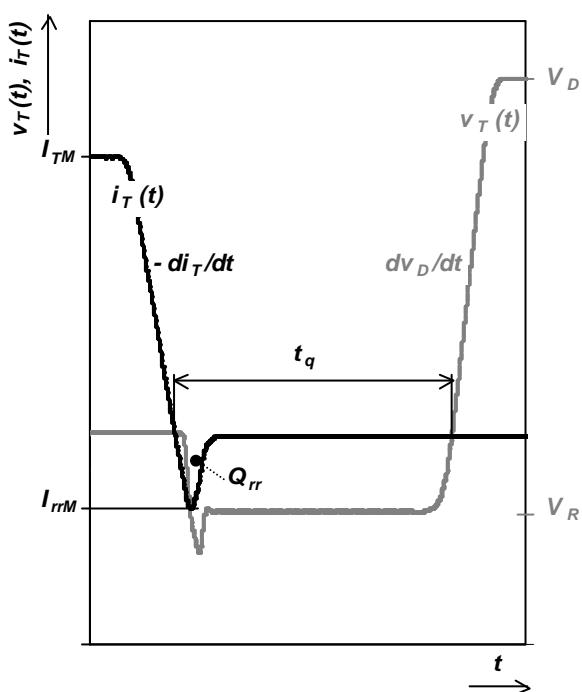
Turn-off Characteristics

Fig. 17 Typical waveforms and definition of symbols at turn-off of a thyristor, inductive switching without RC snubber

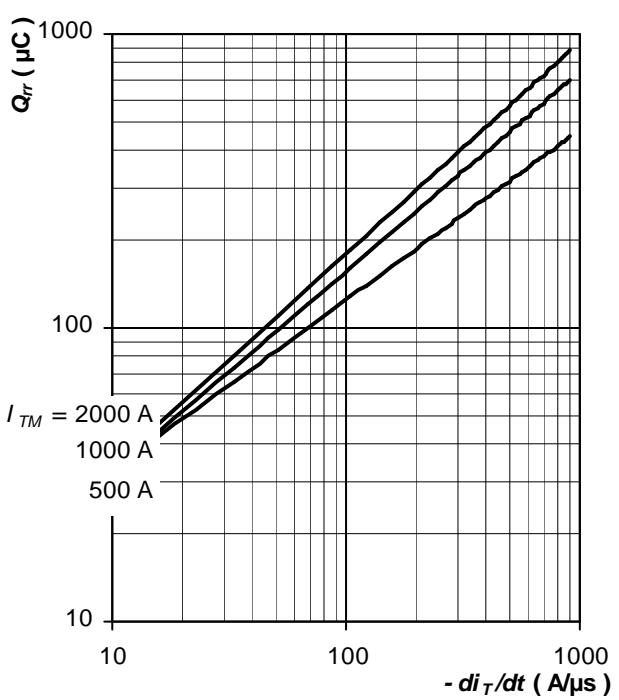


Fig. 18 Max. recovered charge vs. rate of fall on-state current, trapezoid pulse, $V_R = 100$ V, $T_j = T_{j\max}$

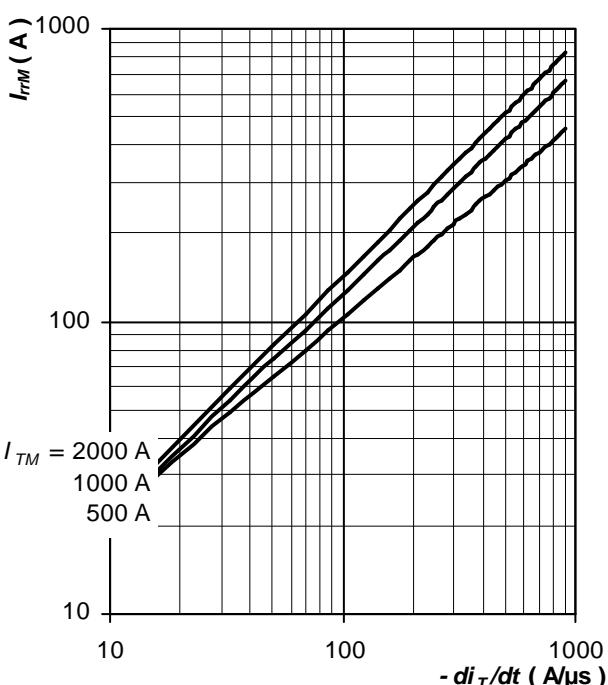


Fig. 19 Max. reverse recovery current vs. rate of fall on-state current, trapezoid pulse, $V_R = 100$ V, $T_j = T_{j\max}$

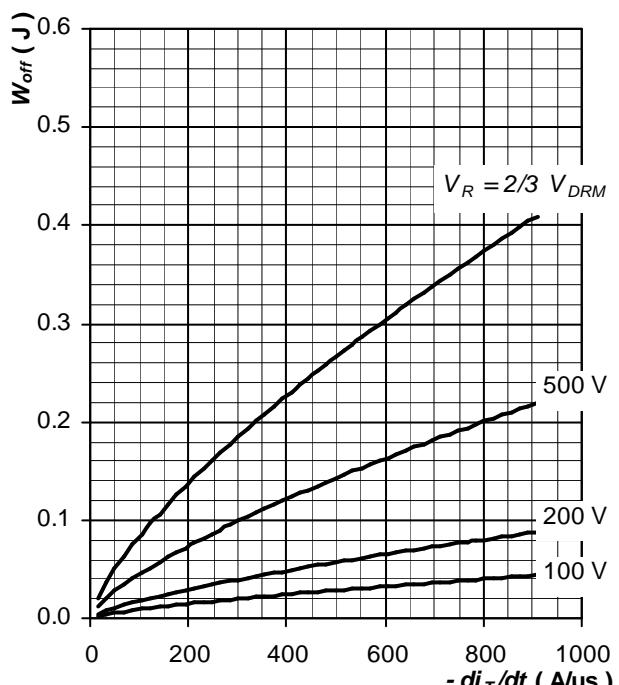


Fig. 20 Maximum turn-off energy per pulse vs. rate of fall on-state current, trapezoid pulse, inductive switching without RC snubber, $I_{TM} = 2\,000$ A, $T_j = T_{j\max}$, $V_R = \frac{2}{3} V_{DRM}$

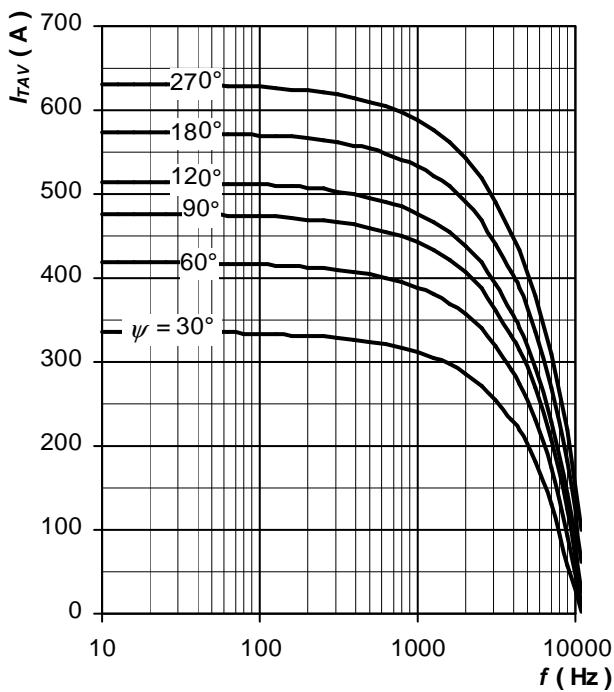
Frequency Ratings

Fig. 21 Average on-state current vs. frequency,
trapezoid waveform, $T_C = 70\text{ }^{\circ}\text{C}$,
 $di_T/dt = \pm 100\text{ A}/\mu\text{s}$, $V_R = 100\text{ V}$

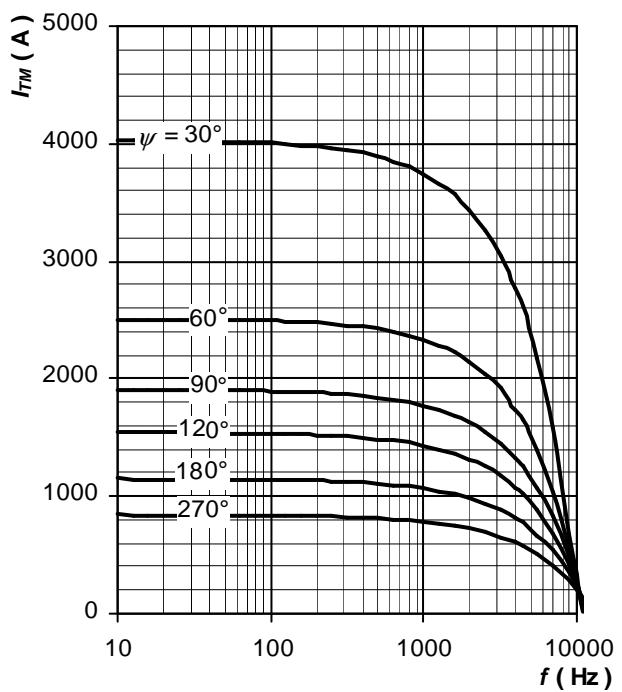


Fig. 22 Maximum on-state current vs. frequency,
trapezoid waveform, $T_C = 70\text{ }^{\circ}\text{C}$,
 $di_T/dt = \pm 100\text{ A}/\mu\text{s}$, $V_R = 100\text{ V}$

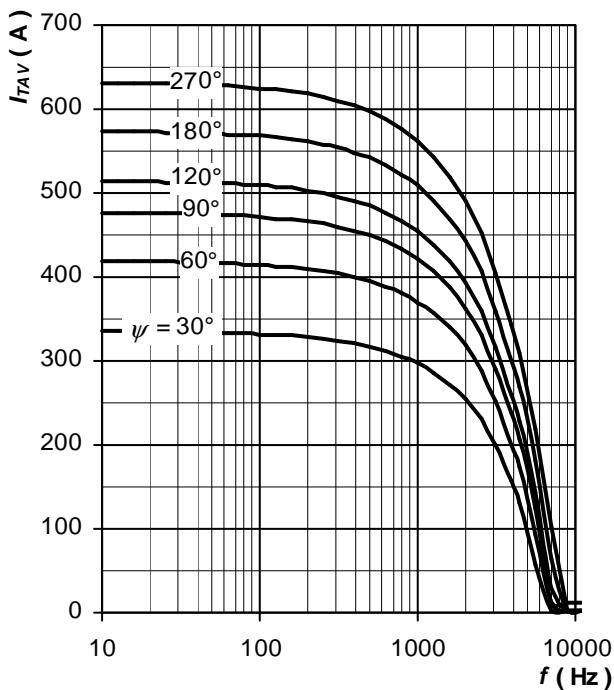


Fig. 23 Average on-state current vs. frequency,
trapezoid waveform, $T_C = 70\text{ }^{\circ}\text{C}$,
 $di_T/dt = \pm 100\text{ A}/\mu\text{s}$, $V_R = 2/3\text{ }V_{DRM}$

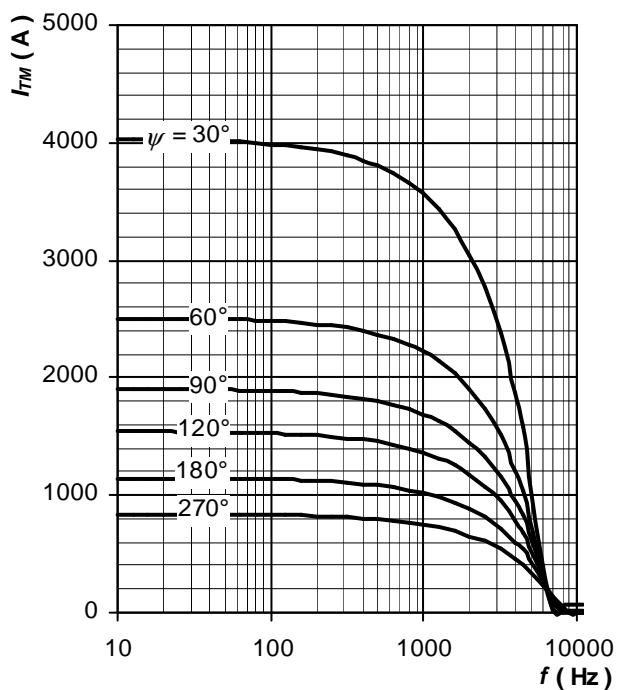


Fig. 24 Maximum on-state current vs. frequency,
trapezoid waveform, $T_C = 70\text{ }^{\circ}\text{C}$,
 $di_T/dt = \pm 100\text{ A}/\mu\text{s}$, $V_R = 2/3\text{ }V_{DRM}$

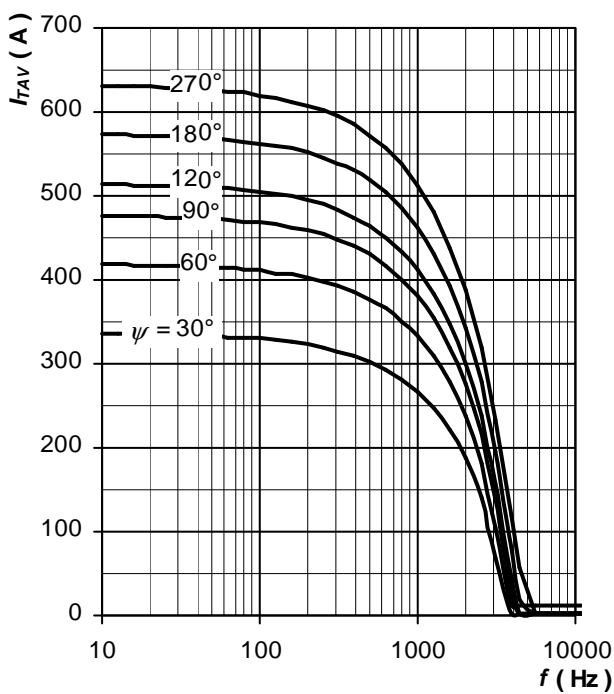
Frequency Ratings

Fig. 25 Average on-state current vs. frequency,
trapezoid waveform, $T_C = 70^\circ\text{C}$,
 $di_T/dt = \pm 500 \text{ A}/\mu\text{s}$, $V_R = 100 \text{ V}$

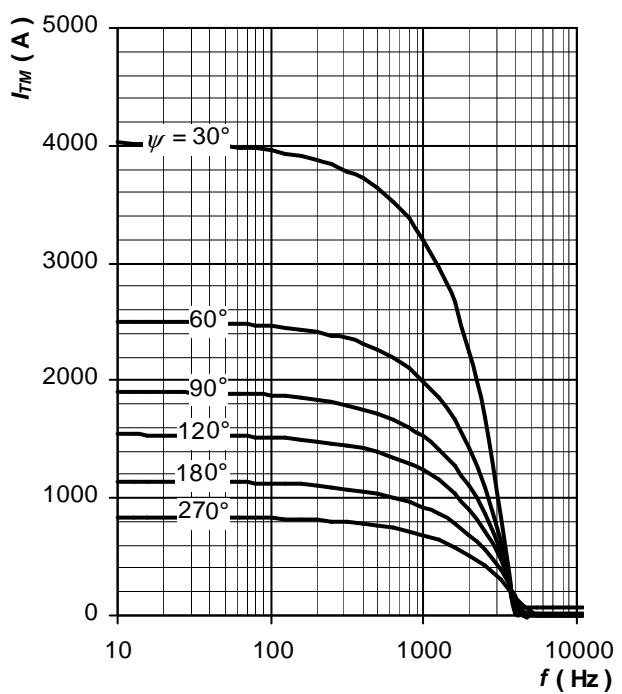


Fig. 26 Maximum on-state current vs. frequency,
trapezoid waveform, $T_C = 70^\circ\text{C}$,
 $di_T/dt = \pm 500 \text{ A}/\mu\text{s}$, $V_R = 100 \text{ V}$

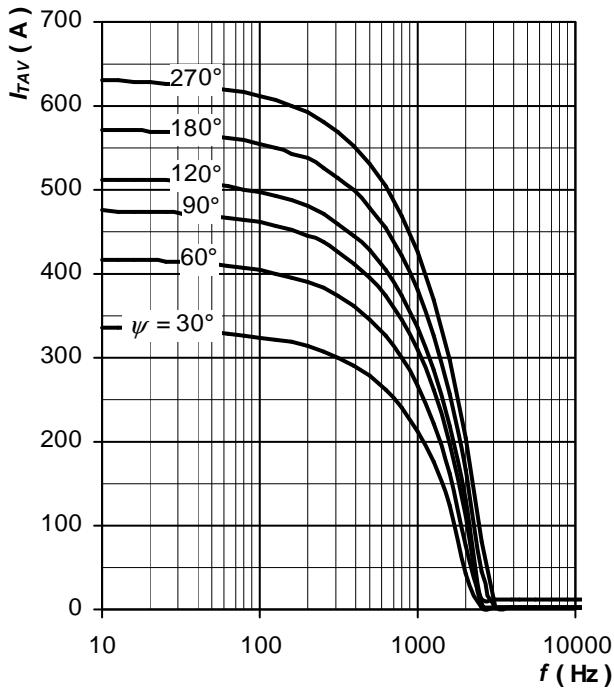


Fig. 27 Average on-state current vs. frequency,
trapezoid waveform, $T_C = 70^\circ\text{C}$,
 $di_T/dt = \pm 500 \text{ A}/\mu\text{s}$, $V_R = 2/3 V_{DRM}$


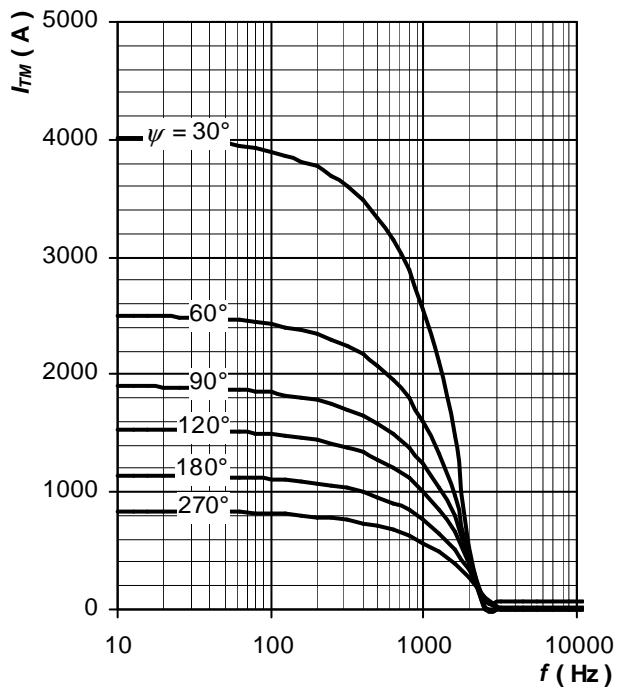
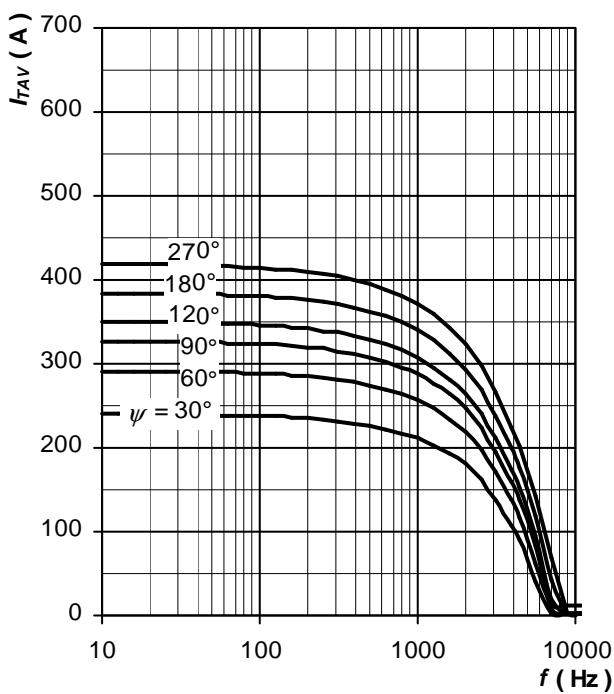



Fig. 28 Maximum on-state current vs. frequency,
trapezoid waveform, $T_C = 70^\circ\text{C}$,
 $di_T/dt = \pm 500 \text{ A}/\mu\text{s}$, $V_R = 2/3 V_{DRM}$

Frequency Ratings


*Fig. 29 Average on-state current vs. frequency,
trapezoid waveform, $T_C = 90^\circ\text{C}$,
 $di_T/dt = \pm 100 \text{ A}/\mu\text{s}$, $V_R = 100 \text{ V}$*

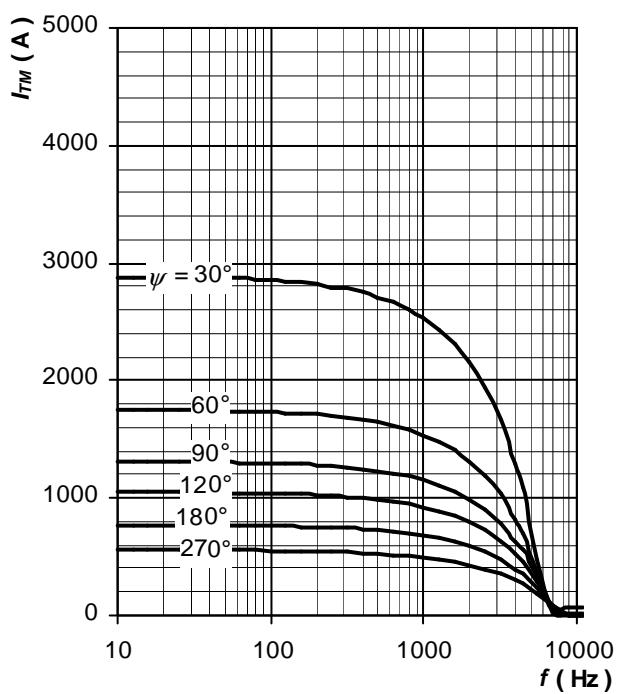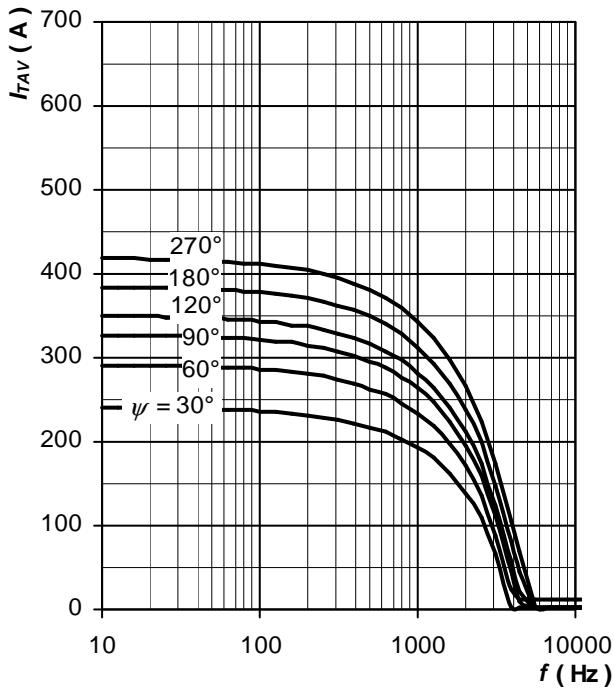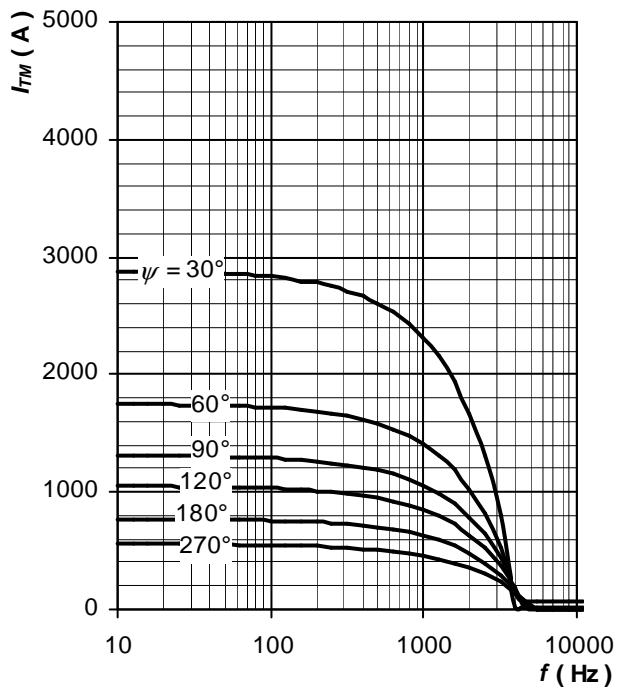

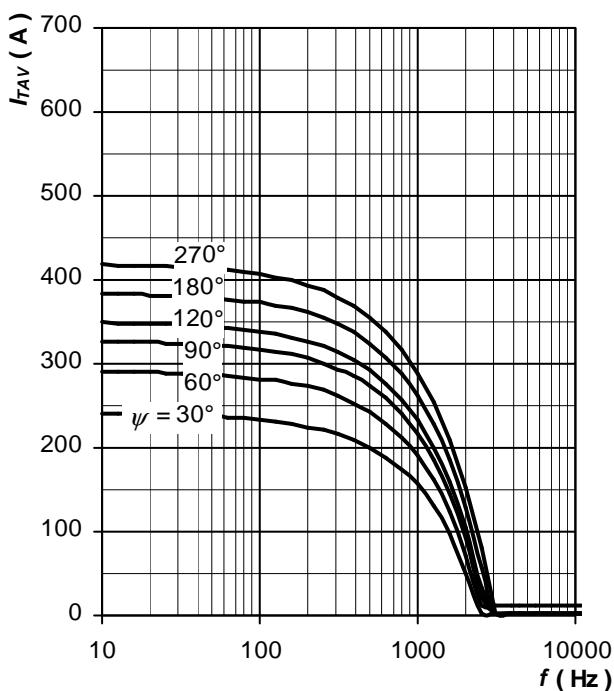
*Fig. 30 Maximum on-state current vs. frequency,
trapezoid waveform, $T_C = 90^\circ\text{C}$,
 $di_T/dt = \pm 100 \text{ A}/\mu\text{s}$, $V_R = 100 \text{ V}$*




*Fig. 31 Average on-state current vs. frequency,
trapezoid waveform, $T_C = 90^\circ\text{C}$,
 $di_T/dt = \pm 100 \text{ A}/\mu\text{s}$, $V_R = 2/3 V_{DRM}$*




*Fig. 32 Maximum on-state current vs. frequency,
trapezoid waveform, $T_C = 90^\circ\text{C}$,
 $di_T/dt = \pm 100 \text{ A}/\mu\text{s}$, $V_R = 2/3 V_{DRM}$*

Frequency Ratings


*Fig. 33 Average on-state current vs. frequency,
trapezoid waveform, $T_C = 90 \text{ }^\circ\text{C}$,
 $di_T/dt = \pm 500 \text{ A}/\mu\text{s}$, $V_R = 100 \text{ V}$*

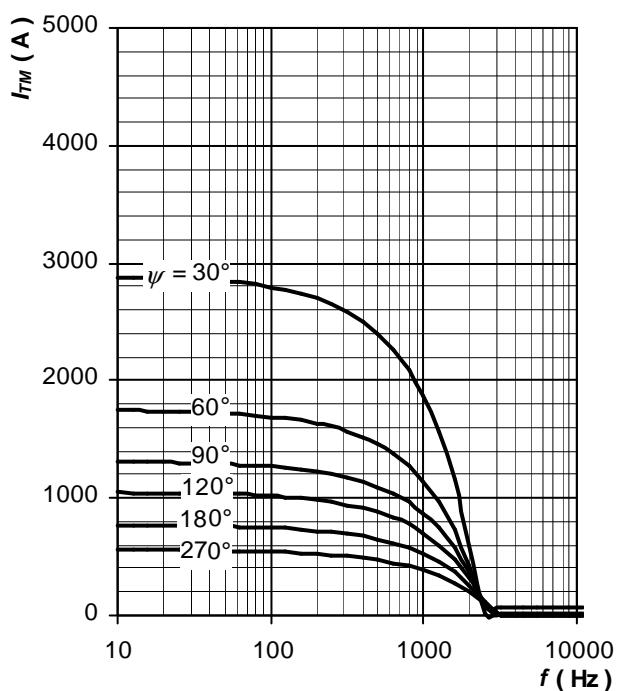

*Fig. 34 Maximum on-state current vs. frequency,
trapezoid waveform, $T_C = 90 \text{ }^\circ\text{C}$,
 $di_T/dt = \pm 500 \text{ A}/\mu\text{s}$, $V_R = 100 \text{ V}$*

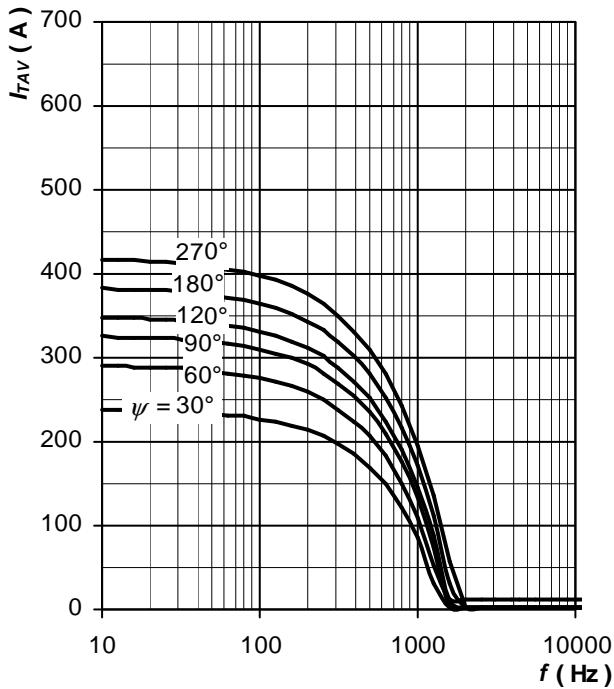

*Fig. 35 Average on-state current vs. frequency,
trapezoid waveform, $T_C = 90 \text{ }^\circ\text{C}$,
 $di_T/dt = \pm 500 \text{ A}/\mu\text{s}$, $V_R = 2/3 \text{ } V_{DRM}$*

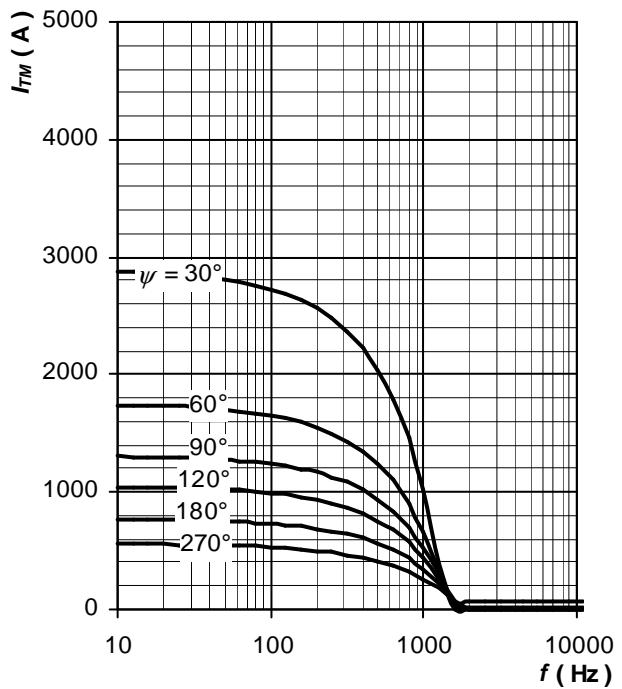

*Fig. 36 Maximum on-state current vs. frequency,
trapezoid waveform, $T_C = 90 \text{ }^\circ\text{C}$,
 $di_T/dt = \pm 500 \text{ A}/\mu\text{s}$, $V_R = 2/3 \text{ } V_{DRM}$*