

# Service Manual



## Colour Television

### TX-28CK1F

### TX-25CK1F

### TX-21CK1F

### Z8 Chassis

## SPECIFICATIONS

(Information in brackets {} refers to model TX-25CK1F)

(Information in brackets [] refers to model TX-21CK1F)

<b>Power Source:</b>	220-240V a.c., 50Hz
<b>Power Consumption:</b>	76W {76W} [60W]
<b>Aerial Impedance:</b>	75Ω unbalanced, Coaxial Type
<b>Standby Power Consumption:</b>	0,9W {0,9W} [1W]
<b>Receiving System:</b>	PAL-B/G, PAL-60, SECAM B/G, SECAM L, SECAM L', M.NTSC (AV) NTSC (AV only)
<b>Receiving Channels:</b>	
VHF E2-E12	VHF H1-H2 (ITALY)
VHF A-H (ITALY)	VHF R1-R2
VHF R3-R5	VHF R6-R12
UHF E21-E69	CATV (S01-S05)
CATV S1-S10 (M1-M10)	CATV S11-S20 (U1-U10)
CATV S21-S41 (HYPERBAND)	
<b>Intermediate Frequency:</b>	
Video	38,9MHz, 33,9MHz
Audio	33,4MHz, 33,05(NICAM, L NICAM) 33,16MHz (A2), 32,4MHz 40,4MHz, 39,75MHz(L'NICAM) 34,47MHz (PAL) 34,5MHz, 34,65MHz 38,3MHz, 38,15MHz
Colour	
<b>Video/Audio Terminals:</b>	
AV1 IN	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ RGB (21 pin) 0,7V p-p 75Ω
AV1 OUT	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ
AV FRONT	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ
<b>High Voltage:</b>	28kV +0,7kV -1kV {28kV +0,7kV -1kV} [27kV +0,7kV -1kV]
<b>Picture Tube:</b>	A66ECF50X04 63cm {A59ECF50X04} 59cm {A51EER35X80} 51cm
<b>Audio Output:</b>	2 x 10W (Music Power) 2 x 5W (R.M.S.), 8Ω Impedance
Headphones	8Ω Impedance
<b>Accessories supplied:</b>	Remote Control 2 x R6 (UM3) Batteries
<b>Dimensions:</b>	
Height:	580mm {538mm} [476mm]
Width:	646mm {580mm} [512mm]
Depth:	471mm {442,5mm} [470mm]
Net Weight:	33kg {27kg} [20,6kg]

Specifications are subject to change without notice.  
Weights and dimensions shown are approximate.

**NOTE:** This Service Manual should be used in conjunction with the Z8 technical guide.

# Panasonic

## TECHNISCHE DATEN

( Die Auskunft in den Klammern {} bezieht sich auf das folgende Modell TX-25CK1F)

( Die Auskunft in den Klammern [] bezieht sich auf das folgende Modell TX-21CK1F)

<b>Netzspannung:</b>	220-240V a.c., 50Hz
<b>Leistungsaufnahme:</b>	76W {76W} [60W]
<b>Antennenimpedanz:</b>	75Ω asymmetrisch, Koaxial-Typ
<b>Standby Leistungsaufnahme:</b>	0,9W {0,9W} [1W]
<b>Empfangssystem:</b>	PAL-B/G, PAL-525/60 SECAM B/G, SECAM L, SECAM L', M.NTSC (AV) NTSC (nur AV Eingang)
<b>Empfangsbereiche:</b>	
VHF E2-E12	VHF H1-H2 (ITALY)
VHF A-H (ITALY)	VHF R1-R2
VHF R3-R5	VHF R6-R12
UHF E21-E69	CATV (S01-S05)
CATV S1-S10 (M1-M10)	CATV S11-S20 (U1-U10)
CATV S21-S41 (HYPERBAND)	
<b>Zwischenfrequenz:</b>	
Video	38,9MHz, 33,9MHz
Audio	33,4MHz, 33,05MHz(NICAM, L NICAM) 33,16MHz (A2), 32,4MHz 40,4MHz, 39,75MHz (L'NICAM) 34,47MHz (PAL) 34,5MHz, 34,65MHz 38,3MHz, 38,15MHz
Colour	
<b>Video/Audio Anschlüsse:</b>	
AV1 EINGANG	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ RGB (21 pin) 0,7V p-p 75Ω
AV1 AUSGANG	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ
AV FRONT	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ
<b>Hochspannung:</b>	28kV +0,7kV -1kV {28kV +0,7kV -1kV} [27kV +0,7kV -1kV]
<b>Bildrohre:</b>	A66ECF50X04 63cm {A59ECF50X04} 59cm {A51EER35X80} 51cm
<b>Ton Ausgangsleistung:</b>	2 x 10W (Musikleistung) 2 x 5W (R.M.S.), 8Ω Impedanz
Lautsprecher	8Ω Impedanz
Kopfhörer:	
<b>Mittel. Zubehör:</b>	Fernbedienung 2 x R6 (UM3) Batterien
<b>Abmessungen:</b>	
Höhe:	580mm {538mm} [476mm]
Breite:	646mm {580mm} [512mm]
Tiefe:	471mm {442,5mm} [470mm]
Gewicht:	33kg {27kg} [20,6kg]

Änderungen der Technischen Daten vorbehalten.

Gewichte und Abmessungen sind Näherungsangaben.

**Hinweis:** Bitte verwenden Sie das Service Manual zusammen mit dem Z8 Technical Guide.

## CONTENTS

SAFETY PRECAUTIONS .....	2
SERVICE HINTS .....	4
SELF CHECK .....	5
ADJUSTMENT PROCEDURE .....	6
WAVEFORM PATTERN TABLE .....	7
ALIGNMENT SETTINGS .....	8
BLOCK DIAGRAMS.....	10
PARTS LOCATION.....	13
REPLACEMENT PARTS LIST .....	14
SCHEMATIC DIAGRAMS .....	22
CONDUCTOR VIEWS .....	27

## SAFETY PRECAUTIONS

### GENERAL GUIDE LINES

1. It is advisable to insert an isolation transformer in the a.c. supply before servicing a hot chassis.
2. When servicing, observe the original lead dress in the high voltage circuits. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
3. After servicing, see that all the protective devices such as insulation barriers, insulation papers, shields and isolation R-C combinations are correctly installed.
4. When the receiver is not being used for a long period of time, unplug the power cord from the a.c. outlet.
5. Potentials as high as 28,7kV {28,7kV} [27,7kV] are present when this receiver is in operation. Operation of the receiver without the rear cover involves the danger of a shock hazard from the receiver power supply. Servicing should not be attempted by anyone who is not familiar with the precautions necessary when working on high voltage equipment. Always discharge the anode of the tube.
6. After servicing make the following leakage current checks to prevent the customer from being exposed to shock hazard.

### LEAKAGE CURRENT COLD CHECK

1. Unplug the a.c. cord and connect a jumper between the two prongs of the plug.
2. Turn on the receiver's power switch.
3. Measure the resistance value with an ohmmeter, between the jumpered a.c. plug and each exposed metallic cabinet part on the receiver, such as screw heads, aerials, connectors, control shafts etc. When the exposed metallic part has a return path to the chassis the reading should be between 4M ohm and 20M ohm. When the exposed metal does not have a return path to the chassis the reading must be infinite.

## INHALT

SICHERHEITSVORKEHRUNGEN .....	2
SERVICE HINWEISE .....	4
SELBSTDIAGNOSE .....	5
ABGLEICH .....	6
SIGNAL TABELLE .....	7
ABGLEICHTABELLE .....	9
SCHALTBILD BLOCK.....	10
EXPLOSIONSZEICHNUNG.....	13
ERSATZTEILLISTE .....	14
SCHALTBILD SCHEMA .....	22
ANSICHT DER LEITERBAHNEN .....	27

## SICHERHEITSVORKEHRUNGEN

### ALLGEMEINE RICHTLINIEN

1. Es ist empfehlenswert einen Trenntransformator in die Stromversorgung zu schalten, bevor Reparaturen an einem Gerät vorgenommen werden, dessen Chassis unter Spannung steht.
2. Bei der Durchführung von Servicearbeiten dürfen die ursprünglichen Kabelanschlüsse nicht vertauscht werden. Dies gilt insbesondere für die Anschlüsse im Hochspannungsteil. Hat sich ein Kurzschluß ereignet, dann sind alle Teile, an denen Spuren von Überhitzung sichtbar sind, auszuwechseln.
3. Nach Beenden der Servicearbeiten ist sicherzustellen, daß alle Sicherheitsvorrichtungen, wie Isolationsstege, Isolationspapiere, Abschirmungen und Isolations -R-C- Glieder wieder richtig eingesetzt sind.
4. Wenn der Fernseher während längerer Zeit nicht in Betrieb gesetzt wird, sollte der Netzstecker aus der Netzsteckdose gezogen werden.
5. Im Betrieb sind Spannungen bis zu 28,7kV {28,7kV} [27,7kV] in diesem Gerät vorhanden. Die Inbetriebnahme des Fernsehers ohne aufgesetzte Rückwand bringt die Gefahr eines elektrischen Schlages von der Fernseher - Stromversorgung mit sich. Servicearbeiten sollten daher auch nie durch Personen versucht werden, die nicht in vollem Umfang mit den Sicherheitsvorkehrungen beim Umgang mit Hochspannungsgeräten vertraut sind. Vor der Handhabung mit der Bildröhre ist die Anode der Bildröhre immer an dem Empfängerchassis zu entladen.
6. Nach Beenden der Servicearbeiten sind die folgenden Kriechstrom-Prüfungen durchzuführen, um den Kunden vor der Gefahr eines elektrischen Schlages zu schützen.

### MESSUNG DES ISOLATIONSWIDERSTANDES IM ABGESCHALTETEN ZUSTAND

1. Den Netzstecker aus der Netzsteckdose ziehen und die beiden Steckerstifte kurzschließen.
2. Den Geräteschalter des Fernsehgerätes einschalten.
3. Mit einem Ohmmeter den Widerstandswert zwischen dem überbrückten Netzkabelstecker und jedem zugänglichen Metallteil am Gehäuse des Fernsehgerätes, wie Schraubenköpfe, Antennen, Achsen der Regler, Griffassungen usw. messen. Wenn ein zugängliches Metallteil keine Rückleitung zum Chassis hat, muß die Anzeige unendlich betragen.

### LEAKAGE CURRENT HOT CHECK

1. Plug the a.c. cord directly into the a.c. outlet. Do not use an isolation transformer for this check.
2. Connect a 2k $\Omega$  10W resistor in series with an exposed metallic part on the receiver and an earth, such as a water pipe.
3. Use an a.c. voltmeter with high impedance to measure the potential across the resistor.
4. Check each exposed metallic part and check the voltage at each point.
5. Reverse the a.c. plug at the outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 1,4 V rms. In case a measurement is outside the limits specified, there is a possibility of a shock hazard, and the receiver should be repaired and rechecked before it is returned to the customer.

### MESSUNG DES KRIECHSTROMS IM EINGESCHALTETEN ZUSTAND

1. Den Netzstecker direkt in eine Netzsteckdose stecken. Für diese Messung keinen Trenntransformator verwenden.
2. Einen 2k $\Omega$  / 10W-Widerstand in Serie mit einem von außen zugänglichen Metallteil am Fernsehgerät und einer guten, Erdung z.B Wasserleitung, anschließen.
3. Ein Wechselstrom-Voltmeter mit einem Meßbereich von 1000 Ohm.Volt oder größer verwenden, um die Spannung über den Widerstand zu messen.
4. Jedes zugängliche Metallteil prüfen, und an jedem Punkt dies Spannung messen.
5. Den Netzstecker umgekehrt in die Steckdose stecken und jede der obigen Messungen wiederholen.
6. Die Spannung darf an keinem der Punkte 1,4V eff. überschreiten. Wird dieser Wert nicht eingehalten, besteht die Gefahr eines elektrischen Schlages, und das Fernsehgerät sollte daher repariert und nachgeprüft werden, bevor es an den Kunden zurückgegeben wird.

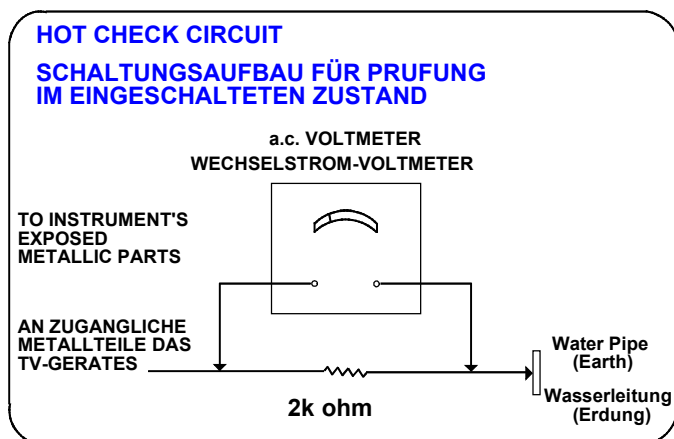


Fig.1.  
Abb.1.

### X-RADIATION WARNING

1. The potential sources of X-Radiation in TV sets are the high voltage section and the picture tube.
2. When using a picture tube test jig for service, ensure that the jig is capable of handling 28,7kV {28,7kV} [27,7kV] without causing X-Radiation.

### NOTE : It is important to use an accurate periodically calibrated high voltage meter.

1. Set the brightness to minimum.
2. Measure the high voltage. The meter should indicate  
TX-28,25CK1F 28kV +0,7kV -1kV.  
TX-21CK1F 27kV +0,7kV -1kV.  
If the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.
3. To prevent any X-Radiation possibility, it is essential to use the specified tube.

### RÖNTGENSTRAHLUNG ACHTUNG :

1. Potentielle Quellen von Röntgenstrahlung in Fernsehgeräten sind das Hochspannungsteil und die Bildröhre.
2. Bei Verwendung eines Bildröhren-Prüfgerätes für den Service ist sicherzustellen, daß es für die Belastung von 28,7kV {28,7kV} [27,7kV] geeignet ist, ohne daß eine Röntgenstrahlung verursacht wird.

### ANMERKUNG : Es ist wichtig, daß ein präzises, regelmäßig geprüftes Voltmeter verwendet wird.

1. Helligkeit auf Minimum stellen.
2. Die Hochspannung messen. Die Anzeige des Instrumentes sollte  
TX-28,25CK1F 28kV +0,7kV -1kV.  
TX-21CK1F 27kV +0,7kV -1kV.  
Falls die Anzeige diese Toleranzgrenzen überschreitet, ist die sofortige Behebung nötig, um die Möglichkeit vorzeitigen Komponentenausfalls zu verhüten.
3. Um die Möglichkeit von Röntgenstrahlung zu begrenzen, ist es wichtig, daß nur die vorgeschriebene Bildröhre verwendet wird.

## SERVICE HINTS


### HOW TO REMOVE THE REAR COVER

1. Remove the 5 screws as shown in **Fig.2.**

## SERVICE HINWEISE

### ENTFERNEN DER GERÄTERÜCKWAND


1. Die 5 Schrauben entfernen, siehe **Abb.2.**

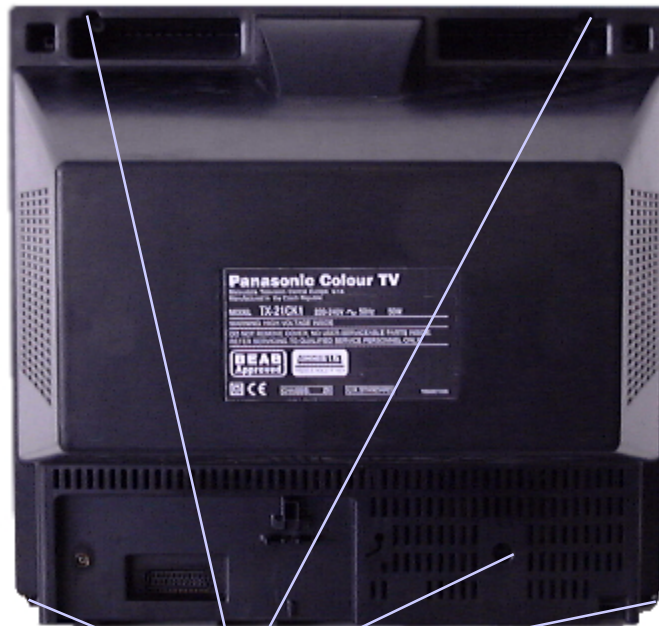

Screws  
Schrauben  
**Fig.2.**  
**Abb.2.**

## LOCATION OF CONTROLS

## LAGE DER EINSTELLREGLER

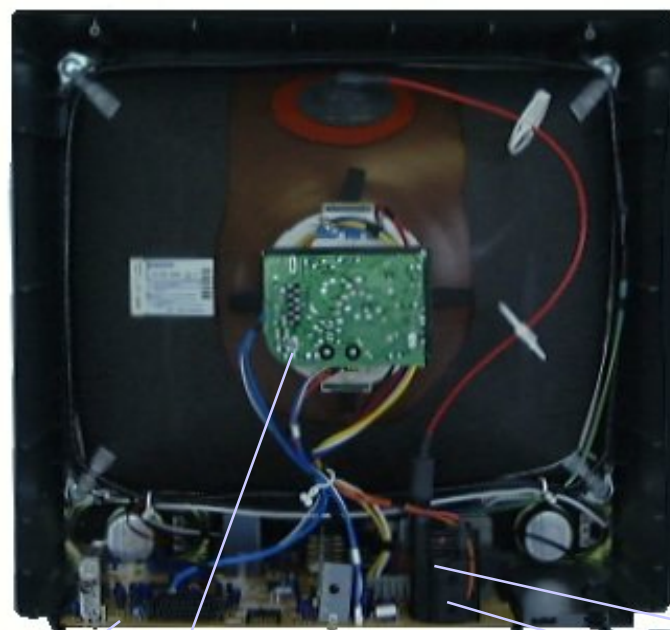

E - Board

Y - Board

**Fig.3.**  
**Abb.3.**

Focus  
Fokusregler  
Screen  
Schirmgitterregler

## SELF CHECK

1. Self-check is used to automatically check the bus lines and hexadecimal code of the TV set.
2. To get into the Self-Check mode press the down (**-V**) button on the customer controls at the front of the set, at the same time pressing the **STATUS** button on the remote control, and the screen will show :-

## SELBSTDIAGNOSE

1. Die Selbstdiagnose dient zum automatischen Prüfen der Bus-Leitungen sowie des Hexadezimalcodes des FS-Geräts. Zum Umschalten auf Selbstdiagnose zunächst die Taste "**STATUS**" auf der Fernbedienung und gleichzeitig die-Taste am Bedienteil des FS-Gerätes drücken (**-V**), auf dem Bildschirm erscheint hierauf :-
2. Nach der Selbstdiagnose wird das Gerät automatisch auf sämtliche werksseitigen Standardeinstellungen zurückgesetzt

OPTION 1 6D {OPTION 1 6D} [OPTION 1 4D]  
OPTION 2 00 {OPTION 2 00} [OPTION 2 00]

### Service Aids

To aid in the service of our current chassis there are a number of Service Aids which have been made available.

- **LUCI** interface kit (**L**inked **U**tility **C**omputer **I**nterface)  
Part number: TZS6EZ002  
This contains interface and cables for connecting TV service connector and a PC as well as diagnostic software. As new models are introduced upgrade software will become available.
- **VICI** (**V**isual **I**nteractive **C**omputer **I**nformation)  
These C.D.'s contain multimedia documentation providing quick access to service information.  
Part No. TZS7EZ006, TZS7EZ005 & TZS8EZ001
  1. Service Manuals
  2. Instruction Books
  3. Technical Information
- **TASMIN** (**T**echnically **A**dvanced **S**ystem for **M**ultimedia **I**nteractive **N**otes)  
As well as providing a first step towards more interactive training this product also achieves quick access to Technical Information.

### Service-Hilfen

Zur Unterstützung der Servicearbeiten stehen weitere Hilfsmittel zur Verfügung.

- **LUCI** interface kit (PC-unterstütztes Diagnosesystem)  
Bestell-Nr.: TZS6EZ002  
Es beinhaltet ein Interface, die Anschlusskabel zum FS-Gerät und die Diagnose-Software. Bei Einführung von neuen Modellen ist ein Update der Software jederzeit möglich.
- **VICI** (Interaktive CD-ROM) mit schnellem Zugriff auf Serviceinformationen.  
Bestell-Nr.: TZS7EZ006, TZS7EZ005 & TZS8EZ001
  1. Service Manuals
  2. Bedienungsanleitungen
  3. Technical Information
- **TASMIN** (Technisch erweitertes System für interaktive Multimedia-Hinweise und Notizen)  
Genauso wie dieses Produkt einen ersten Schritt in Richtung erweitertes interaktives Training bereitstellt, ermöglicht es einen noch schnelleren Zugang zu technischen Informationen.

## ADJUSTMENT PROCEDURE

Item/Preparation	Adjustments																																				
<p style="text-align: center;"><b>+B SET-UP</b></p> <ol style="list-style-type: none"> <li>1. Receive a Greyscale signal.</li> <li>2. Set the controls:-            Brightness Minimum             Contrast Minimum             Volume Minimum</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm the following voltages:  <table style="width: 100%; border: none;"> <tr> <td style="width: 33%;"><b>+B1</b> 3,3 ± 0,3V</td> <td style="width: 33%;"><b>+B13</b> -13 ± 1V</td> <td style="width: 33%;"></td> </tr> <tr> <td><b>+B2</b> 195 ± 10V</td> <td><b>+B14</b> 27,5 ± 1,5V</td> <td></td> </tr> <tr> <td>{195 ± 10V}</td> <td>{27,5 ± 1,5V}</td> <td></td> </tr> <tr> <td>[190 ± 10V]</td> <td>[27,5 ± 1,5V]</td> <td></td> </tr> <tr> <td><b>+B3</b> 13,5 ± 1V</td> <td><b>+B15</b> 28 ± 1,5V</td> <td></td> </tr> <tr> <td>{13,5 ± 1V}</td> <td>{28 ± 1,5V}</td> <td></td> </tr> <tr> <td>[12,5 ± 1V]</td> <td>[28 ± 1,5V]</td> <td></td> </tr> <tr> <td><b>+B4</b> 10 ± 1V</td> <td><b>+B16</b> 11,5 ± 1V</td> <td></td> </tr> <tr> <td><b>+B8</b> 5 ± 0,3V</td> <td>{11,5 ± 1V}</td> <td></td> </tr> <tr> <td><b>+B11</b> 147 ± 10V</td> <td>[11,5 ± 1V]</td> <td></td> </tr> <tr> <td>{147 ± 10V}</td> <td><b>+B17</b> 8 ± 1V</td> <td></td> </tr> <tr> <td>[127 ± 10V]</td> <td><b>+B18</b> 5 ± 0,3V</td> <td></td> </tr> </table> </li> </ol>	<b>+B1</b> 3,3 ± 0,3V	<b>+B13</b> -13 ± 1V		<b>+B2</b> 195 ± 10V	<b>+B14</b> 27,5 ± 1,5V		{195 ± 10V}	{27,5 ± 1,5V}		[190 ± 10V]	[27,5 ± 1,5V]		<b>+B3</b> 13,5 ± 1V	<b>+B15</b> 28 ± 1,5V		{13,5 ± 1V}	{28 ± 1,5V}		[12,5 ± 1V]	[28 ± 1,5V]		<b>+B4</b> 10 ± 1V	<b>+B16</b> 11,5 ± 1V		<b>+B8</b> 5 ± 0,3V	{11,5 ± 1V}		<b>+B11</b> 147 ± 10V	[11,5 ± 1V]		{147 ± 10V}	<b>+B17</b> 8 ± 1V		[127 ± 10V]	<b>+B18</b> 5 ± 0,3V	
<b>+B1</b> 3,3 ± 0,3V	<b>+B13</b> -13 ± 1V																																				
<b>+B2</b> 195 ± 10V	<b>+B14</b> 27,5 ± 1,5V																																				
{195 ± 10V}	{27,5 ± 1,5V}																																				
[190 ± 10V]	[27,5 ± 1,5V]																																				
<b>+B3</b> 13,5 ± 1V	<b>+B15</b> 28 ± 1,5V																																				
{13,5 ± 1V}	{28 ± 1,5V}																																				
[12,5 ± 1V]	[28 ± 1,5V]																																				
<b>+B4</b> 10 ± 1V	<b>+B16</b> 11,5 ± 1V																																				
<b>+B8</b> 5 ± 0,3V	{11,5 ± 1V}																																				
<b>+B11</b> 147 ± 10V	[11,5 ± 1V]																																				
{147 ± 10V}	<b>+B17</b> 8 ± 1V																																				
[127 ± 10V]	<b>+B18</b> 5 ± 0,3V																																				
<p style="text-align: center;"><b>Cut-Off / Ug2 Adjustment</b></p> <ol style="list-style-type: none"> <li>1. Receive a Greyscale signal.</li> <li>2. Degauss the tube externally.</li> <li>3. Set the TV into Service Mode 1.</li> <li>4. Select Ug2 Test.</li> </ol>	<p>Set Contrast on maximum, set Brightness on centre, switch on AV mode.            Enter Service mode. Set Sub-Brightness to 31. Select Ug2. Press "+" and adjust screen Vr till sharp vertical line is visible and LED switches off. Then reduce screen Vr till LED is just switched on (pin6 of connector E6 must be connected to GND).</p>																																				

Note: To set pu white balance first set up Cut off register to 8. Then set up high light with the help of drive registers. Finish setting-up of low light with the help of Cut off register.  
 Carry out setting-up of white balance in available TV systems (PAL, SECAM).

## ABGLEICH














Vorbereitungen	Abgleich																																				
<p style="text-align: center;"><b>+B - Abgleich</b></p> <ol style="list-style-type: none"> <li>1. Empfangen Sie das Signal Greyscale.</li> <li>2. Helligkeit auf Minimum             Kontrast auf Minimum             Lautstärke Minimum</li> </ol>	<ol style="list-style-type: none"> <li>1. Folgende Spannungen sind zu überprüfen:  <table style="width: 100%; border: none;"> <tr> <td style="width: 33%;"><b>+B1</b> 3,3 ± 0,3V</td> <td style="width: 33%;"><b>+B13</b> -13 ± 1V</td> <td style="width: 33%;"></td> </tr> <tr> <td><b>+B2</b> 195 ± 10V</td> <td><b>+B14</b> 27,5 ± 1,5V</td> <td></td> </tr> <tr> <td>{195 ± 10V}</td> <td>{27,5 ± 1,5V}</td> <td></td> </tr> <tr> <td>[190 ± 10V]</td> <td>[27,5 ± 1,5V]</td> <td></td> </tr> <tr> <td><b>+B3</b> 13,5 ± 1V</td> <td><b>+B15</b> 28 ± 1,5V</td> <td></td> </tr> <tr> <td>{13,5 ± 1V}</td> <td>{28 ± 1,5V}</td> <td></td> </tr> <tr> <td>[12,5 ± 1V]</td> <td>[28 ± 1,5V]</td> <td></td> </tr> <tr> <td><b>+B4</b> 10 ± 1V</td> <td><b>+B16</b> 11,5 ± 1V</td> <td></td> </tr> <tr> <td><b>+B8</b> 5 ± 0,3V</td> <td>{11,5 ± 1V}</td> <td></td> </tr> <tr> <td><b>+B11</b> 147 ± 10V</td> <td>[11,5 ± 1V]</td> <td></td> </tr> <tr> <td>{147 ± 10V}</td> <td><b>+B17</b> 8 ± 1V</td> <td></td> </tr> <tr> <td>[127 ± 10V]</td> <td><b>+B18</b> 5 ± 0,3V</td> <td></td> </tr> </table> </li> </ol>	<b>+B1</b> 3,3 ± 0,3V	<b>+B13</b> -13 ± 1V		<b>+B2</b> 195 ± 10V	<b>+B14</b> 27,5 ± 1,5V		{195 ± 10V}	{27,5 ± 1,5V}		[190 ± 10V]	[27,5 ± 1,5V]		<b>+B3</b> 13,5 ± 1V	<b>+B15</b> 28 ± 1,5V		{13,5 ± 1V}	{28 ± 1,5V}		[12,5 ± 1V]	[28 ± 1,5V]		<b>+B4</b> 10 ± 1V	<b>+B16</b> 11,5 ± 1V		<b>+B8</b> 5 ± 0,3V	{11,5 ± 1V}		<b>+B11</b> 147 ± 10V	[11,5 ± 1V]		{147 ± 10V}	<b>+B17</b> 8 ± 1V		[127 ± 10V]	<b>+B18</b> 5 ± 0,3V	
<b>+B1</b> 3,3 ± 0,3V	<b>+B13</b> -13 ± 1V																																				
<b>+B2</b> 195 ± 10V	<b>+B14</b> 27,5 ± 1,5V																																				
{195 ± 10V}	{27,5 ± 1,5V}																																				
[190 ± 10V]	[27,5 ± 1,5V]																																				
<b>+B3</b> 13,5 ± 1V	<b>+B15</b> 28 ± 1,5V																																				
{13,5 ± 1V}	{28 ± 1,5V}																																				
[12,5 ± 1V]	[28 ± 1,5V]																																				
<b>+B4</b> 10 ± 1V	<b>+B16</b> 11,5 ± 1V																																				
<b>+B8</b> 5 ± 0,3V	{11,5 ± 1V}																																				
<b>+B11</b> 147 ± 10V	[11,5 ± 1V]																																				
{147 ± 10V}	<b>+B17</b> 8 ± 1V																																				
[127 ± 10V]	<b>+B18</b> 5 ± 0,3V																																				
<p style="text-align: center;"><b>Cut-Off / Ug2 Test</b></p> <ol style="list-style-type: none"> <li>1. Testbild empfangen.</li> <li>2. Bildröhre entmagnetisieren.</li> <li>3. Service-Mode 1 anwählen.</li> <li>4. Im Service-Mode den Abgleichpunkt Cutoff DC-Mode wählen.</li> </ol>	<p>Stellen Sie den Kontrast auf das Maximum und die Helligkeit auf die Mitte ein, schalten Sie in den Mode "AV" um. Treten Sie in den Service Mode ein. Stellen Sie die Sub-Brightness auf den Wert 31 ein. Drücken Sie TV/AV. Wählen Sie "Ug2" aus. Drücken Sie "+" und stellen Sie die vertikale Schwenkung ein.            Stellen Sie den Screen "Vr" so, dass die vertikale dünne Linie scharf sichtbar ist und L.E.D. sich ausschaltet. Dann nehmen Sie den Screen "Vr" ab, bis sich L.E.D. anzündet (pin6 des Konektors E6 muß geerdet sein).</p>																																				

Um die white balance einzustellen, stellen Sie zuerst das Cut off Register auf 8. Dann stellen Sie mit der Hilfe von drive Registern high-light ein. Beenden Sie die Einstellung von low-light mit der Hilfe von dem Cut off Register.  
 Führen Sie die Einstellung von white balance in den zugänglichen Systemen (PAL, SECAM) durch.



## WAVEFORM PATTERN TABLE

## SIGNAL TABELLE

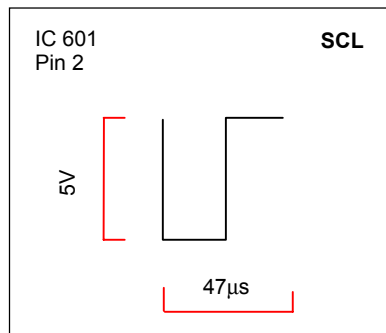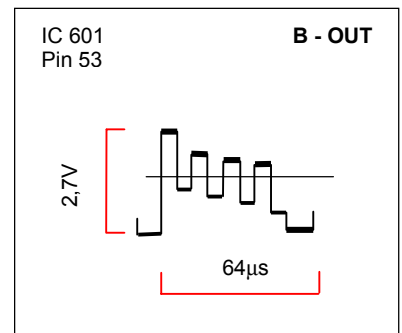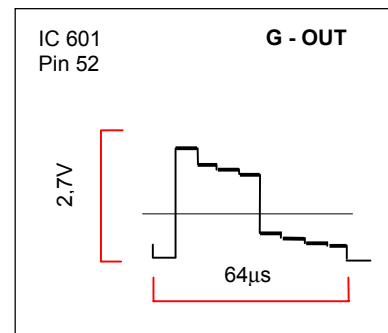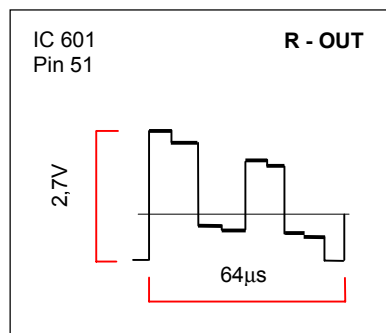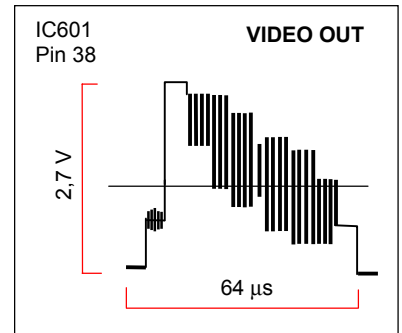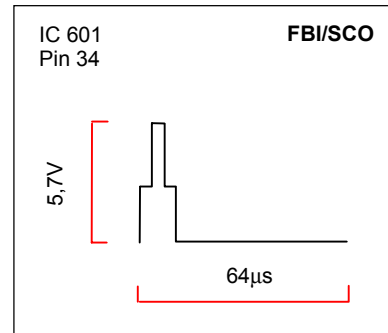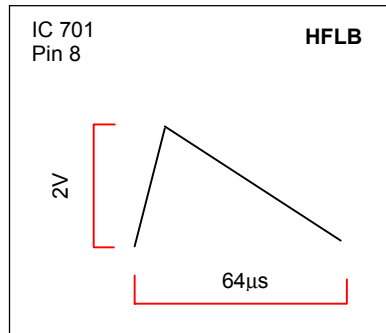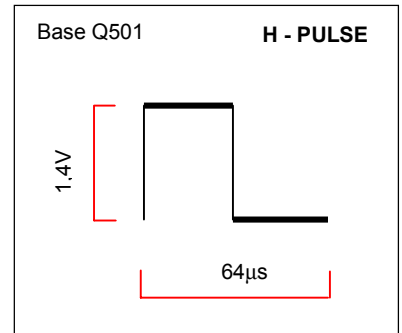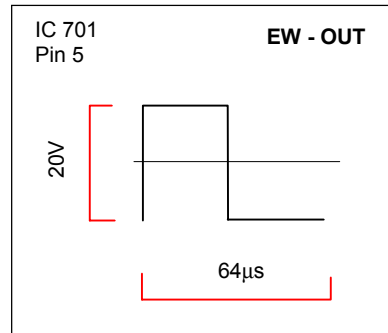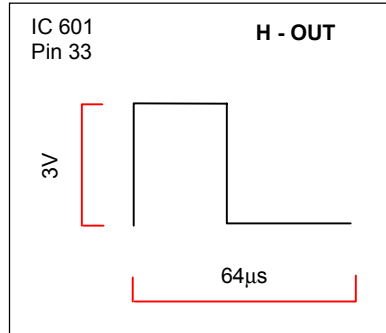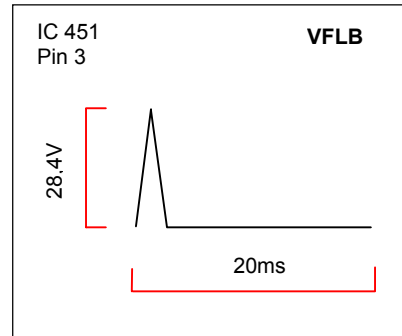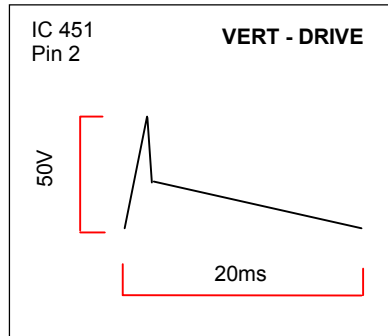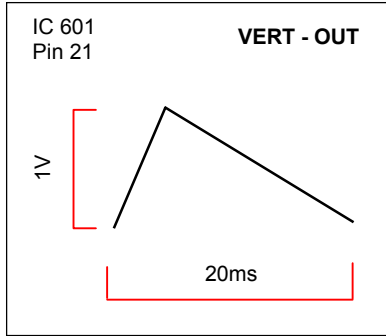

## ALIGNMENT SETTINGS:

Enter in service mode:

By inputting remote code "FA" followed by key "0" (19 hex) or press "MUTE" on remote control and "V" on TV set, when the sharpness is set on minimum and programme position is on 99.

Use  $\wedge$  /  $\vee$  remote buttons to cycle through the service items.

Use  $+$  /  $-$  remote keys to decrement / increment the values within range.

**STR** lokal key stores the current data.

To exit the Service Mode, press the "N" button.

Alignment Function	Setting indication Note: All setting values are approximate	Settings / Special features
1. Cut off (Ug2)	LED On/Off ( pin6 of connector E6 to the GND)	LED to be just On.
2. Vertical Slope	V-SLO 32	Optimum setting.
3. Vertical Shift	V-POS 43	Optimum setting.
4. Vertical Amplitude	V-AMP 60	Optimum setting.
5. Horizontal Shift	H-CTR 31	Optimum setting.
6. Horizontal parallelogram	H-PAR 034 {034} [-]	Optimum setting.
7. Horizontal bow	H-BOW 031 {031} [-]	Optimum setting.
8. R - Cut	R-CUT 8	Optimum setting.
9. B - Cut	B- CUT 8	Optimum setting.
10. R - Drive	R-DRV 31	Optimum setting.
11. G - Drive	G-DRV 31	Optimum setting.
12. B - Drive	B-DRV 31	Optimum setting.
13. AGC	AGC 01	Optimum setting.
14. Sub Color	S - COL 20	Optimum setting.
15. Sub Brightness	S - BRI 31	Optimum setting.

For models TX-25CK1F and TX-28CK1F only:

Alignment Function	Setting indication Note: All setting values are approximate	Settings / Special features
16. Horizontal Width	EW – WD 34	Optimum setting.
17. EW parabola	EW – PR 32	Optimum setting.
18. EW Upper corners	EW – UC 32	Optimum setting.
19. EW Lower corners	EW – LC 33	Optimum setting.
20. EW Trapezoid	EW – TP 36	Optimum setting.

Input remote code "FA" followed by key 5 (14hex) or press "V" on remote control:

Option Byte - 1		Option Byte Table	
Bit No.	Value	Function	
0	1	French model	0 NO
			1 YES
1	0	Irish model	0 NO
			1 YES
2	1	NICAM enabled	0 NO
			1 YES
3	1	A2 stereo	0 NO
			1 YES
4	0	Tuner modification	0 MACO
			1 ALPS
5	1 [0]	CRT	0 21"
			1 25",28"
6	1	Q - link enabled	0 NO
			1 YES

Option Byte - 2		Option Byte Table	
Bit No.	Value	Function	
0	0		
1	0		
2	0		
3	0		
4	0		
5	0		
6	0		



## ABGLEICHTABELLE:

Der Eingang in den Service Mode:

Stellen Sie den Fernkode "**FA**" ein, dann drücken Sie die Taste "**0**"; oder die Taste "**MUTE**" auf der Fernsteuerung und die Taste "**V**" auf dem TV Empfänger, wobei die Schärfe auf das Minimum eingestellt ist und die Programmposition 99 ist.

Verwenden Sie die Tasten  $\wedge$  /  $\vee$  auf der Fernsteuerung für den Durchgang durch die Serviceposten.

Verwenden Sie die Tasten  $+$  /  $-$  auf der Fernsteuerung für Verminderung/Erhöhung der Werte im Rahmen des Umfangs von TV.

Die Taste "**STR**" speichert die aktuellen Werte ein.

Für den Ausgang aus dem Service Mode drücken Sie die Taste "**N**".

Abgleichfunktion	Indikation der Einstellung Notiz: Alle Einstellungswerte sind approximativ	Einstellung / Besondere Merkmale
1. Cut off	LED on/off (pin6 des Konektors E6 muß geerdet sein)	LED on
2. Vertical slope	V - SLO 32	Optimale Einstellung.
3. Vertical shift	V - POS 43	Optimale Einstellung.
4. Vertical Amplitude	V - AMP 60	Optimale Einstellung.
5. Horizontal shift	H - CTR 31	Optimale Einstellung.
6. Horizontal parallelogram	H - PAR 34 {34} [-]	Optimale Einstellung.
7. Horizontal bow	H - BOW 31 {31} [-]	Optimale Einstellung.
8. R - Cut	R - CUT 8	Optimale Einstellung.
9. B - Cut	B - CUT 8	Optimale Einstellung.
10. R - Drive	R - DRV 31	Optimale Einstellung.
11. G - Drive	G - DRV 31	Optimale Einstellung.
12. B - Drive	B - DRV 31	Optimale Einstellung.
13. AGC	AGC 01	Optimale Einstellung.
14. Sub Colour	S - COL 20	Optimale Einstellung.
15. Sub-Brightness	S - BRI 31	Optimale Einstellung.

Nur für die Modelle TX-25CK1F und TX-28CK1F:

Ableichfunktion	Indikation der Einstellung Notiz: Alle Einstellungswerte sind approximativ	Einstellung / Besondere Merkmale
18. Horizontal Width	EW – WD 34	Optimale Einstellung.
19. EW Parabola	EW – PR 32	Optimale Einstellung.
20. EW Upper corners	EW – UC 32	Optimale Einstellung.
21. EW Lower corners	EW – LC 33	Optimale Einstellung.
22. EW Trapezoid	EW – TP 36	Optimale Einstellung.


Drücken Sie auf den Knopf "**FA**" auf der Fernsteuerung und folgend auf den Knopf 5 (14 hex) oder drücken Sie auf "**V**" auf der Fernsteuerung:

Option Byte - 1		Option Byte Tabelle	
Bit No.	Werte	Funktion	
0	1	Das französische Modell	0 NEIN 1 JA
1	0	Das irische Modell	0 NEIN 1 JA
2	1	NICAM zugänglich	0 NEIN 1 JA
3	1	A2 stereo zugänglich	0 NEIN 1 JA
4	0	Der Hersteller von Tuner	0 MACO 1 ALPS
5	1 [0]	CRT	0 21" 1 25", 28"
6	1	Q - link zugänglich	0 NEIN 1 JA

Option Byte - 2		Option Byte Tabelle	
Bit No.	Werte	Funktion	
0	0		
1	0		
2	0		
3	0		
4	0		
5	0		
6	0		


POWER SUPPLY AND DEFLECTION BLOCK DIAGRAM

STROMVERSORGUNGS UND ABLENKUNG BLOKSCHEMA

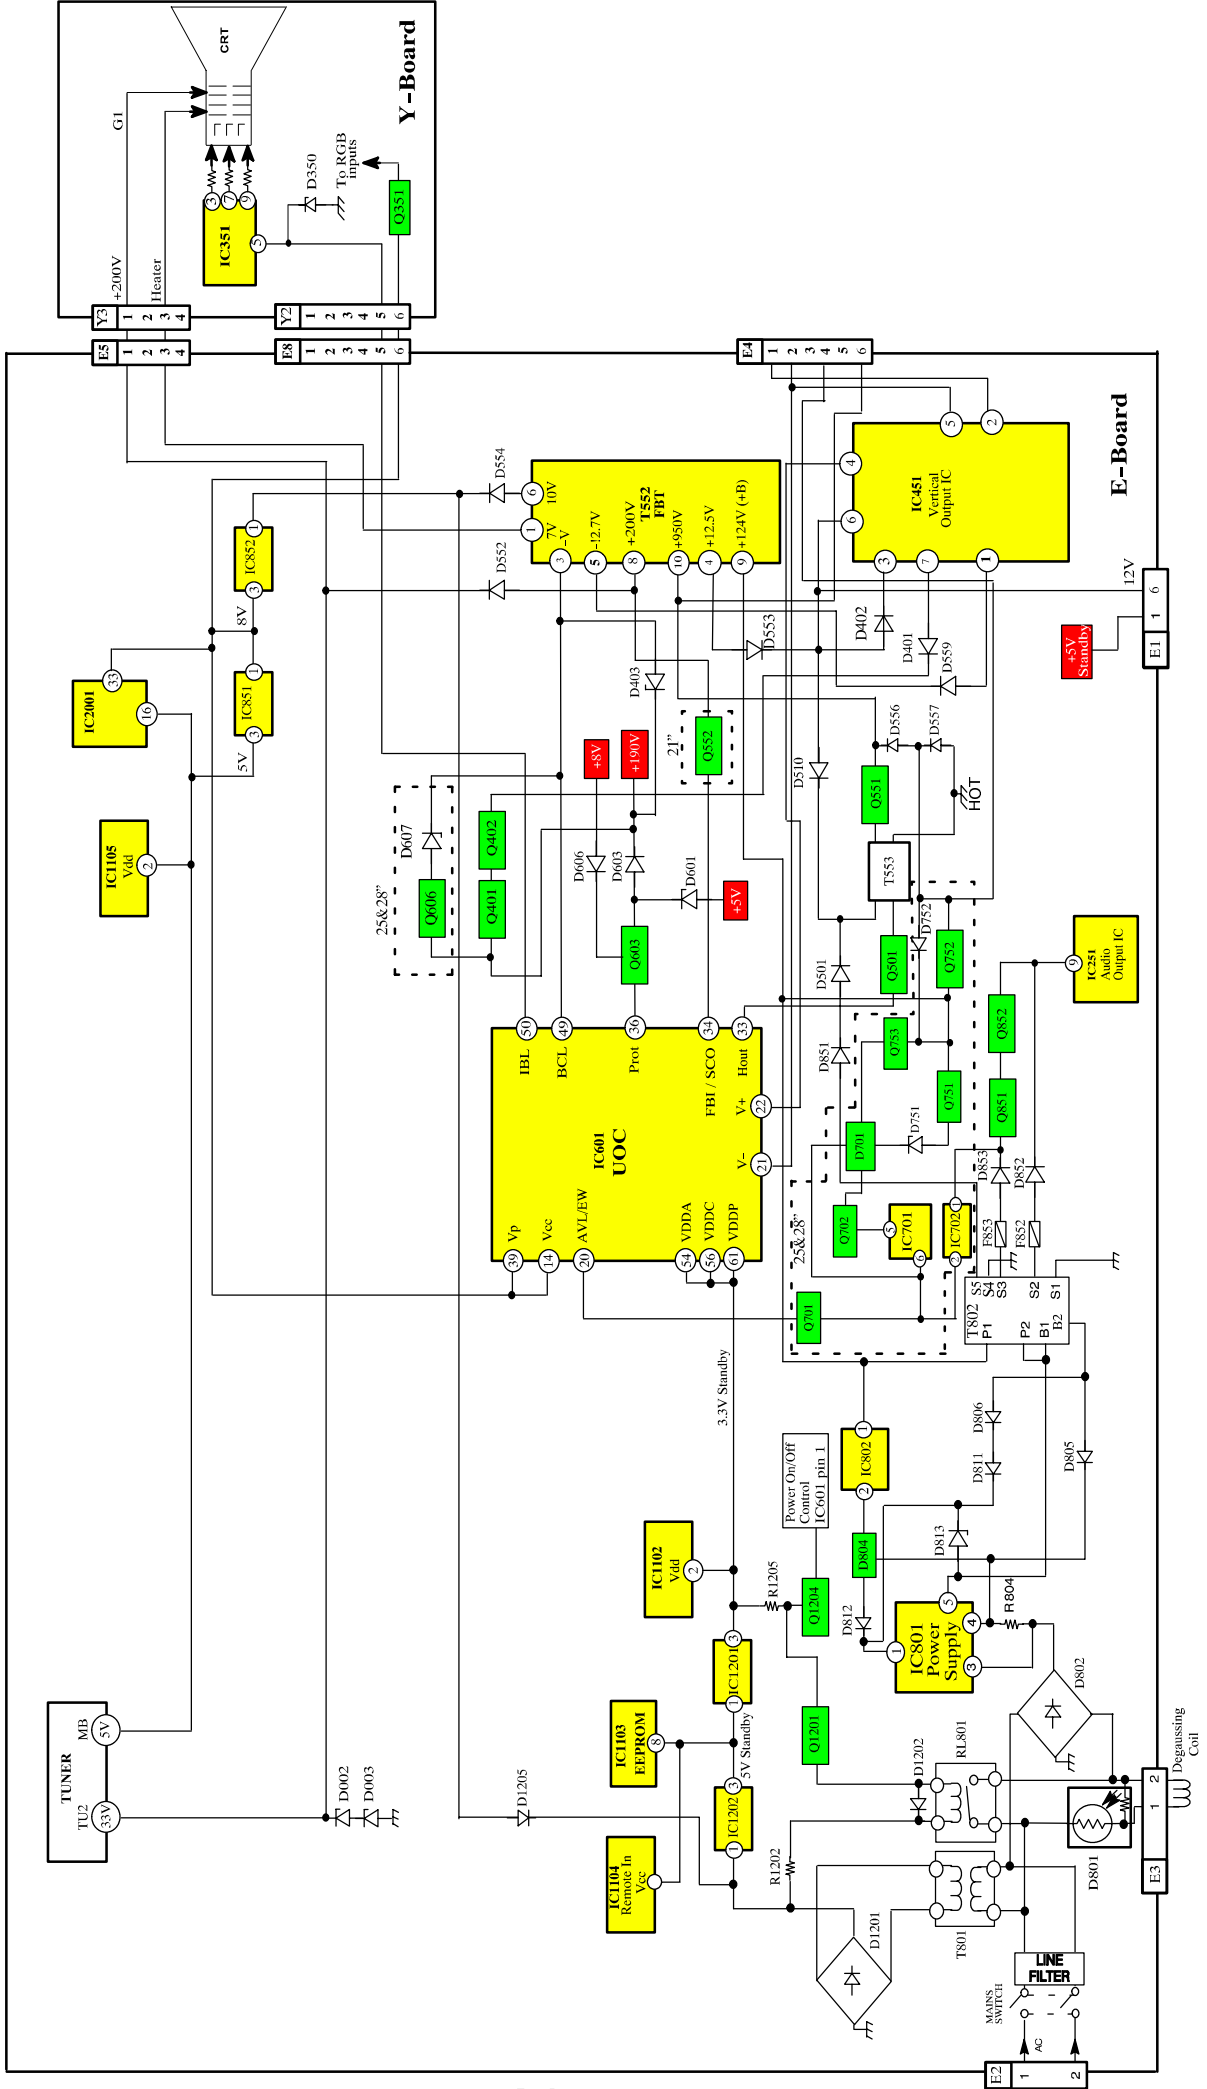


VIDEO & AUDIO BLOCK DIAGRAM

BILDSIGNAL & AUDIOSIGNAL BLOCKSCHEMA

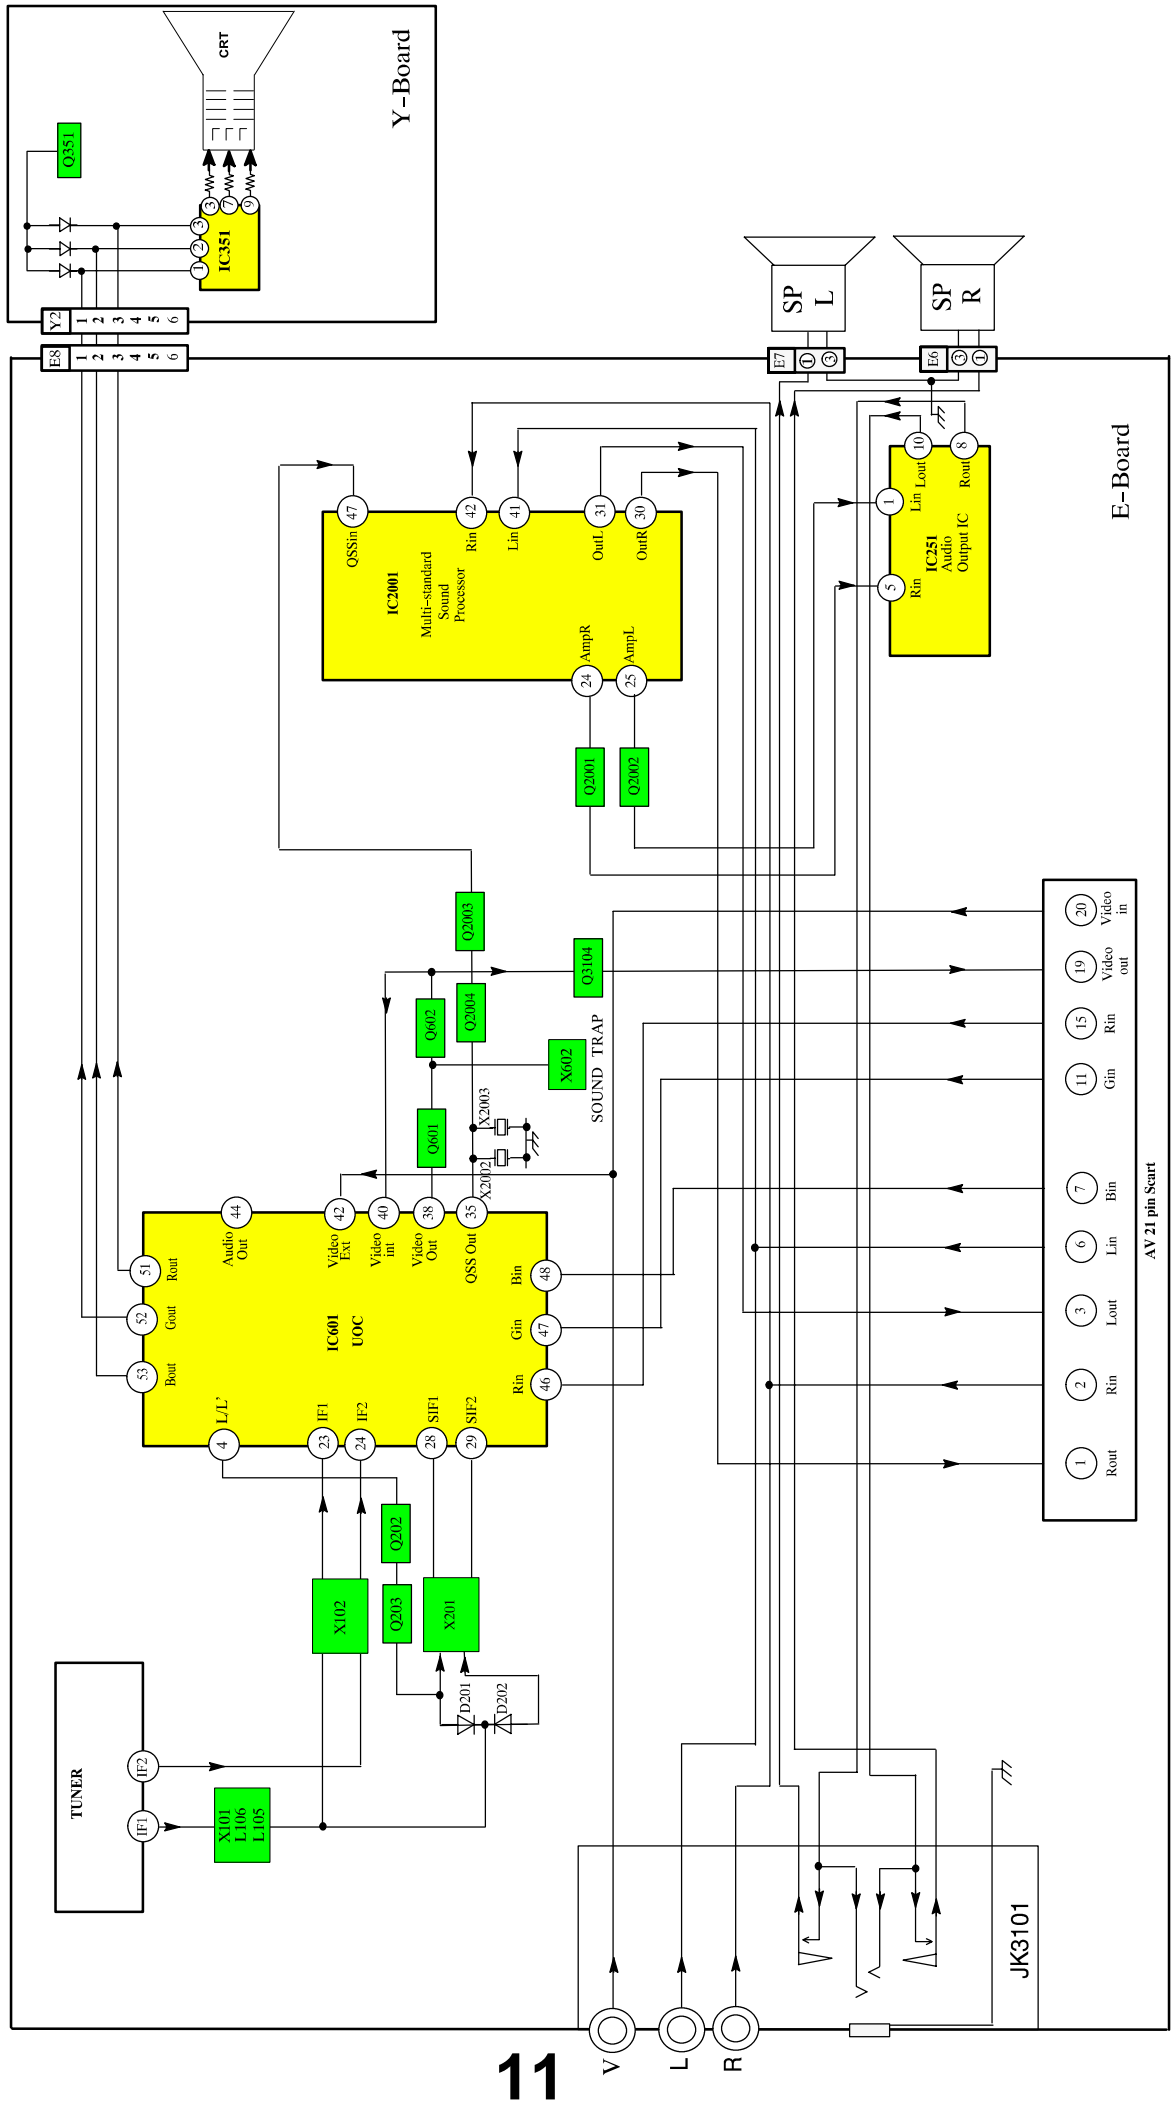

# CONTROL BLOCK DIAGRAM

# KONTROLL BLOCKSCHEMA

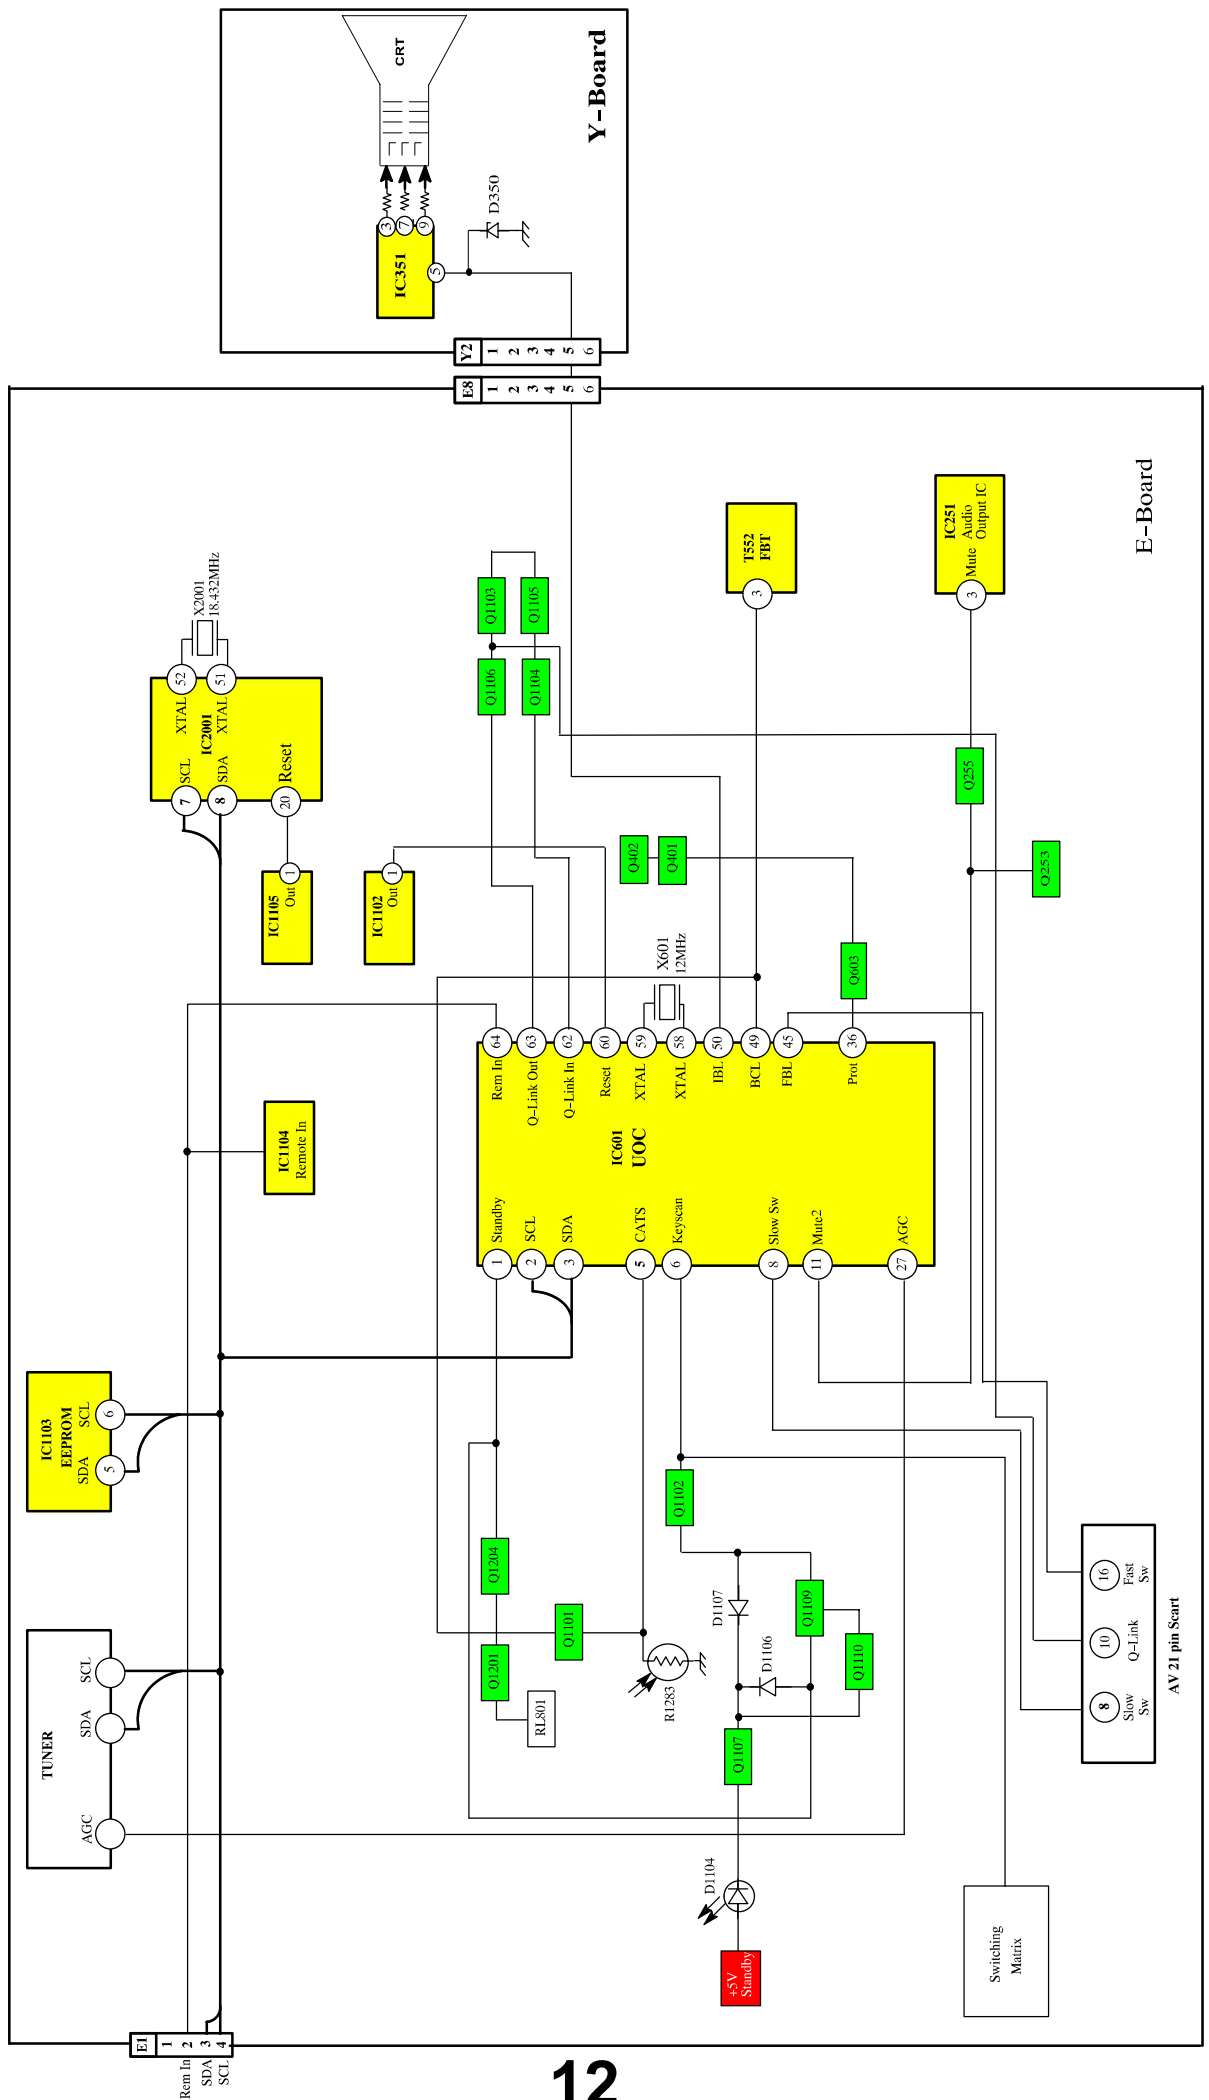

## PARTS LOCATION


**NOTE:**

The numbers on the exploded view below refer to the mechanical section of the Replacement Parts List.

## EXPLOSIONSZEICHNUNG


**Anmerkung:**

Die Nummer auf den mechanischen Teilen zeigt die Bezugsnummer der Ersatzteilliste an.

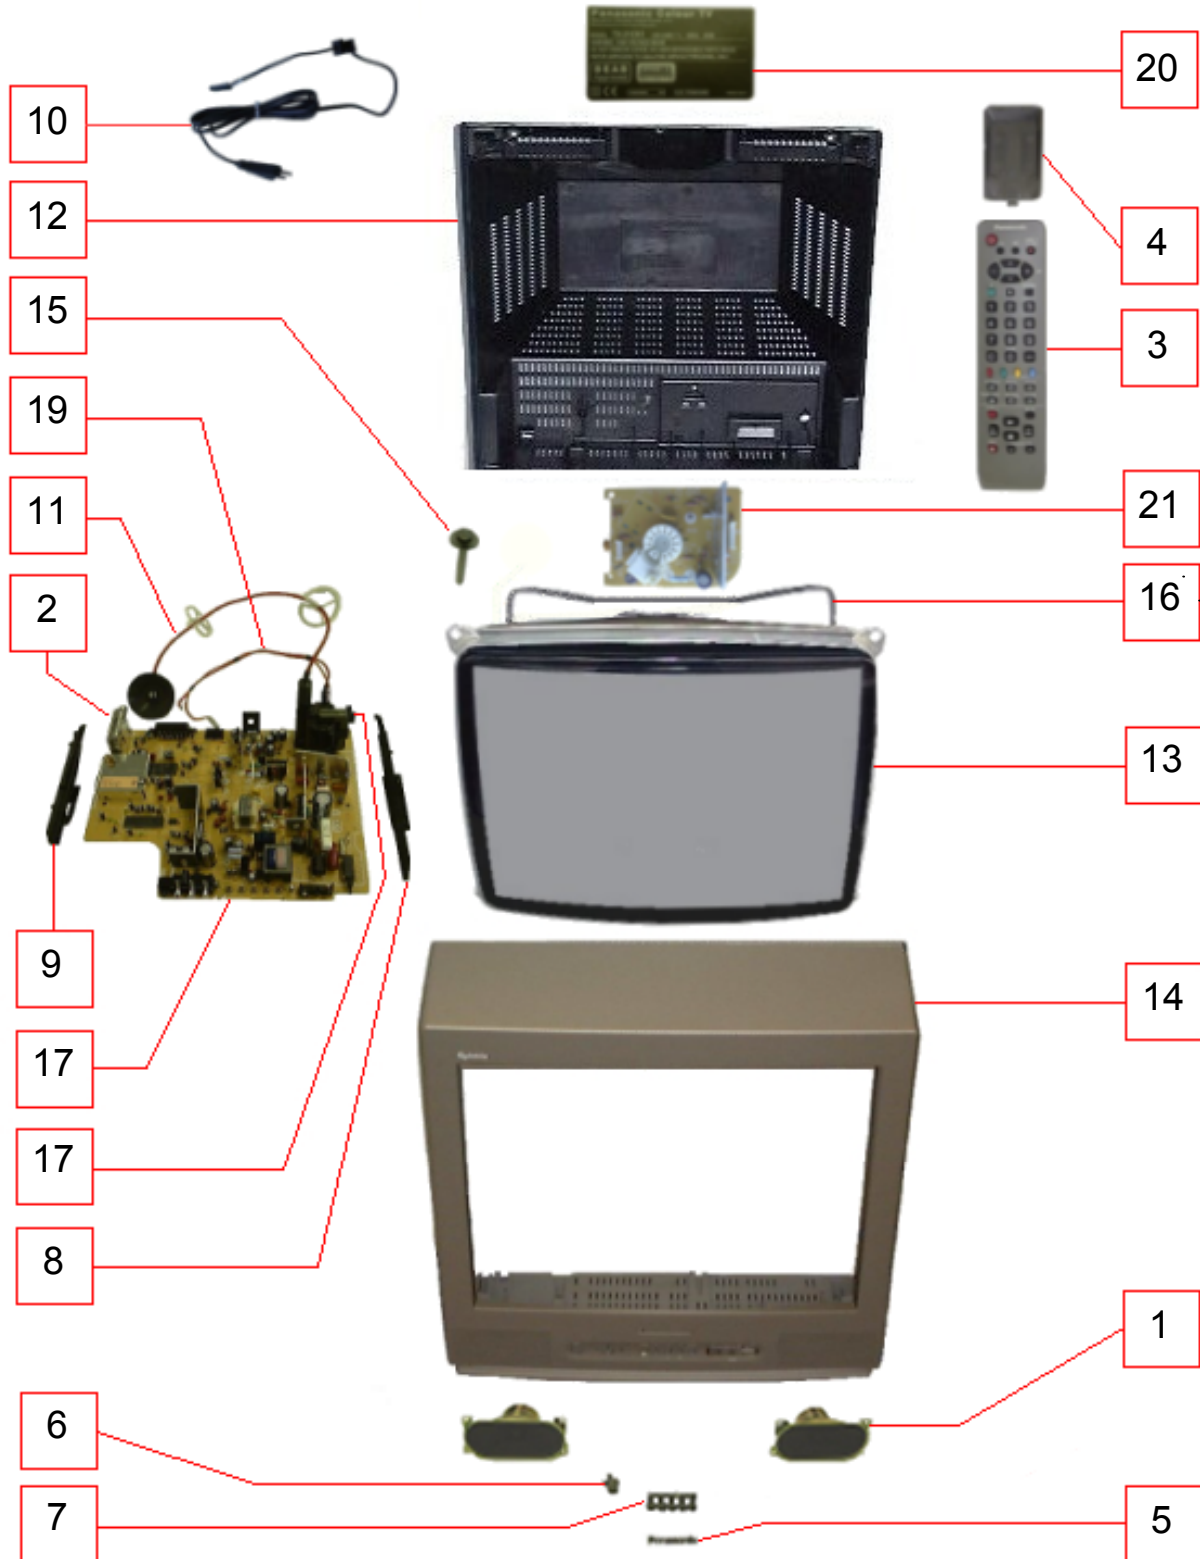


# REPLACEMENT PARTS LIST















## Important Safety Notice

Components Identified by  mark have special characteristics important for safety. When replacing any of these components, use only manufacturers specified parts.  
\* In case of ordering these spare parts, please always add the complete Model-Type number to your order.

# ERSATZTEILLISTE

## Wichtiger Sicherheitshinweis

Teile, die mit einem Hinweis  gekennzeichnet sind wichtig für die Sicherheit. Sollte ein Auswechseln erforderlich sein, sind unbedingt Originalteile einzusetzen.  
Bei der Bestellung von Ersatzteilen, die mit \* gekennzeichnet sind, geben Sie bitte unbedingt die vollständige Typenbezeichnung mit an.

Cct Ref	Parts Number	Description	
<b>COMMON PARTS</b>			
<b>MECHANICAL PARTS</b>			
1	EASG12D552A2	SPEAKER	
2	ENV57D38G3	TUNER	
3	EUR511310	REMOTE CONTROL	
4	EUR51EC924A	BATTERY COVER	
5	TBM8E1928	PANA BADGE	
6	TBX8E071	POWER BUTTON	
7	TBX8E072	5-KEY BUTTON	
8	TMZ8E001	CHASSIS RAIL RIGHT	
9	TMZ8E002	CHASSIS RAIL LEFT	
10	TSX8E0023	POWER CORD	
<b>MISCELLANEOUS COMPONENTS</b>			
	TKP8E1291	LIGHT TUBE	
	TKP8E1292	LED VISOR	
	UM-3DJ-2P	BATTERY PACK	
POE3	TMW8E015-2	LED HOLDER	
R1283	P1201	SENSOR	
RL801	DJ5D1-0M	RELAY	
<b>INSTRUCTION BOOKS</b>			
	TQB8E2767A	GERMAN	
	TQB8E2767BD1	DUTCH / FRENCH	
	TQB8E2767CE	ITALIAN / SPANISH	
	TQB8E2767FG1	SWEDISH / NORWEGIAN	
	TQB8E2767HK	FINNISH / DANISH	
	TQB8E2767J	PORTUGUESE	
<b>I.C.s</b>			
IC251	TDA7263	AUDIO OUTPUT	
IC801	STRF6523LF51	POWER SUPPLY	
IC851	L78M05MRB	5V REGULATOR	
IC852	BA08T-M3	8V REGULATOR	
IC1102	MN13812-HTA	RESET IC	
IC1104	RPM-6937	LED RECEIVER	
IC1105	MN1381-R(TA)	RESET	
IC1201	BA033T	3.3V REGULATOR	
IC1202	BA05T-M1	5V REGULATOR	
IC2001	MSP3415DPOA2	AUDIO PROCESSOR	
<b>FUSES</b>			
F801	19181-3.15	FUSE	
F851	TR5-T500	FUSE	
F852	TR5-T1000	FUSE	
F853	TR5-T500	FUSE	
F8011	EYF52BC	FUSE HOLDER	
F8012	EYF52BC	FUSE HOLDER	

Cct Ref	Parts Number	Description
<b>DIODES</b>		
D001	MTZJ2.2A	DIODE
D002	MTZJT-7716A	DIODE
D003	MTZJT-7716A	DIODE
D201	MA858TA5	DIODE
D202	MA858TA5	DIODE
D260	MA29TA5	DIODE
D261	MTZJT-7739C	DIODE
D262	MTZJT-7739C	DIODE
D350	MTZJT-777.5B	DIODE
D351	1SR124-4AT82	DIODE
D352	1SR124-4AT82	DIODE
D353	1SR124-4AT82	DIODE
D370	MA165TA5	DIODE
D371	MA165TA5	DIODE
D372	MA165TA5	DIODE
D401	MA165TA5	DIODE
D402	ERA15-02V3	DIODE
D403	MTZJ33B	DIODE
D501	1SR124-4AT82	DIODE
D502	MTZJT-778.2A	DIODE
D510	1SR124-4AT82	DIODE
D555	MA165TA5	DIODE
D601	MTZJT-775.1A	DIODE
D603	MA165TA5	DIODE
D606	MA165TA5	DIODE
D802	RBV4-08	DIODE
D803	AU01V0	DIODE
D804	TLP621GR-LF2	PHOTO COUPLER
D805	1SR124-4AT82	DIODE
D806	1SR124-4AT82	DIODE
D809	R2KNLFA1	DIODE
D810	MA165TA5	DIODE
D811	1SR124-4AT82	DIODE
D812	MA165TA5	DIODE
D813	MTZJT-7720D	DIODE
D851	TVSRU3AMLFA5	DIODE
D852	TVSRU3AMLFA5	DIODE
D853	1SR124-4AT82	DIODE
D1101	MTZJT-776.2A	DIODE
D1104	SLR56UR3FLF	LED
D1106	MA165TA5	DIODE
D1107	MA165TA5	DIODE
D1201	TVSS1WBS20	DIODE
D1202	MA165TA5	DIODE
D1205	MA165TA5	DIODE
D3101	MTZJT-775.1A	DIODE
<b>TRANSISTORS</b>		
Q202	BC847B	TRANSISTOR
Q203	BC847B	TRANSISTOR
Q253	BC857B	TRANSISTOR
Q255	BC847B	TRANSISTOR

Cct Ref	Parts Number	Description
Q401	BC847B	TRANSISTOR
Q402	BC847B	TRANSISTOR
Q501	2SD2398-M2	TRANSISTOR
Q601	BC847B	TRANSISTOR
Q602	BC847B	TRANSISTOR
Q603	BC857B	TRANSISTOR
Q851	BC557B/126	TRANSISTOR
Q852	2SA684R	TRANSISTOR
Q1101	2SD965-R	TRANSISTOR
Q1102	BC847B	TRANSISTOR
Q1103	BC847B	TRANSISTOR
Q1104	BC847B	TRANSISTOR
Q1105	BC847B	TRANSISTOR
Q1106	BC847B	TRANSISTOR
Q1107	BC847B	TRANSISTOR
Q1109	BC847B	TRANSISTOR
Q1110	BC847B	TRANSISTOR
Q1201	BC847B	TRANSISTOR
Q1204	BC847B	TRANSISTOR
Q2001	BC857B	TRANSISTOR
Q2002	BC857B	TRANSISTOR
Q2003	BC847B	TRANSISTOR
Q2004	BC847B	TRANSISTOR
Q3104	2SC1318-S	TRANSISTOR
<b>TRANSFORMERS</b>		
T553	ETH19Z192AZ	TRANSFORER <span style="float:right">⚠</span>
T801	ETP35KAN619U	TRANSFORMER <span style="float:right">⚠</span>
<b>COILS</b>		
J65	EXCELSA35V	COIL
J116	EXCELSA35T	COIL
L001	TALV35VB100K	COIL
L105	TYML0001	COIL
L106	TYML0001	COIL
L108	ELESNR22KA	COIL
L601	TALV35VB8R2K	COIL
L602	TALV35VB100K	COIL
L604	EXCELD35V	COIL
L802	EXCELSA35T	COIL
L803	EXCELD35V	COIL
L851	EXCELSA35T	COIL
L852	EXCELSA35T	COIL
L853	EXCELSA35T	COIL
L1101	TALV35VB331K	COIL
L2001	TALV35VB4R7K	COIL
L2002	TALV35VB4R7K	COIL
L2004	EXCELSA35T	COIL
L2005	TALV35VB6R8K	COIL
L2006	TALV35VB100K	COIL
L3101	TLT100K991R	COIL
L3102	TLT100K991R	COIL
L3103	EXCELSA35T	COIL
L3104	EXCELSA35T	COIL
L3105	TALV35VB100K	COIL
L3107	EXCELD35V	COIL
<b>FILTERS</b>		
	EFCV4045T4	CERAMIC FILTER
L801	ELF15N005A	LINE FILTER
X101	EFCV3095A6	CHIP FILTER
X102	K3953-M100	SAW FILTER
X201	L9454M	SAW FILTER
X2002	EFCA6504BF	FILTER
X2003	EFCA7004BF	FILTER
<b>CRYSTALS</b>		
X601	TSSA010	CRYSTAL
X602	EFCWS2F11T	CRYSTAL

Cct Ref	Parts Number	Description
X2001	4730007158	CRYSTAL
<b>RESISTORS</b>		
C010	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
C110	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
C111	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
C118	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
C3122	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
J118	ERD25T0V	RESISTOR 0W 0% 0 Ω
JA1	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA2	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA3	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA6	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA7	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA8	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA9	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA10	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA11	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA12	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA15	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA16	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA18	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA19	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA20	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA21	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA27	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA28	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA29	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA30	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA31	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA32	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA33	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA34	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA36	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA37	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA38	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA39	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA40	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA41	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA42	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JA43	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA44	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JS103	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE1	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE2	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE10	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE11	ERJ8GEY0R00	S.M.CARB .125W 5% 0 Ω
JSE15	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE18	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE26	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE29	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE30	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE31	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
R001	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100 Ω
R002	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100 Ω
R003	ERJ6GEYJ153	S.M.CARB 0.1W 5% 15K Ω
R004	ERG2SJS273	METAL 2W 5% 27K Ω <span style="float:right">⚠</span>
R005	ERJ6GEYJ393	S.M.CARB 0.1W 5% 39K Ω
R006	ERJ6GEYJ273	S.M.CARB 0.1W 5% 27K Ω
R007	ERJ6GEYJ302	S.M.CARB 0.1W 5% 3K Ω
R008	ERJ6GEYJ681	S.M.CARB 0.1W 5% 680 Ω
R110	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
R113	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1K Ω
R115	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
R202	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47K Ω
R203	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47K Ω
R205	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47K Ω



Cct Ref	Parts Number	Description			
R206	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R207	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R209	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R210	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R217	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R241	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R251	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R252	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R254	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R256	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R257	ERJ6GEYJ240	RESISTOR	0.1W	5%	24 Ω
R258	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R259	ERJ6GEYJ240	RESISTOR	0.1W	5%	24 Ω
R260	ERJ6GEYJ432	S.M.CARB	0.1W	5%	4K3 Ω
R261	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R262	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R263	ERJ6GEYJ432	S.M.CARB	0.1W	5%	4K3 Ω
R264	ERJ6GEYJ512	S.M.CARB	0.1W	5%	5K1 Ω
R265	ERD25TJ2R2	CARBON	0.25W	5%	2R2 Ω
R266	ERD25TJ2R2	CARBON	0.25W	5%	2R2 Ω
R268	ERJ6GEYJ203	S.M.CARB	0.1W	5%	20K Ω
R280	ERJ6GEYJ204	RESISTOR	0.1W	5%	200K Ω
R281	ERJ6GEYJ204	RESISTOR	0.1W	5%	200K Ω
R351	ERDS1TJ182	CARBON	0.5W	10%	1K8 Ω
R352	ERDS1TJ182	CARBON	0.5W	10%	1K8 Ω
R353	ERDS1TJ182	CARBON	0.5W	10%	1K8 Ω
R357	ERDS1TJ102	CARBON	0.5W	5%	1K Ω
R358	ERDS1TJ102	CARBON	0.5W	5%	1K Ω
R359	ERDS1TJ102	CARBON	0.5W	5%	1K Ω
R401	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R402	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R403	ERJ6ENF2701	S.M.CARB	0.1W	5%	27 Ω
R404	ERJ6ENF2701	S.M.CARB	0.1W	5%	27 Ω
R405	ERJ6ENF2701	S.M.CARB	0.1W	5%	27 Ω
R406	ERJ6GEYJ1R0	S.M.CARB	0.1W	5%	1 Ω
R409	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R410	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R411	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R415	ERJ6ENF2701	S.M.CARB	0.1W	5%	27 Ω
R501	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R502	ERD25TJ272	CARBON	0.25W	5%	2K7 Ω
R503	ERG3SJS220H	RESISTOR	3W	5%	22 Ω
R504	ERG2ANJ471	METAL	2W	5%	470 Ω <sup>△</sup>
R507	ERJ6GEYJ122	S.M.CARB	0.1W	5%	1K2 Ω
R553	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω
R557	ERDS1TJ184	CARBON	0.5W	5%	180 Ω
R560	ERQ1CJP102	FUSIBLE	1W	5%	1K Ω <sup>△</sup>
R601	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R602	ERJ6ENF3001	S.M.CARB	0.5W	5%	30 Ω
R604	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R605	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R606	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R607	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R608	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R609	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R610	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R611	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R612	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R613	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R614	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R615	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47 Ω
R616	ERJ6GEYJ201	S.M.CARB	0.1W	5%	200 Ω
R617	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180 Ω
R618	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47 Ω
R619	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R620	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω

Cct Ref	Parts Number	Description			
R621	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R622	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R623	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R624	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R625	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R626	ERJ6GEYJ474	S.M.CARB	0.1W	5%	470K Ω
R627	ERJ6GEYJ474	S.M.CARB	0.1W	5%	470K Ω
R629	ERJ6GEYJ154	S.M.CARB	0.1W	5%	150K Ω
R630	ERJ6ENF1802	S.M.CARB	0.1W	5%	1K8 Ω
R631	ERO50PKF5603	METAL	0.5W	1%	560K Ω <sup>△</sup>
R632	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R633	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R635	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R638	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R646	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10 Ω
R802	ERC12ZGK335D	SOLID	0.5W	10%	3M3 Ω
R803	ERF7ZK2R7	WOUND	7W	20%	2R7 Ω <sup>△</sup>
R804	ERG2ANJ104	METAL	2W	5%	100K Ω
R805	ERDS1TJ103	CARBON	0.5W	5%	10K Ω
R806	ERDS1TJ332	RESISTOR	0.5W	5%	3K3 Ω
R810	ERDS1TJ152	CARBON	0.5W	5%	1K5 Ω
R811	ERQ12HJ100	FUSIBLE	0.5W	5%	10 Ω <sup>△</sup>
R812	ERD75TAJ825	CARBON	0.75W	5%	8M2 Ω <sup>△</sup>
R814	ERDS1TJ330	CARBON	0.5W	5%	33 Ω
R815	ERDS1TJ681	CARBON	0.5W	5%	680 Ω
R851	ERG2SJS220H	RESISTOR	2W	5%	22 Ω
R852	ERG2SJS130H	RESISTOR	2W	5%	13 Ω
R853	ERG3FJ151	METAL	3W	5%	150 Ω <sup>△</sup>
R854	ERG3FJ151	METAL	3W	5%	150 Ω <sup>△</sup>
R855	ERDS1TJ4R7	CARBON	0.5W	5%	4R7 Ω
R856	ERD25TJ101	CARBON	0.25W	5%	100 Ω
R857	ERD25TJ202	CARBON	0.25W	5%	2K Ω
R858	ERDS1TJ103	CARBON	0.5W	5%	10K Ω
R1101	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1102	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1104	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R1105	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R1107	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56K Ω
R1110	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1112	ERJ6GEYJ362	S.M.CAR	0.1W	5%	3K6 Ω
R1113	ERJ6GEYJ242	S.M.CARB	0.1W	5%	2K4 Ω
R1114	ERJ6GEYJ432	S.M.CARB	0.1W	5%	4K3 Ω
R1115	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R1116	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R1117	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R1118	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1119	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1120	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1121	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1122	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1123	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1124	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1125	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1127	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1128	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1129	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1130	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R1131	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R1132	ERJ6GEYJ225	S.M.CARB	0.1W	5%	2M2 Ω
R1133	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R1134	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K Ω
R1135	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1136	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1137	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R1138	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R1139	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω

Cct Ref	Parts Number	Description			
R1140	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1141	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1144	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R1145	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R1146	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R1148	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1149	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1150	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1202	ERDS1TJ680	CARBON	0.5W	5%	68 Ω
R1205	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω
R1206	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R1209	ERDS1TJ560	CARBON	0.5W	5%	56 Ω
R2001	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2002	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2003	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2004	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2007	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2008	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2009	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2010	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R2011	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R2012	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R2013	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R2014	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R2015	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2016	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2017	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2018	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω
R2020	ERJ6GEYJ202	S.M.CARB	0.1W	5%	2K Ω
R2021	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2022	ERJ6GEYJ303	S.M.CARB	0.1W	5%	30K Ω
R3106	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3111	ERDS1TJ101	CARBON	0.5W	5%	100 Ω
R3115	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R3116	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3117	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3118	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3120	ERDS1TJ750	CARBON	0.5W	5%	75 Ω
R3121	ERJ6GEYJ334	S.M.CARB	0.1W	5%	330K Ω
R3122	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3123	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3124	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3125	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R3129	ERDS1TJ750	CARBON	0.5W	5%	75 Ω
R3130	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3131	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3132	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3133	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3134	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
<b>CAPACITORS</b>					
C001	ECA1CM470GB	ELECT	16V		47μF
C002	ECJ2VF1H104Z	ELECT	350V		100nF
C005	ECJ2VF1H104Z	ELECT	350V		100nF
C006	ECA1HM101GB	ELECT	50V		100μF
C007	ECA1HM330B	ELECT	50V		33μF
C008	ECA1HM010GB	ELECT	50V		1μF
C109	ECUV1H080DCX	S.M. CAP	50V		80pF
C117	ECJ2VB1H103K	ELECT	350V		10μF
C209	ECUV1H101JCX	S.M. CAP	50V		100pF
C251	ECA1HM101GB	ELECT	50V		100μF
C252	ECJ2VB1H223K	ELECT	350V		22μF
C253	ECKC1H103JB	CERAMIC	50V		10nF
C254	ECQM1H154J	FILM	50V		150nF
C255	ECA1CM470GB	ELECT	16V		47μF
C256	ECJ2VB1H223K	ELECT	350V		22μF
C257	ECA1CHG102B	ELECT	10V		1000μF

Cct Ref	Parts Number	Description			
C258	ECA1HM101GB	ELECT	50V		100μF
C259	ECQM1H154J	FILM	50V		150nF
C260	ECA1VM102GB	ELECT	35V		1nF
C261	ECA1VM102GB	ELECT	35V		1nF
C262	ECA1HM3R3GB	ELECT	50V		3.3μF
C263	ECA1HM010GB	ELECT	50V		1μF
C264	ECA1HHG222E	ELECT	50V		2200μF
C265	ECA1HM3R3GB	ELECT	50V		3.3μF
C266	ECA1HM010GB	ELECT	50V		1μF
C267	ECJ2YB1H104K	ELECT	350V		100nF
C268	ECJ2YB1H104K	ELECT	350V		100nF
C270	ECJ2YB1H104K	ELECT	350V		100nF
C351	ECA2EM010B	ELECT	250V		100nF
C352	ECKC2H152J	CERAMIC	500V		1.5nF
C353	ECA2EM100B	ELECT	250V		10μF
C370	ECA1CM221GB	ELECT	16V		220μF
C405	ECUV1H100CCX	S.M. CAP	50V		10pF
C406	ECA1HHG101B	ELECT	50V		100μF
C408	ECQM1H274J	FILM	50V		270nF
C409	ECA1HM2R2GB	ELECT	50V		2.2μF
C410	ECEA1HU101	ELECT	50V		100μF
C501	EEUFC1H390B	ELECT	50V		390μF
C502	ECQM1273KZW	FILM	100V		27nF
C504	ECUV1H222JCX	S.M. CAP	50V		2.2nF
C552	ECA2EM100B	ELECT	250V		10μF
C554	ECA1VM471GB	ELECT	35V		470μF
C555	ECKC2H471J	CERAMIC	500V		470pF
C556	ECKC2H471J	CERAMIC	500V		470pF
C557	ECKC2H331J	CERAMIC	500V		330pF
C560	ECQF4273JZH	FILM	400V		27nF
C563	ECWF2394JBB	FILM	250V		0.39μF
C564	ECA1VM471GB	ELECT	35V		470μF
C565	ECKC2H471J	CERAMIC	500V		470pF
C566	ECA1VM471GB	ELECT	35V		470μF
C601	ECA1CM102B	ELECT	16V		1000μF
C602	ECJ2YB1H104K	ELECT	350V		100nF
C603	ECJ2VB1H472K	ELECT	350V		4.7nF
C604	ECQM1H224J	FILM	50V		220nF
C605	ECQM1H224J	FILM	50V		220nF
C606	ECUV1H222JCX	S.M. CAP	50V		2.2nF
C607	ECA1HM010GB	ELECT	50V		1μF
C608	ECA1HM2R2GB	ELECT	50V		2.2μF
C609	ECJ2YB1H104K	ELECT	350V		100nF
C610	ECJ2VB1H103K	ELECT	350V		10μF
C614	ECQM1H104J	FILM	50V		100nF
C615	ECQM1H224J	FILM	50V		220nF
C618	ECA1CM100GB	ELECT	16V		10μF
C620	ECUV1H470GCG	S.M. CAP	50V		47pF
C621	ECJ2VF1H104Z	ELECT	350V		100nF
C622	ECUV1H101JCX	S.M. CAP	50V		100pF
C623	ECUV1H220GCG	S.M. CAP	50V		22pF
C624	ECQB1H223K	FILM	50V		22nF
C625	ECQB1H223K	FILM	50V		22nF
C626	ECQB1H223K	FILM	50V		22nF
C627	ECJ2YB1H473K	ELECT	350V		47nF
C628	ECJ2YB1H473K	ELECT	350V		47nF
C629	ECJ2YB1H104K	ELECT	350V		100nF
C630	ECJ2VF1H104Z	ELECT	350V		100nF
C631	ECA1HM101GB	ELECT	50V		100μF
C632	ECA1HM101GB	ELECT	50V		100μF
C633	ECJ2VF1H104Z	ELECT	350V		100nF
C634	ECA1HM101GB	ELECT	50V		100μF
C635	ECJ2VF1H104Z	ELECT	350V		100nF
C636	ECA1CM102B	ELECT	16V		1000μF
C637	ECA1HM101GB	ELECT	50V		100μF
C638	ECA1HM101GB	ELECT	50V		100μF

Cct Ref	Parts Number	Description			
C639	ECA1HM220GB	ELECT	50V	22µF	
C640	ECA1HM2R2GB	ELECT	50V	2.2µF	
C642	ECA1HM010GB	ELECT	50V	1µF	
C647	ECJ2VB1H472K	ELECT	350V	4.7nF	
C648	ECJ2VB1H472K	ELECT	350V	4.7nF	
C654	ECJ2VB1H103K	ELECT	350V	10µF	
C802	ECKWNA332MEC	CERAMIC	250V	3.3nF	
C803	ECKWNA101MBC	CERAMIC	400V	100µF	
C805	ECQE2A474MWB	FILM	100V	470nF	
C806	ECKC2H472J	CERAMIC	500V	4.7nF	△
C807	ECKC2H472J	CERAMIC	500V	4.7nF	△
C808	ECKC2H472J	CERAMIC	500V	4.7nF	△
C809	ECOS2GA151BB	ELECT	400V	150µF	
C810	ECA1HHG101B	ELECT	50V	100µF	
C811	ECKC1H471J	CERAMIC	50V	470pF	
C812	ECKC3A182J	CERAMIC	1KV	1800pF	△
C813	ECKC3D221JB	CERAMIC	2KV	220pF	△
C814	ECKC3D102J	CERAMIC	2KV	1nF	△
C815	ECA2CHG221E	ELECT	160V	220µF	
C816	ECKC2H472J	CERAMIC	500V	4.7nF	△
C818	ECQB1H683K	FILM	50V	68nF	
C851	ECA1CM471GB	ELECT	16V	470µF	
C854	ECKC2H471J	CERAMIC	500V	470pF	△
C855	ECJ2VF1H104Z	ELECT	350V	100nF	
C856	ECA1VM471GB	ELECT	35V	470µF	
C857	ECA1CM471GB	ELECT	16V	470µF	
C858	ECJ2VF1H104Z	ELECT	350V	100nF	
C859	ECA1HHG471E	ELECT	50V	470µF	
C860	ECA1VHG331B	ELECT	35V	330pF	
C1101	ECJ2VF1H104Z	ELECT	350V	100nF	
C1102	ECA1CM220GB	ELECT	16V	22µF	
C1103	ECUV1H331JCX	S.M. CAP	50V	330pF	
C1104	ECA1HM101GB	ELECT	50V	100µF	
C1105	ECJ2VF1H104Z	ELECT	350V	100nF	
C1106	ECA1HM010GB	ELECT	50V	1µF	
C1107	ECUV1H221JCX	S.M. CAP	50V	220pF	
C1108	ECUV1H221JCX	S.M. CAP	50V	220pF	
C1201	ECA1CM471GB	ELECT	16V	470µF	
C1202	ECQM1H334J	FILM	50V	330nF	
C1203	ECA1HM101GB	ELECT	50V	100µF	
C1204	ECA1HM101GB	ELECT	50V	100µF	
C1205	ECJ2VF1C334Z	ELECT	350V	330nF	
C1210	ECA1HM101GB	ELECT	50V	100µF	
C2001	ECJ2VB1H103K	ELECT	350V	10µF	
C2002	ECJ2VB1H103K	ELECT	350V	10µF	
C2003	ECA1HM101GB	ELECT	50V	100µF	
C2004	ECJ2VF1H104Z	ELECT	350V	100nF	
C2005	ECUV1H102JCX	S.M. CAP	50V	1nF	
C2006	ECUV1H102JCX	S.M. CAP	50V	1nF	
C2007	ECUV1H102JCX	S.M. CAP	50V	1nF	
C2008	ECUV1H010CCX	S.M. CAP	50V	1pF	
C2009	ECUV1H010CCX	S.M. CAP	50V	1pF	
C2010	ECQM1H334J	FILM	50V	330nF	
C2011	ECUV1H221JCX	S.M. CAP	50V	220pF	
C2012	ECUV1H470JCX	S.M. CAP	50V	47pF	
C2013	ECUV1H070DTX	S.M. CAP	50V	70pF	
C2014	ECUV1H560GCG	S.M. CAP	50V	56pF	
C2015	ECUV1H220JCX	S.M. CAP	50V	22pF	
C2016	ECJ2VF1H104Z	ELECT	350V	100nF	
C2017	ECJ2VF1H104Z	ELECT	350V	100nF	
C2018	ECA1CM100GB	ELECT	16V	10µF	
C2019	ECA1HM101GB	ELECT	50V	100µF	
C2020	ECQM1H474J	FILM	50V	470nF	
C2021	ECQM1H474J	FILM	50V	470nF	
C2022	ECUV1H221JCX	S.M. CAP	50V	220pF	
C2023	ECUV1H221JCX	S.M. CAP	50V	220pF	






Cct Ref	Parts Number	Description			
C2024	ECJ2VF1H104Z	ELECT	350V	100nF	
C2025	ECA1HM2R2GB	ELECT	50V	2.2µF	
C2026	ECA1CM100GB	ELECT	16V	10µF	
C2027	ECA1HM101GB	ELECT	50V	100µF	
C2029	ECA1CM470GB	ELECT	16V	47µF	
C2030	ECA1CM470GB	ELECT	16V	47µF	
C2031	ECUV1H102JCX	S.M. CAP	50V	1nF	
C2032	ECUV1H102JCX	S.M. CAP	50V	1nF	
C2033	ECJ2VF1H104Z	ELECT	350V	100nF	
C2036	ECUV1H471JCX	S.M. CAP	50V	470pF	
C2037	ECUV1H221JCX	S.M. CAP	50V	220pF	
C2038	ECJ2VB1H103K	ELECT	350V	10µF	
C2039	ECJ2VF1H104Z	ELECT	350V	100nF	
C2040	ECA1HM101GB	ELECT	50V	100µF	
C2041	ECUV1H100DCX	S.M. CAP	50V	10pF	
C2042	ECUV1H100DCX	S.M. CAP	50V	10pF	
C3103	ECA1HM101GB	ELECT	50V	100µF	
C3104	ECJ2VF1H104Z	ELECT	350V	100nF	
C3109	ECUV1H222KBX	S.M. CAP	50V	2.2nF	
C3110	ECUV1H222KBX	S.M. CAP	50V	2.2nF	
C3111	ECUV1H222KBX	S.M. CAP	50V	2.2nF	
C3112	ECUV1H222KBX	S.M. CAP	50V	2.2nF	
C3113	ECUV1H222KBX	S.M. CAP	50V	2.2nF	
C3114	ECUV1H222KBX	S.M. CAP	50V	2.2nF	
C3116	ECUV1H561KBX	S.M. CAP	50V	560pF	
C3117	ECUV1H561KBX	S.M. CAP	50V	560pF	
<b>TERMINALS AND LINKS</b>					
JK3101	TJB16673	RCA / HEADPHONE JACK			
JK3102	TJB8E011	SCART SOCKET			
<b>SWITCHES</b>					
S801	ESB92S11B	SWITCH			△
S1101	EVQ21405R	SWITCH			
S1102	EVQ21405R	SWITCH			
S1103	EVQ21405R	SWITCH			
S1104	EVQ21405R	SWITCH			
S1105	EVQ21405R	SWITCH			
<b>DIFFERENCES FOR MODEL TX-21CK1F</b>					
<b>MECHANICAL PARTS</b>					
11	ZTUZAE450A	ANODE LEAD			△
12	TKU8E00490	BACK COVER			△
13	A51EER35X80	C.R.T.			△
14	TKY8E410	CABINET			△
15	VP15005-35	CRT FIXING SCREW			
16	TLK8E05143	DEGAUSS COIL			△
17	TNP8EE011AR	E P.C.B.			△
18	ZTFM23004A	F.B.T.			△
19	TXAJTF01B2AG	FOCUS LEAD ASSY			△
20	TBM8E1963-2	MODEL LABEL			△
21	TNP8EY015AF	Y P.C.B.			△
<b>MISCELLANEOUS COMPONENTS</b>					
	TPC8E4766-1	OUTER CARTON			
	TPD8E697	TOP CUSHION			
	TPD8E698	BOTTOM CUSHION			
MOE8	31221212478	FIX CLIP			
<b>I.C.s</b>					
IC351	TDA6107Q	RGB OUTPUT			
IC451	LA7840	VERTICAL OUTPUT			
IC601	TDA9367V401S	UOC			
IC802	SE120NLF4	ERROR IC			
IC1103	XPK2-4AF	EEROM			
<b>DIODES</b>					
D551	MA165TA5	DIODE			



Cct Ref	Parts Number	Description
D552	1SR124-4AT82	DIODE
D553	EU02	DIODE
D554	EU02	DIODE
D556	TVSRH2FV1	DIODE
D557	RU2AMLFA1	DIODE
D559	1SR124-4AT82	DIODE
D801	59209T80B110	DIODE
D807	MTZJT-7720D	DIODE
D808	RU3LFA1	DIODE
D814	MTZJT-773.9A	DIODE
<b>TRANSISTORS</b>		
Q551	BU4506DFRB	TRANSISTOR
Q552	BC847B	TRANSISTOR
<b>TRANSFORMERS</b>		
T802	ETS33KD1B6AC	TRANSFORMER <span style="float:right">△</span>
<b>COILS</b>		
L501	ELH5L4119	COIL
L551	ELC08D820E	COIL
<b>RESISTORS</b>		
JSE44	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
R407	ERDS1TJ331	CARBON 0.5W 5% 330 Ω
R416	ERO25CKF2R40	RESISTOR 0.25W 1% 2R4 Ω <span style="float:right">△</span>
R417	ERO25CKF2R40	RESISTOR 0.25W 1% 2R4 Ω <span style="float:right">△</span>
R418	ERO25CKF2R40	RESISTOR 0.25W 1% 2R4 Ω <span style="float:right">△</span>
R554	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1K Ω
R555	ERJ6GEYJ123	S.M.CARB 0.1W 5% 12K Ω
R556	ERD25TJ103	CARBON 0.25W 5% 10K Ω
R558	ERD25TJ153	CARBON 0.25W 5% 15K Ω
R559	ERQ1CJP1R5	RESISTOR 1W 5% 1R5 Ω <span style="float:right">△</span>
R603	ERJ6ENF3902	S.M.CARB 0.5W 5% 39 Ω
R628	ERDS1TJ564	RESISTOR 0.5W 5% 560K Ω
R807	ERD25TJ152	CARBON 0.25W 5% 1K5 Ω
R809	ERW2PKR47	WOUND 2W 10% R47 Ω <span style="float:right">△</span>
R813	ERDS1TJ333	CARBON 0.5W 5% 33K Ω
R1106	ERJ6GEYJ124	S.M.CARB 0.1W 5% 120K Ω
R1108	ERJ6GEYJ183	S.M.CARB 0.1W 5% 18K Ω
R1147	ERJ6GEYJ124	S.M.CARB 0.1W 5% 120K Ω
<b>CAPACITORS</b>		
C558	ECEA2CN2R2SB	ELECT 160V 2.2μF
C559	ECWH16103JVB	FILM 1600 0.01μF
C567	ECKC3D122J	CERAMIC 2KV 1.2nF <span style="float:right">△</span>
C570	ECKC2H472J	CERAMIC 500V 4.7nF <span style="float:right">△</span>
C653	ECJ2YB1H473K	ELECT 350V 47nF
<b>DIFFERENCES FOR MODEL TX-25CK1F</b>		
<b>MECHANICAL PARTS</b>		
11	ZTUZAE550A	ANODE LEAD <span style="float:right">△</span>
12	TKU8E00520	BACK COVER <span style="float:right">△</span>
13	A59ECF50X04	C.R.T. <span style="float:right">△</span>
14	TKY8E450	CABINET <span style="float:right">△</span>
15	VP17005-32	CRT FIXING SCREW
16	TLK8E05138	DEGAUSS COIL <span style="float:right">△</span>
17	TNP8EE011AX	E P.C.B. <span style="float:right">△</span>
18	ZTFL84001A	F.B.T. <span style="float:right">△</span>
19	TXFJTF01BXGG	FOCUS LEAD ASSY <span style="float:right">△</span>
20	TBM8E1983	MODEL LABEL <span style="float:right">△</span>
21	TNP8EY015AG	Y P.C.B. <span style="float:right">△</span>
<b>MISCELLANEOUS COMPONENTS</b>		
	31221212478	FIX CLIP
	TPC8E4799	OUTER CARTON
	TPD8E708	TOP CUSHION
	TPD8E709	BOTTOM CUSHION

Cct Ref	Parts Number	Description
D801	232266296706	THERMISTOR <span style="float:right">△</span>
S351	TJSC00300	CRT SOCKET
<b>I.C.s</b>		
IC351	TDA6108JF	R.G.B. AMPLIFIER
IC451	LA7845N	VERTICAL OUTPUT
IC601	TDA9365V401S	UOC
IC701	TEA2031A	E/W CORRECTION
IC702	AN78L20	20V REGULATOR
IC802	SE140NLF4	ERROR AMPLIFIER
IC1103	XPK2-1BF	EEROM
<b>DIODES</b>		
D551	MTZJT-778.2C	DIODE
D552	EU02	DIODE
D553	TVSRU3AMLFB4	DIODE
D554	TVSRU3AMLFB4	DIODE
D556	ERD07-15L7	DIODE
D557	RU3LFA1	DIODE
D559	EU02	DIODE
D607	BZD23C240143	DIODE
D701	TLP621GR-LF2	PHOTO COUPLER
D702	MA165TA5	DIODE
D703	MA165TA5	DIODE
D704	MTZJT-775.6C	DIODE
D705	MA29TA5	DIODE
D706	MA4036MTA	DIODE
D751	MA4051	DIODE
D752	AU02V0	DIODE
D753	MTZJT-7730D	DIODE
D754	MTZJT-7727D	DIODE
D755	MA165TA5	DIODE
D808	TVSRU3AMLFA5	DIODE
D814	MTZJT-775.6A	DIODE
<b>TRANSISTORS</b>		
Q351	BC857B	TRANSISTOR
Q551	BU4508AFRB	TRANSISTOR
Q606	BC847B	TRANSISTOR
Q701	BC857B	TRANSISTOR
Q702	BC847B	TRANSISTOR
Q751	BC847B	TRANSISTOR
Q752	2SK2538000LB	TRANSISTOR
Q753	BC557B/126	TRANSISTOR
<b>TRANSFORMERS</b>		
T802	10653050-A	TRANSFORMER
<b>COILS</b>		
J405	EXCELSA35T	COIL
L501	ELH5L4121	COIL
L502	ELC08D682E	COIL
L751	ELC18B801L	COIL
L752	ELC10D822E	COIL
<b>RESISTORS</b>		
JSE33	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSE45	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JYAK	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
R360	ERG2SJS470	METAL 2W 5% 47 Ω
R370	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10K Ω
R371	ERJ6GEYJ391	S.M.CARB 0.1W 5% 390 Ω
R407	ERDS1TJ471	CARBON 0.5W 5% 470 Ω
R408	ERDS1TJ471	CARBON 0.5W 5% 470 Ω
R416	ERDS1TJ1R5	CARBON 0.5W 5% 1R5 Ω
R417	ERDS1TJ1R2	CARBON 0.5W 5% 1R2 Ω
R418	ERDS1TJ1R2	CARBON 0.5W 5% 1R2 Ω
R556	ERG1SJ183	METAL 1W 5% 18K Ω
R558	ERD25TJ183	CARBON 0.25W 5% 18K Ω
R559	ERQ1ABJP3R0S	RESISTOR 1W 5% 3 Ω <span style="float:right">△</span>

Cct Ref	Parts Number	Description				
R561	ERQ12AJ101	FUSIBLE	0.5W	5%	100 Ω	△
R603	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω	
R628	ERDS1TJ684	RESISTOR	1W	5%	680K Ω	
R639	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R701	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R702	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R703	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω	
R704	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R705	ERDS1TJ821	CARBON	0.5W	5%	820 Ω	
R706	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56K Ω	
R707	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R708	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω	
R709	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω	
R710	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω	
R711	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R712	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω	
R713	ERG1SJ101	METAL	1W	5%	100 Ω	
R715	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R716	ERJ6GEYJ432	S.M.CARB	0.1W	5%	4K3 Ω	
R717	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω	
R751	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω	
R752	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R753	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω	
R754	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R756	ERDS1TJ472	CARBON	0.5W	5%	4K7 Ω	
R757	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68 Ω	
R758	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω	
R759	ERQ12HJ8R2	FUSIBLE	0.5W	5%	8R2 Ω	△
R760	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R761	ERG1SJ563	RESISTOR	1W	5%	56K Ω	
R762	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R763	ERG3FJ561H	RESISTOR	3W	5%	560 Ω	
R809	ERW2PKR33	WOUND	2W	20%	R33 Ω	△
R813	ERDS1TJ103	CARBON	0.5W	5%	10K Ω	
R1106	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω	
R1108	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R1147	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω	
<b>CAPACITORS</b>						
C354	ECJ2VF1H104Z	ELECT	350V		100nF	
C356	ECUV1H102ZFX	S.M. CAP	50V		1nF	
C357	ECKC3D152J	CERAMIC	2KV		1.5nF	△
C358	ECUV1H561KBX	S.M. CAP	50V		560pF	
C551	ECUV1H220JCX	S.M. CAP	50V		22pF	
C558	ECA2CM3R3B	ELECT	160V		3.3μF	
C559	ECWH20123JVB	FILM	2000V		120nF	
C562	ECA2GHG2R2B	ELECT	400V		120nF	
C567	ECKC3D681J	CERAMIC	2KV		680pF	△
C570	ECKC2H152J	CERAMIC	500V		1.5nF	△
C646	ECJ2YB1H104K	ELECT	350V		100nF	
C650	ECUV1H390JCX	S.M. CAP	50V		39pF	
C651	ECUV1H390JCX	S.M. CAP	50V		39pF	
C652	ECUV1H390JCX	S.M. CAP	50V		39pF	
C653	ECJ2YB1H683K	S.M. CAP	50V		68nF	
C701	ECA1HM100GB	ELECT	50V		10μF	
C702	ECJ2VF1H104Z	ELECT	350V		100nF	
C703	ECA1HHG100B	ELECT	50V		10μF	
C704	ECQB1H122J	FILM	50V		1.2nF	
C705	ECQB1H223K	FILM	50V		22nF	
C706	ECQP1152GZ	FILM	100V		1.5nF	
C707	ECQP1102JZ3	FILM	100V		1nF	
C708	ECA1HM220GB	ELECT	50V		22μF	
C751	ECWF2334JBB	FILM	250V		330nF	
C752	ECJ2VF1H104Z	ELECT	350V		100nF	
C753	ECJ2VF1H104Z	ELECT	350V		100nF	
C754	ECA1JM101B	ELECT	63V		100μF	

Cct Ref	Parts Number	Description	
<b>DIFFERENCES FOR MODEL TX-28CK1F</b>			
<b>MECHANICAL PARTS</b>			
11	ZTUZAE550A	ANODE LEAD	△
12	TKU8E00530	BACK COVER	△
13	A66ECF50X04	C.R.T.	△
14	TKY8E460	CABINET	△
15	VP17005-32	CRT FIXING SCREW	
16	TLK8E05140	DEGAUSS COIL	△
17	TNP8EE011BA	E P.C.B.	△
18	ZTFL84001A	F.B.T.	△
19	TXFJTF01BXGG	FOCUS LEAD ASSY	△
20	TBM8E1981	MODEL LABEL	△
21	TNP8EY015AH	Y P.C.B.	△
<b>MISCELLANEOUS COMPONENTS</b>			
	31221212478	FIX CLIP	
	TPC8E4800	OUTER CARTON	
	TPD8E710	TOP CUSHON	
	TPD8E711	BOTTOM CSHION	
D801	232266296706	THERMISTOR	△
S351	TJSC00300	CRT SOCKET	
<b>I.C.s</b>			
IC351	TDA6108JF	R.G.B. AMPLIFIER	
IC451	LA7845N	VERTICAL OUTPUT	
IC601	TDA9365V401S	UOC	
IC701	TEA2031A	E/W CORRECTION	
IC702	AN78L20	20V REGULATOR	
IC802	SE140NLF4	ERROR AMLIFIER	
IC1103	XPK2-1CF	EEROM	
<b>DIODES</b>			
D551	MTZJT-778.2C	DIODE	
D552	EU02	DIODE	
D553	TVSRU3AMLFB4	DIODE	
D554	TVSRU3AMLFB4	DIODE	
D556	ERD07-15L7	DIODE	
D557	RU3LFA1	DIODE	
D559	EU02	DIODE	
D607	BZD23C240143	DIODE	
D701	TLP621GR-LF2	PHOTO COUPLER	
D702	MA165TA5	DIODE	
D703	MA165TA5	DIODE	
D704	MTZJT-775.6C	DIODE	
D705	MA29TA5	DIODE	
D706	MA4036MTA	DIODE	
D751	MA4051	DIODE	
D752	AU02V0	DIODE	
D753	MTZJT-7730D	DIODE	
D754	MTZJT-7727D	DIODE	
D755	MA165TA5	DIODE	
D808	TVSRU3AMLFA5	DIODE	
D814	MTZJT-775.6A	DIODE	
<b>TRANSISTORS</b>			
Q351	BC857B	TRANSISTOR	
Q551	BU4508AFRB	TRANSISTOR	
Q606	BC847B	TRANSISTOR	
Q701	BC857B	TRANSISTOR	
Q702	BC847B	TRANSISTOR	
Q751	BC847B	TRANSISTOR	
Q752	2SK2538000LB	TRANSISTOR	
Q753	BC557B/126	TRANSISTOR	
<b>TRANSFORMERS</b>			
T802	10653050-A	TRANSFORER	


Cct Ref	Parts Number	Description			
<b>COILS</b>					
J405	EXCELSA35T	COIL			
L501	ELH5L4105	COIL			
L502	ELC08D682E	COIL			
L751	ELC18B801L	COIL			
L752	ELC10D822E	COIL			
<b>RESISTORS</b>					
JSE33	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
JSE45	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
JYAK	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R360	ERG2SJS470	METAL	2W	5%	47 Ω
R370	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R371	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R407	ERDS1TJ471	CARBON	0.5W	5%	470 Ω
R408	ERDS1TJ471	CARBON	0.5W	5%	470 Ω
R416	ERDS1TJ1R5	CARBON	0.5W	5%	1R5 Ω
R417	ERDS1TJ1R2	CARBON	0.5W	5%	1R2 Ω
R418	ERDS1TJ1R2	CARBON	0.5W	5%	1R2 Ω
R556	ERG1SJ183	METAL	1W	5%	18K Ω
R558	ERD25TJ183	CARBON	0.25W	5%	18K Ω
R559	ERQ1ABJP3R0S	RESISTOR	1W	5%	3 Ω 
R561	ERQ12AJ101	FUSIBLE	0.5W	5%	100 Ω 
R603	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω
R628	ERDS1TJ684	RESISTOR	1W	5%	680K Ω
R639	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R701	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R702	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R703	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω
R704	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R705	ERDS1TJ821	CARBON	0.5W	5%	820 Ω
R706	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56K Ω
R707	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R708	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω
R709	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω
R710	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω
R711	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R712	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R713	ERG1SJ101	METAL	1W	5%	100 Ω
R715	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R716	ERJ6GEYJ432	S.M.CARB	0.1W	5%	4K3 Ω
R717	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω
R751	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω
R752	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R753	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω
R754	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R756	ERDS1TJ472	CARBON	0.5W	5%	4K7 Ω
R757	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68 Ω
R758	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω
R759	ERQ12HJ8R2	FUSIBLE	0.5W	5%	8R2 Ω 
R760	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R761	ERG1SJ563	RESISTOR	1W	5%	56K Ω
R762	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R763	ERG3FJ561H	RESISTOR	3W	5%	560 Ω
R809	ERW2PKR33	WOUND	2W	20%	R33 Ω 
R813	ERDS1TJ103	CARBON	0.5W	5%	10K Ω
R1106	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω
R1108	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1147	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω
<b>CAPACITORS</b>					
C354	ECJ2VF1H104Z	ELECT	350V		100nF
C356	ECUV1H102ZFX	S.M. CAP	50V		1nF
C357	ECKC3D152J	CERAMIC	2KV		1.5nF 
C358	ECUV1H561KBX	S.M. CAP	50V		560pF
C551	ECUV1H220JCX	S.M. CAP	50V		22pF
C558	ECA2CM3R3B	ELECT	160V		3.3μF

Cct Ref	Parts Number	Description			
C559	ECWH20123JVB	FILM	2000V		120nF
C562	ECA2GHG2R2B	ELECT	400V		120nF
C567	ECKC3D681J	CERAMIC	2KV		680pF 
C570	ECKC2H152J	CERAMIC	500V		1.5nF 
C646	ECJ2YB1H104K	ELECT	350V		100nF
C650	ECUV1H390JCX	S.M. CAP	50V		39pF
C651	ECUV1H390JCX	S.M. CAP	50V		39pF
C652	ECUV1H390JCX	S.M. CAP	50V		39pF
C653	ECJ2YB1H683K	S.M. CAP	50V		68nF
C701	ECA1HM100GB	ELECT	50V		10μF
C702	ECJ2VF1H104Z	ELECT	350V		100nF
C703	ECA1HHG100B	ELECT	50V		10μF
C704	ECQB1H122J	FILM	50V		1.2nF
C705	ECQB1H223K	FILM	50V		22nF
C706	ECQP1152GZ	FILM	100V		1.5nF
C707	ECQP1102JZ3	FILM	100V		1nF
C708	ECA1HM220GB	ELECT	50V		22μF
C751	ECWF2334JBB	FILM	250V		330nF
C752	ECJ2VF1H104Z	ELECT	350V		100nF
C753	ECJ2VF1H104Z	ELECT	350V		100nF
C754	ECA1JM101B	ELECT	63V		100μF


# SCHEMATIC DIAGRAMS FOR MODEL TX-21CK1F, TX-25CK1F, TX-28CK1F (Z8 CHASSIS)

# ZEICHENERKLÄRUNG FÜR MODELL TX-21CK1F, TX-25CK1F, TX-28CK1F (Z8 CHASSIS)

## IMPORTANT SAFETY NOTICE

Components identified by  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.





## WICHTIGER SICHERHEITSHINWEIS

Teile, die mit einem Hinweis  gekennzeichnet sind, sind wichtig für die Sicherheit. Sollte ein Auswechseln erforderlich sein, sind unbedingt Originalteile einzusetzen.

## NOTES

- RESISTOR**  
All resistors are carbon 1/4W resistor, unless marked otherwise.  
Unit of resistance is OHM ( $\Omega$ ) (k=1,000, M=1,000,000)
- CAPACITORS**  
All capacitors are ceramic 50V unless marked otherwise.  
Unit of capacitance is  $\mu$ F unless otherwise stated.
- COIL**  
Unit of inductance is  $\mu$ H, unless otherwise stated.
- Components marked "L" on the schematic diagram shows leadless parts.
- TEST POINT**

 Test Point Position

- EARTH SYMBOL**  
 Chassis Earth (Cold)     Line Earth (Hot)
- VOLTAGE MEASUREMENT**  
Voltage is measured by a d.c. voltmeter.  
Measurement conditions are as follows:  
Power source                      a.c. 220V-240V, 50Hz  
Receiving Signal                  Colour Bar signal (RF)  
All customer controls              Maximum position
-  Indicates the Video signal path  
 Indicates the Audio signal path


These schematic diagrams are the latest at time of printing and are subject to change without notice.





## REMARKS

- The Power Supply Circuit contains a circuit area which uses a separate power supply to isolate the earth connection. The circuit is defined by HOT and COLD indications in the schematic diagram. All circuits except the Power Circuit, are COLD.  
Take the following precautions :-  
a. Do not touch the hot part, or the hot and cold parts at the same time, as you are liable to a shock hazard.  
b. Do not short circuit the hot and cold circuits as electrical components may be damaged.  
c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously as this may cause fuse failure. Connect the earth of the instruments to the earth connection of the circuit being measured.  
d. Make sure to disconnect the power plug before removing the chassis.

## ANMERKUNG

- WIDERSTÄNDE**  
Alle 1/4W Widerstände sind Kohlewiderstände, Abweichungen sind folgt gekennzeichnet.  
Die Maßeinheit ist OHM ( $\Omega$ ) (k=1,000, M=1,000,000)
- KONDENSATOREN**  
Alle Kondensatoren sind Keramikausführungen. Spannungsfestigkeit 50V. Abweichungen sind wie folgt gekennzeichnet. Die Maßeinheit ist  $\mu$ F, wenn keine anderen Bezeichnungen genannt sind.
- SPULEN**  
Die Maßeinheit ist  $\mu$ H, Abweichungen sind gekennzeichnet.
- Mit "L" gekennzeichnete Teile sind ohne Anschlußdrähte.
- TESTPUNKTE**

 Kennzeichnung der Testpunktposition

- MASSE SYMBOL**  
 Erdung am Chassis     Erdung an Masse-Leitung
- SPANNUNGSMESSUNG**  
Spannungsmessungen sind mit einem d.c.-Voltmeter durchzuführen. Die Meßbedingungen sind folgende:  
Netzspannung                      a.c. 220V-240V, 50Hz  
Wiedergabe Signal                  Farbbalken-Testbild  
Wiedergabesignal                  Farbbalken-Testbild (HF)
-  Videosignalweg  
 Audiosignalweg


Änderungen im Laufe der Fertigung sind möglich.

## BEMERKUNGEN


- Das Schaltnetzteil enthält Bereiche, die direkt mit dem Netz verbunden sind. Diese Bereiche sind im Schaltplan mit HOT gekennzeichnet. Alle anderen Schaltungen sind mit COLD gekennzeichnet und haben keine direkte Verbindung mit dem Netz :-  
a. Weder die Leitungen im heißen noch Leitungen im heißen und im kalten Bereich gleichzeitig berühren. Es besteht die Gefahr eines elektrischen Schlages.  
b. Keinesfalls die Leitungen im heißen Bereich mit denen im kalten Bereich verbinden oder kurzschliessen. Dies kann zur Zerstörung von Bauteilen oder Sicherungen führen. Außerdem ist die elektrische Betriebssicherheit des Gerätes nicht mehr gegeben.  
c. Keine Messinstrumente gleichzeitig an Leitungen im heißen und kalten Bereich anschliessen. Sicherungen könnten zerstört werden. Die Erde des Messinstrumentes immer mit der des zu prüfenden Schaltkreises verbinden.  
d. Vor Ausbau des Chassis, Stecker aus der Netzsteckdose ziehen.




# TX-21CK1F

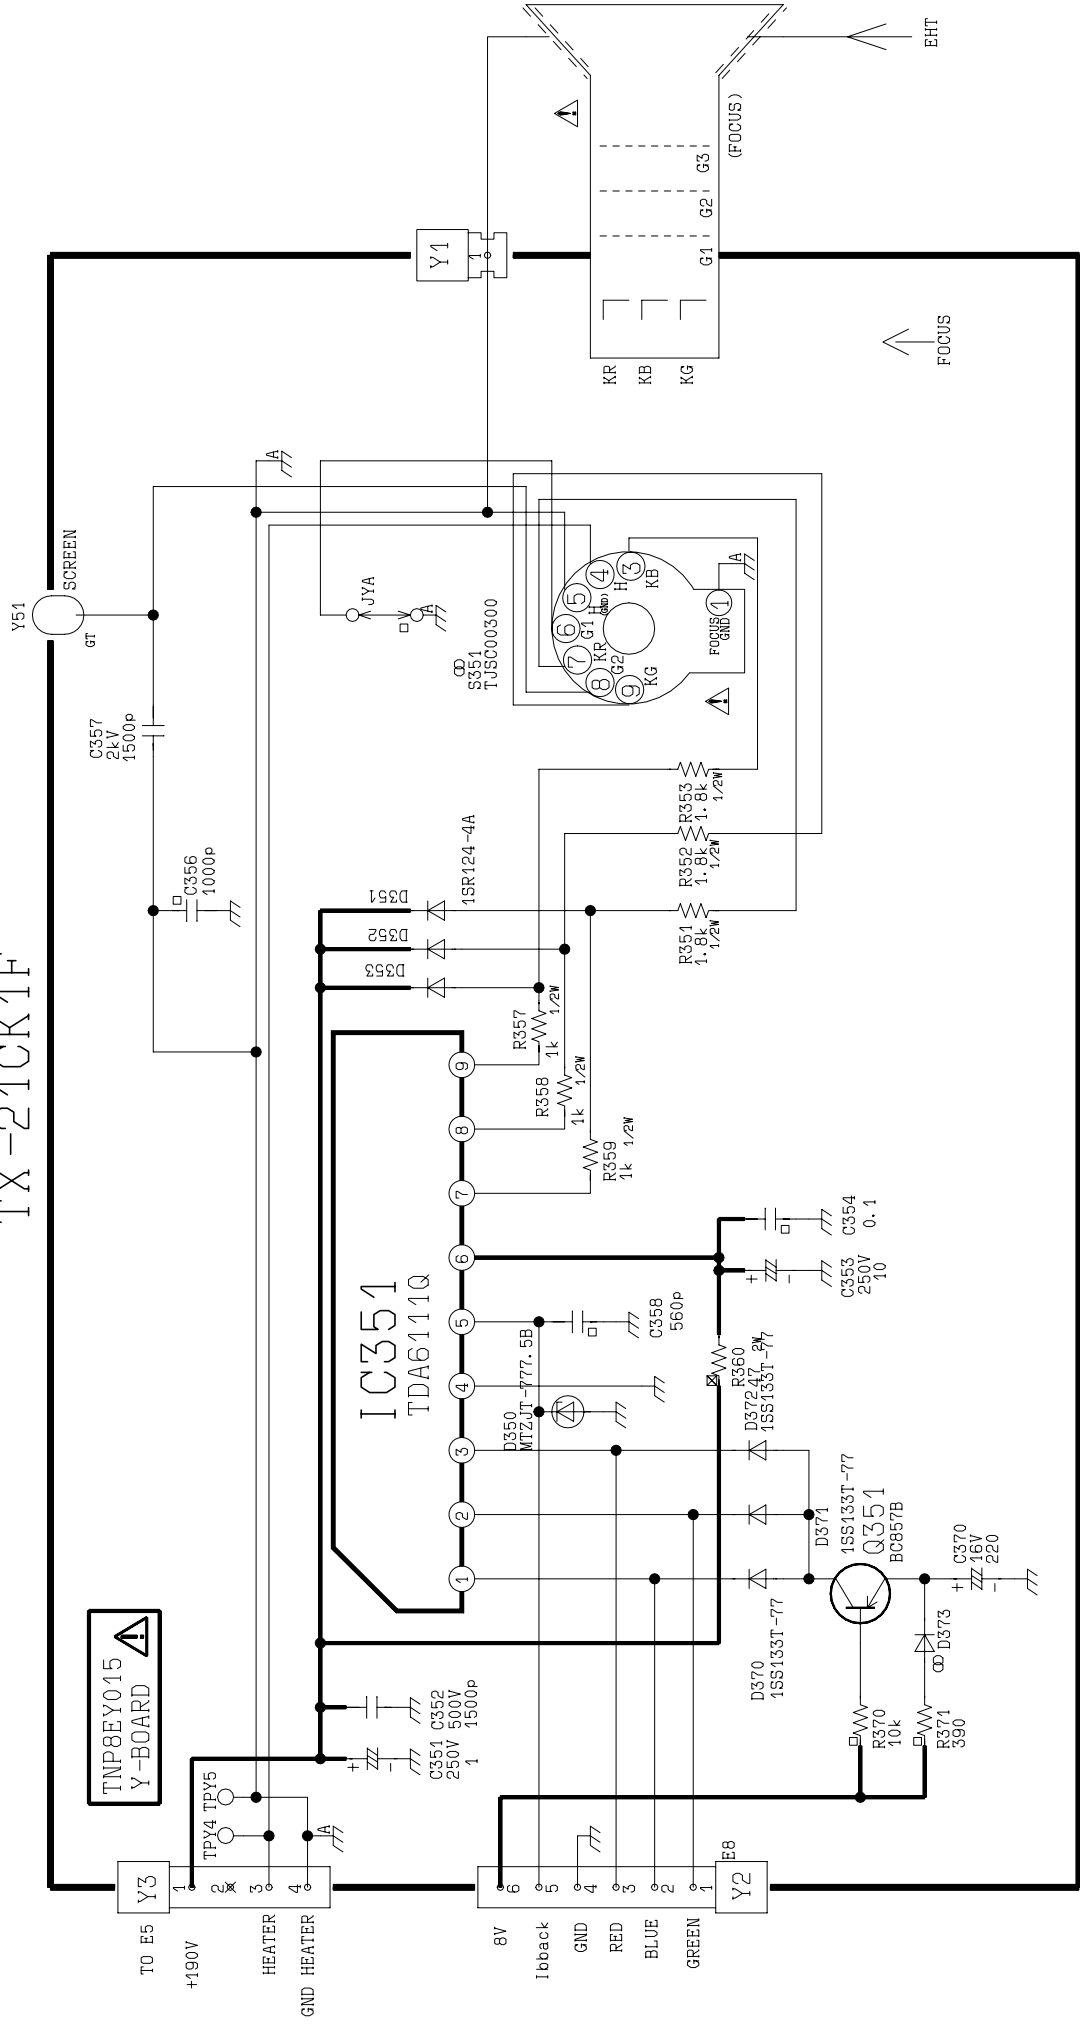

# TX-25CK1F, TX-28CK1F

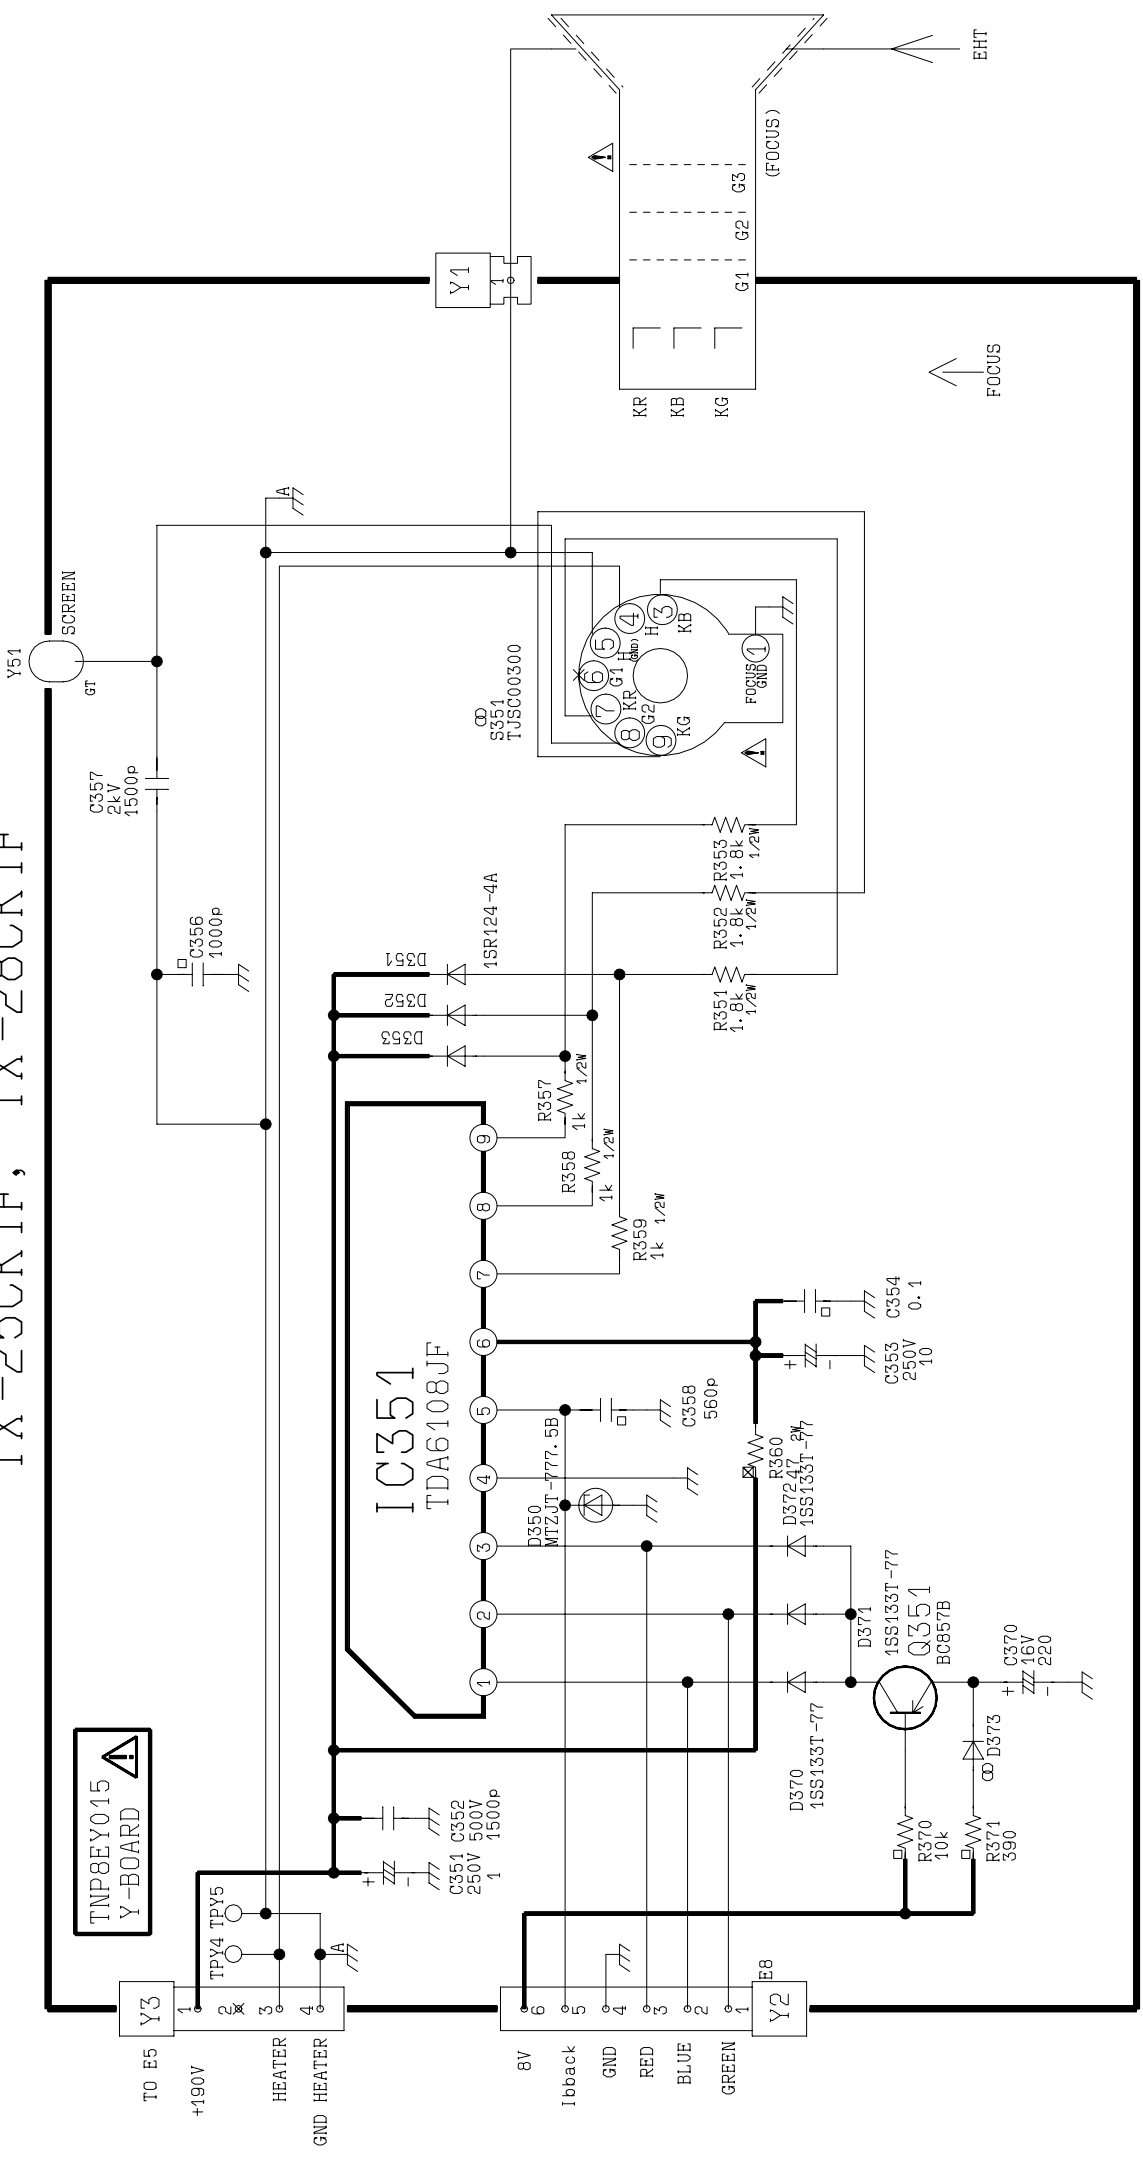

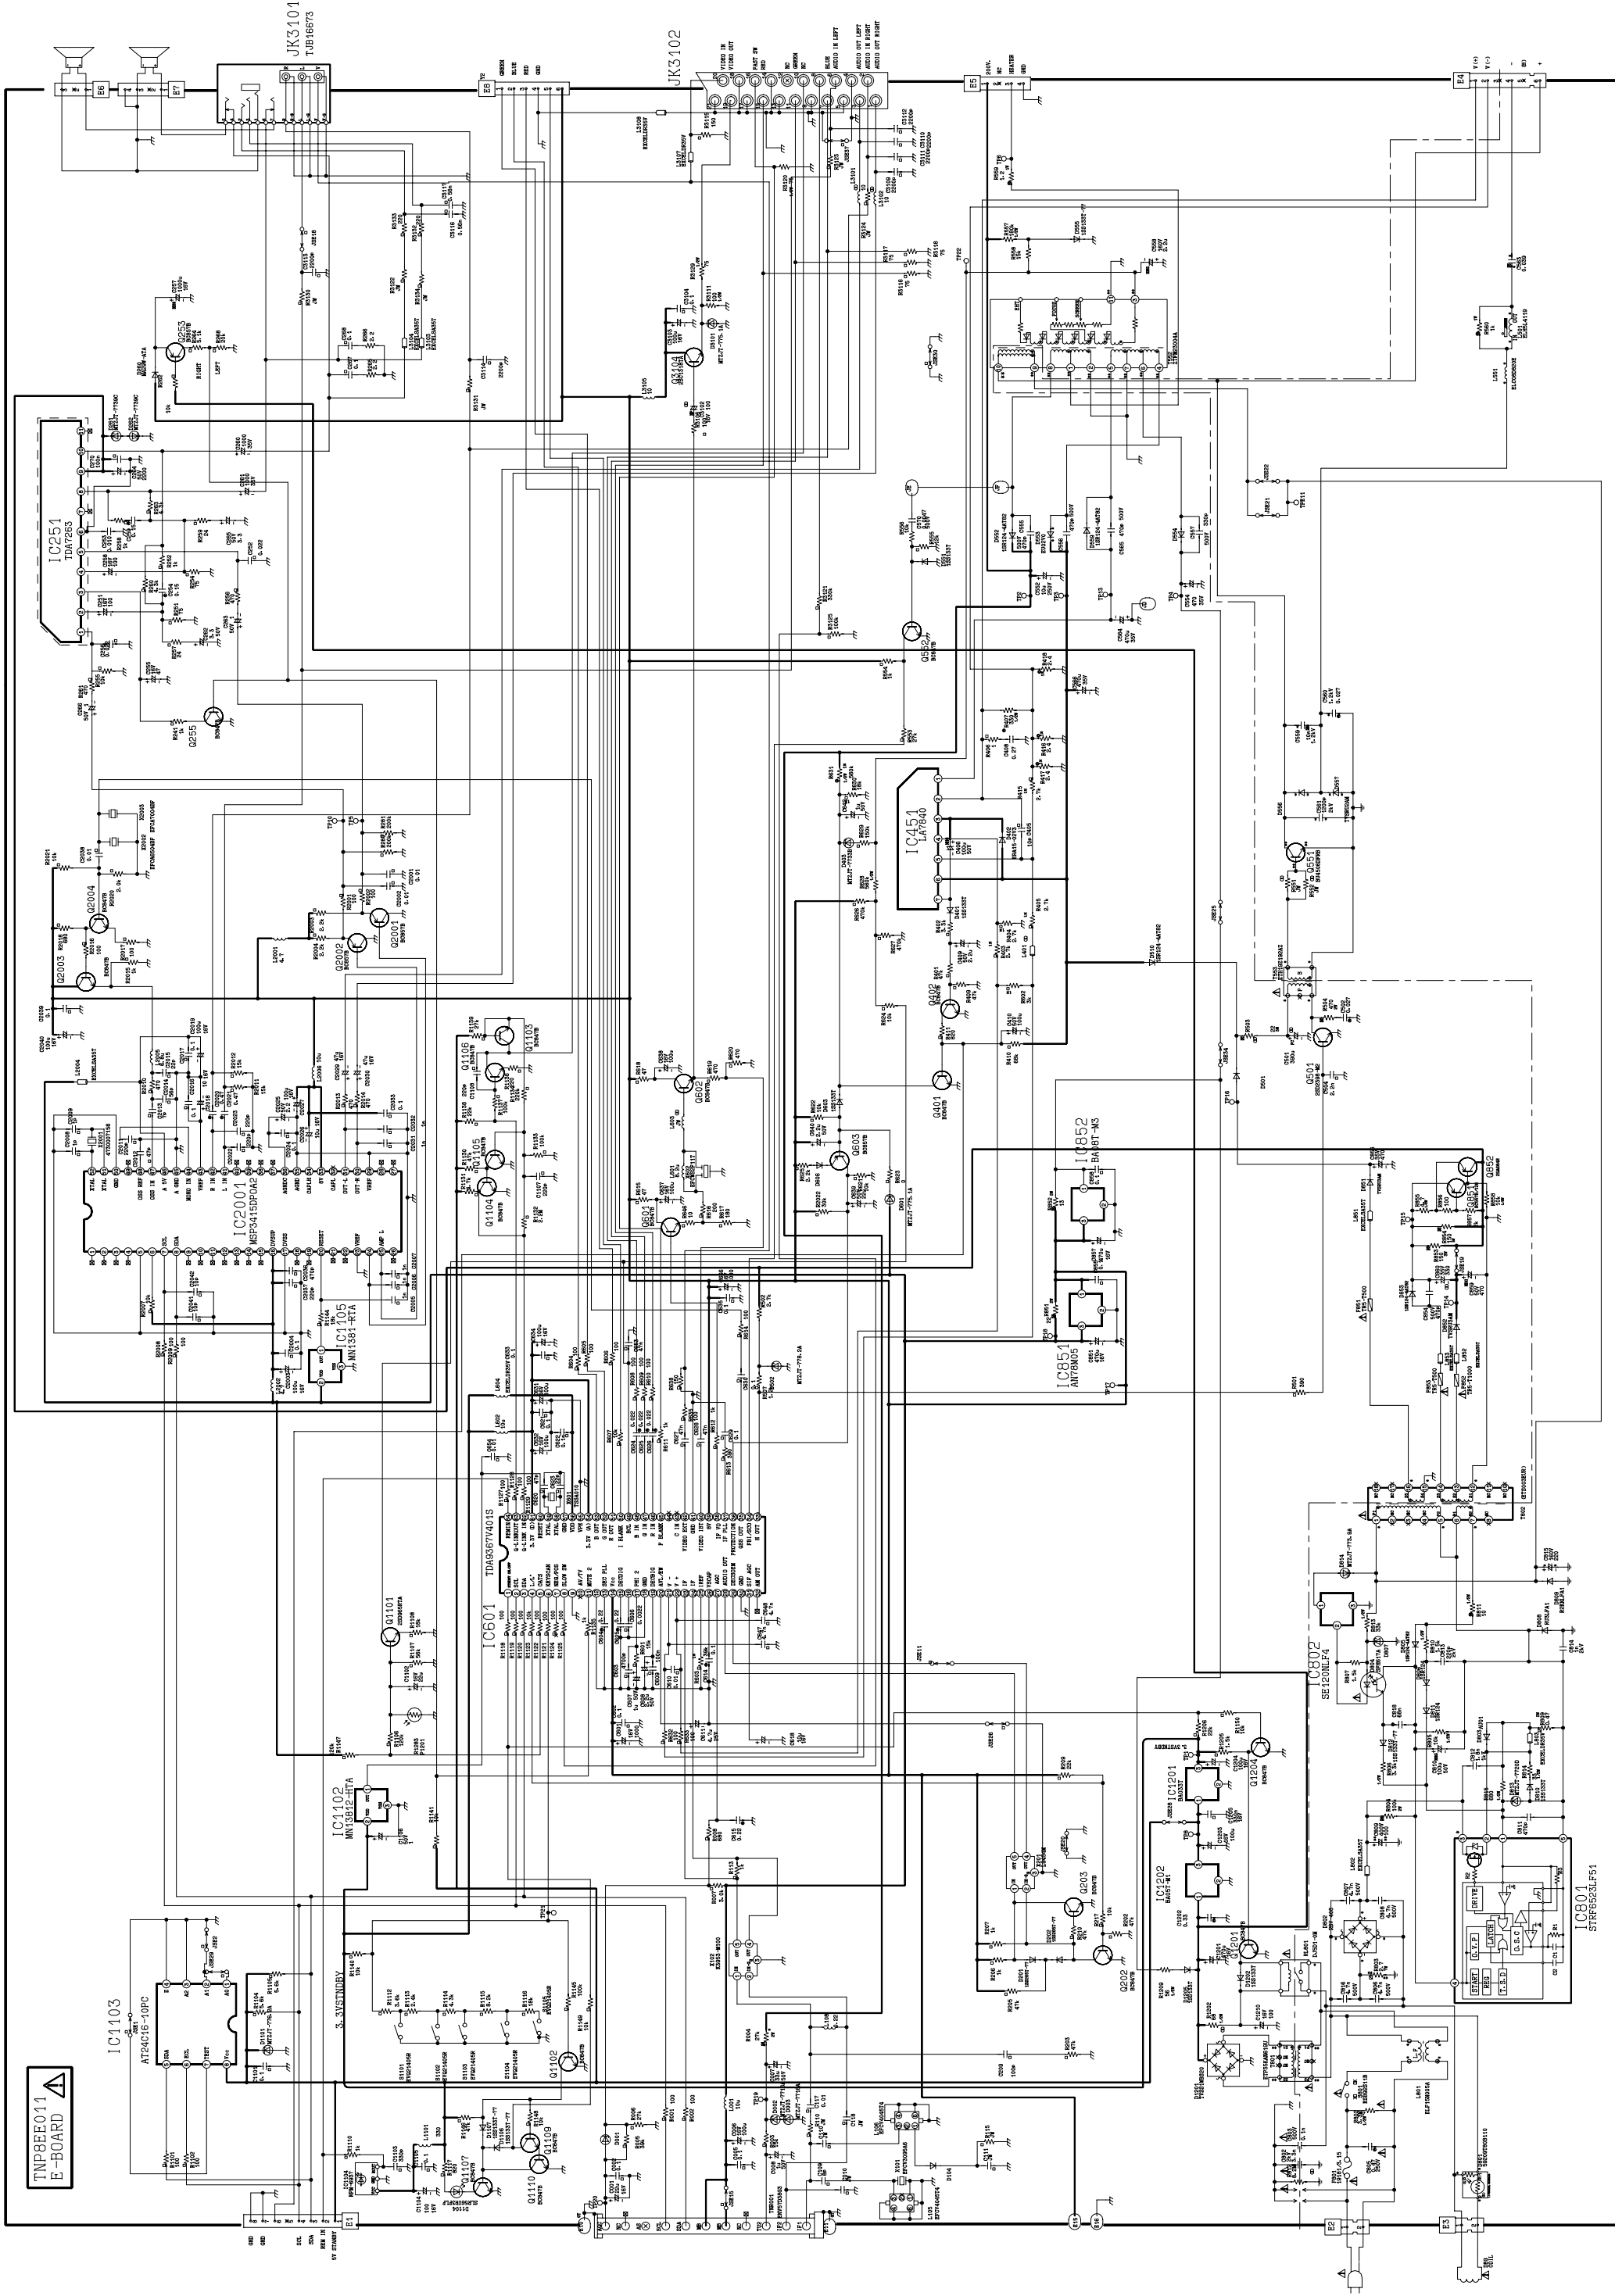

JK3101  
RJ816873

JK3102

IC251  
TDA7881

IC451  
LA7840

IC851  
AN7805

IC852  
AN7805


IC601  
TDA93674015

IC1103  
ATT24C16-10PC

IC1104  
MN13812-HTA

IC802  
SE420NLF4

IC801  
STRF662ULF51

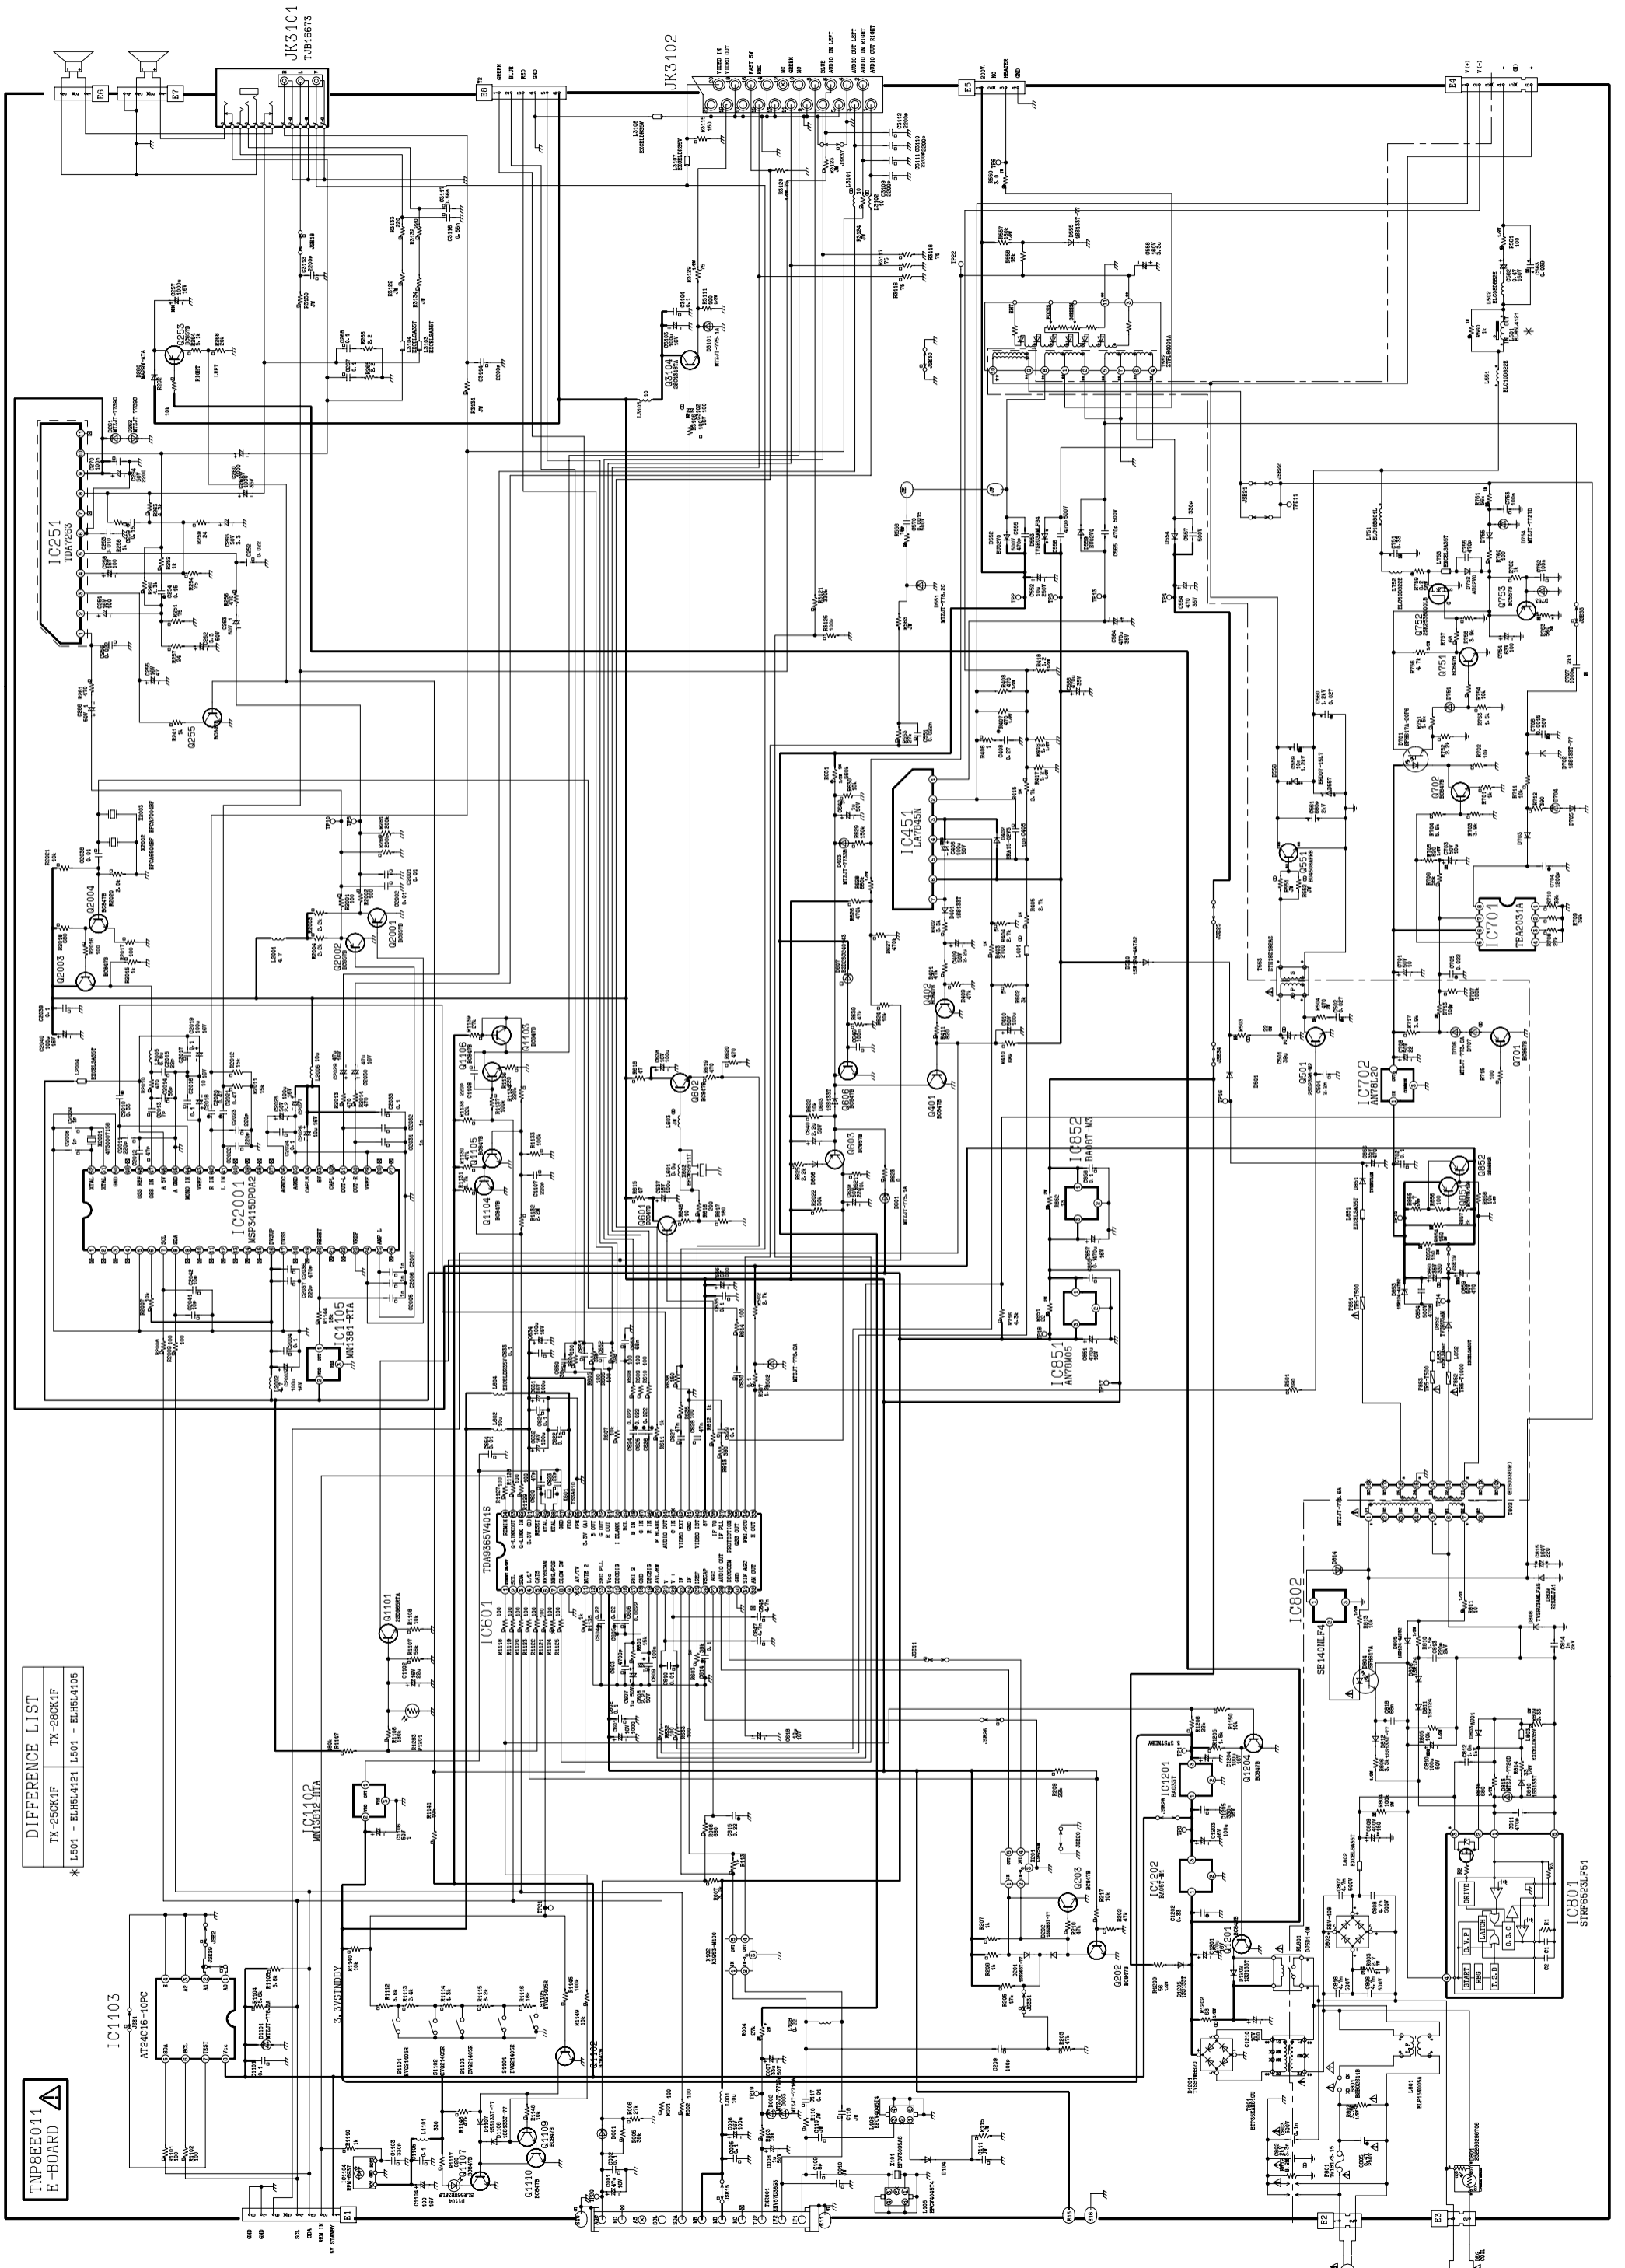

**DIFFERENCE LIST**

TX-25CK1F	TX-28CK1F
LS01 - ELHSL4121	LS01 - ELHSL4105

\* LS01 - ELHSL4121

TNP8E011  
E-BOARD

JK3101  
TUB16B73

JK3102

IC301  
STR6524F51

IC103  
AT24C16-10PC

IC2001  
MSP3415DP0A2

IC4105  
MN1381-RTA

IC4102  
MN1381-RTA

IC501  
TDA9851A015

IC851  
AN1805

IC852  
BA80T-NE2

IC451  
LA7845N

IC702  
AN7820

IC701  
TEA2025A

IC2551  
TDA7263