



## UD38252


CMOS IC

### 38V SYNCHRONOUS BUCK CONVERTER WITH CC/CV

#### DESCRIPTION

UTC **UD38252** is a wide input voltage, high efficiency Active CC step-down DC/DC converter that operates in either CV (Constant Output Voltage) mode or CC (Constant Output Current) mode. UTC **UD38252** provides up to 2.5A output current at 160kHz switching frequency. Current mode control provides fast transient response and cycle-by-cycle current limit.

An internal soft-start prevents inrush current at turn-on, provides a very compact solution with minimal external components.

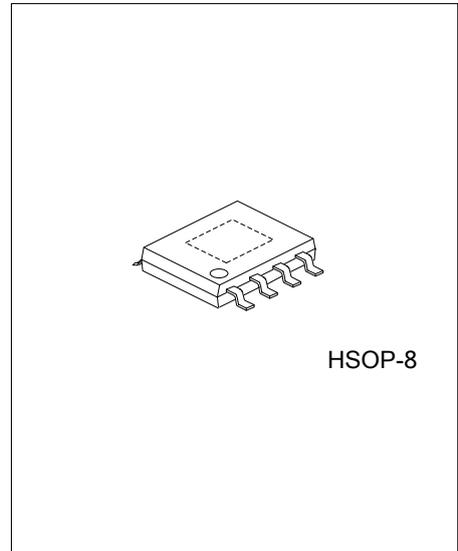

#### FEATURES


- \* Wide 8V to 38V Operating Input Range
- \* Integrated 140mΩ Power MOSFET Switches
- \* Output Adjustable from  $V_{FB}(1.00V \pm 2\%)$  to 5.5V
- \* Up to 92% Efficiency
- \* Internal Soft-Start.
- \* Stable with Low ESR Ceramic Output Capacitors
- \* Fixed 160KHz Frequency
- \* Cycle-by-Cycle Over Current Protection
- \* Input Under/Over Voltage Lockout

#### ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
UD38252L-SH2-R	UD38252G-SH2-R	HSOP-8	Tape Reel

<p>UD38252G-SH2-R</p> <ul style="list-style-type: none"> <li>(1) Packing Type</li> <li>(2) Package Type</li> <li>(3) Green Package</li> </ul>	<ul style="list-style-type: none"> <li>(1) R: Tape Reel</li> <li>(2) SH2: HSOP-8</li> <li>(3) G: Halogen Free and Lead Free, L: Lead Free</li> </ul>
---	--

#### MARKING

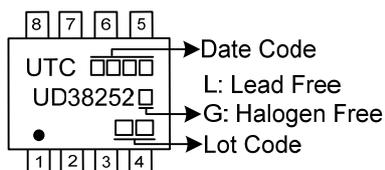


## PIN CONFIGURATION

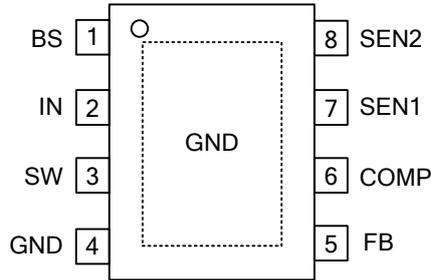

## PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	BS	Boot-Strap Pin. Supply high side gate driver. Decouple this pin to LX pin with 24ohm + 0.1uF ceramic cap.
2	IN	Power Input pin. Bypass IN to GND with a suitably large capacitor to eliminate noise on the input to the IC.
3	SW	Power Switching Output. SW is the switching node that supplies power to the output. Connect the output LC filter from SW to the output load.
4	GND	Ground.
	PAD	Ground (Connect to GND).
5	FB	Feedback Input. FB senses the output voltage to regulate that voltage. Drive FB with a resistive voltage divider from the output voltage.
6	COMP	Compensation Node. COMP is used to compensate the regulation control loop. Connect a series RC network from COMP to GND to compensate the regulation control loop.
7	SEN1	The Current Sense Input (-) pin.
8	SEN2	The Current Sense Input (+) pin = $V_{OUT}$ .

## BLOCK DIAGRAM

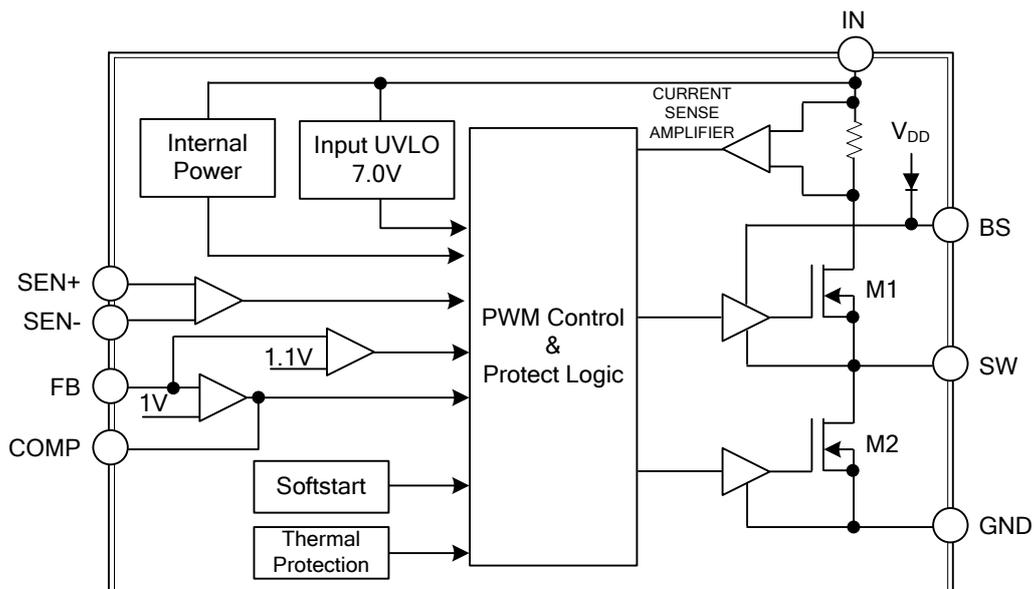

■ ABSOLUTE MAXIMUM RATING ( $T_A=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{IN}$	-0.3 ~ +42	V
Switch Node Voltage	$V_{SW}$	-0.3 ~ $V_{IN}+0.3$	V
Boost Voltage	$V_{BS}$	$V_{SW}-0.3 \sim V_{SW}+6$	V
All Other Pins Voltage		-0.3 ~ +6	V
Lead Temperature	$T_L$	260	$^\circ\text{C}$
Junction Temperature	$T_J$	150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-65 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Supply Voltage	$V_{IN}$	8 ~ 38	V
Output Voltage	$V_{OUT}$	$V_{FB} \sim 6$	V
Ambient Temperature	$T_A$	-40 ~ +85	$^\circ\text{C}$

■ THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	RATINGS	UNIT
Junction To Ambient	$\theta_{JA}$	40	$^\circ\text{C}/\text{W}$
Junction to Case	$\theta_{JC}$	15	$^\circ\text{C}/\text{W}$

Note:  $\theta_{JA}$  is measured with the PCB copper area of approximately  $1 \text{ in}^2$  (Multi-layer). That need connect to exposed pad.

■ ELECTRICAL CHARACTERISTICS ( $V_{IN}=12\text{V}$ ,  $T_A=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage Range	$V_{IN}$		8		38	V
Quiescent Current	$I_{CCQ}$	$V_{FB}=1.05\text{V}$		1	1.5	mA
Feedback Voltage	$V_{FB}$	$8\text{V} \leq V_{IN} \leq 38\text{V}$	0.98	1.00	1.02	V
Feedback Overvoltage Threshold	$\text{OVP}_{(FB)}$			1.1X		$V_{FB}$
High-Side Switch On Resistance (Note)	$R_{DS(ON)1}$		110	150	190	m $\Omega$
Low-Side Switch On Resistance (Note)	$R_{DS(ON)2}$		105	140	175	m $\Omega$
High-Side Switch Leakage Current		$V_{FB}=1.05\text{V}$ , $V_{SW}=0\text{V}$			10	$\mu\text{A}$
Upper Switch Current Limit		Minimum Duty Cycle	2.9	3.5		A
Lower Switch Current Limit		From Drain to Source		0.9		A
Oscillation Frequency (Note)	$F_{OSC1}$		110	160	210	KHz
Short Circuit Oscillation Frequency (Note)	$F_{OSC2}$	$V_{FB} < 0.5\text{V}$	35	60	85	KHz
Maximum Duty Cycle (Note)	$D_{MAX}$		82	87	92	%
Minimum On Time (Note)	$T_{ON(min)}$			220		ns
Sense Voltage	$\Delta V_{SEN}$	$(V_{SEN2})-(V_{SEN1})$	114	120	126	mV
$V_{IN}$ OVP Turn-Off Voltage		Input voltage rising		40		V
$V_{IN}$ OVP Hysteresis		Input voltage falling		5		V
Input Under Voltage Lockout Threshold	UVLO	$V_{IN}$ Rising	6.5	7.0	7.9	V
Input Under Voltage Lockout Threshold Hysteresis	UVLO-Hys			800		mV
Soft-Start Period				3		ms
Thermal Shutdown (Note)	$T_{SD}$		140	150	170	$^\circ\text{C}$
Thermal Shutdown Hysteresis (Note)	$T_{SH}$		25	35	50	$^\circ\text{C}$

Note: Guaranteed by design.

## ■ FUNCTION DESCRIPTIONS

The UTC **UD38252** is a synchronous rectified, current-mode, step-down regulator. It regulates input voltages from 8V to 38V down to an output voltage as low as  $V_{FB}$ , and supplies up to 2.5A of load current.

The UTC **UD38252** uses current-mode control to regulate the output voltage. The output voltage is measured at FB through a resistive voltage divider and amplified through the internal Transconductance error amplifier.

The converter uses internal N-Channel MOSFET switches to step-down the input voltage to the regulated output voltage. Since the high side MOSFET requires a gate voltage greater than the input voltage, a boost capacitor connected between SW and BS is needed to drive the high side gate. The boost capacitor is charged from the internal 5V rail when SW is low.

When the UTC **UD38252** FB pin exceeds 10% of the nominal regulation voltage of  $V_{FB}$ , the over voltage comparator is tripped and the COMP pin is discharged to GND, forcing the high-side switch off.

## ■ APPLICATION INFORMATION

### Setting the Output Voltage

The output voltage is set using a resistive voltage divider from the output voltage to FB pin. The voltage divider divides the output voltage down to the feedback voltage by the ratio.

Thus the output voltage is:

$$V_{OUT} = V_{FB} \times \frac{R1+R2}{R2}$$

For example,  $V_{FB} = 1.00V$  for a 5.0V output voltage, R2 is 10k $\Omega$ , and R1 is 40k $\Omega$ .

### Inductor Selection

The inductor is required to supply constant current to the output load while being driven by the switched input voltage. A larger value inductor will result in less ripple current that will result in lower output ripple voltage. However, the larger value inductor will have a larger physical size, higher series resistance, and/or lower saturation current. A good rule for determining the inductance to use is to allow the peak-to-peak ripple current in the inductor to be approximately 30% of the maximum switch current limit.


$V_{IN}$	<28V	<35V
Inductor	33 $\mu$ H	22 $\mu$ H

The choice of which style inductor to use mainly depends on the price vs. size requirements and any EMI requirements.

### CC Measurement (L=33 $\mu$ H)

RSEN	100m $\Omega$	50m $\Omega$	40m $\Omega$	37m $\Omega$
IOUT	900mA	2000mA	2500mA	2700mA







■ TYPICAL APPLICATION CIRCUIT

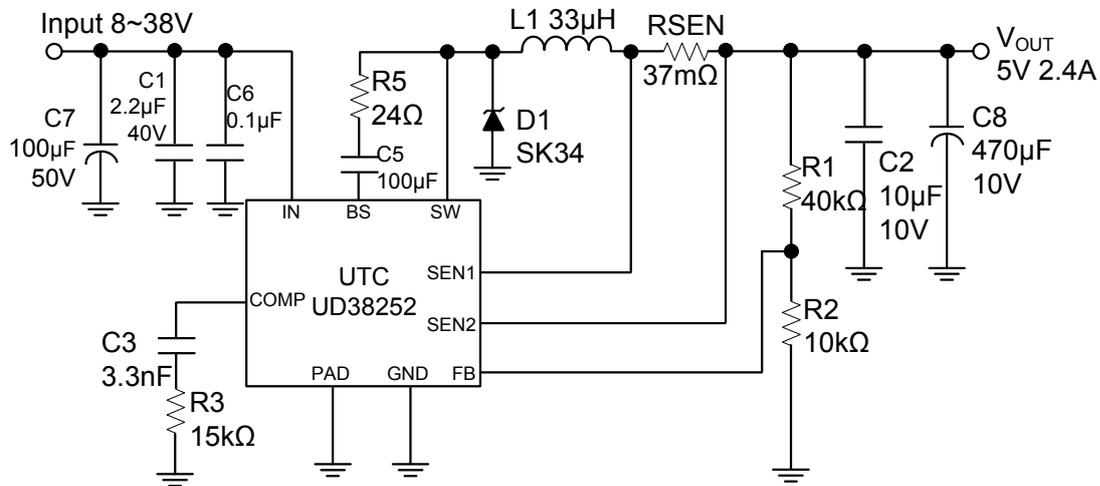


$$V_{OUT} = V_{FB} \times (1 + R1/R2), \quad V_{FB} = 1.00V, \quad R2 \text{ suggest } 1K \sim 30K\Omega$$

$$I_{SEN} = 2.7A \quad (I_{SEN} = V_{SEN}(0.1V) / RSEN(37m\Omega))$$

■ TYPICAL CHARACTERISTICS

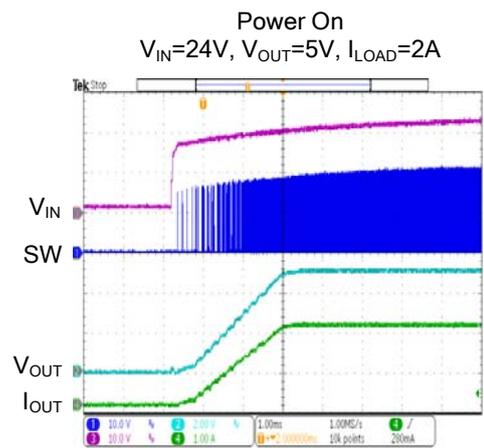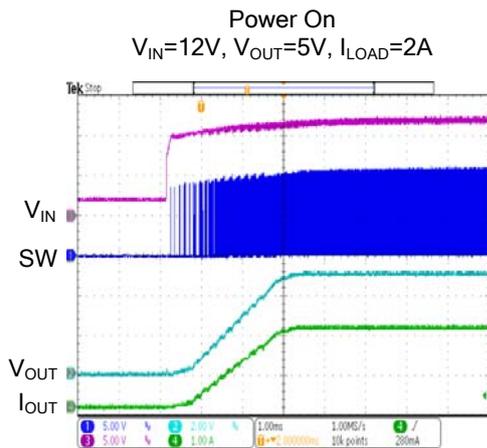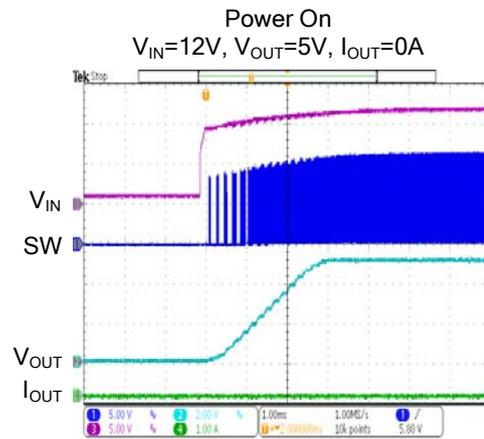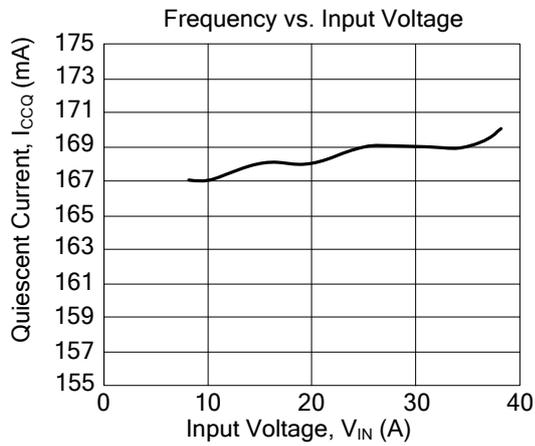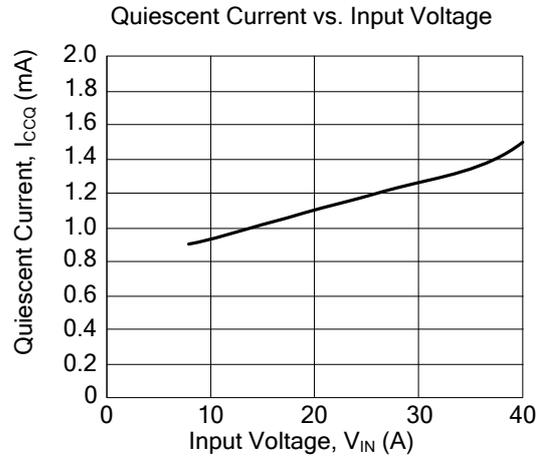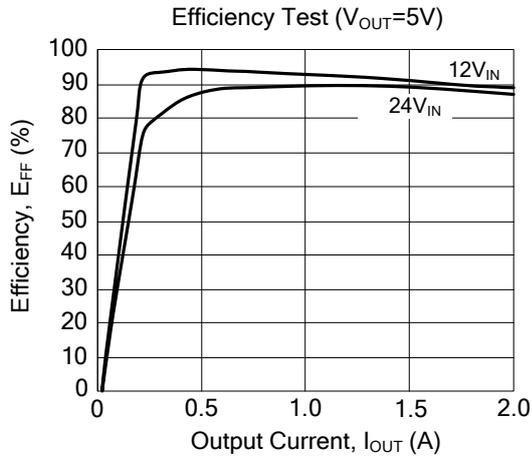

■ TYPICAL CHARACTERISTICS (Cont.)

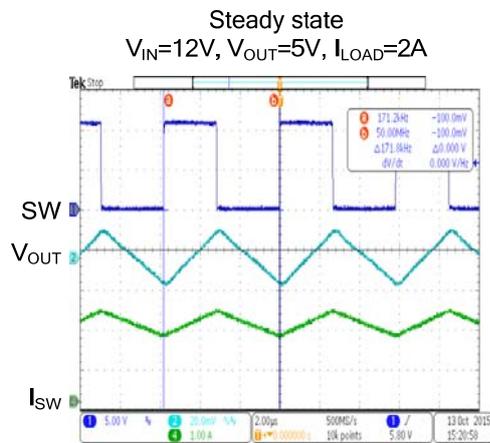

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.