



# UM2681 SERIES

## Dual Asynchronous Receiver/ Transmitter (DUART)

### Features

- Dual full-duplex asynchronous receiver/transmitter
- Quadruple buffered receiver data registers
- Programmable data format
  - 5 to 8 data bits plus parity
  - Odd, even, no parity or force parity
  - 1, 1.5 or 2 stop bits programmable in 1/16 bit increments
- Programmable baud rate for each receiver and transmitter selectable from:
  - 18 fixed rates: 50 to 38.4K baud
  - One user defined rate derived from programmable timer/counter
  - External 1x or 16x clock
- Parity, framing, and overrun error detection
- False start bit detection
- Line break detection and generation
- Programmable channel mode
  - Normal (full duplex)
  - Automatic echo
  - Local loopback
  - Remote loopback
- Multi-function programmable 16-bit counter/timer
- Multi-function 7-bit input port
  - Can serve as clock or control inputs
  - Change of state detection on four inputs
- Multi-function 8-bit output port
  - Individual bit set/reset capability
  - Outputs can be programmed to be status/interrupt signals
- Versatile interrupt system
  - Single interrupt output with eight maskable interrupting conditions
  - Output port can be configured to provide a total of up to six separate wire-OR'able interrupt outputs
- Maximum data transfer: 1X—1MB/sec, 16X—125KB/sec
- Automatic wake-up mode for multidrop applications
- Start-end break interrupt/status
- Detects break which originates in the middle of a character
- On-chip crystal oscillator
- TTL compatible
- Single +5V power supply

### General Description



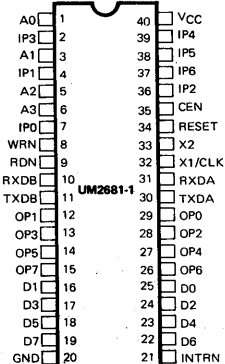
The UM2681 Dual Universal Asynchronous Receiver/Transmitter (DUART) is a single chip NMOS-LSI communications device that provides two independent full-duplex asynchronous receiver/transmitter channels in a single package. It interfaces directly with microprocessors and may be used in a polled or interrupt driven system.

The operating mode and data format of each channel can be programmed independently. Additionally, each receiver and transmitter can select its operating speed as one of eighteen fixed baud rates, a 16X clock derived from a programmable counter/timer, or an external 1X or 16X

clock. The baud rate generator and counter/timer can operate directly from a crystal or from external clock inputs. The ability to independently program the operating speed of the receiver and transmitter make the DUART particularly attractive for dual-speed channel applications such as clustered terminal systems.

Each receiver is quadruply buffered to minimize the potential of receiver overrun or to reduce interrupt overhead in interrupt driven systems. In addition, a flow control capability is provided to disable a remote DUART transmitter when the buffer of the receiving device is full.

### Pin Configuration



Also provided on the UM2681 are a multipurpose 7-bit input port and a multipurpose 8-bit output port. These can be used as general purpose I/O ports or can be assigned specific functions (such as clock inputs or status/interrupt

outputs) under program control.

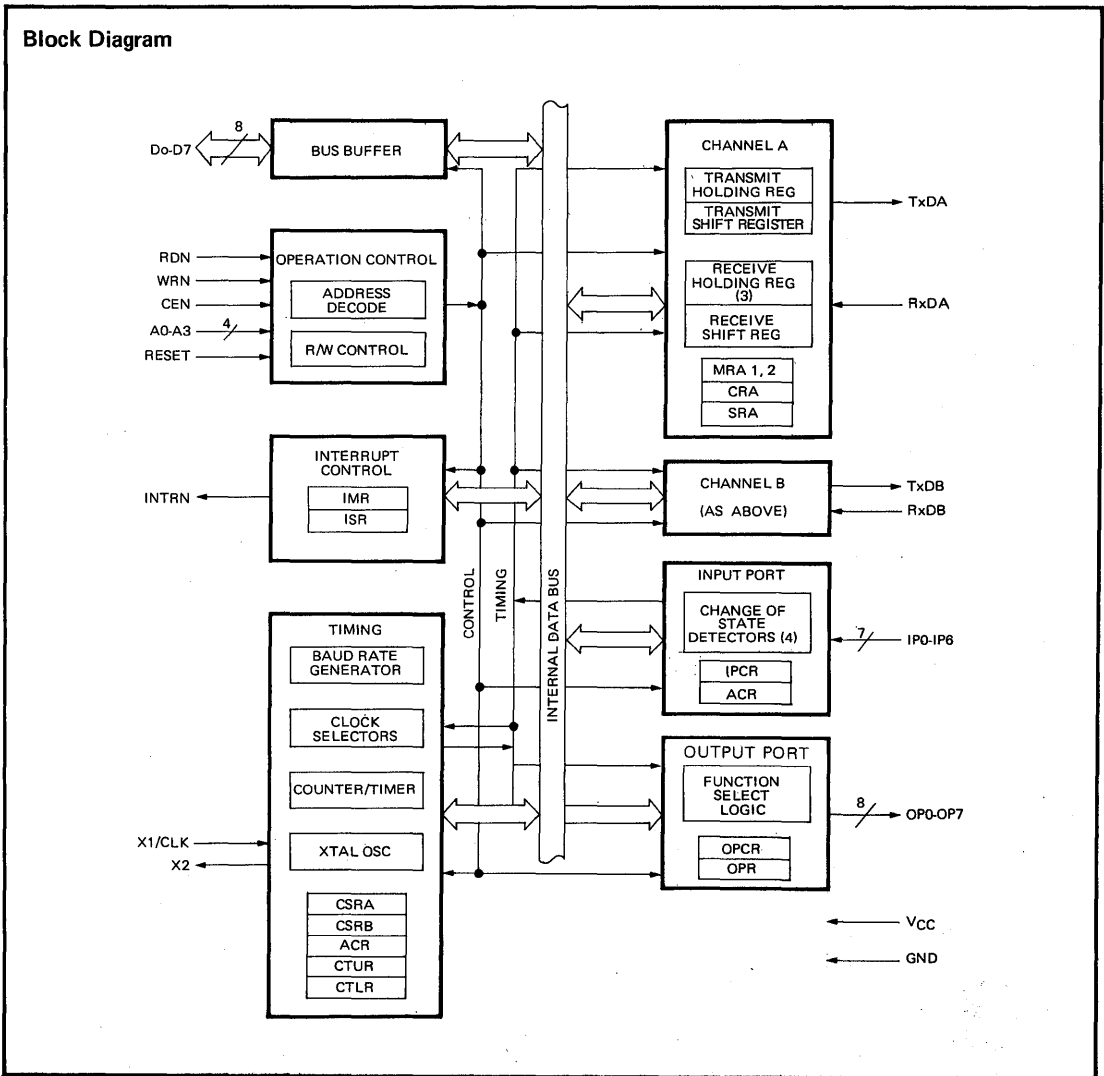
The UM2681 is available in three package versions to satisfy various system requirements.

### Absolute Maximum Ratings\*

Operating ambient temperature . . . . . 0° to +70°C  
 Storage temperature . . . . . -65° to +150°C  
 All voltages with respect to ground . . . . -0.5V to +6.0V

### \*Comments

Stress above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only. Functional operation of this device at these or any other conditions above those indicated in the operational sections of this specification is not implied and exposure to absolute maximum rating conditions for extended periods may affect device reliability.



Peripheral IC


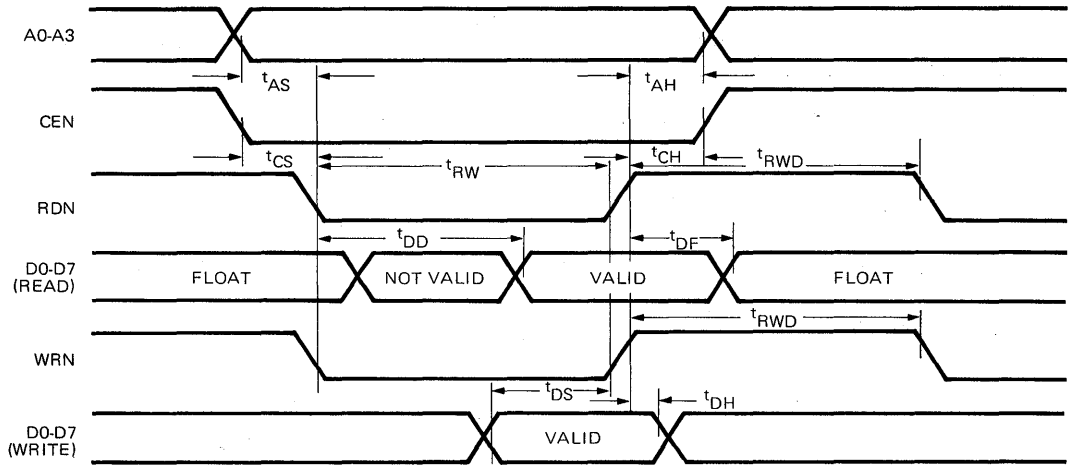
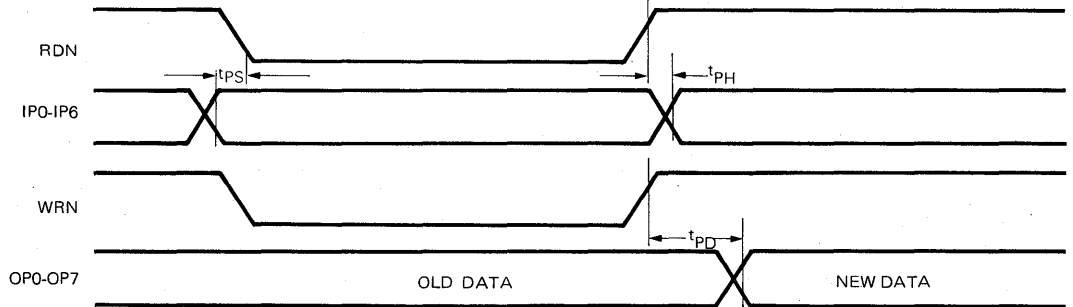
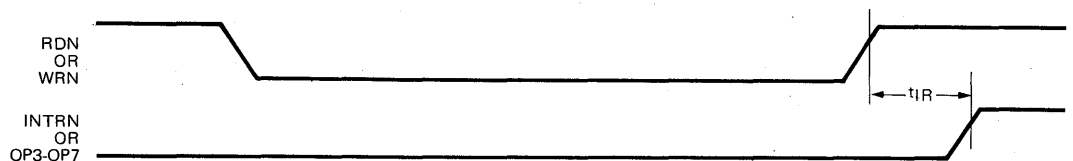
**D.C. Electrical Characteristics**
 $(T_A = 0^\circ\text{C to } +70^\circ\text{C}, V_{CC} = 5.0\text{V} \pm 5\%)$ 

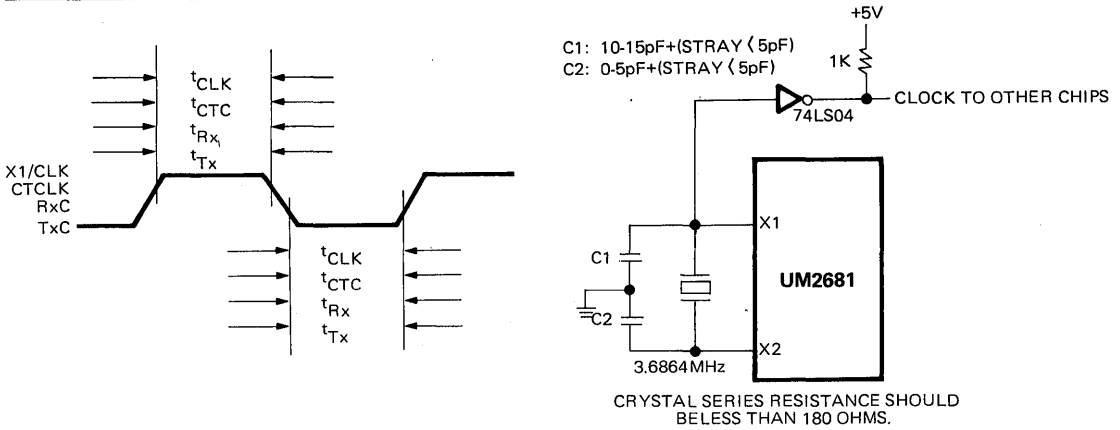
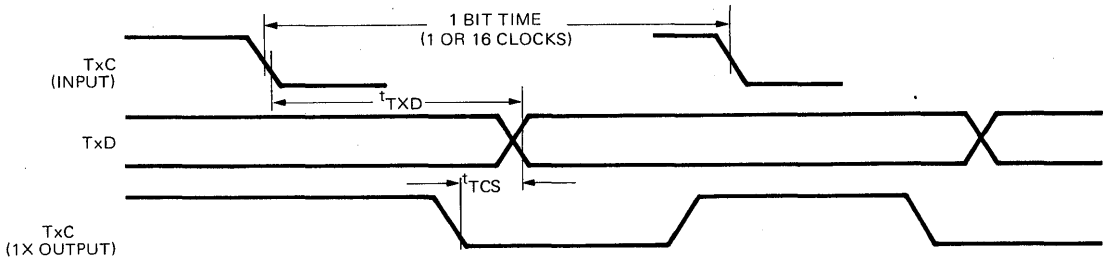
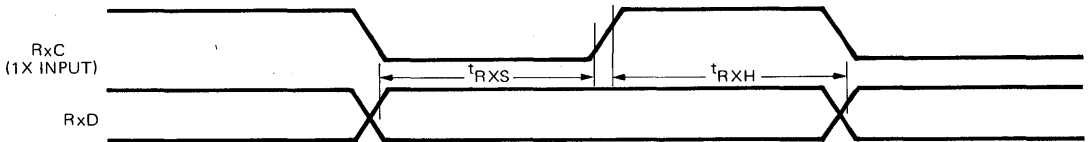
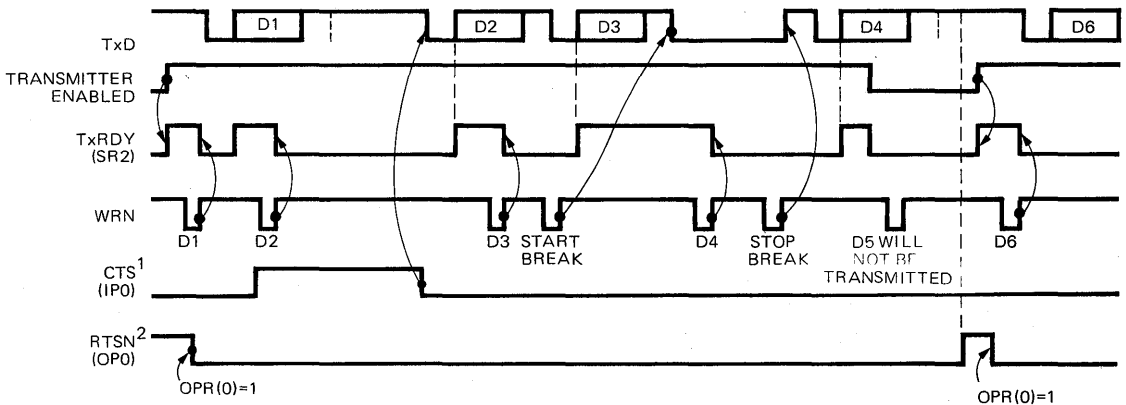
Parameter	Test Conditions	Limits			Units
		Min.	Typ.	Max.	
$V_{IL}$ Input low voltage				0.8	V
$V_{IH}$ Input high voltage (except X1/CLK)		2.0			V
$V_{IH}$ Input high voltage (X1/CLK)		4.0			V
$V_{OL}$ Output low voltage	$I_{OL} = 2.4\text{mA}$			0.4	V
$V_{OH}$ Output high voltage (except o.c., outputs)	$I_{OH} = -400\mu\text{A}$	2.4			V
$I_{IL}$ Input leakage current	$V_{IN} = 0 \text{ to } V_{CC}$	-10		10	$\mu\text{A}$
$I_{LL}$ Data bus 3-state leakage current	$V_O = 0 \text{ to } V_{CC}$	-10		10	$\mu\text{A}$
$I_{OC}$ Open collector output leakage current	$V_O = 0 \text{ to } V_{CC}$	-10		10	$\mu\text{A}$
$I_{CC}$ Power supply current				150	mA

**A.C. Electrical Characteristics**
 $(T_A = 0^\circ\text{C to } +70^\circ\text{C}, V_{CC} = 5.0\text{V} \pm 5\%)$ 

Parameter	Tentative Limits			Units
	Min.	Typ.	Max.	
Reset Timing (Figure 1) $t_{RES}$ RESET pulse width	1.0			$\mu\text{s}$
Bus Timing (Figure 2)				
$t_{AS}$ A0-A3 setup time to RDN, WRN low	10			ns
$t_{AH}$ A0-A3 hold time from RDN, WRN high	0			ns
$t_{CS}$ CEN setup time to RDN, WRN low	0			ns
$t_{CH}$ CEN hold time from RDN, WRN high	0			ns
$t_{RW}$ WRN, RDN pulse width	225			ns
$t_{DD}$ Data valid after RDN low			175	ns
$t_{DF}$ Data bus floating after RDN high			100	ns
$t_{DS}$ Data setup time before WRN high	100			ns
$t_{DH}$ Data hold time after WRN high	20			ns
$t_{RWD}$ High time between READs and/or WRITEs	200			ns

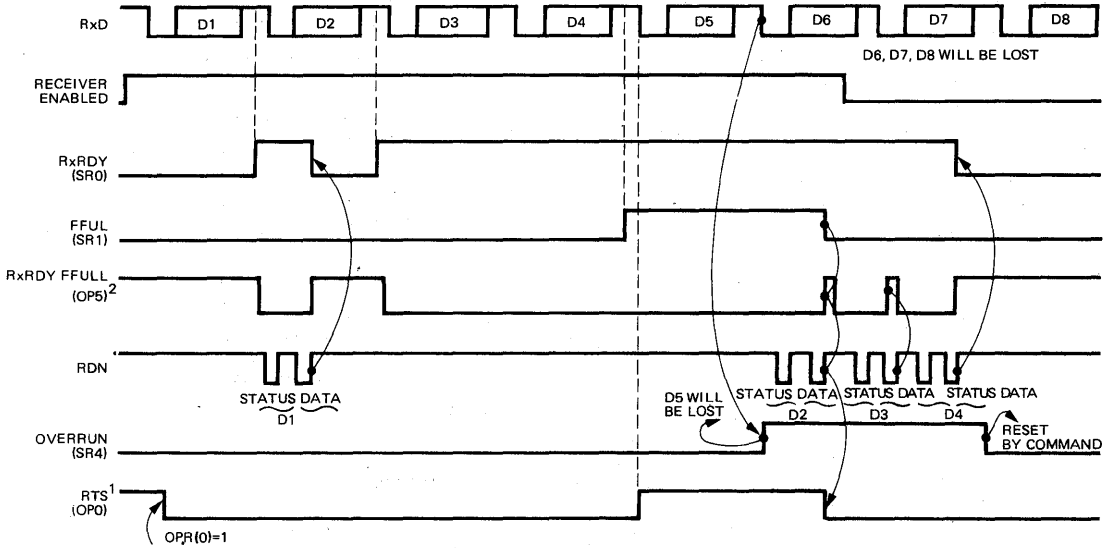
Parameter	Tentative Limits			Units
	Min.	Typ.	Max.	
Port Timing (Figure 3)				
t <sub>PS</sub> Port input setup time before RDN low	0			ns
t <sub>PH</sub> Port input hold time after RDN high	0			ns
t <sub>PD</sub> Port output valid after WRN high			400	ns
Interrupt Timing (Figure 4)				
t <sub>IR</sub> INTRN (or OP3-OP7 when used as interrupts) high from:				
Read RHR (RXRDY/FFULL interrupt)			300	ns
Write THR (TXRDY interrupt)			300	ns
Reset command (delta break interrupt)			300	ns
Stop C/T command (counter interrupt)			300	ns
Read IPCR (input port change interrupt)			300	ns
Write IMR (clear of interrupt mask bit)			300	ns
Clock Timing (Figure 5)				
t <sub>CLK</sub> X1/CLK high or low time	100			ns
t <sub>CLK</sub> X1/CLK frequency	2.0	3.6864	4.0	MHz
t <sub>CTC</sub> CTCLK (IP2) high or low time	100			ns
f <sub>CTC</sub> CTCLK (IP2) frequency	0		4.0	MHz
t <sub>RX</sub> high or low time	220			ns
f <sub>RX</sub> RxC frequency (16X)	0		2.0	MHz
(1X)	0		1.0	MHz
t <sub>TX</sub> TxC high or low time	220			ns
f <sub>TX</sub> TxC frequency (16X)	0		2.0	MHz
(1X)	0		1.0	MHz
Transmitter Timing (Figure 6)				
t <sub>TXD</sub> TxD output delay from TxC low			350	ns
t <sub>TCS</sub> TxC output skew from TxD output data	0		150	ns
Receiver Timing (Figure 7)				
t <sub>RXS</sub> RxD data setup time to RxC high	240			ns
t <sub>RXH</sub> RxD data hold time from RxC high	200			ns


**Figure 1. Reset Timing**

**Figure 2. Bus Timing**

**Figure 3. Port Timing**

**Figure 4. Interrupt Timing**


**Figure 5. Clock Timing**

**Figure 6. Transmit**

**Figure 7. Receive**


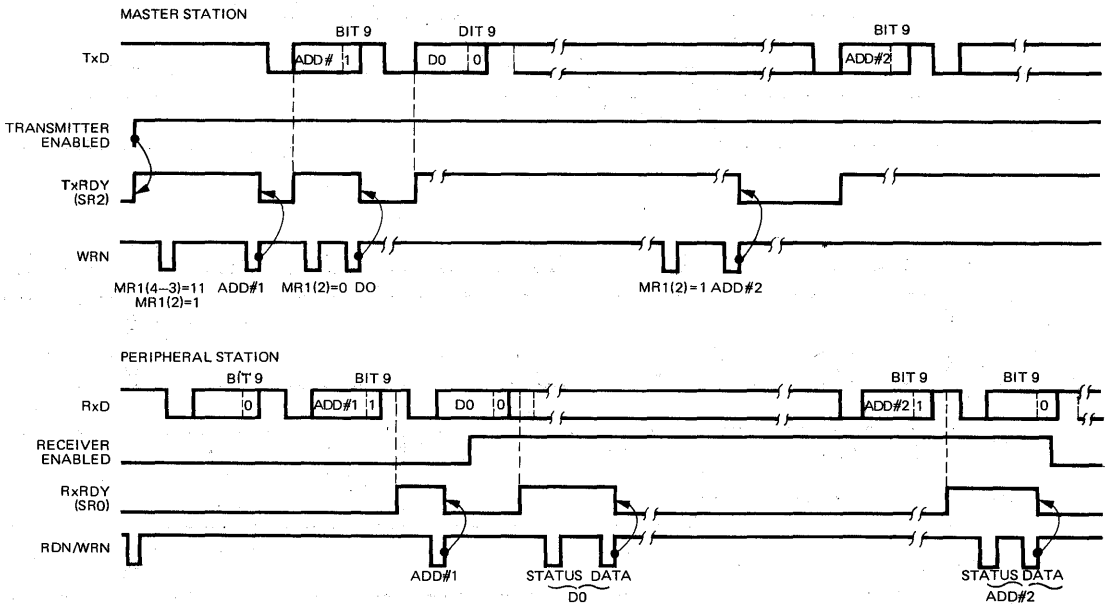
Notes: TIMING SHOWN FOR MR2(4) = 1  
TIMING SHOWN FOR MR2(5) = 1

**Figure 8. Transmitter Timing**



**Figure 9. Receiver Timing**

- Notes: 1. Timing shown for MR1(7)=1.  
 2. Shown for OPCR(4)=1 and MR(6)=0.



**Figure 10. Wake Up Mode**

**Pin Description**

Mnemonic	Applicable			Type	Names and Functions
	40	28	24		
D0-D7	X	X	X	I/O	<b>Data Bus:</b> Bidirectional 3-state data bus used to transfer commands, data and status between the DUART and the CPU. D0 is the least significant bit.
CEN	X	X	X	I	<b>Chip Enable:</b> Active low input signal. When low, data transfers between the CPU and the DUART are enabled on D0-D7 as controlled by the WRN, RND and A0-A3 inputs. When high, places the D0-D7 lines in the 3-state condition.
WRN	X	X	X	I	<b>Write Strobe:</b> When low and CEN is also low, the contents of the data bus is loaded into the addressed register. The transfer occurs on the rising edge of the signal.
RDN	X	X	X	I	<b>Read Strobe:</b> When low and CEN is also low, causes the contents of the addressed register to be presented on the data bus. The read cycle begins on the falling edge of RDN.
A0-A3	X	X	X	I	<b>Address Inputs:</b> Select the DUART internal registers and ports for read/write operations.
RESET	X	X	X	I	<b>Reset:</b> A high level clears internal registers (SRA, SRB, IMB, ISR, OPR, OPCR), puts OP0-OP7 in the high state, stops the counter/timer, and puts channels A and B in the inactive state, with the TxDA and TxDB outputs in the mark (high) state.
INTRN	X	X	X	O	<b>Interrupt Request:</b> Active low, open drain, output which signals the CPU that one or more of the eight maskable interrupting conditions are true.
X1/CLK	X	X	X	I	<b>Crystal 1:</b> Crystal or external clock input. A crystal or clock of the specified limits must be supplied at all times. When a crystal is used, a capacitor must be connected from this pin to ground (see Figure 5).
X2	X	X		O	<b>Crystal 2: Connection</b> for other side of the crystal. Should be connected to ground if a crystal is not used. When a crystal is used, a capacitor must be connected from this pin to ground (see Figure 5).
RxDA	X	X	X	I	<b>Channel A Receiver Serial Data Input:</b> The least significant bit is received first. 'Mark' is high, 'space' is low.
RxDB	X	X	X	I	<b>Channel B Receiver Serial Data Input:</b> The least significant bit is received first. 'Mark' is high, 'space' is low.
TxDA	X	X	X	O	<b>Channel A Transmitter Serial Data Output:</b> The least significant bit is transmitted first. This output is held in the 'mark' condition when the transmitter is disabled, idle, or when operating in local loopback mode. 'Mark' is high, 'space' is low.
TxDB	X	X	X	O	<b>Channel B Transmitter Serial Data Output:</b> The least significant bit is transmitted first. This output is held in the 'mark' condition when the transmitter is disabled, idle, or when operating in local loopback mode. 'Mark' is high, 'space' is low.
OP0	X	X		O	<b>Output 0:</b> General purpose output, or channel A request to send (RTSAN, active low). Can be deactivated on receive or transmit.
OP1	X	X		O	<b>Output 1:</b> General purpose output, or channel B request to send (RTSBN, active low). Can be deactivated on receive or transmit.
OP2	X			O	<b>Output 2:</b> General purpose output, or channel A transmitter 1X or 16X clock output, or channel A receiver 1X clock output.



**Pin Description (Continued)**

Mnemonic	Applicable			Type	Names and Functions
	40	28	24		
OP3	X			O	<b>Output 3:</b> General purpose output, or open drain, active low counter/timer output, or channel B transmitter 1X clock output, or channel B receiver 1X clock output.
OP4	X			O	<b>Output 4:</b> General purpose output, or channel A open drain, active low, RxRDYA/FFULLA output.
OP5	X			O	<b>Output 5:</b> General purpose output, or channel B open drain, active low, RxRDYB/FFULLB output.
OP6	X			O	<b>Output 6:</b> General purpose output, or channel A open drain, active low, TxRDYA output.
OP7	X			O	<b>Output 7:</b> General purpose output, or channel B open drain, active low, TxRDYB output.
IP0	X			I	<b>Input 0:</b> General purpose input, or channel A clear to send active low input (CTSAN).
IP1	X			I	<b>Input 1:</b> General purpose input, or channel B clear to send active low input (CTSBN).
IP2	X	X		I	<b>Input 2:</b> General purpose input, or counter/time external clock input.
IP3	X			I	<b>Input 3:</b> General purpose input, or channel A transmitter external clock input (TxCA). When the external clock is used by the transmitter, the transmitted data is clocked on the falling edge of the clock.
IP4	X			I	<b>Input 4:</b> General purpose input, or channel A receiver external clock input (RxCA). When the external clock is used by the receiver, the received data is sampled on the rising edge of the clock.
IP5	X			I	<b>Input 5:</b> General purpose input, or channel B transmitter external clock input (TxCB). When the external clock is used by the transmitter, the transmitted data is clocked on the falling edge of the clock.
IP6	X			I	<b>Input 6:</b> General purpose input or channel B receiver external clock input (RxCB). When the external clock is used by the receiver, the received data is sampled on the rising edge of the clock.
V <sub>CC</sub>	X	X	X	I	<b>Power Supply:</b> +5V supply input.
GND	X	X	X	I	<b>Ground</b>

**Block Diagram**

The 2681 DUART consists of the following eight major sections: data bus buffer, operation control, interrupt control, timing, communications channels A and B, input port and output port. Refer to the block diagram.

**Data Bus Buffer**

The data bus buffer provides the interface between the external and internal data busses. It is controlled by the operation control block to allow read and write operations

to take place between the controlling CPU and the DUART.

**Operation Control**

The operation control logic receives operation commands from the CPU and generates appropriate signals to internal sections to control device operation. It contains address decoding and read and write circuits to permit communications with the microprocessor via the data bus buffer.

### Interrupt Control

A single active low interrupt output (INTRN) is provided which is activated upon the occurrence of any of eight internal events. Associated with the interrupt system are the interrupt mask register (IMR) and the interrupt status register (ISR). The IMR may be programmed to select only certain conditions to cause INTRN to be asserted. The ISR can be read by the CPU to determine all currently active interrupting conditions.

Outputs OP3-OP7 can be programmed to provide discrete interrupt outputs for the transmitters, receivers, and counter/timer.

### Timing Circuits

The timing block consists of a crystal oscillator, a baud rate generator, a programmable 16-bit counter/timer, and four clock selectors. The crystal oscillator operates directly from a 3.6864MHz crystal connected across the X1/CLK and X2 inputs. If an external clock of the appropriate frequency is available, it may be connected to X1/CLK. The clock serves as the basic timing reference for the baud rate generator (BRG), the counter/timer, and other internal circuits. A clock signal within the limits specified in the specifications section of this data sheet must always be supplied to the DUART.

The baud rate generator operates from the oscillator or external clock input and is capable of generating 18 commonly used data communications baud rates ranging from 50 to 38.4K baud. The clock outputs from the BRG are at 16X the actual baud rate. The counter/time can be used as a timer to produce a 16X clock for any other baud rate by counting down the crystal clock or an external clock. The four clock selectors allow the independent selection, for each receiver and transmitter, of any of these baud rates or an external timing signal.

The counter/timer (C/T) can be programmed to use one of several timing sources as its input. The output of the C/T is available to the clock selectors and can also be programmed to be output at OP3. In the counter mode, the contents of the C/T can be read by the CPU and it can be stopped and started under program control. In the timer mode, the C/T acts as a programmable divider.

### Communications Channels A and B

Each communications channel of the 2681 comprises a full duplex asynchronous receiver/transmitter (UART). The operating frequency for each receiver and transmitter can be selected independently from the baud rate generator, the counter timer, or from an external input.

The transmitter accepts parallel data from the CPU, converts it to a serial bit stream, inserts the appropriate

start, stop, and optional parity bits and outputs a composite serial stream of data on the TxD output pin. The receiver accepts serial data on the RxD pin, converts this serial input to parallel format, checks for start bit, stop bit, parity bit (if any), or break condition and sends an assembled character to the CPU.

### Input Port

The inputs to this unlatched 7-bit port can be read by the CPU by performing a read operation at address D<sub>16</sub>. A high input results in a logic 1 while a low input results in a logic 0. D<sub>7</sub> will always be read as a logic 1. The pins of this port can also serve as auxiliary inputs to certain portions of the DUART logic.

Four change-of-state detectors are provided which are associated with inputs IP3, IP2, IP1, and IP0. A high-to-low or low-to-high transition of these inputs lasting longer than 25-50 $\mu$ s will set the corresponding bit in the input port will change register. The bits are cleared when the register is ready by the CPU. Any change of state can also be programmed to generate an interrupt to the CPU.

### Output Port

The 8-bit multi-purpose output port can be used as a general purpose output port, in which case the outputs are the complements of the output port register (OPR). OPR [n] = 1 results in OP [n] = low and viceversa. Bits of the OPR can be individually set and reset. A bit is set by performing a write operating at address E<sub>16</sub> with the accompanying data specifying the bits to be set (1=set, 0=not change). Likewise, a bit is reset by a write at address F<sub>16</sub> with the accompanying data specifying the bits to be reset (1 = reset, 0 = no change).

Outputs can be also individually assigned specific functions by appropriate programming of the channel. A mode registers (MR1A, MR2A), the channel B mode registers (MR1B, MR2B), and the output port configuration register (OPCR).

## Operational Description

### Transmitter

The 2681 is conditioned to transmit data when the transmitter is enabled through the command register. The 2681 indicates to the CPU that it is ready to accept a character by setting the TxRDY bit in the status register. This condition can be programmed to generate an interrupt request at OP6 or OP7 and INTRN. When a character is loaded into the transmit holding register (THR), the above conditions are negated. Data is transferred from the holding register to the transmit shift register when it is idle or has completed transmission of the previous character. The TxRDY conditions are then asserted again

which means one full character time of buffering is provided. Characters cannot be loaded into the THR while the transmitter is disabled.

The transmitter converts the parallel data from the CPU to a serial bit stream on the TxD output pin. It automatically sends a start bit followed by the programmed number of data bits, an optional parity bit, and the programmed number of stop bits. The least significant bit is sent first. Following the transmission of the stop bits, if a new character is not available in the THR, the TxD output remains high and the TxEMT bit in the status register (SR) will be set to 1. Transmission resumes and the TxEMT bit is cleared when the CPU loads a new character into the THR. If the transmitter is disabled, it continues operating until the character currently being transmitted is completely sent out. The transmitter can be forced to send a continuous low condition by issuing a send break command.

The transmitter can be reset through a software command. If it is reset, operation ceases immediately and the transmitter must be enabled through the command register before resuming operation. If CTS operation is enabled, the CTSN input must be low in order for the character to be transmitted. If it goes high in the middle of a transmission, the character in the shift register is transmitted and TxDA then remains in the marking state until CTSN goes low. The transmitter can also control the deactivation of the RTSN output. If programmed, the RTSN output will be reset one bit time after the character in the transmit shift register and transmit holding register (if any) are completely transmitted, if the transmitter has been disabled.

### Receiver

The 2681 is conditioned to receive data when enabled through the command register. The receiver looks for a high to low (mark to space) transition of the start bit on the RxD input pin. If a transition is detected, the state of the RxD pin is sampled each 16X clock for 7-1/2 clocks (16X clock mode) or at the next rising edge of the bit time clock (1X clock mode). If RxD is sampled high, the start bit is invalid and the search for a valid start bit begins again. If RxD is still low, a valid start bit is assumed and the receiver continues to sample the input at one bit time intervals at the theoretical center of the bit, until the proper number of data bits and the parity bit (if any) have assembled, and one stop bit has been detected. The least significant bit is received first. The data is then transferred to the receive holding register (RHR) and the RxRDY bit in the SR is set to a 1. This condition can be programmed to generate an interrupt at OP4 or OP5 and INTRN. If the character length is less than eight bits, the most significant unused bits in the RHR are set to

zero.

After the stop bit is detected, the receiver will immediately look for the next start bit. However, if a non-zero character was received without a stop bit (framing error) and RxD remains low for one half of the bit period after the stop bit was sampled, then the receiver operates as if a new start bit transition had been detected at that point (one-half bit time after the stop bit was sampled).

The parity error, framing error, overrun error and received break state (if any) are strobed into the SR at the received character boundary, before the RxRDY status bit is set. If a break condition is detected (RxD is low for the entire character including the stop bit), a character consisting of all zeros will be loaded into the RHR and the received break bit in the SR is set to 1. The RxD input must return to a high condition for at least one-half bit time before a search for the next start bit begins.

The RHR consists of a first-in-first-out (FIFO) stack with a capacity of three characters. Data is loaded from the receive shift register into the topmost empty position of the FIFO. The RxRDY bit in the status register is set whenever one or more characters are available to be read, and a FFULL status bit is set if all three stack positions are filled with data. Either of these bits can be selected to cause an interrupt. A read of the RHR outputs the data at the top of the FIFO. After the read cycle, the data FIFO and its associated status bits (see below) are 'popped' thus emptying a FIFO position for new data.

In addition to the data word, three status bits (parity error, framing error, and received break) are also appended to each data character in the FIFO (overrun is not). Status can be provided in two ways, as programmed by the error mode control bit in the mode register. In the 'character' mode, status is provided on a character-by-character basis: the status applies only to the character at the top of the FIFO. In the 'block' mode, the status provided in the SR for these three bits is the logical OR of the status for all characters coming to the top of the FIFO since the last 'reset error' command was issued. In either mode reading the SR does not affect the FIFO. The FIFO is 'popped' only when the RHR is read. Therefore the status register should be read prior to reading the FIFO.

If the FIFO is full when a new character is received, that character is held in the receive shift register until a FIFO position is available. If an additional character is received while this state exists, the contents of the FIFO are not affected: the character previously in the shift register is lost and the overrun error status bit (SR[4]) will be set upon receipt of the start bit of the new (overrunning) character.

The receiver can control the deactivation of RTS. If programmed to operate in this mode, the RTSN output will be negated when a valid start bit was received and the FIFO is full. When a FIFO position becomes available, the RTSN output will be reasserted automatically. This feature can be used to prevent an overrun, in the receiver, by connecting the RTSN output to the CTSN input of the transmitting device.

If the receiver is disabled, the FIFO characters can be read. However, no additional characters can be received until the receiver is enabled again. If the receiver is reset, the FIFO and all of the receiver status, and the corresponding output ports and interrupt are reset. No additional characters can be received until the receiver is enabled again.

### Multidrop Mode

The DUART is equipped with a wake up mode used for multidrop applications. This mode is selected by programming bits MR1A[4:3] or MR1B[4:3] to '11' for channels A and B respectively. In this mode of operation, a 'master' station transmits an address character followed by data characters for the addressed 'slave' station. The slave stations, with receivers that are normally disabled, examine the received data stream and 'wake up' the CPU (by setting RxRDY) only upon receipt of an address character. The CPU compares the received address to its station address and enables the receiver if it wishes to receive the subsequent data characters. Upon receipt of another address character, the CPU may disable the receiver to initiate the process again.

A transmitted character consists of a start bit, the programmed number of data bits, an address/data (A/D) bit, and the programmed number of stop bits. The polarity of the transmitted A/D bit is selected by the CPU by programming bit MR1A[2]/MR1B[2]. MR1A[2]/MR1B[2] = 0 transmits a zero in the A/D bit position, which identifies the corresponding data bits as data, while MR1A[2]/MR1B[2] = 1 transmits a one in the A/D bit position, which identifies the corresponding data bits as an address. The CPU should program the mode register prior to loading the corresponding data bits into the THR.

In this mode, the receiver continuously looks at the received data stream, whether it is enabled or disabled. If disabled, it sets the RxRDY status bit and loads the character into the RHR FIFO if the received A/D bit is a one (address tag), but discards the received character if the received A/D bit is a zero (data tag). If enabled, all received characters are transferred to the CPU via the RHR. In either case, the data bits are loaded into the data FIFO while the A/D bit is loaded into the status FIFO position normally used for parity error (SRA[5] or

SRB[5]). Framing error, overrun error, and break detect operate normally whether or not the receiver is enabled.

### Programming

The operation of the DUART is programmed by writing control words into the appropriate registers. Operational feedback is provided via status registers which can be read by the CPU. The addressing of the registers is described in Table 1.

The contents of certain control registers are initialized to zero on RESET. Care should be exercised if the contents of a register are changed during operation, since certain changes may cause operational problems. For example, changing the number of bits per character while the transmitter is active may cause the transmission of an incorrect character. In general, the contents of the MR, the CSR, and the OPCR should only be changed while the receiver(s) and transmitter(s) are not enabled, and certain changes to the ACR should only be made while the C/T is stopped.

Mode registers 1 and 2 of each channel are accessed via independent auxiliary pointers. The pointer is set to MR1x by RESET or by issuing a 'reset pointer' command via the corresponding command register. Any read or write of the mode register while the pointer is at MR1x switches the pointer to MR2x. The pointer then remains at MR2x, so that subsequent accesses are always to MR2x unless the pointer is reset to MR1x as described above.

Mode, command, clock select, and status registers are duplicated for each channel to provide total independent operation and control. Refer to Table 2 for register bit descriptions.

### MR1A—Channel A Mode Register 1

MR1A is accessed when the channel A MR pointer points to MR1. The pointer is set to MR1 by RESET or by a 'set pointer' command applied via CRA. After reading or writing MR1A, the pointer will point to MR2A.

### MR1A(7)—Channel A Receiver Request-to-Send Control —

This bit controls the deactivation of the RNSAN output (OP0) by the receiver. This output is normally asserted by setting OPR[0]. MR1A[7]=1 causes RTSAN to be negated upon receipt of a valid start bit if the channel A FIFO is full. However, OPR[0] is not reset and RTSAN will be asserted again when an empty FIFO position is available. This feature can be used for flow control to prevent overrun in the receiver by using the RTSAN output signal to control the CTSN input of the transmitting device.

**MR1A[6] — Channel A Receiver Interrupt Select —** This bit selects either the channel A receiver ready status

(RXRDY) or the channel A FIFO full status (FFULL) to be used for CPU interrupts. It also causes the selected bit to be output on OP4 if it is programmed as an interrupt output via the OPCR.

**MR1A[5] – Channel A Error Mode Select** – This bit selects the operating mode of the three FIFOed status bits (FE, PE, received break) for channel A. In the 'character' mode, status is provided on a character-by-character basis: the status applies only to the character at the top of the FIFO. In the 'block' mode, the status provided in the SR for these bits is the accumulation (logical OR) of the status for all characters coming to the top of the FIFO since the last 'reset error' command for channel A was issued.

**MR1A[4:3] – Channel A Parity Mode Select** – If 'with parity' or 'force parity' is selected, a parity bit is added to the transmitted character and the receiver performs a parity check on incoming data. MR1A[4:3]=11 selects channel A to operate in the special multidrop mode described in the Operation section.

**MR1A[2] – Channel A Parity Type Select** – This bit selects the parity type (odd or even) if the 'with parity' mode is programmed by MR1A[4:3], and the polarity of the forced parity bit if the 'force parity' mode is pro-

grammed. It has no effect if the 'no parity' mode is programmed. In the special multidrop mode it selects the polarity of the A/D bit.

**MR1A[1:0] – Channel A Bits per Character Select** – This field selects the number of data bits per character to be transmitted and received. The character length does not include the start, parity, and stop bits.

**MR2A – Channel A Mode Register 2**

MR2A is accessed when the channel A MR pointer points to MR2, which occurs after any access to MR1A. Accesses to MR2A do not change the pointer.

**MR2A[7:6] – Channel A Mode Select** – Each channel of the DUART can operate in one of four modes. MR2A[7:6]=00 is the normal mode, with the transmitter and receiver operating independently. MR2A[7:6]=01 places the channel in the automatic echo mode, which automatically retransmits the received data. The following conditions are true while in automatic echo mode:

1. Received data is reclocked and retransmitted on the TxDA output.
2. The receive clock is used for the transmitter.
3. The receiver must be enabled, but the transmitter need

**Table 1. UM2681 Register Addressing**

A3	A2	A1	A0	Read (RDN=0)	Write (WRN=0)
0	0	0	0	Mode Register A (MR1A, MR2A)	Mode Register A (MR1A, MR2A)
0	0	0	1	Status Register A (SRA)	Clock Select Reg. A (CSRA)
0	0	1	0	* Reserved *	Command Register A (CRA)
0	0	1	1	RX Holding Register A (RHRA)	TX Holding Register A (THRA)
0	1	0	0	Input Port Change Reg. (IPCR)	Aux. Control Register (ACR)
0	1	0	1	Interrupt Status Reg. (ISR)	Interrupt Mask Reg. (IMR)
0	1	1	0	Counter/Timer Upper (CTU)	C/T Upper Register (CTUR)
0	1	1	1	Counter/Timer Lower (CTL)	C/T Lower Register (CTLR)
1	0	0	0	Mode Register B (MR1B, MR2B)	Mode Register B (MR1B, MR2B)
1	0	0	1	Status Register B (SRB)	Clock Select Reg. B (CSRB)
1	0	1	0	* Reserved *	Command Register B (CRB)
1	0	1	1	RX Holding Register B (RHRB)	TX Holding Register B (THRB)
1	1	0	0	* Reserved *	* Reserved *
1	1	0	1	Input Port	Output Port Conf. Reg. (OPCR)
1	1	1	0	Start Counter Command	Set Output Port Bits Command
1	1	1	1	Stop Counter Command	Reset Output Port Bits Command

**Table 2. Register Bit Formats**

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
	<b>RX RTS Control</b>	<b>RX INT Select</b>	<b>Error Mode</b>	<b>Parity Mode</b>		<b>Parity Type</b>	<b>Bits Per Char.</b>	
<b>MR1A</b> <b>MR1B</b>	0=no 1=yes	0=RXRDY 1=FFULL	0=char 1=block	00=with parity 01=force parity 10=no parity 11=multi-drop mode		0=even 1=odd	00=5 01=6 10=7 11=8	

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
	<b>Channel Mode</b>		<b>TxRTS Control</b>	<b>CTS Enable Tx</b>	<b>Stop Bit Length*</b>			
<b>MR2A</b> <b>MR2B</b>	00=Normal 01=Auto echo 10=Local loop 11=Remote loop		0=no 1=yes	0=no 1=yes	0=0.563 1=0.625 2=0.688 3=0.750	4=0.813 5=0.875 6=0.938 7=1.000	8=1.563 9=1.625 A=1.688 B=1.750	C=1.813 D=1.875 E=1.938 F=2.000

\*Add 0.5 to values shown for 0-7 if channel is programmed for 5 bits/char.

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
<b>CSRA</b> <b>CSRB</b>	<b>Receiver Clock Select</b>				<b>Transmitter Clock Select</b>			
	See text				See text			

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
<b>CRA</b> <b>CRB</b>	not used- must be 0	<b>Miscellaneous Commands</b>			<b>Disable Tx</b>	<b>Enable Tx</b>	<b>Disable Rx</b>	<b>Enable Rx</b>
		See text			0=no 1=yes	0=no 1=yes	0=no 1=yes	0=no 1=yes

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
<b>SRA</b> <b>SRB</b>	<b>Received Break</b>	<b>Framing Error</b>	<b>Parity Error</b>	<b>Overrun Error</b>	<b>TxE<sub>MT</sub></b>	<b>TxRDY</b>	<b>FFULL</b>	<b>RxRDY</b>
	0=no 1=yes *	0=no 1=yes *	0=no 1=yes *	0=no 1=yes	0=no 1=yes	0=no 1=yes	0=no 1=yes	0=no 1=yes

\*These status bits are appended to the corresponding data character in the receive FIFO. A read of the status register provides these bits (7:5) from the top of the FIFO together with bits 4:0. These bits are cleared by a reset error status command. In character mode they are discarded when the corresponding data character is read from the FIFO.

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
<b>OPCR</b>	<b>OP7</b>	<b>OP6</b>	<b>OP5</b>	<b>OP4</b>	<b>OP3</b>		<b>OP2</b>	
	0=OPR[7] 1=TxRDYB	0=OPR[6] 1=TxRDYA	0=OPR[5] 1=RxRDY/ FFULLB	0=OPR[4] 1=RxRDY/ FFULLA	00=OPR[3] 01=C/T OUTPUT 10=TxCB (1X) 11=RxCB(1X)		00=OPR[2] 01=TxCA (16X) 10=TxCA (1X) 11=RxCA (1X)	

**Table 2. Register Bit Formats (Continued)**

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
	<b>BRG Set Select</b>	<b>Counter/Timer Mode and Source</b>			<b>Delta IP3 Int</b>	<b>Delta IP2 Int</b>	<b>Delta IP1 Int</b>	<b>Delta IP0 Int</b>
<b>ACR</b>	0=set1 1=set2	See table 4			0=off 1=on	0=off 1=on	0=off 1=on	0=off 1=on

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
	<b>Delta IP3</b>	<b>Delta IP2</b>	<b>Delta IP1</b>	<b>Delta IP0</b>	<b>IP3</b>	<b>IP2</b>	<b>IP1</b>	<b>IP0</b>
<b>IPCR</b>	0=no 1=yes	0=no 1=yes	0=no 1=yes	0=no 1=yes	0=low 1=high	0=low 1=high	0=low 1=high	0=low 1=high

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
	<b>Input Port Change</b>	<b>Delta Break B</b>	<b>RxRDY/FFULLB</b>	<b>TxRDYB</b>	<b>Counter Ready</b>	<b>Delta BREAK</b>	<b>RxRDY/FFULLA</b>	<b>TxRDYA</b>
<b>ISR</b>	0=no 1=yes	0=no 1=yes	0=no 1=yes	0=no 1=yes	0=no 1=yes	0=no 1=yes	0=no 1=yes	0=no 1=yes

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
	<b>In Port Change Int</b>	<b>Delta Break B Int</b>	<b>RxRDY/FFULLB Int</b>	<b>TxRDYB Int</b>	<b>Counter Ready Int</b>	<b>Delta Break A Int</b>	<b>RxRDY/FFULLA Int</b>	<b>TxRDYA Int</b>
<b>IMR</b>	0=off 1=on	0=off 1=on	0=off 1=on	0=off 1=on	0=off 1=on	0=off 1=on	0=off 1=on	0=off 1=on

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
	<b>C/T[15]</b>	<b>C/T[14]</b>	<b>C/T[13]</b>	<b>C/T[12]</b>	<b>C/T[11]</b>	<b>C/T[10]</b>	<b>C/T[9]</b>	<b>C/T[8]</b>
<b>CTUR</b>								

	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
	<b>C/T[7]</b>	<b>C/T[6]</b>	<b>C/T[5]</b>	<b>C/T[4]</b>	<b>C/T[3]</b>	<b>C/T[2]</b>	<b>C/T[1]</b>	<b>C/T[0]</b>
<b>CTLR</b>								

not be enabled.

4. The channel A TxRDY and TxEMT status bits are inactive.
5. The received parity is checked, but is not regenerated for transmission, i.e., transmitted parity bit is as received.
6. Character framing is checked, but the stop bits are retransmitted as received.
7. A received break is echoed as received until the next valid start bit is detected.
8. CPU to receiver communication continues normally, but the CPU to transmitter link is disabled.

Two diagnostic modes can also be configured. MR2A[7:6]=10 selects local loopback mode. In this mode:

1. The transmitter output is internally connected to the receiver input.
2. The transmit clock is used for the receiver.
3. The TxDA output is held high.
4. The RxDA input is ignored.
5. The transmitter must be enabled, but the receiver need not be enabled.
6. CPU to transmitter and receiver communications continue normally.

The second diagnostic mode is the remote loopback mode, selected by MR2A[7:6]=11. In this mode:

1. Received data is relocked and retransmitted on the TxDA output.
2. The receive clock is used for the transmitter.
3. Received data is not sent to the local CPU, and the error status conditions are inactive.
4. The received parity is not checked and is not regenerated for transmission, i.e., transmitted parity bit is as received.
5. The receiver must be enabled.
6. Character framing is not checked, and the stop bits are retransmitted as received.
7. A received break is echoed as received until the next valid start bit is detected.

The user must exercise care when switching into and out of the various modes. The selected mode will be activated immediately upon mode selection, even if this occurs in the middle of a received or transmitted character. Likewise, if a mode is deselected, the device will switch out of the mode immediately. An exception to this is switching out of autoecho or remote loopback modes: if the de-selection occurs just after the receiver has sampled the stop bit (indicated in autoecho by assertion of RxRDY), and the transmitter is enabled, the transmitter will remain in autoecho mode until the entire stop bit has been retransmitted.

#### MR2A[5] – Channel A Transmitter Request-to-Send

**Control** – This bit controls the deactivation of the RTSAN output (OP0) by the transmitter. This output is normally asserted by setting OPR[0]) and negated by resetting OPR[0]. MR2A[50=1 causes OPR[0] to be reset automatically one bit time after the characters in the channel A transmit shift register and in the THR, if any, are completely transmitted, including the programmed number of stop bits, if the transmitter is not enabled. This feature can be used to automatically terminate the transmission of a message as follows:

1. Program auto-reset mode: MR2A[5] = 1.
2. Enable transmitter.
3. Assert RTSAN: OPR[0] = 1.
4. Send message.
5. Disable transmitter after the last character is loaded into the channel A THR.
6. The last character will be transmitted and OPR[0] will be reset one bit time after the last stop bit, causing RTSAN to be negated.

#### MR2A[4] – Channel A Clear-to-Send Control

– If this bit is 0, CTSAN has no effect on the transmitter. If this bit is a 1, the transmitter checks the state of CTSAN (IP0) each time it is ready to send a character. If IP0 is asserted (low), the character is transmitted. If it is negated (high), the TxDA output remains in the marking state and the transmission is delayed until CTSAN goes low. Changes in CTSAN while a character is being transmitted do not affect the transmission of that character.

#### MR2A[3:0] – Channel A Stop Bit Length Select

– This field programs the length of the stop bit appended to the transmitted character. Stop bit lengths of 9/16 to 1 and 1-9/16 to 2 bits, in increments of 1/16 bit, can be programmed for character lengths of 6, 7, and 8 bits. For a characterlength of 5 bits, 1-1/16 to 2 stop bits can be programmed in increments of 1/16 bit. The receiver only checks for a 'mark' condition at the center of the first stop bit position (one bit time after the last data bit, or after the parity bit if parity is enabled) in all cases.

If an external 1X clock is used for the transmitter, MR2A[3]=0 selects one stop bit and MR2A[3]=1 selects two stop bits to be transmitted.

#### MR1B – Channel B Mode Register 1

MR1B is accessed when the channel B MR pointer points to MR1. The pointer is set to MR1 by RESET or by a 'set pointer' command applied via CRB. After reading or writing MR1B, the pointer will point to MR2B.

The bit definitions for this register are identical to the bit definitions for MR1A, except that all control actions apply



to the channel B receiver and transmitter and the corresponding inputs and outputs.

### MR2B – Channel B Mode Register 2

MR2B is accessed when the channel B MR pointer points to MR2, which occurs after any access to MR1B. Accesses to MR2B do not change the pointer.

The bit definitions for this register are identical to the bit definitions for MR2A, except that all control actions apply to the channel B receiver and transmitter and the corresponding inputs and outputs.

### CSRA – Channel A Clock Select Register

**CSRA[7:4] – Channel A Receiver Clock Select** – This field selects the baud rate clock for the channel A receiver as follows:

				Baud Rate CLOCK = 3.6864MHz	
CSRA[7:4]				ACR[7]=0	ACR[7]=1
0	0	0	0	50	75
0	0	0	1	110	110
0	0	1	0	134.5	134.5
0	0	1	1	220	150
0	1	0	0	300	300
0	1	0	1	600	600
0	1	1	0	1,200	1,200
0	1	1	1	1,050	2,000
1	0	0	0	2,400	2,400
1	0	0	1	4,800	4,800
1	0	1	0	7,200	1,800
1	0	1	1	9,600	9,600
1	1	0	0	38.4K	19.2K
1	1	0	1	Timer	Timer
1	1	1	0	IP4-16X	IP4-16X
1	1	1	1	IP4-1X	IP4-1X

The receiver clock is always a 16X clock except for CSRA [7:4] = 1111.

**CSRA[3:0] – Channel A Transmitter Clock Select** – This field selects the baud rate clock for the channel A transmitter. The field definition is as per CSRA[7:4] except as follows:

				Baud Rate	
CSRA[3:0]				ACR[7]=0	ACR[7]=1
1	1	1	0	IP3-16X	IP3-16X
1	1	1	1	IP3-1X	IP3-1X

The transmitter clock is always a 16X clock except for CSRA[3:0] = 1111.

### CSRB - Channel B Clock Select Register

**CSRB[7:4] – Channel B Receiver Clock Select** – This field selects the baud rate clock for the channel B receiver. The field definition is as per CSRA[7:4] except as follows:

				Baud Rate	
CSRB[7:4]				ACR[7]=0	ACR[7]=1
1	1	1	0	IP6-16X	IP6-16X
1	1	1	1	IP6-1X	IP6-1X

The receiver clock is always a 16X clock except for CSRB [7:4] = 1111.

**CSRB[3:0] – Channel B Transmitter Clock Select** – This field selects the baud rate clock for the channel B transmitter. The field definition is as per CSRA[7:4] except as follows:

				Baud Rate	
CSRB[3:0]				ACR[7]=0	ACR[7]=1
1	1	1	0	IP5-16X	IP5-16X
1	1	1	1	IP5-1X	IP5-1X

The transmitter clock is always a 16X clock except for CSRB[3:0] = 1111.

### CRA – Channel A Command Register

CRA is a register used to supply commands to channel A. Multiple commands can be specified in a single write to CRA as long as the commands are non-conflicting, e.g., the 'enable transmitter' and 'reset transmitter' commands cannot be specified in a single command word.

**CRA[6:4] – Channel A Miscellaneous Commands** – The encoded value of this field may be used to specify a single command as follows:

CRA[6:4]	Command
0 0 0	No command.
0 0 1	Reset MR pointer. Causes the channel A MR pointer to point to MR1.
0 1 0	Reset receiver. Resets the channel A receiver as if a hardware reset had been applied. The receiver is disabled and the FIFO is flushed.
0 1 1	Reset transmitter. Resets the channel A transmitter as if a hardware reset had been applied.

- 1 0 0 Reset error status. Clears the channel A. Received Break, Parity Error, Framing Error, and Overrun Error bits in the status register (SRA[7:4]). Used in character mode to clear OE status (although RB, PE, and FE bits will also be cleared) and in block mode to clear all error status after a block of data has been received.
- 1 0 1 Reset channel A break change interrupt. Causes the channel A break detect change bit in the interrupt status register (ISR[2]) to be cleared to zero.
- 1 1 0 Start break. Forces the TXDA output low (spacing). If the transmitter is empty the start of the break condition will be delayed up to two bit times. If the transmitter is active the break begins when transmission of the character is completed. If a character is in the THR, the start of the break will be delayed until that character, or any others loaded subsequently are transmitted. The transmitter must be enabled for this command to be accepted.
- 1 1 1 Stop Break. The TXDA line will go high (marking) within two bit times. TXDA will remain high for one bit time before the next character, if any, is transmitted.

**CRA[3] – Disable Channel A Transmitter** – This command terminates transmitter operation and resets the TxRDY and TxEMT status bits. However, if a character is being transmitted or if a character is in the THR when the transmitter is disabled, the transmission of the character(s) is completed before assuming the inactive state.

**CRA[2] – Enable Channel A Transmitter** – Enables operation of the channel A transmitter. The TxRDY status bit will be asserted.

**CRA[1] – Disable Channel A Receiver** – This command terminates operation of the receiver immediately – a character being received will be lost. The command has no effect on the receiver status bits or any other control registers. If the special multidrop mode is programmed, the receiver operates even if it is disabled. See Operation section.

**CRA[0] – Enable Channel A Receiver** – Enables operation of the channel A receiver. If not in the special wakeup mode, this also forces the receiver into the search for start-bit state.

### CRB – Channel B Command Register

CRB is a register used to supply commands to channel B.

Multiple commands can be specified in a single write to CRB as long as the commands are non-conflicting, e.g., the 'enable transmitter' and 'reset transmitter' commands cannot be specified in a single command word.

The bit definitions for this register are identical to the bit definitions for CRA, except that all control actions apply to the channel B receiver and transmitter and the corresponding inputs and outputs.

### SRA – Channel A Status Register

**SRA[7] – Channel A Received Break** – This bit indicates that an all zero character of the programmed length has been received without a stop bit. Only a single FIFO position is occupied when a break is received: further entries to the FIFO are inhibited until the RxDATA line returns to the marking state for at least one-half a bit time (two successive edges of the internal or external 1 x clock).

When this bit is set, the channel A 'change in break' bit in the ISR (ISR[2]) is set. ISR[2] is also set when the end of the break condition, as defined above, is detected.

The break detect circuitry can detect breaks that originate in the middle of a received character. However, if a break begins in the middle of a character, it must persist until at least the end of the next character time in order for it to be detected.

**SRA[6] – Channel A Framing Error** – This bit, when set, indicates that a stop bit was not detected when the corresponding data character in the FIFO was received. The stop bit check is made in the middle of the first stop bit position.

**SRA[5] – Channel A Parity Error** – This bit is set when the 'with parity' or 'force parity' mode is programmed and the corresponding character in the FIFO was received with incorrect parity.

In the special multidrop mode the parity error bit stores the received A/D bit.

**SRA[4] – Channel A Overrun Error** – This bit, when set, indicates that one or more characters in the received data stream have been lost. It is set upon receipt of a new character when the FIFO is full and a character is already in the receive shift register waiting for an empty FIFO position. When this occurs, the character in the receive shift register (and its break detect, parity error and framing error status, if any) is lost.

This bit is cleared by a 'reset error status' command.

**SRA[3] – Channel A Transmitter Empty (TxEMTA) –**

This bit will be set when the channel A transmitter under-  
runs, i.e., both the transmit holding register (THR) and  
the transmit shift register are empty. It is set after  
transmission of the last stop bit of a character if no  
character is in the THR awaiting transmission. It is reset  
when the THR is loaded by the CPU or when the  
transmitter is disabled.

**SRA[2] – Channel A Transmitter Ready (TxRDYA) –**

This bit, when set, indicates that the THR is empty and  
ready to be loaded with a character. This bit is cleared  
when the THR is loaded by the CPU and is set when the  
character is transferred to the transmit shift register.  
TxRDY is reset when the transmitter is disabled and is  
set when the transmitter is first enabled, viz., characters  
loaded into the THR while the transmitter is disabled  
will not be transmitted.

**SRA[1] – Channel A FIFO Full (FFULLA) –**

This bit is set when a character is transferred from the receive shift  
register to the receive FIFO and the transfer causes the  
FIFO to become full, i.e., all three FIFO positions are  
occupied. It is reset when the CPU reads the RHR. If a  
character is waiting in the receive shift register because the  
FIFO is full, FFULL will not be reset when the CPU reads  
the RHR.

**SRA[0] – Channel A Receiver Ready (RxRDYA) –**

This bit indicates that a character has been received and is  
waiting in the FIFO to be read by the CPU. It is set when  
the character is transferred from the receive shift register  
to the FIFO and reset when the CPU reads the RHR, if  
after this read there are no more characters still in the  
FIFO.

**SRB – Channel B Status Register**

The bit definitions for this register are identical to the bit  
definitions for SRA, except that all status applies to the  
channel B receiver and transmitter and the corresponding  
inputs and outputs.

**OPCR – Output Port Configuration Register**

**OPCR[7] – OP7 Output Select** – This bit programs the  
OP7 output to provide one of the following:

- The complement of OPR[7]
- The channel B transmitter interrupt output which is the  
complement of TxRDYB. When in this mode OP7  
acts as an open collector output. Note that this output  
is not masked by the contents of the IMR.

**OPCR[6] – OP6 Output Select** – This bit programs the  
OP6 output to provide one of the following:

- The complement of OPR[6]
- The channel A transmitter interrupt output, which is  
the complement of TxRDYA. When in this mode OP6  
acts as an open collector output. Note that this output  
is not masked by the contents of the IMR.

**OPCR[5] – OP5 Output Select** – This bit programs the  
OP5 output to provide one of the following:

- The complement of OPR[5]
- The channel B receiver interrupt output, which is the  
complement of ISR[5]. When in this mode OP5 acts  
as an open collector output. Note that this output is  
not masked by the contents of the IMR.

**OPCR[4] – OP4 Output Select** – This bit programs the  
OP4 output to provide one of the following:

- The complement of OPR[4]
- The channel A receiver interrupt output, which is the  
complement of ISR[1]. When in this mode OP4 acts as  
an open collector output. Note that this output is not  
masked by the contents of the IMR.

**OPCR[3:2] – OP3 Output Select** – This field programs  
the OP3 output to provide one of the following:

- The complement of OPR[3]
- The counter/timer output, in which case OP3 acts as  
an open collector output. In the timer mode, this out-  
put is a square wave at the programmed frequency.  
In the counter mode, the output remains high until  
terminal count is reached, at which time it goes low.  
The output returns to the high state when the counter  
is stopped by a stop counter command. Note that this  
output is not masked by the contents of the IMR.
- The 1X clock for the channel B transmitter, which is  
the clock that shifts the transmitted data. If data is  
not being transmitted, a free running 1X clock is output.
- The 1X clock for the channel B receiver, which is the  
clock that samples the received data. If data is not  
being received, a free running 1X clock is output.

**OPCR[1:0] – OP2 Output Select** – This field programs the  
OP2 output to provide one of the following:

- The complement of OPR[2]
- The 16X clock for the channel A transmitter. This is  
the clock selected by CSRA[3:0], and will be a 1X  
clock if CSRA [3:0] = 1111.
- The 1X clock for the channel A transmitter, which is  
the clock that shifts the transmitted data. If data is  
not being transmitted, a free running 1X clock is output.

– The 1X clock for the channel A receiver, which is the clock that samples the received data. If data is not being received, a free running 1X clock is output.

### ACR – Auxiliary Control Register

**ACR[7] – Baud Rate Generator Set Select** – This bit selects one of two sets of baud rates to be generated by the BRG:

Set 1: 50, 110, 134.5, 200, 300, 600, 1.05K, 1.2K, 2.4K, 4.8K, 7.2K, 9.6K, and 38.4K baud.

Set 2: 75, 110, 134.5, 150, 300, 600, 1.2K, 1.8K, 2.0K, 2.4K, 4.8K, 9.6K, and 19.2K baud.

The selected set of rates is available for use by the channel A and B receivers and transmitters as described in CSRA and CSRB. Baud rate generator characteristics are given in Table 3.

**ACR[6:4] – Counter/Timer Mode and Clock Source Select** – This field selects the operating mode of the counter/timer and its clock source as shown in Table 4.

**ACR[3:0] – IP3, IP2, IP1, IP0 Change of State Interrupt Enable** – This field selects which bits of the Input Port Change register (IPCR) cause the input change bit in the interrupt status register (ISR[7]) to be set. If a bit is in the 'on' state, the setting of the corresponding bit in the IPCR will also result in the setting of ISR[7], which results in the generation of an interrupt output if IMR[7]=1. If a bit is in the 'off' state, the setting of that bit in the IPCR has no effect on ISR[7].

### IPCR – Input Port Change Register

**IPCR[7:4] – IP3, IP2, IP1, IP0 Change of State** – These bits are set when a change of state, as defined in the Input Port section of this data sheet, occurs at the respective input pins. They are cleared when the IPCR is read by the CPU. A read of the IPCR also clears ISR[7], the input change bit in the interrupt status register.

The setting of these bits can be programmed to generate an interrupt to the CPU.

**IPCR[3:0] – IP3, IP2, IP1, IP0 Current State** – These bits provide the current state of the respective inputs. The information is unlatched and reflects the state of the input pins at the time the IPCR is read.

### ISR – Interrupt Status Register

This register provides the status of all potential interrupt sources. The contents of this register are masked by the interrupt mask register (IMR). If a bit in the ISR is a '1' and the corresponding bit in the IMR is also a '1', the INTRN output will be asserted. If the corresponding bit in the IMR is a zero, the state of the bit in the ISR has no effect on the INTRN output. Note that the IMR does not mask the reading of the ISR – the true status will be provided regardless of the contents of the IMR. The contents of this register are initialized to 00<sub>16</sub> when the DUART is reset.

**ISR[7] – Input Port Change Status** – This bit is a '1' when a change of state has occurred at the IP0, IP1, IP2, or IP3 inputs and that event has been selected to cause an interrupt by the programming of ACR[3:0]. The bit is cleared when the CPU reads the IPCR.

**ISR[6] – Channel B Change in Break** – This bit, when set, indicates that the channel B receiver has detected the beginning or the end of a received break. It is reset when the CPU issues a channel B 'reset break change interrupt' command.

**ISR[5] – Channel B Receiver Ready or FIFO Full** – The function of this bit is programmed by MR1B[6]. If programmed as receiver ready, it indicates that a character has been received in channel B and is waiting in the FIFO to be read by the CPU. It is set when the character is transferred from the receive shift register to the FIFO and reset when the CPU reads the RHR. If after this read there are more characters still in the FIFO the bit will be set again after the FIFO is 'popped'. If programmed as FIFO full, it is set when a character is transferred from the receive holding register to the receive FIFO and the transfer causes the channel B FIFO to become full, i.e., all three FIFO positions are occupied. It is reset when the CPU reads the RHR. If a character is waiting in the receive

**Table 3. Baud Rate Generator Characteristics Crystal or Clock = 3.6864 MHz**

Nominal Rate (Baud)	Actual 16X Clock (KHz)	Error (Percent)
50	0.8	0
75	1.2	0
110	1.759	-0.069
134.5	2.153	0.059
150	2.4	0
200	3.2	0
300	4.8	0
600	9.6	0
1050	16.756	-0.260
1200	19.2	0
1800	28.8	0
2000	32.056	0.175
2400	38.4	0
4800	76.8	0
7200	115.2	0
9600	153.6	0
19.2K	307.2	0
38.4K	614.4	0

**Table 4. ACR [6:4] Field Definition**

ACR [6:4]	Mode	Clock Source
0 0 0	Counter	External (IP2)
0 0 1	Counter	TXCA – 1X clock of channel A transmitter
0 1 0	Counter	TXCB – 1X clock of channel B transmitter
0 1 1	Counter	Crystal or external clock (X1/CLK) divided by 16
1 0 0	Timer	External (IP2)
1 0 1	Timer	External (IP2) divided by 16
1 1 0	Timer	Crystal or external clock (X1/CLK)
1 1 1	Timer	Crystal or external clock (X1/CLK) divided by 16

shift register because the FIFO is full, the bit will be set again when the waiting character is loaded into the FIFO.

**ISR[4] – Channel B Transmitter Ready** – This bit is a duplicate of TxRDYB (SRB[2]).

**ISR[3] – Counter Ready** – In the counter mode, this bit is set when the counter reaches terminal count and is reset when the counter is stopped by a stop counter command.

In the timer mode, this bit is set once each cycle of the generated square wave (every other time that the counter/timer reaches zero count). The bit is reset by a stop counter command. The command, however, does not stop the counter/timer.

**ISR[2] – Channel A Change in Break** – This bit, when set, indicates that the channel A receiver has detected the beginning or the end of a received break. It is reset when the CPU issues a channel A 'reset break change interrupt' command.

**ISR[1] – Channel A Receiver Ready or FIFO Full** – The function of this bit is programmed by MR1A[6]. If programmed as receiver ready, it indicates that a character has been received in channel A and is waiting in the FIFO to be read by the CPU. It is set when the character is transferred from the receive shift register to the FIFO and reset when the CPU reads the RHR. If after this read there are more characters still in the FIFO the bit will be set again after the FIFO is 'popped'. If programmed as FIFO full, it is set when a character is transferred from the receive holding register to the receive FIFO and the transfer causes the channel A FIFO to become full, i.e., all three FIFO positions are occupied. It is reset when the CPU reads the RHR. If a character is waiting in the receive shift register because the FIFO is full, the bit will be set again when the waiting character is loaded into the FIFO.

**ISR[0] – Channel A Transmitter Ready** – This bit is a duplicate of TxRDYA (SRA[2]).

## IMR – Interrupt Mask Register

The programming of this register selects which bits in the ISR cause an interrupt output. If a bit in the ISR is a '1' and the corresponding bit in the IMR is also a '1', the INTRN output will be asserted. If the corresponding bit in the IMR is a zero, the state of the bit in the ISR has no effect on the INTRN output. Note that the IMR does not mask the programmable interrupt output OP3-OP7 or the reading of the ISR.

## CTUR and CTLR – Counter/Timer Registers

The CTUR and CTLR hold the eight MSBs and eight LSBs respectively of the value to be used by the counter/timer in either the counter or timer modes of operation. The minimum value which may be loaded into the CTUR/CTLR registers is 0002<sub>16</sub>. Note that these registers are write-only and cannot be read by the CPU.

In the timer (programmable divider) mode, the C/T generates a square wave with a period of twice the value (in clock periods) to the CTUR and CTLR. If the value in CTUR or CTLR is changed, the current half-period will not be affected, but subsequent half periods will be. In this mode the C/T runs continuously. Receipt of a start counter command (read with A3-A0=1110) causes the counter to terminate the current timing cycle and to begin a new cycle using the values in CTUR and CTLR.

The counter ready status bit (ISR[3]) is set once each cycle of the square wave. The bit is reset by a stop counter command (read with A3-A0=111). The command, however, does not stop the C/T. The generated square wave is output on OP3 if it is programmed to be the C/T output.

In the counter mode, the C/T counts down the number of pulses loaded into CTUR and CTRL by the CPU. Counting begins upon receipt of a start counter command. Upon reaching terminal count ( $0000_{16}$ ), the counter ready interrupt bit (ISR[3]) is set. The counter continues counting past the terminal count until stopped by the CPU. If OP3 is programmed to be the output of the C/T, the output remains high until terminal count is reached, at which time it goes low. The output returns to the high state and ISR[3] is cleared when the counter is stopped by a stop counter command. The CPU may change the values of CTUR and CTRL at any time, but the new count becomes effective only on the next start counter command. If new values have not been loaded, the

previous count values are preserved and used for the next count cycle.

In the counter mode, the current value of the upper and lower 8 bits of the counter (CTU, CTL) may be read by the CPU. It is recommended that the counter be stopped when reading to prevent potential problems which may occur if a carry from the lower 8-bits to the upper 8-bits occurs between the times that both halves of the counter are read. However, note that a subsequent start counter command will cause the counter to begin a new count cycle using the values in CTUR and CTRL.

### Ordering Information

Part Number	Package
UM2681-1	40 DIP
UM2681-2	28 DIP
UM2681-3	24 DIP