

UTC LD3870 LINEAR INTEGRATED CIRCUIT


LOW DROPOUT VOLTAGE REGULATOR

DESCRIPTION

The UTC LD3870 is low dropout voltage regulator designed for cellular phone application.

FEATURES

- * High Ripple Rejection: 56dB RR(DC<f<60kHz)
66dB typ. (f=100Hz)
60dB typ. (f=1kHz)
- * Output Noise Voltage: $V_{no}=30 \mu V$, $C_p=0.01 \mu F$
- * Output Current: $I_o(max)=150mA$
- * High Precision Output: $V_o \pm 2\%$
- * Low Dropout Voltage: $V_i-o=0.12V$ typ.
($I_o=60mA, V_o=1.8V$)
- * Input Voltage range: +2~+14V($V_o=1.5V$ Version)
- * ON/OFF Control: Active High
- * Output capacitor with 4.7uF ceramic capacitor
- * Internal Short Circuit Current Limit
- * Internal Thermal Overload Protection

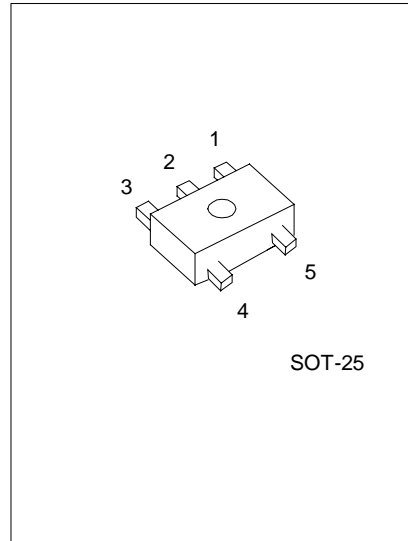


1:CONTROL(Active High) 2:GND
3:NOISE BYPASS 4:Vout 5:VIN

MARKING INFORMATION

PART NUMBER	VOLTAGE	VOLATGE CODE	PART NUMBER	VOLTAGE	VOLATGE CODE	MARKING
LD3870-1.5V	1.5V	15	LD3870-3.1V	3.1V	31	
LD3870-1.8V	1.8V	18	LD3870-3.2V	3.2V	32	
LD3870-1.9V	1.9V	19	LD3870-3.3V	3.3V	33	
LD3870-2.0V	2.0V	20	LD3870-3.4V	3.4V	34	
LD3870-2.1V	2.1V	21	LD3870-3.5V	3.5V	35	
LD3870-2.3V	2.3V	23	LD3870-3.6V	3.6V	36	
LD3870-2.4V	2.4V	24	LD3870-3.8V	3.8V	38	
LD3870-2.5V	2.5V	25	LD3870-4.0V	4.0V	40	
LD3870-2.6V	2.6V	26	LD3870-4.5V	4.5V	45	
LD3870-2.7V	2.7V	27	LD3870-4.6V	4.6V	46	
LD3870-2.8V	2.8V	28	LD3870-4.7V	4.7V	47	
LD3870-2.85V	2.85V	2J	LD3870-4.8V	4.8V	48	
LD3870-2.9V	2.9V	29	LD3870-5.0V	5.0V	50	
LD3870-3.0V	3.0V	30				

UTC LD3870 LINEAR INTEGRATED CIRCUIT

BLOCK DIAGRAM

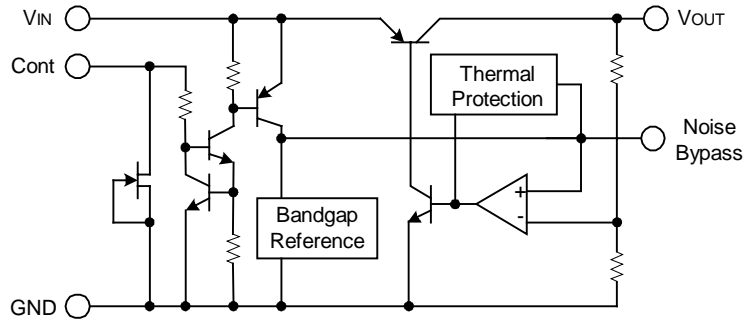

ABSOLUTE MAXIMUM RATINGS (Ta=25)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{IN}	+14	V
Control Voltage	V _{CONT}	+14(Note 1)	V
Power Dissipation	P _D	200	mW
Operating Temperature	T _{opr}	-40 ~ +85	
Storage Temperature	T _{stg}	-40 ~ +125	

Note 1: When input voltage is less than +14V, the absolute maximum control voltage is equal to the input voltage.

ELECTRICAL CHARACTERISTICS (V_{IN}=V_O+1V, C_{IN}=0.1 μF, C_O=4.7 μF, C_p=0.01 μF, Ta=25)

PARAMETER	SYMBOL	TEST CONDITONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V _O	I _O =30mA	-2%		+2%	V
Quiescent Current	I _Q	I _O =0mA, expect I _{cont}		200	300	μA
Quiescent Current At Control OFF	I _{Q(OFF)}	V _{CONT} =0V			100	nA
Output Current	I _O	V _O -0.3V	150	200		mA
Line Regulation	V _O / V _{IN}	V _{IN} =V _O +1V ~ V _O +6V, I _O =30mA			0.10	%/V
Load Regulation	V _O / I _O	I _O =0 ~ 100mA			0.03	%/mA
Dropout Voltage	V _{I-O}	I _O =60mA		0.12	0.2	V
Ripple Rejection	RR	e _{in} =200mVrms, f=1kHz, I _O =10mA, V _{IN} =V _O +2V, V _O =3V Version		60		dB
Average Temperature Coefficient of Output Voltage	V _O / Ta	Ta=0~85 , I _O =10mA, V _O =3V Version		0.2		mV/
Output Noise Voltage	V _{NO}	f=10Hz ~ 80kHz, I _O =10mA, V _O =3V Version		30		μVrms
Control Voltage for ON-state	V _{CONT(ON)}		1.6			V
Control Voltage for OFF-state	V _{CONT(OFF)}				0.6	V

Note 2: The above specification is a common specification for all output voltages. Therefore, it may be different from the individual specification for a specific output voltage.

UTC UNISONIC TECHNOLOGIES CO., LTD. 2

QW-R102-027,B


UTC LD3870 LINEAR INTEGRATED CIRCUIT

ELECTRICAL CHARACTERISTICS

($V_o=1.5V$ Version, $V_{IN}=2.4V$, $C_{IN}=0.1\mu F$, $C_o=4.7\mu F$, $C_p=0.01\mu F$, $T_a=25^\circ C$)


PARAMETER	SYMBOL	TEST CONDITONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_o	$I_o=30mA$	-2%		+2%	V
Quiescent Current	I_Q	$I_o=0mA$, expect I_{cont}		200	300	μA
Quiescent Current At Control OFF	$I_{Q(OFF)}$	$V_{CONT}=0V$			100	nA
Output Current	I_o	$V_o=0.3V$	150	200		mA
Line Regulation	V_o/V_{IN}	$V_{IN}=V_o+1V \sim V_o+6V$, $I_o=30mA$			0.10	%/V
Load Regulation	V_o/I_o	$I_o=0 \sim 100mA$			0.03	%/mA
Ripple Rejection	RR	$e_{in}=200mV_{rms}$, $f=1kHz$, $I_o=10mA$, $V_{IN}=V_o+2V$		64		dB
Average Temperature Coefficient of Output Voltage	V_o/T_a	$T_a=0 \sim 85^\circ C$, $I_o=10mA$		0.13		mV/
Output Noise Voltage	V_{NO}	$f=10Hz \sim 80kHz$, $I_o=10mA$		15		μV_{rms}
Control Voltage for ON-state	$V_{CONT(ON)}$		1.6			V
Control Voltage for OFF-state	$V_{CONT(OFF)}$				0.6	V

TEST CIRCUIT

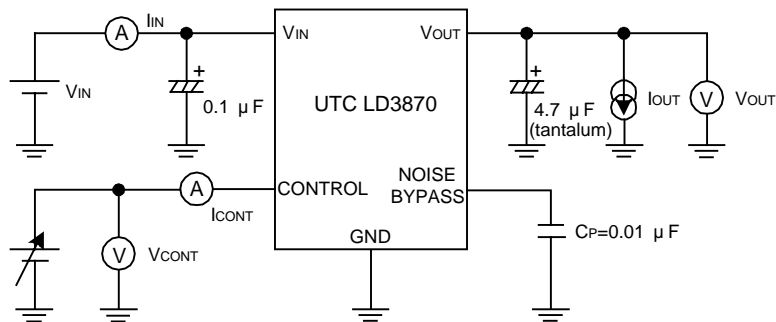

TYPICAL APPLICATION

In case that ON/OFF Control is not required:

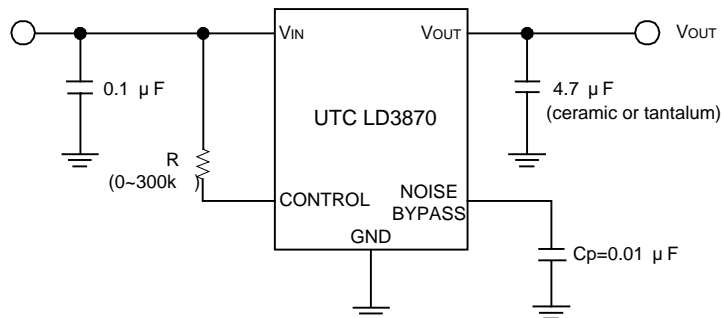


UTC LD3870 LINEAR INTEGRATED CIRCUIT

Connect control terminal to V_{IN} terminal

The quiescent current can be reduced by using a resistance "R". Instead, it increases the minimum operating voltage. For further information, please refer to Figure "Output Voltage vs. Control Voltage".

In use of ON/OFF CONTROL:

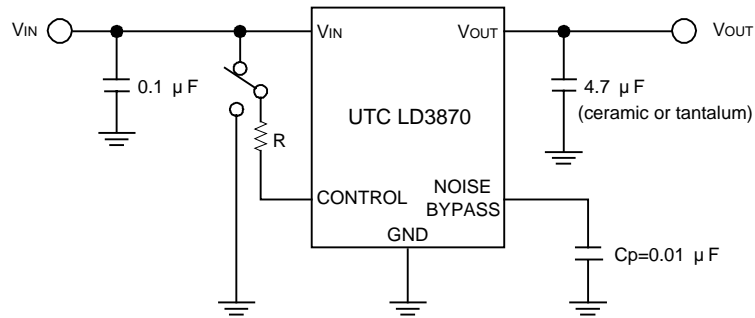

State of control terminal:

* "H" → Output is enables.

* "L" or "open" → Output is disabled.

* Noise bypass Capacitance Cp

Noise bypass capacitance Cp reduces noise generated by hand-gap reference circuit.







Noise level and ripple rejection will be improved when larger Cp is used.

Use of smaller Cp value may cause oscillation.

Use the Cp value of 0.01uF greater to avoid the problem.






UTC LD3870 LINEAR INTEGRATED CIRCUIT

TYPICAL CHARACTERISTICS

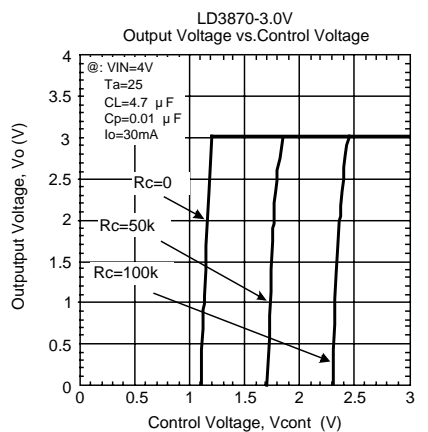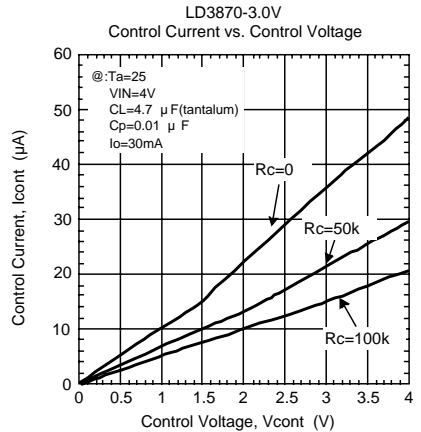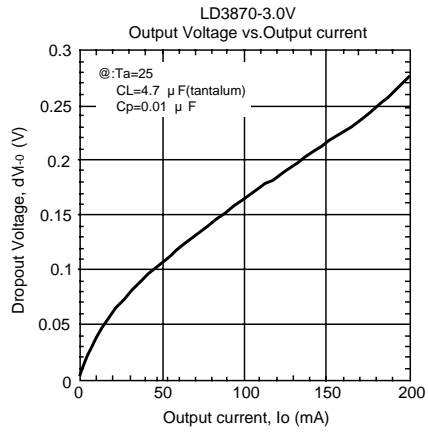
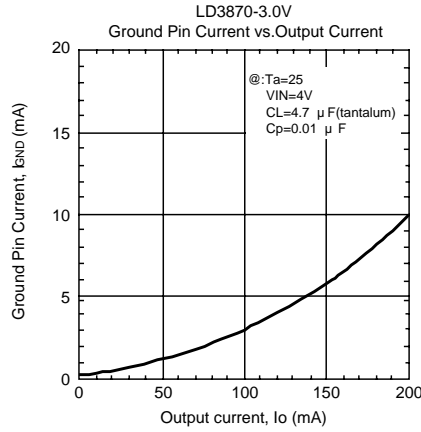
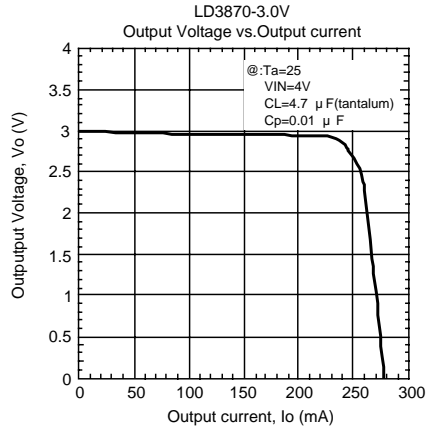
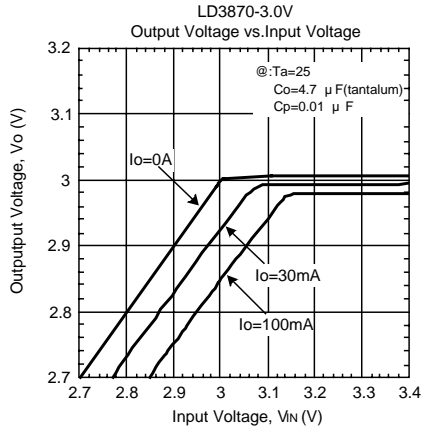


UTC LD3870 LINEAR INTEGRATED CIRCUIT

www.DataSheet4U.com

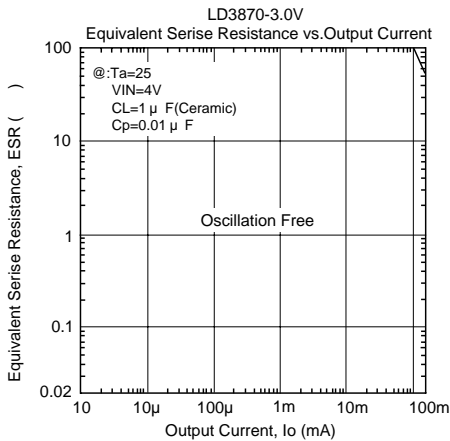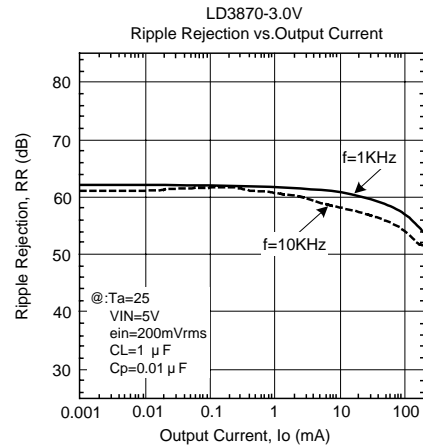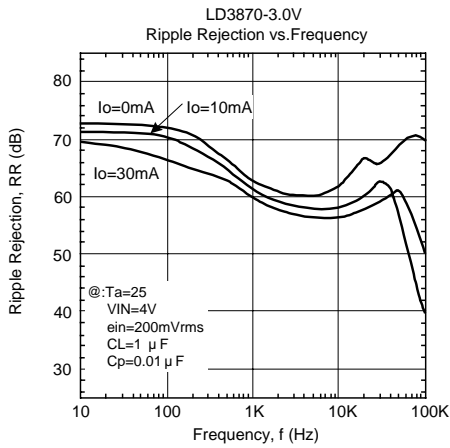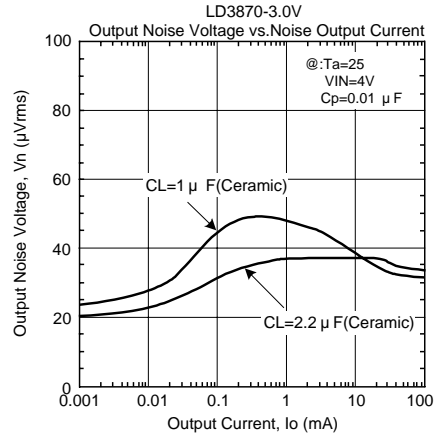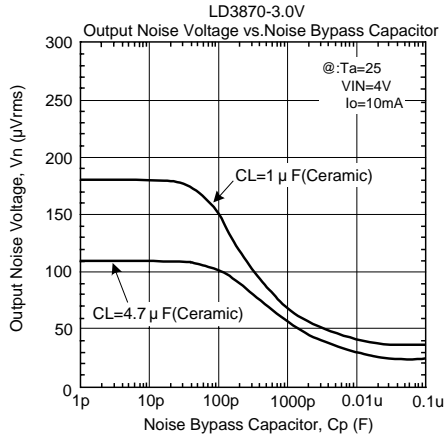

UTC LD3870 LINEAR INTEGRATED CIRCUIT

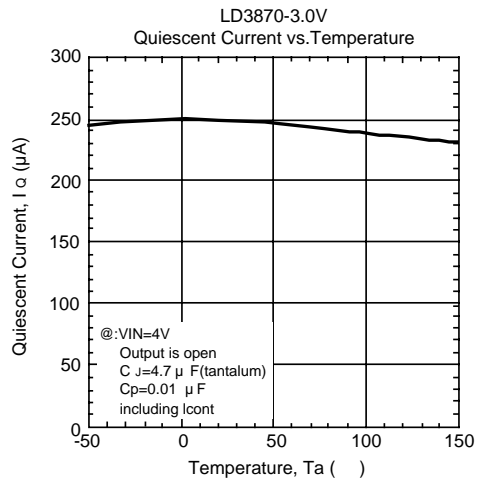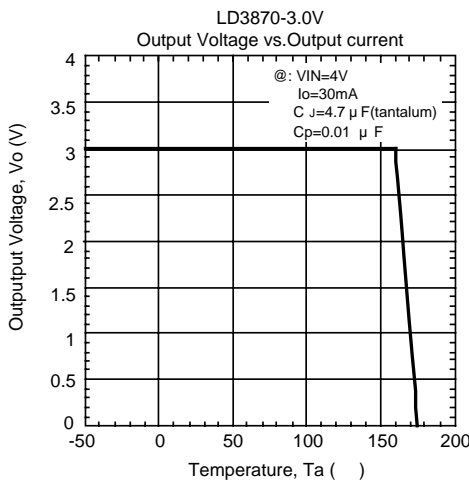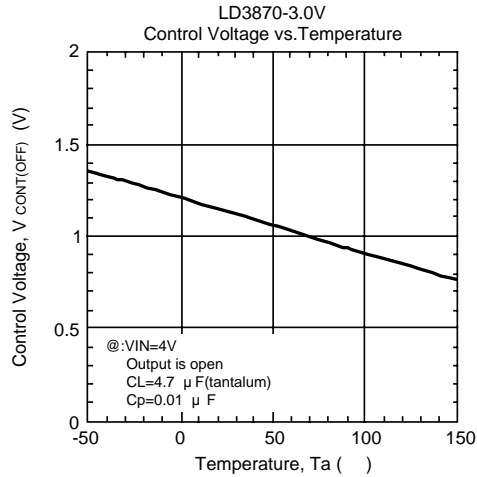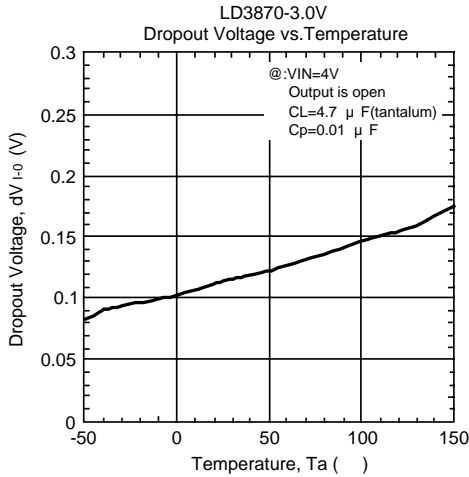

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.