

Applications

- Transistor, diode, IC, thyristor or triac semiconductor protection.
- Surge protection in consumer electronics.
- Surge protection in industrial electronics.
- Surge protection in electronic home appliances, gas and petroleum appliances.
- Relay and electromagnetic valve surge absorption.

Features

- Wide operating voltage (V1mA) range from 8V to 1800V.
- Fast responding to transient over-voltage.
- Large absorbing transient energy capability.
- Low clamping ratio and no following-on current.

Package Dimensions

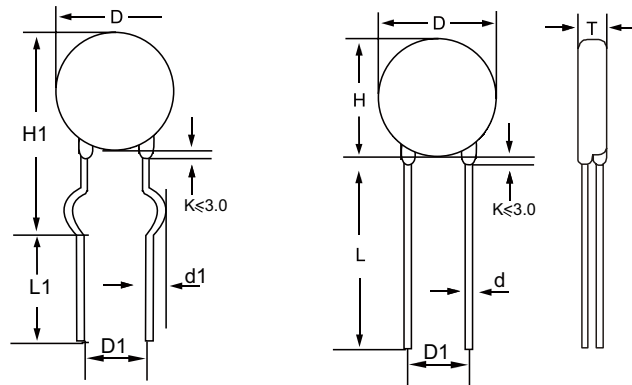


TABLE 1

| Symbol | Dimensions |
|----------|------------------|
| H(max.) | 26.5 |
| H1(max.) | 28.0 |
| L(min.) | 20.0 |
| L1(min.) | 15.0 |
| D(max.) | 23.0 |
| D1(±0.8) | 7.5+0.8/10.0+1.0 |
| T(max.) | TABLE 2 |
| d(±0.05) | 0.8 |
| d1(±0.4) | 1.4 |

TABLE 2

| Model | T(max.) | Model | T(max.) |
|-------|---------|-------|---------|
| 180K | 4.8 | 301K | 5.8 |
| 220K | 4.9 | 331K | 6.0 |
| 270K | 5.0 | 361K | 6.2 |
| 330K | 5.2 | 391K | 6.5 |
| 390K | 5.5 | 431K | 6.7 |
| 470K | 5.6 | 471K | 6.9 |
| 560K | 5.7 | 511K | 7.0 |
| 680K | 5.08 | 561K | 7.2 |
| 820K | 4.9 | 621K | 7.5 |
| 101K | 5.1 | 681K | 8.2 |
| 121K | 5.3 | 751K | 5.3 |
| 151K | 5.6 | 781K | 8.5 |
| 181K | 5.0 | 821K | 9.0 |
| 201K | 5.2 | 911K | 9.5 |
| 221K | 5.3 | 102K | 10.1 |
| 241K | 5.4 | 112K | 10.6 |
| 271K | 5.6 | 182K | 13.2 |
| 301k | 5.7 | - | - |

Electrical Characteristic

| Type Number | | Maximum Allowable Voltage | | Varistor Voltage | Maximum Clamping Voltage | | Withstanding Surge Current | | Maximum Energy (10/1000μs) | | Rated Power | Typical Capacitance (Reference) |
|-------------|------------|---------------------------|---------------------|----------------------|--------------------------|--------------------|----------------------------|--------------------|----------------------------|-------------------|-------------|---------------------------------|
| Standard | High Surge | V _{AC} (V) | V _{DC} (V) | V _{1mA} (V) | I _P (A) | V _C (V) | I(A) Standard | I(A) High Surge | (J) Standard | (J) High Surge | (W) | @1KHz(pf) |
| 20D180K | 20D180KJ | 11 | 14 | 18(15~21.6) | 20 | 36 | 2000 | 3000 | 11 | 13 | 0.2 | 28500 |
| 20D220K | 20D220KJ | 14 | 18 | 22(19.5~26) | 20 | 43 | 2000 | 3000 | 14 | 16 | 0.2 | 18500 |
| 20D270K | 20D270KJ | 17 | 22 | 27(24~30) | 20 | 53 | 2000 | 3000 | 16 | 19 | 0.2 | 13000 |
| 20K330K | 20K330KJ | 20 | 26 | 33(29.5~36.5) | 20 | 65 | 2000 | 3000 | 23 | 24 | 0.2 | 11500 |
| 20D390K | 20D390KJ | 25 | 31 | 39(35~43) | 20 | 77 | 2000 | 3000 | 26 | 28 | 0.2 | 8500 |
| 20D470K | 20D470KJ | 30 | 38 | 47(42~54) | 20 | 93 | 2000 | 3000 | 30 | 34 | 0.2 | 7400 |
| 20D560K | 20D560KJ | 35 | 45 | 56(50~62) | 20 | 100 | 2000 | 3000 | 41 | 41 | 0.2 | 6500 |
| 20D680K | 20D680KJ | 40 | 56 | 68(61~75) | 20 | 135 | 2000 | 3000 | 46 | 49 | 0.2 | 5800 |
| 20D820K | 20D820KJ | 50 | 65 | 82(74~90) | 100 | 135 | 6500 | 10000 | 38 | 56 | 1.0 | 4900 |
| 20D101K | 20D101KJ | 60 | 85 | 100(90~110) | 100 | 165 | 6500 | 10000 | 45 | 70 | 1.0 | 4000 |
| 20D121K | 20D121KJ | 75 | 100 | 120(108~132) | 100 | 200 | 6500 | 10000 | 55 | 85 | 1.0 | 3300 |
| 20D151K | 20D151KJ | 95 | 125 | 150(135~165) | 100 | 250 | 6500 | 10000 | 70 | 106 | 1.0 | 2700 |
| 20D181K | 20D181KJ | 115 | 150 | 180(162~198) | 100 | 300 | 6500 | 10000 | 85 | 130 | 1.0 | 2200 |
| 20D201K | 20D201KJ | 130 | 170 | 200(180~220) | 100 | 340 | 6500 | 10000 | 95 | 140 | 1.0 | 2000 |
| 20D221K | 20D221KJ | 140 | 180 | 220(198~242) | 100 | 360 | 6500 | 10000 | 100 | 155 | 1.0 | 1800 |
| 20D241K | 20D241KJ | 150 | 200 | 240(216~264) | 100 | 395 | 6500 | 10000 | 108 | 168 | 1.0 | 1650 |
| 20D271K | 20D271KJ | 175 | 225 | 270(243~297) | 100 | 455 | 6500 | 10000 | 127 | 190 | 1.0 | 1500 |
| 20D301K | 20D301KJ | 190 | 250 | 300(270~330) | 100 | 500 | 6500 | 10000 | 136 | 210 | 1.0 | 1300 |
| 20D331K | 20D331KJ | 210 | 275 | 330(297~363) | 100 | 550 | 6500 | 10000 | 150 | 228 | 1.0 | 1200 |
| 20D361K | 20D361KJ | 230 | 300 | 360(324~396) | 100 | 595 | 6500 | 10000 | 163 | 255 | 1.0 | 1100 |
| 20D391K | 20D391KJ | 250 | 320 | 390(351~429) | 100 | 650 | 6500 | 10000 | 180 | 275 | 1.0 | 1000 |
| 20D431K | 20D431KJ | 275 | 350 | 430(387~473) | 100 | 710 | 6500 | 10000 | 190 | 305 | 1.0 | 930 |
| 20D471K | 20D471KJ | 300 | 385 | 470(423~517) | 100 | 775 | 6500 | 10000 | 220 | 350 | 1.0 | 850 |
| 20D511K | 20D511KJ | 320 | 415 | 510(459~561) | 100 | 845 | 6500 | 10000 | 220 | 360 | 1.0 | 780 |
| 20D561K | 20D561KJ | 350 | 460 | 560(504~616) | 100 | 925 | 6500 | 10000 | 220 | 380 | 1.0 | 710 |
| 20D621K | 20D621KJ | 385 | 505 | 620(558~682) | 100 | 1025 | 6500 | 10000 | 220 | 390 | 1.0 | 650 |
| 20D681K | 20D681KJ | 420 | 560 | 680(612~748) | 100 | 1120 | 6500 | 10000 | 230 | 400 | 1.0 | 600 |
| 20D751K | 20D751KJ | 460 | 615 | 750(675~825) | 100 | 1240 | 6500 | 10000 | 255 | 420 | 1.0 | 530 |
| 20D781K | 20D781KJ | 485 | 640 | 780(702~858) | 100 | 1290 | 6500 | 10000 | 265 | 440 | 1.0 | 510 |
| 20D821K | 20D821KJ | 510 | 670 | 820(738~902) | 100 | 1355 | 6500 | 10000 | 282 | 460 | 1.0 | 500 |
| 20D911K | 20D911KJ | 550 | 745 | 910(819~1001) | 100 | 1500 | 6500 | 10000 | 310 | 510 | 1.0 | 440 |
| 20D102K | 20D102KJ | 625 | 825 | 1000(900~1100) | 100 | 1650 | 6500 | 10000 | 342 | 565 | 1.0 | 400 |
| 20D112K | 20D112KJ | 680 | 895 | 1100(990~1210) | 100 | 1815 | 6500 | 10000 | 383 | 620 | 1.0 | 460 |
| 20D122K | 20D122KJ | 750 | 990 | 1200(1080_1320) | 100 | 1980 | 6500 | 10000 | 408 | 660 | 1.0 | 320 |
| 20D182K | 20D182KJ | 1000 | 1465 | 1800(1620~1980) | 100 | 2970 | 6500 | 10000 | 625 | 660 | 1.0 | 320 |

Remark: Voltage>33V, K is ±10%

Electrical Rating

| Item | Test Condition / Description | Requirement | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------|--|-----------------------------|-----------|--------------|-----------------------|--------------|-----------------------|----------|--------------|-----------------------|--------------|-----------------------|------------|--------------|-----------------------|--------------|------------------------|------------|--------------|-----------------------|--------------|------------------------|------------|--------------|------------------------|--------------|------------------------|
| Varistor Voltage | The voltage between two terminals with the specified measuring current 1mA.DC applied is call Vb. | To meet the specified value | | | | | | | | | | | | | | | | | | | | | | | | | |
| Maximum Allowable Voltage | The recommended maximum sine wave voltage (RMS) or the maximum DC voltage can be applied continuously. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated Wattaget | The maximum average power that can be applied within the specified ambient temperature. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| IEnergy | The maximum energy within the varistor voltage change of $\pm 10\%$ when one impulse of 10/1000 μ sec. or 2 msec. is applied. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Withstanding Surge Current | The maximum current within the varistor voltage change of $\pm 10\%$ with the standard impulse current (8/20 μ sec.) applied one time. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Surge Life | <p>The change of Vb shall be measured after the impulse listed below is applied 10,000 times continuously with the interval of ten seconds at room temperature.</p> <table border="1" data-bbox="384 1160 1082 1496"> <tbody> <tr> <td rowspan="2">5D series</td> <td>180K to 680K</td> <td>10A (8/20μsec.)</td> </tr> <tr> <td>820K to 751K</td> <td>20A (8/20μsec.)</td> </tr> <tr> <td rowspan="2">7Dseries</td> <td>180K to 680K</td> <td>25A (8/20μsec.)</td> </tr> <tr> <td>820K to 821K</td> <td>50A (8/20μsec.)</td> </tr> <tr> <td rowspan="2">10D series</td> <td>180K to 680K</td> <td>50A (8/20μsec.)</td> </tr> <tr> <td>820K to 182K</td> <td>100A (8/20μsec.)</td> </tr> <tr> <td rowspan="2">14D series</td> <td>180K to 680K</td> <td>75A (8/20μsec.)</td> </tr> <tr> <td>820K to 182K</td> <td>150A (8/20μsec.)</td> </tr> <tr> <td rowspan="2">20D series</td> <td>180K to 680K</td> <td>100A (8/20μsec.)</td> </tr> <tr> <td>820K to 182K</td> <td>200A (8/20μsec.)</td> </tr> </tbody> </table> | | 5D series | 180K to 680K | 10A (8/20 μ sec.) | 820K to 751K | 20A (8/20 μ sec.) | 7Dseries | 180K to 680K | 25A (8/20 μ sec.) | 820K to 821K | 50A (8/20 μ sec.) | 10D series | 180K to 680K | 50A (8/20 μ sec.) | 820K to 182K | 100A (8/20 μ sec.) | 14D series | 180K to 680K | 75A (8/20 μ sec.) | 820K to 182K | 150A (8/20 μ sec.) | 20D series | 180K to 680K | 100A (8/20 μ sec.) | 820K to 182K | 200A (8/20 μ sec.) |
| 5D series | 180K to 680K | 10A (8/20 μ sec.) | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 820K to 751K | 20A (8/20 μ sec.) | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7Dseries | 180K to 680K | 25A (8/20 μ sec.) | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 820K to 821K | 50A (8/20 μ sec.) | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10D series | 180K to 680K | 50A (8/20 μ sec.) | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 820K to 182K | 100A (8/20 μ sec.) | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14D series | 180K to 680K | 75A (8/20 μ sec.) | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 820K to 182K | 150A (8/20 μ sec.) | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20D series | 180K to 680K | 100A (8/20 μ sec.) | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 820K to 182K | 200A (8/20 μ sec.) | | | | | | | | | | | | | | | | | | | | | | | | | |

General Characteristics

No Radioactive Material
 Storage Temperature: -55°C to +125°C
 Operating Temperature: -55°C to +85°C
 Body: Nickel Plated
 Leads: Surface-mount, Axial Devices: Tin Plated
 Devices with No Leads: Nickel Plated

Packaging Information

| Part Number | Component package | Quantity | Packaging Option | Packaging Specification |
|-------------|-------------------|----------|------------------|-------------------------|
| 20D | 20.0 | 150 | BOX | |
| | | | | |

Part Numbering System

Example Part Number: 20D471KJ

20D=Disc Diameter
 471 = $V_{1mA}(V)$ of 470V
 K = Tolerance k:+_10%
 J= High Surge