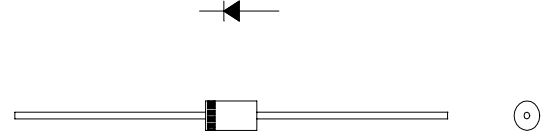


**2A 200V**
**SBD Type : 20KHA20**

OUTLINE DRAWING

 構造 : ショットキバリア・ダイオード(SBD)  
 リード線型

 Construction: Schottky barrier Diode  
 Axial Lead Type

 用途 : 高周波整流用  
 Application: High Frequency Rectification

**最大定格 / Maximum Ratings**

Approx Net Weight:0.38g


Rating	Symbol	20KHA20		Unit
くり返しピーク逆電圧 Repetitive Peak Reverse Voltage	$V_{RRM}$	200		V
平均整流電流 Average Rectified Output Current	$I_O$	2.0	TI=115 TI=Lead Temperature 50Hz, 正弦半波通電 Half Sine Wave 抵抗負荷 Resistive Load	A
		1.6	Ta=36	
実効順電流 RMS Forward Current	$I_{F(RMS)}$	3.14		A
サージ順電流 Surge Forward Current	$I_{FSM}$	40	50Hz 正弦半波, 1サイクル, 非くり返し Half Sine Wave, 1cycle, Non-repetitive	A
動作接合温度範囲 Operating Junction Temperature Range	$T_{jw}$	- 40 ~ + 150		
保存温度範囲 Storage Temperature Range	$T_{stg}$	- 40 ~ + 150		

**電氣的・熱的特性 / Electrical/Thermal Characteristics**



Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
ピーク逆電流 Peak Reverse Current	$I_{RM}$	$T_j = 25$ , $V_{RM} = V_{RRM}$	-	-	200	$\mu A$
ピーク順電圧 Peak Forward Voltage	$V_{FM}$	$T_j = 25$ , $I_{FM} = 2 A$	-	-	0.90	V
熱抵抗 Thermal Resistance	$R_{th(j-a)}$	接合部・リード間 Junction to Lead	-	-	17	/W
		接合部・周囲間 * Junction to Ambient	-	-	70	

\*:Print Lands = 5 x 5mm, Both sides


20KHA\_外形図 (mm)

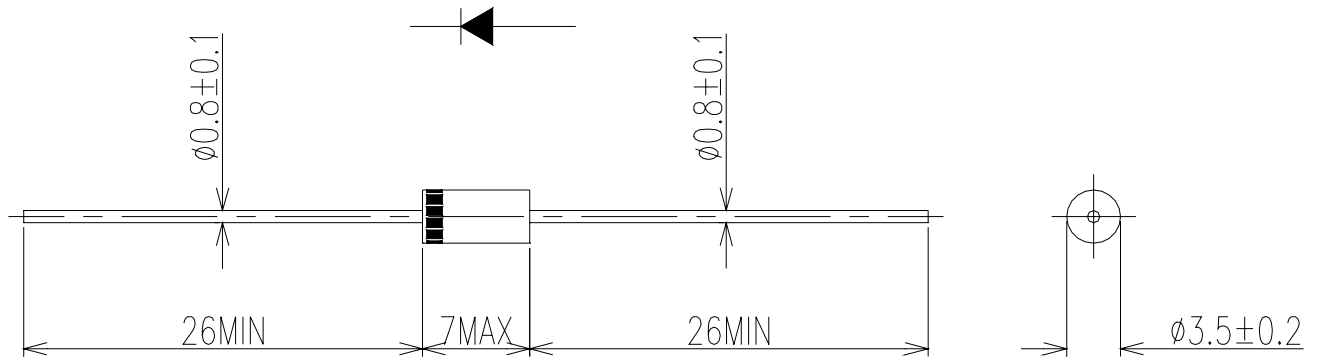

順電壓特性  
FORWARD CURRENT VS. VOLTAGE

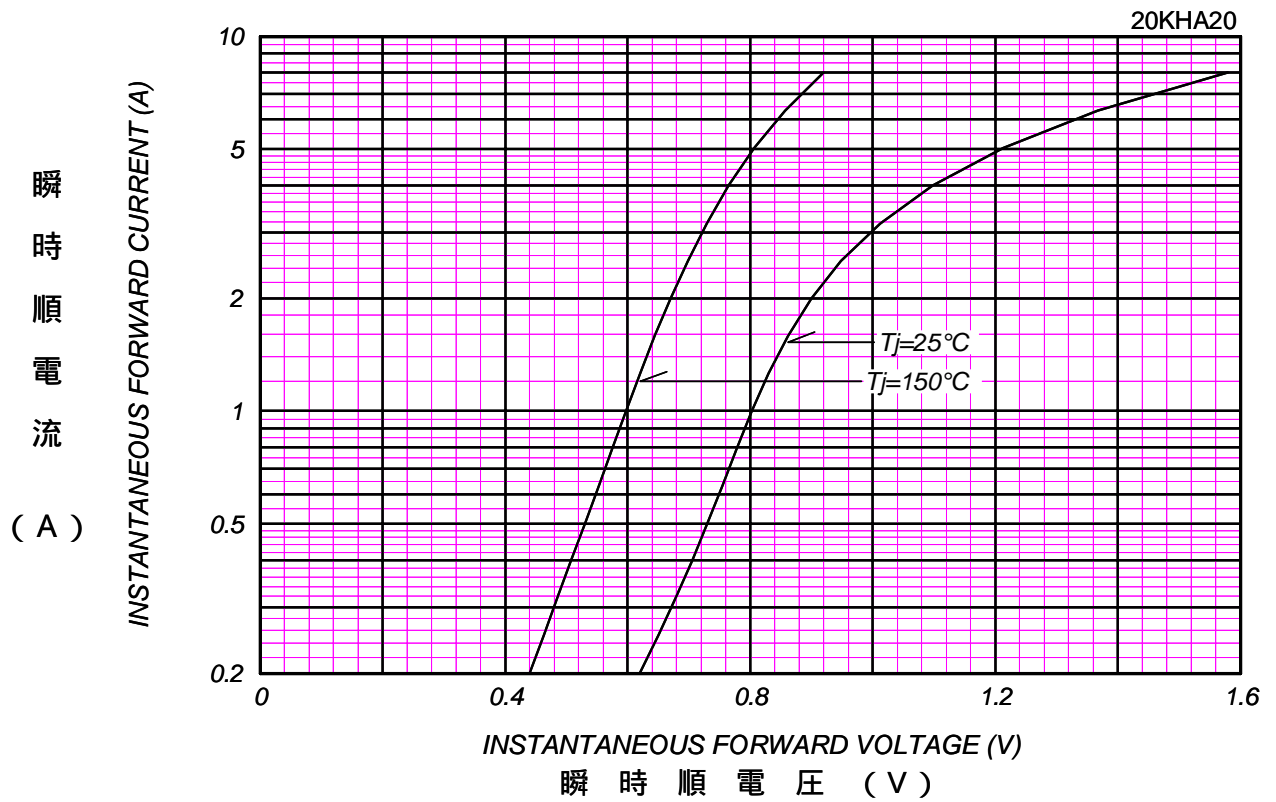


平均順電力損失特性  
AVERAGE FORWARD POWER DISSIPATION

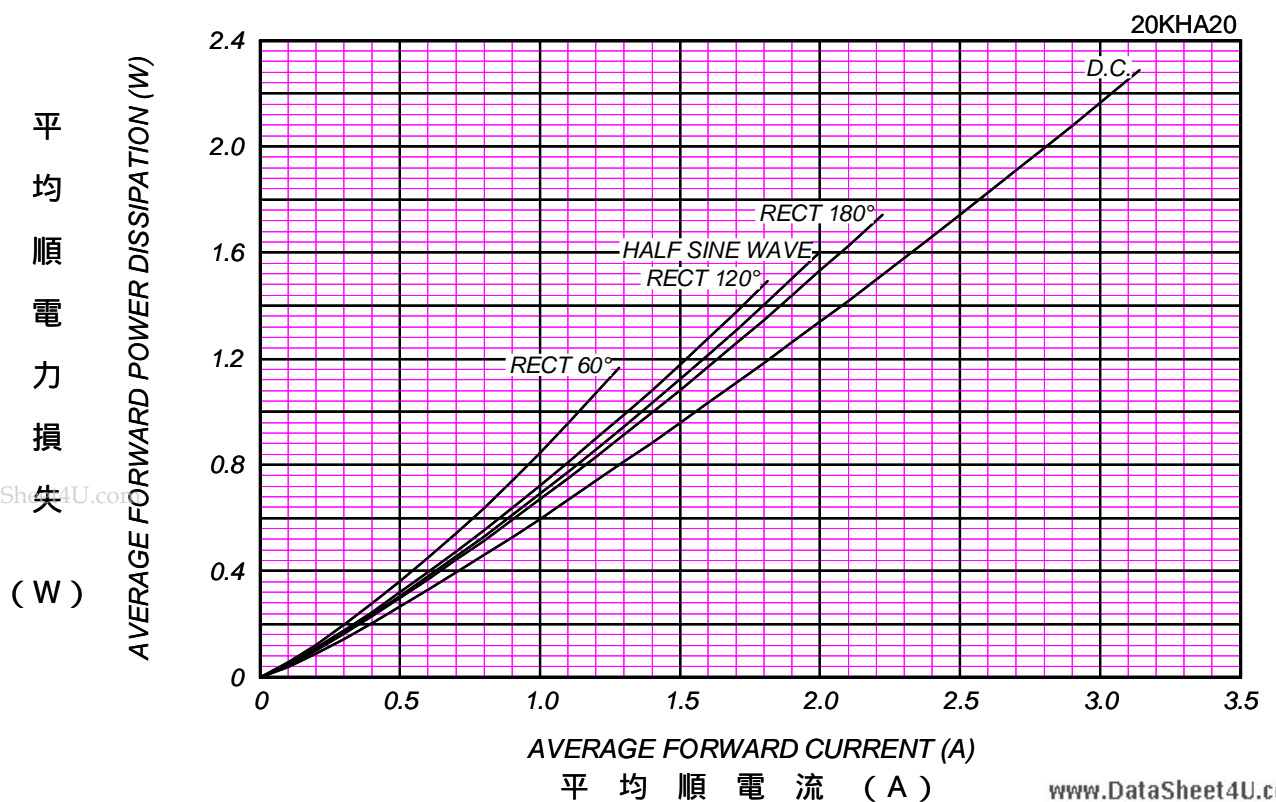



ピーク逆電流 - ピーク逆電圧特性  
 PEAK REVERSE CURRENT VS. PEAK REVERSE VOLTAGE

T<sub>j</sub> = 150 °C

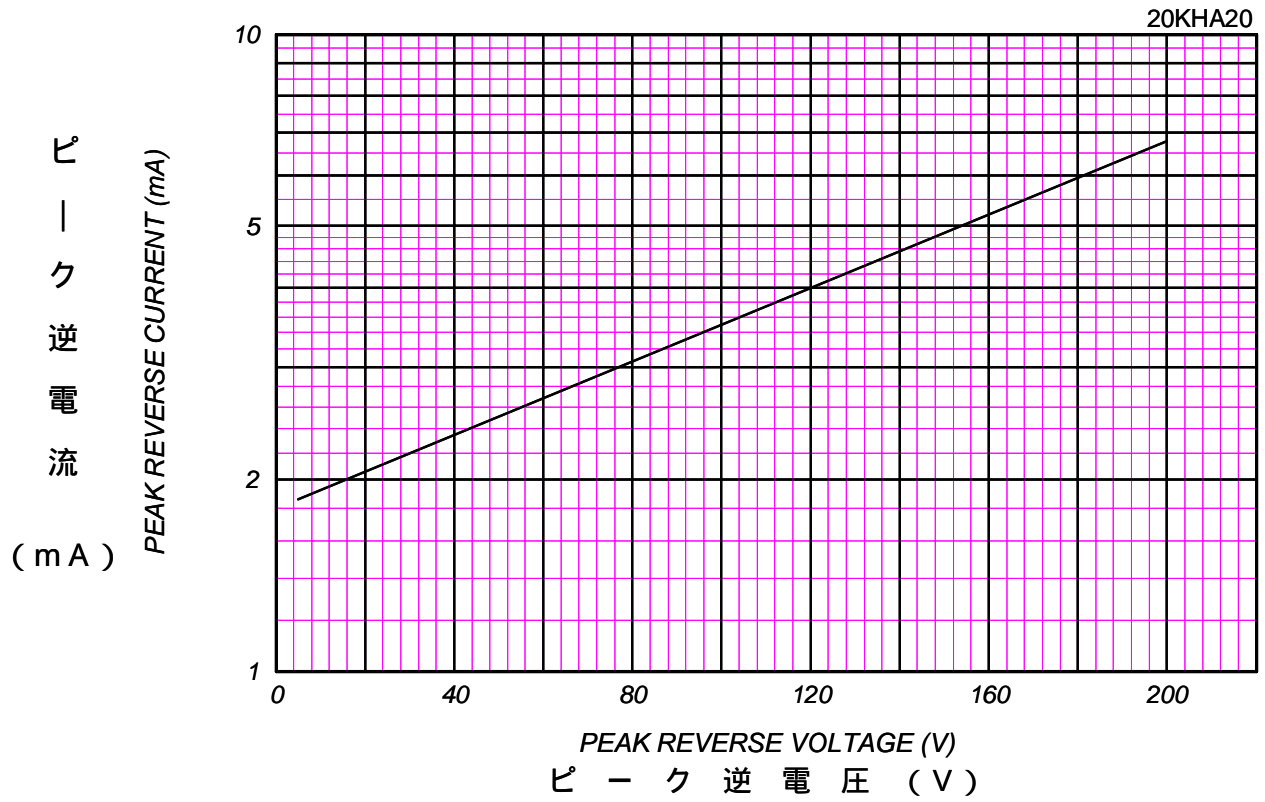



平均逆電力損失  
 AVERAGE REVERSE POWER DISSIPATION

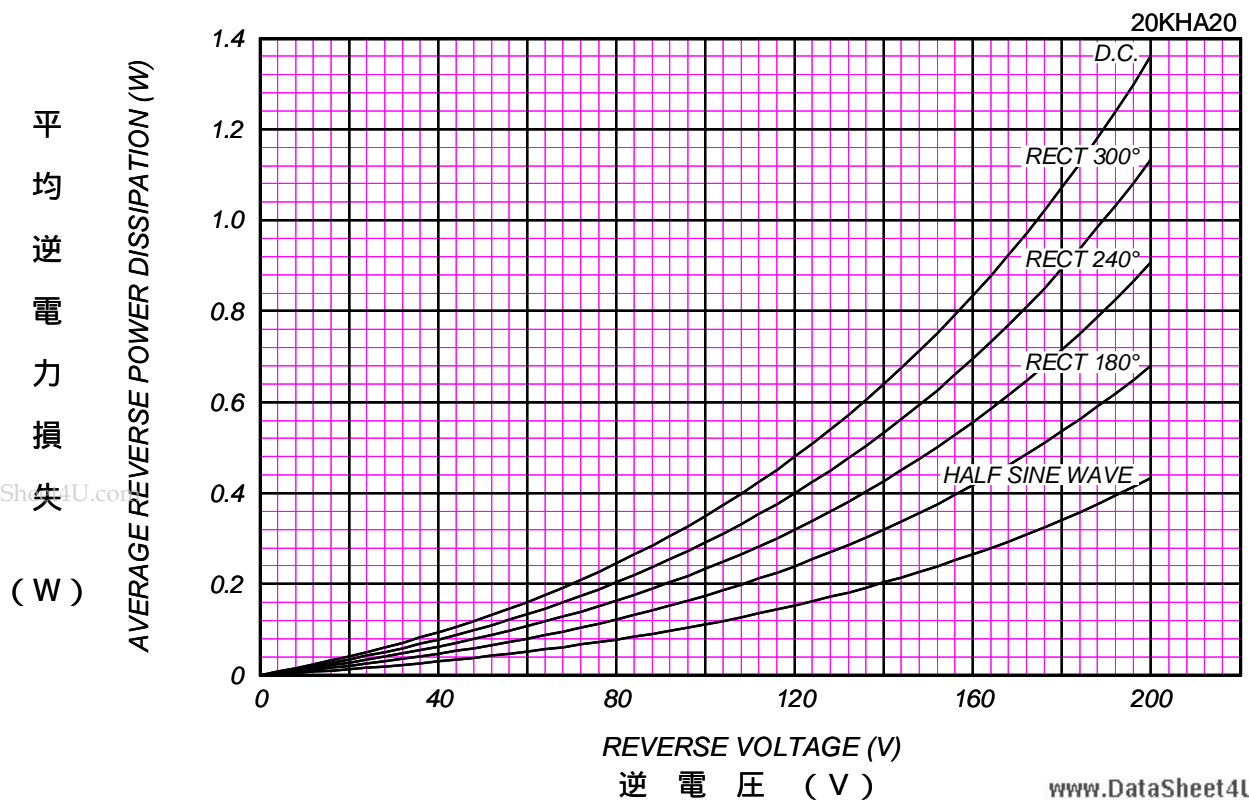




平均順電流 - リード温度定格  
AVERAGE FORWARD CURRENT VS. LEAD TEMPERATURE

$V_{RM}=200V$

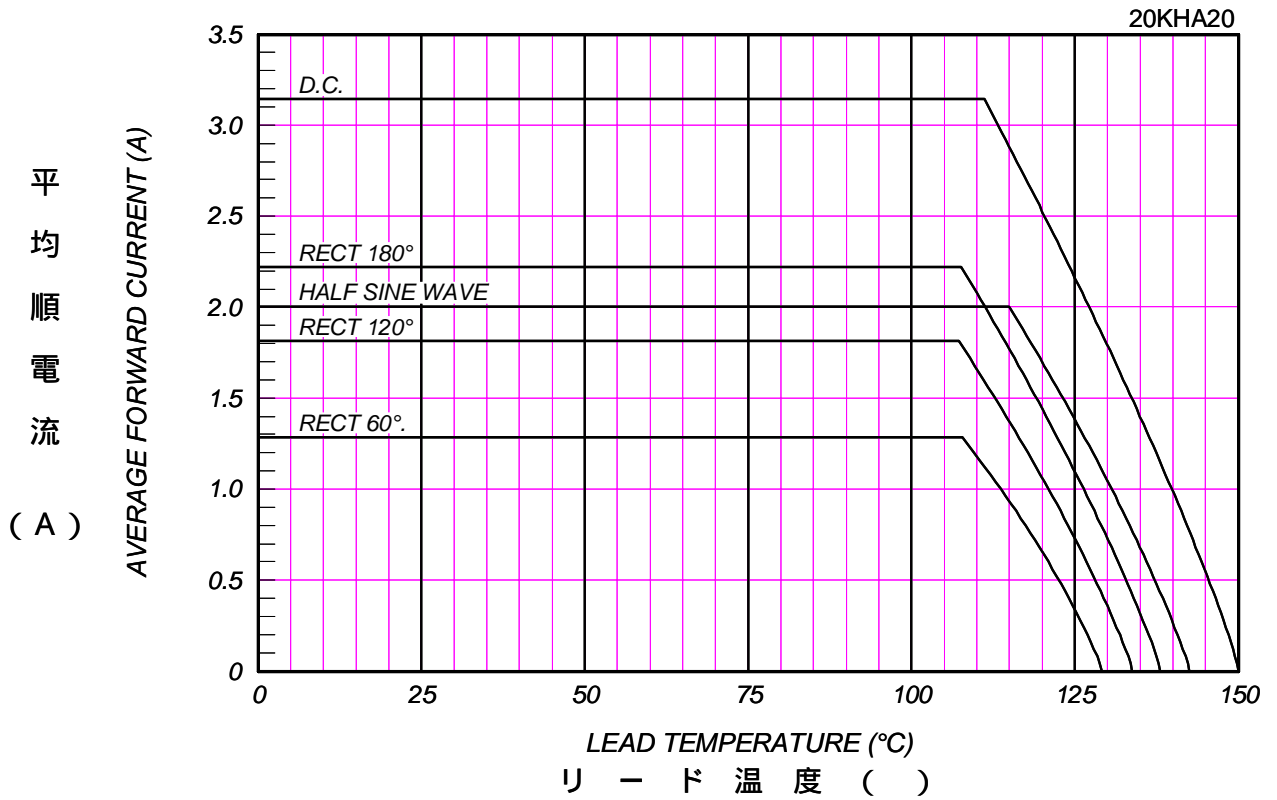

平均順電流 - 周囲温度定格  
AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE

Without fin or P.C. board,  $V_{RM}=200V$

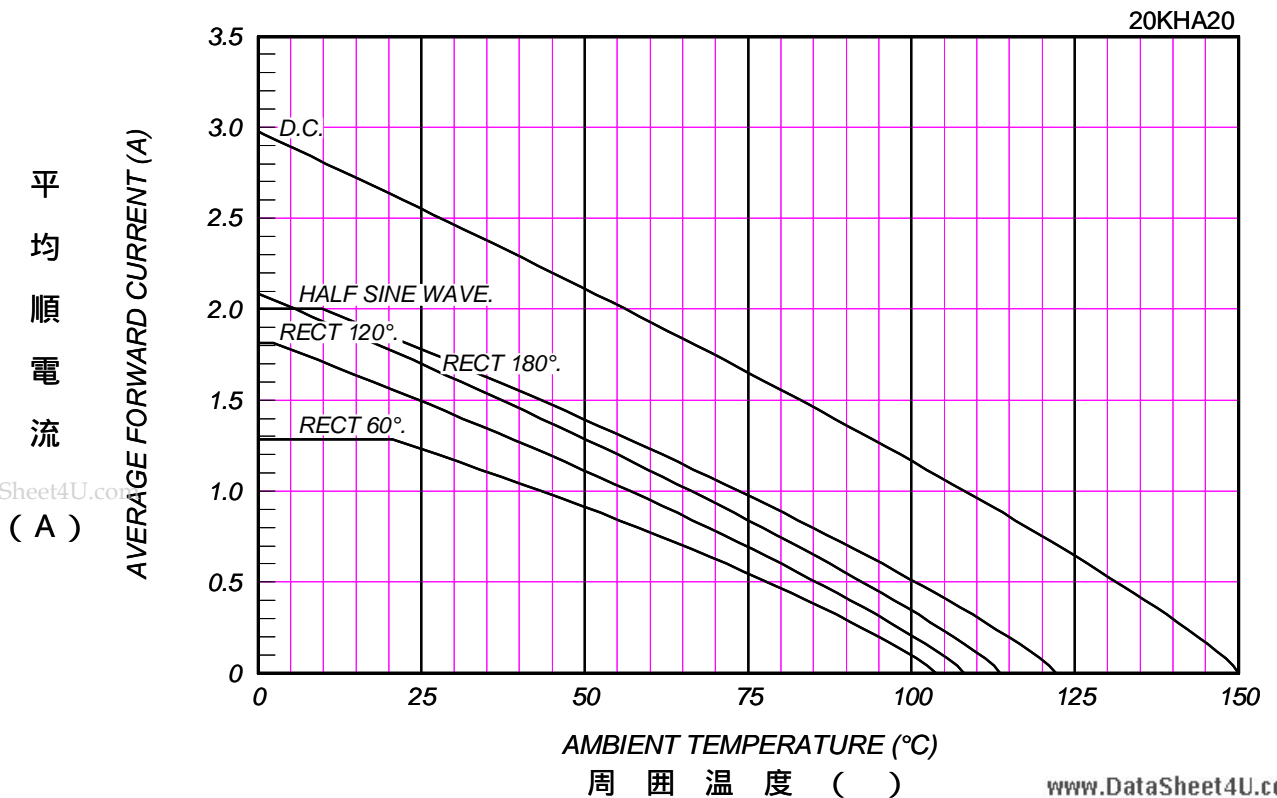


# サージ順電流定格 SURGE CURRENT RATINGS

f=50Hz, Half Sine Wave, Non-Repetitive, No Load

20KHA20

サ  
ー  
ジ  
順  
電  
流  
  
(A)

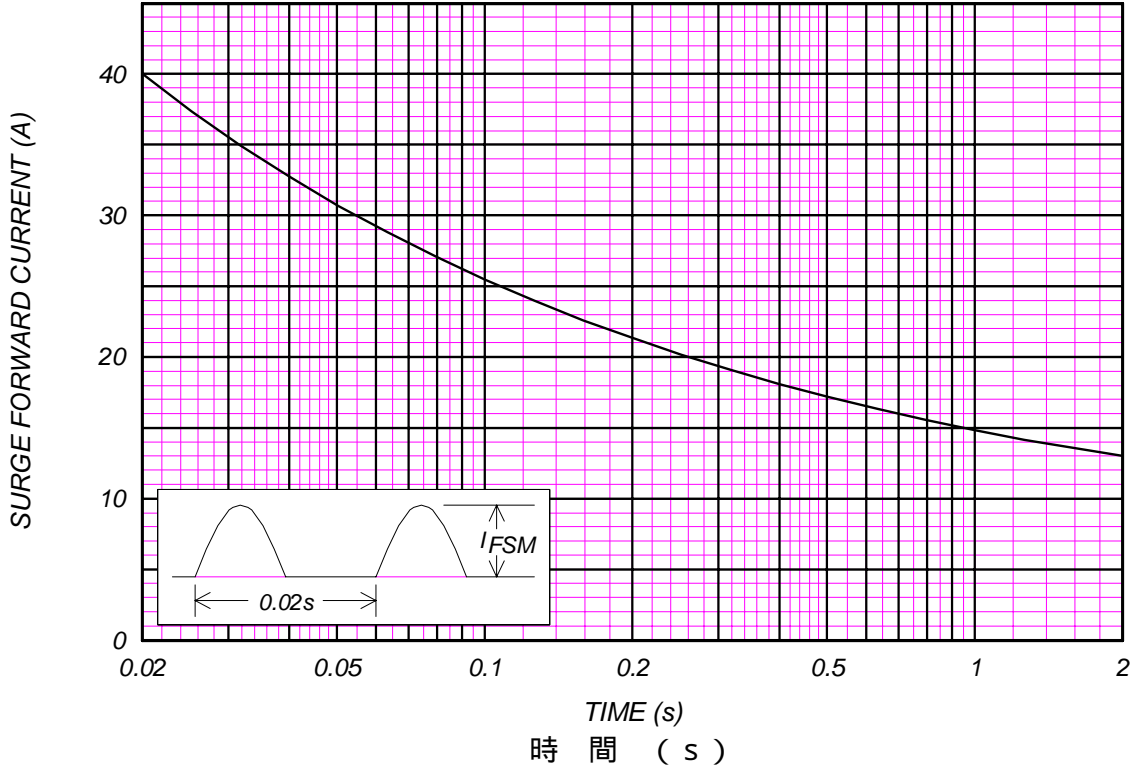

# 接合容量特性 JUNCTION CAPACITANCE VS. REVERSE VOLTAGE

T<sub>j</sub>=25°C, V<sub>m</sub>=20mV<sub>RMS</sub>, f=100kHz, Typical Value

20KHA20

接  
合  
容  
量  
  
(pF)

