

1.7A Avg.

60 Volts


SBD

21DQ06

■最大定格 Maximum Ratings

Item	Symbol	Conditions	Unit
くり返しピーク逆電圧 Repetitive Peak Reverse Voltage	V_{RRM}	60	V
非くり返しピーク逆電圧 Non-repetitive Peak Reverse Voltage	V_{RSM}	65	V
平均整流電流 Average Rectified Forward Current	I_O	50Hz、正弦半波通電抵抗負荷 50Hz Half Sine Wave Resistive Load	$T_a=32^{\circ}\text{C}^{*1}$ 1.1 A
			$T_a=65^{\circ}\text{C}^{*2}$ 1.7 A
実効順電流 R.M.S. Forward Current	$I_{F(RMS)}$	2.67	A
サージ順電流 Surge Forward Current	I_{FSM}	45 50Hz正弦半波、1サイクル、非くり返し 50Hz Half Sine Wave, 1cycle, Non-repetitive	A
動作接合温度範囲 Operating Junction Temperature Range	T_{jw}	-40~+150	$^{\circ}\text{C}$
保存温度範囲 Storage Temperature Range	T_{stg}	-40~+150	$^{\circ}\text{C}$

■OUTLINE DRAWING(mm)

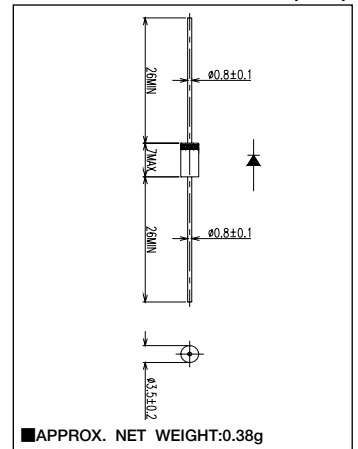

■電氣的・熱的特性 Electrical/Thermal Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
ピーク逆電流 Peak Reverse Current	I_{RM}	$T_j=25^{\circ}\text{C}, V_{RM}=V_{RRM}$	—	—	2	mA
ピーク順電圧 Peak Forward Voltage	V_{FM}	$T_j=25^{\circ}\text{C}, I_{FM}=2\text{A}$	—	—	0.58	V
熱抵抗 Thermal Resistance	$R_{th(j-a)}$	接合部・周囲間 Junction to Ambient	単体フィン無し*1		105	$^{\circ}\text{C}/\text{W}$
			プリント基板実装*2		70	$^{\circ}\text{C}/\text{W}$

*1: 単体フィン無し / Without Fin or P.C. Board

*2: プリント基板実装 / P.C. Board Mounted (Print Lands=5×5 mm, Both Sides)

■定格・特性曲線

