


International IOR Rectifier

21DQ06

SCHOTTKY RECTIFIER

2 Amp




Major Ratings and Characteristics

Characteristics	21DQ06	Units
$I_{F(AV)}$ Rectangular waveform	2	A
V_{RRM}	60	V
V_F @ 2 Apk, $T_J = 125^\circ\text{C}$	0.55	V
T_J range	-40 to 150	$^\circ\text{C}$

Description/Features

The 21DQ06 axial leaded Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- Low profile, axial leaded outline
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

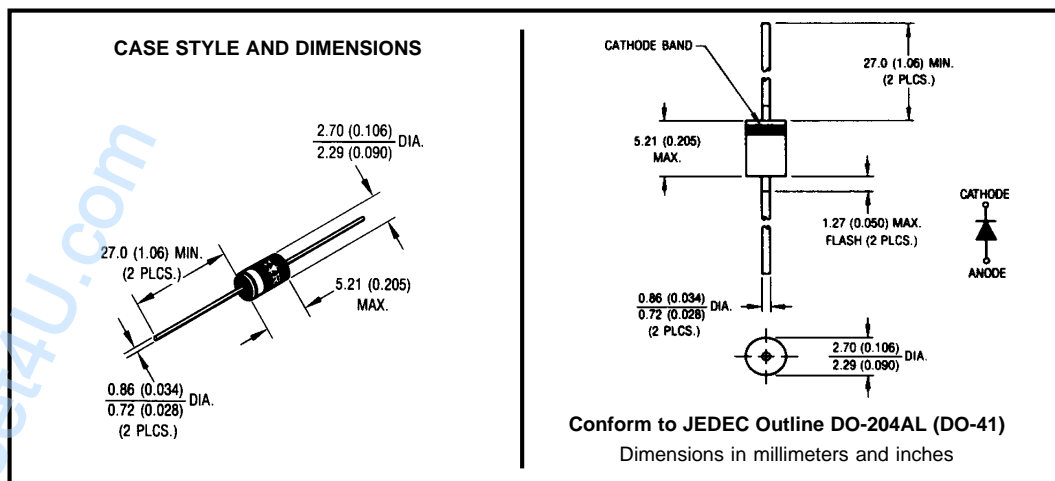

21DQ06

Bulletin PD-20714 rev. C 03/03

International
IR Rectifier

Voltage Ratings

Part number	21DQ06
V_R Max. DC Reverse Voltage (V)	60
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	21DQ06	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 4	2	A	50% duty cycle @ $T_C = 106^\circ\text{C}$, rectangular wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 6	340	A	5 μs Sine or 3 μs Rect. pulse
	60		10ms Sine or 6ms Rect. pulse
E_{AS} Non-Repetitive Avalanche Energy	4.0	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 1$ Amps, $L = 8$ mH
I_{AR} Repetitive Avalanche Current	0.5	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	21DQ06		Units	Conditions	
	Typ.	Max.			
V_{FM} Max. Forward Voltage Drop (1)	0.53	0.60	V	@ 2A	$T_J = 25^\circ\text{C}$
	0.67	0.75	V	@ 4A	
	0.49	0.55	V	@ 2A	$T_J = 125^\circ\text{C}$
	0.61	0.67	V	@ 4A	
I_{RM} Max. Reverse Leakage Current (1)	0.02	0.50	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$
	7.0	10	mA	$T_J = 125^\circ\text{C}$	
C_T Typical Junction Capacitance	120		pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C	
L_S Typical Series Inductance	8.0		nH	Measured lead to lead 5mm from package body	

(1) Pulse Width < 300 μs , Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	21DQ06	Units	Conditions
T_J Max. Junction Temperature Range	-40 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-40 to 150	$^\circ\text{C}$	
R_{thJA} Max. Thermal Resistance Junction to Ambient	100	$^\circ\text{C}/\text{W}$	DC operation Without cooling fin
R_{thJL} Typical Thermal Resistance Junction to Lead	25	$^\circ\text{C}/\text{W}$	DC operation (See Fig. 4)
wt Approximate Weight	0.33(0.012)	g (oz.)	
Case Style	DO-204AL(DO-41)		

(*) $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$ thermal runaway condition for a diode on its own heatsink

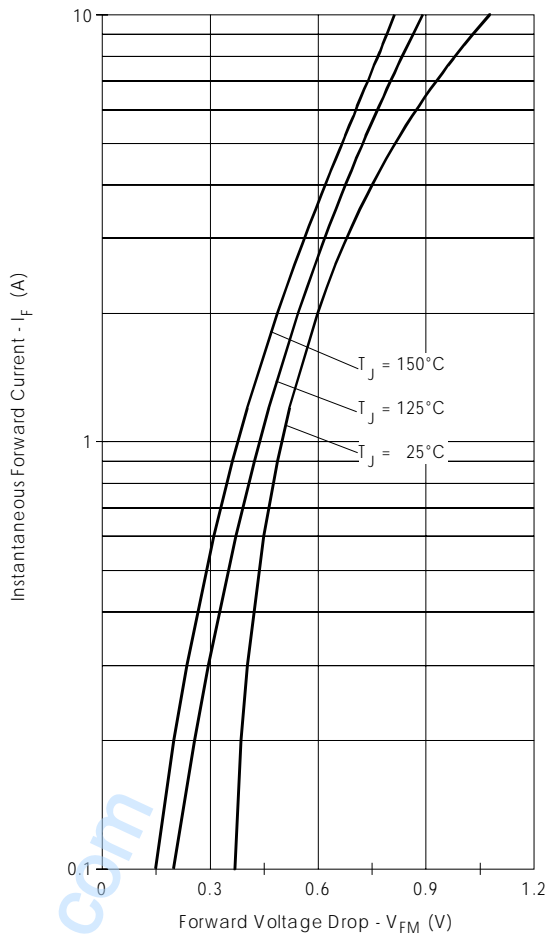


Fig. 1 - Maximum Forward Voltage Drop Characteristics

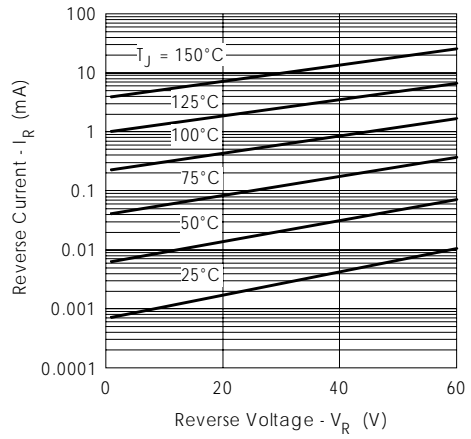


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

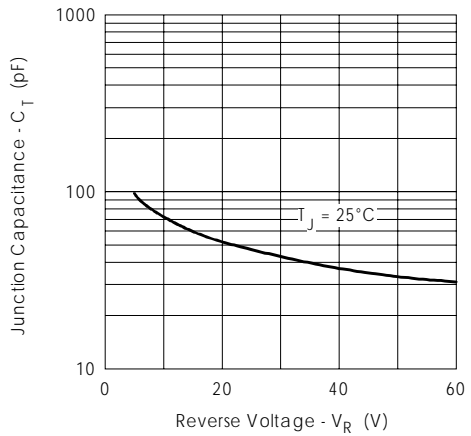


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

21DQ06

Bulletin PD-20714 rev. C 03/03

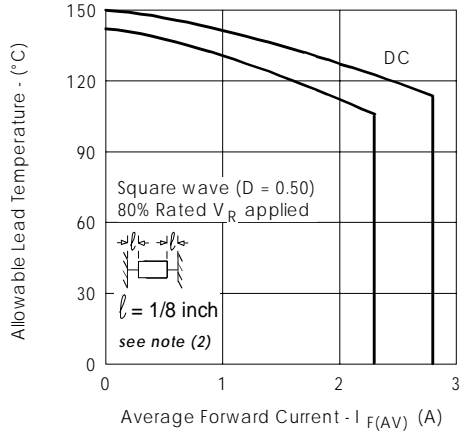


Fig. 4 - Maximum Allowable Lead Temperature Vs. Average Forward Current

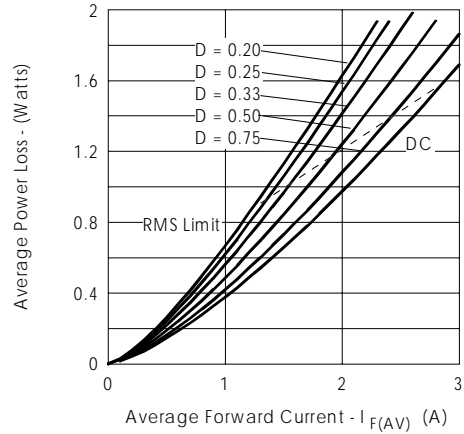


Fig. 5 - Forward Power Loss Characteristics

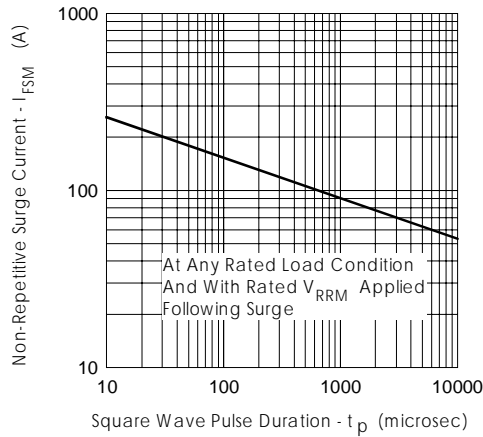


Fig. 6 - Maximum Non-Repetitive Surge Current

- (2) Formula used: $T_L = T_J - (Pd + Pd_{REV}) \times R_{thJL}$;
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 5);
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\% \text{ rated } V_R$

www.DataSheet4U.com

Ordering Information Table

Device Code											
	<table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">21</td> <td style="padding: 5px;">D</td> <td style="padding: 5px;">Q</td> <td style="padding: 5px;">06</td> <td style="padding: 5px;">TR</td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> </tr> </table>	21	D	Q	06	TR	①	②	③	④	⑤
21	D	Q	06	TR							
①	②	③	④	⑤							
1	- 21 = 2.1A (Axial and small packages - Current is x10)										
2	- D = DO-41 package										
3	- Q = Schottky Q.. Series										
4	- 06 = Voltage Rating : 60V										
5	- TR= Tape & Reel package (5000 pcs) TB= Tape & Box package (Ammunition -3000 pcs) - = Box package (1000 pcs)										

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 03/03