
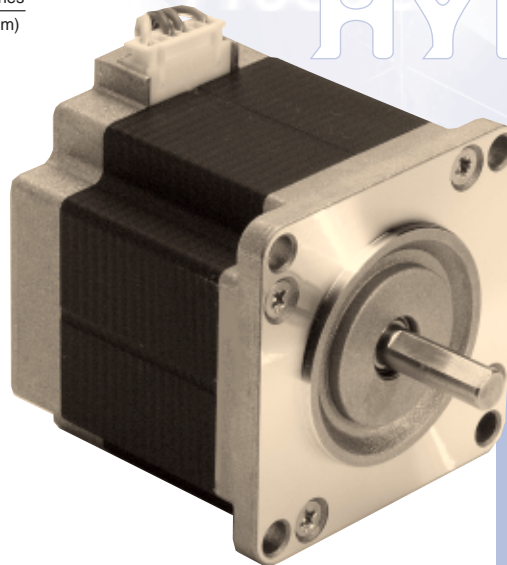


High Torque

23KM-C 1.8° HYBRID


23KM-C 1.8° HYBRID

Unit: inches
(mm)

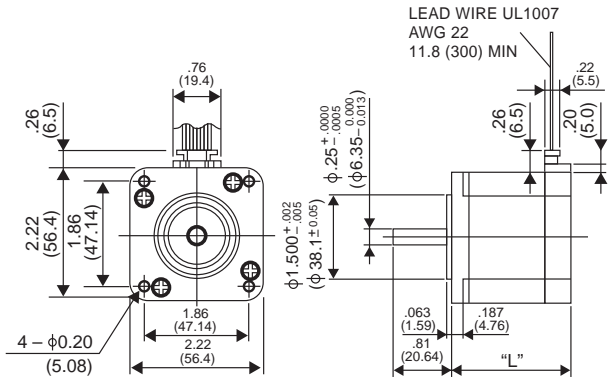

P/N	"L"
23KM-C2XX	1.65 (42)
23KM-C3XX	1.97 (50)
23KM-C0XX	2.13 (54)
23KM-C7XX	2.99 (76)

WINDING DIAGRAM



GENERAL SPECIFICATIONS

- Step Angle 1.8°
- Step Angle Accuracy +/- 5%
- Temperature Rise 80° C Max.
- Ambient Temperature Range -20° to +50° C
- Insulation Resistance 100MΩ Min., 500 VDC
- Dielectric Strength 500 VAC for 1 min.
- Radial Play 0.02 mm Max. (450 g-load)
- End Play 0.08 mm Max. (450 g-load)
- Switching Sequence See page 31


MODEL SPECIFICATIONS

Model Number	Rated Voltage V	Rated Current/Phase A	Winding Resistance/Phase Ω	Holding Torque g-cm	Inductance mH	Rotor Inertia g-cm ²	Detent Torque g-cm	Weight g
23KM-C250V	3.30	1.50	2.20	4,400	2.6	150.0	200	470
23KM-C379V	4.10	1.50	2.70	8,000	3.6	230.0	300	590
23KM-C032V	5.10	1.50	3.40	9,500	5.4	280.0	350	680
23KM-C716V	6.30	1.50	4.20	14,000	6.8	440.0	600	1,050

TORQUE/SPEED CHARACTERISTICS


Model: 23KM-C250V

Driver: Unipolar Chopper Dual • Supply Voltage: 24.0 (Volt)
Drive Current: 1.50 (A/WDG) • Load Inertia: 161.0 (g-cm²)

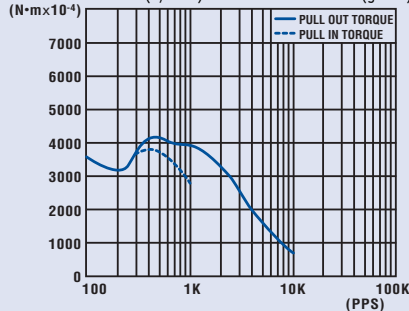

Model: 23KM-C379V

Driver: Unipolar Chopper Dual • Supply Voltage: 24.0 (Volt)
Drive Current: 1.50 (A/WDG) • Load Inertia: 161.0 (g-cm²)

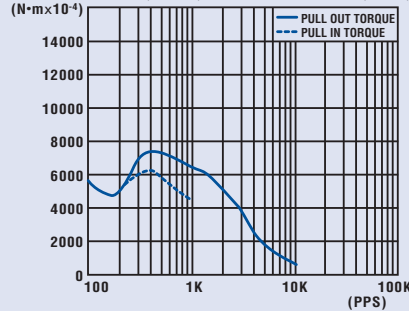

Model: 23KM-C716V

Driver: Unipolar Chopper Dual • Supply Voltage: 24.0 (Volt)
Drive Current: 1.50 (A/WDG) • Load Inertia: 161.0 (g-cm²)

