
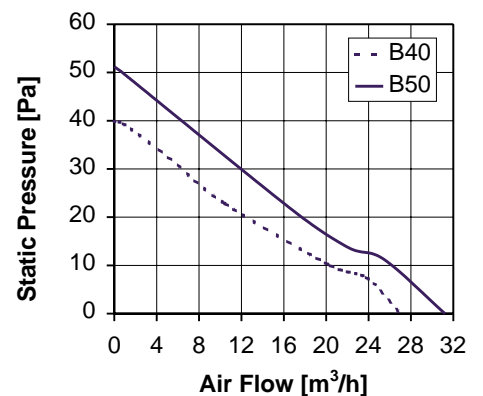
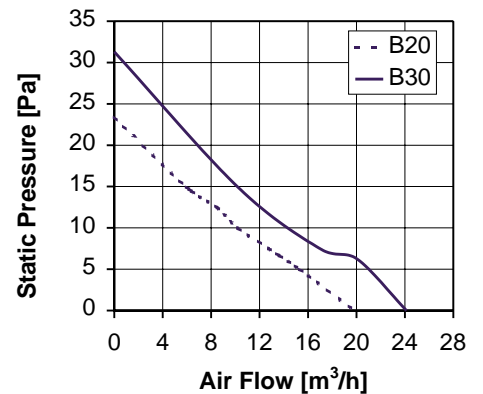


FEATURES

- Size:** 60 x 60 x 15 mm
- Casing:** UL 94V-0 reinforced polybutylene plastic
- Impeller:** UL 94V-0 reinforced polybutylene plastic
- Weight:** 45 g.
- Motor type:** Brushless
- Motor protections:** Auto restart, polarity protection
- Bearing system:** Radial shielded ball bearing
- Life-time:** L10 at 40°C 80,000 hours
- Temperature range:** -10°C to +70°C
- Connection:** Lead wires AWG26, red/black, UL 1007

Model	Rated Voltage V	Input Voltage Range V	Rated Power W	Rated Current mA	Speed rpm	Noise dB(A)	Max Static Pressure Pa	Max Air Flow m³/h	Approvals			
									UL	CSA	VDE	TUV
2406KL-04W-B10	12	7.0-13.8	0.48	40	1800	19	8.5	11.6	✓	✓	✓	
2406KL-04W-B20	12	6.0-13.8	0.84	70	3100	25	23.4	19.8	✓	✓	✓	
2406KL-04W-B30	12	6.0-13.8	1.08	90	3600	28	31.3	24.1	✓	✓	✓	
2406KL-04W-B40	12	6.0-13.8	1.56	130	4100	31	39.9	27.0	✓	✓	✓	
2406KL-04W-B50	12	6.0-13.8	1.92	160	4600	34	51.2	31.2	✓	✓	✓	
2406KL-05W-B10	24	18.5-27.6	0.96	40	1800	19	8.5	11.6				
2406KL-05W-B20	24	12.0-27.6	1.44	60	3100	25	23.4	19.8				
2406KL-05W-B30	24	12.0-27.6	1.44	60	3600	28	31.3	24.1				
2406KL-05W-B40	24	12.0-27.6	1.68	70	4100	31	39.9	27.0				
2406KL-05W-B50	24	12.0-27.6	2.40	100	4600	34	51.2	31.2				

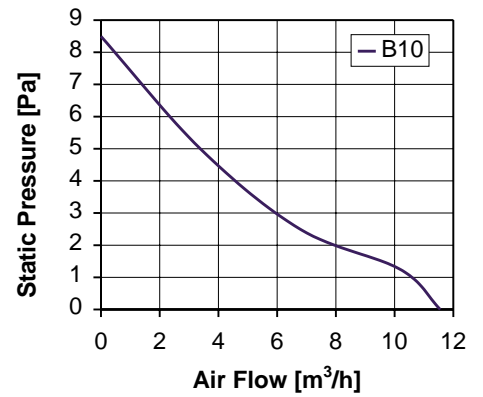

Please refer to our terms of sale including our warranty and limited liabilities clauses.

Approvals

