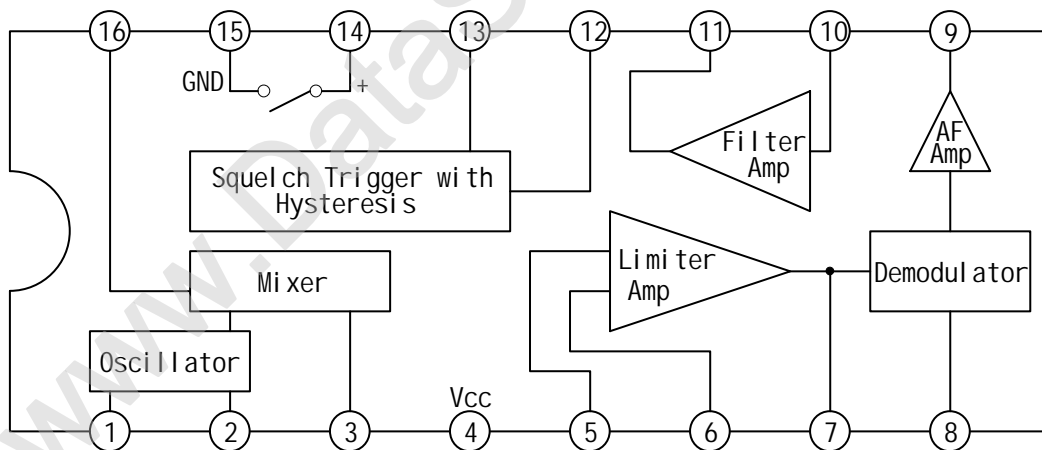


**LOW POWER NARROW BAND IF AMPLIFIER****—YD3361****DESCRIPTION**

The YD3361 includes an Oscillator, Mixer, Limiting Amplifier, Quadrature Discriminator, Active Filter, Squelch, Scan Control ND mute Switch. This device is designed for use in FM dual conversion communications equipment.

**FEATURES**

- \*Operates from 2.0 to 8.0 V supply.
- \*Low drain current 3.9 mA Typical (VCC=4.0 Vdc).
- \*Excellent sensitivity: input limiting voltage  $-3.0 \text{ Db} = 2.6 \mu \text{ V}$  typical.
- \*Low number of external parts required.
- \*Operating frequency up to 60 MHz.

**BLOCK DIAGRAM****WuXi YouDa Electronics Co., Ltd**

Add: No.5 Xijin Road, National Hi-Tech Industrial Development Zone, Wuxi Jiangsu China  
 Tel: 86-510-5205117 86-510-5205108 Fax: 86-510-5205110 Website: www.e-youda.com  
 SHENZHEN OFFICE Tel : 86-755-83740369 13823533350 Fax : 86-755-83741418

**ABSOLUTE MAXIMUM RATINGS**( $T_{amb}=25$  )


PARAMETERS	SYMBOL	VALUE	UNIT
Power Supply Voltage	$V_{CC}$	10	V
Input Voltage( $V_{CC} = 4.0V$ )	$V_{15}$	1.0	V
Mute Function	$V_{14}$	-0.5 ~ 5.0	V
Detector Input Voltage	$V_8$	1.0	V
Junction Temperature	$T_j$	150	
Power Dissipation	$P_D$	1.5	W
Operating Temperature	$T_{opr}$	-20 ~ +70	
Storage Temperature	$T_{stg}$	-65 ~ +150	

**ELECTRICAL CHARACTERISTICS**

( $T_{amb}=25$  ,  $V_{CC}=1.3V$ ,  $f_m=1MHz$ ,  $MOD=30\%$  unless otherwise specified)

PARAMETERS	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	$V_{CC}$		2.0		8.0	V
Drain Current	$I_{CC}$	Mute OFF	2.9	3.9	4.9	mA
		Mute ON	4.4	5.4	6.4	
Input Limiting Voltage	$V_{ILIM}$	-3dBlimiting		2.6	6.0	$\mu V$
Recovered Audio Output Voltage	$V_{od}$	$V_{IN}=10mV$	130	160	200	mV
Distortion	THD			0.86		%
Recovered Output Voltage	$V_9$	No Input Signal	1.2	1.5	1.8	V
Detector Output Impedance	$R_9$			450		
Drop Voltage AF Gain Loss	$A_F$		-3.0	-0.6		dB
Filter Gain	$A_{VF}$	$f=10kHz$ , $V_{in}=0.3mV$	40	50		dB
Filter Output Voltage	$V_{OF}$		1.0	1.3	1.6	V
Mute Function	$R_{OL}$			30	50	
	$R_{OH}$		1.0	11		m
Scan Level	$V_{13L}$	$V_{12}=1.0V$		0	0.4	V
	$V_{13H}$	$V_{12}=0V$	3.0	3.5		
Trigger Hysteresis	$V_{TH}$			45	100	mV
Mixer Conversion Gain	$A_{VM}$			28		dB
Mixer Input Resistance	$R_{16}$			3.3		k
Mixer Input Capacitor	$C_{16}$			2.2		pF


APPLICATION CIRCUIT

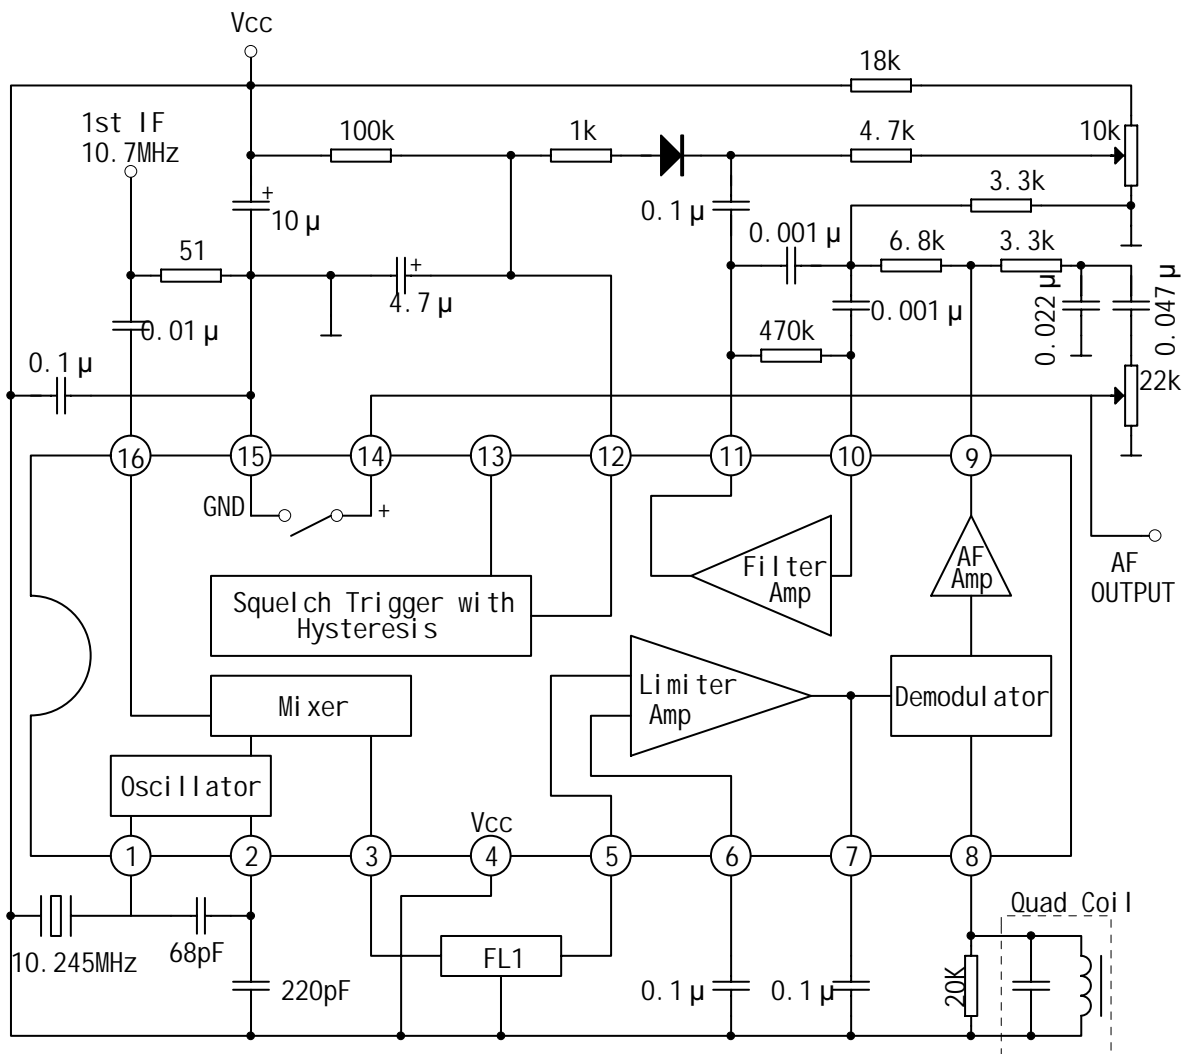

OUTLINE DRAWING

DIP-16

unit:mm

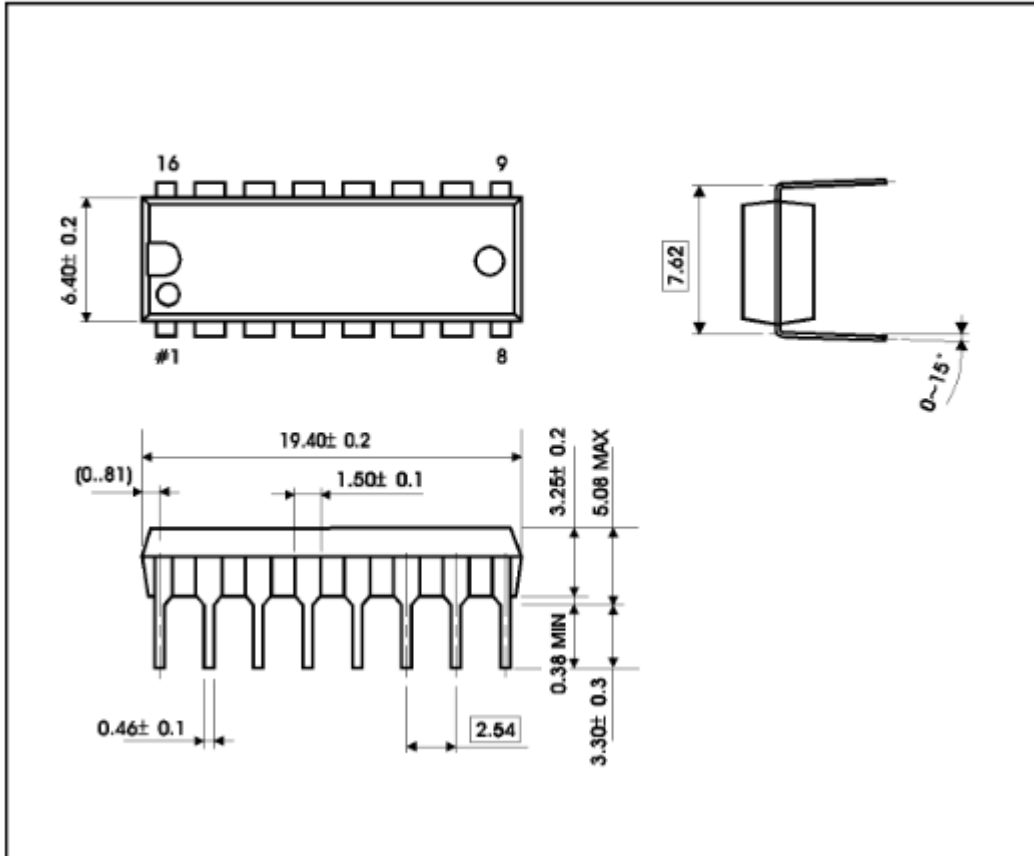

# SOP-16



unit:mm

