



eSL Series

**16 Bits DSP
Sound Processor**

Product Specification

DOC. VERSION 1.7


ELAN MICROELECTRONICS CORP.

October 2009

**Trademark Acknowledgments:**

IBM is a registered trademark and PS/2 is a trademark of IBM.

Windows is a trademark of Microsoft Corporation.

ELAN and ELAN logo  are trademarks of ELAN Microelectronics Corporation.

Copyright © 2006~2009 by **ELAN Microelectronics Corporation**

All Rights Reserved

Printed in Taiwan

The contents of this specification are subject to change without further notice. ELAN Microelectronics assumes no responsibility concerning the accuracy, adequacy, or completeness of this specification. ELAN Microelectronics makes no commitment to update, or to keep current the information and material contained in this specification. Such information and material may change to conform to each confirmed order.

In no event shall ELAN Microelectronics be made responsible for any claims attributed to errors, omissions, or other inaccuracies in the information or material contained in this specification. ELAN Microelectronics shall not be liable for direct, indirect, special incidental, or consequential damages arising from the use of such information or material.

The software (if any) described in this specification is furnished under a license or nondisclosure agreement, and may be used or copied only in accordance with the terms of such agreement.

ELAN Microelectronics products are not intended for use in life support appliances, devices, or systems. Use of ELAN Microelectronics product in such applications is not supported and is prohibited.

NO PART OF THIS SPECIFICATION MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE EXPRESSED WRITTEN PERMISSION OF ELAN MICROELECTRONICS.

**ELAN MICROELECTRONICS CORPORATION****Headquarters:**

No. 12, Innovation Road 1
Hsinchu Science Park
Hsinchu, Taiwan 30077
Tel: +886 3 563-9977
Fax: +886 3 563-9966
<http://www.emc.com.tw>

Hong Kong:

Elan (HK) Microelectronics Corporation, Ltd.
Flat A, 19F., World Tech Centre 95
How Ming Street, Kwun Tong
Kowloon, HONG KONG
Tel: +852 2723-3376
Fax: +852 2723-7780
elanhk@emc.com.hk

USA :

Elan Information Technology Group (USA)
1821 Saratoga Ave., Suite 250
Saratoga, CA 95070
USA
Tel : +1 408 366-8225
Fax: +1 408 366-8220

Shenzhen:

Elan Microelectronics Shenzhen, Ltd.
3F, SSMEC Bldg., Gaoxin S. Ave. I
Shenzhen Hi-tech Industrial Park
(South Area) Shenzhen 518057
CHINA
Tel: +86 755 2601-0565
Fax: +86 755 2601-0500

Shanghai:

Elan Microelectronics Shanghai, Ltd.
23/Bldg. #115 Lane 572, Bibo Road
Zhangjiang Hi-Tech Park
Shanghai, CHINA
Tel: +86 21 5080-3866
Fax: +86 21 5080-4600



Contents

1	General Description	1
2	Features	1
3	Block Diagram	3
4	Selection Table	4
5	Algorithm Selection Table	6
6	Pin Description	8
7	Electrical Characteristics	12
8	Application Circuits	15

Specification Revision History

Doc. Version	Revision Description	Date
1.0	<ol style="list-style-type: none"> 1. Modified the Pin description in Section 5 2. Modified the Operating temperature Range in Section 6.2 	2006/10/31
1.1	<ol style="list-style-type: none"> 1. Added a comment after the Selection table in Section 4 2. Modified the Application Circuits diagram in Section 7 3. Modified the Sampling Rate Range in Section 4 	2007/04/12
1.2	<ol style="list-style-type: none"> 1. Added eSL032 2. Modified the Temperature Range in Section 6.2 3. Modified the Power Supply voltage in Section 6.3 4. Added algorithm support such as beat tracking, sound location, speech control, pitch control in Section 2 and 4 	2007/08/10
1.3	<ol style="list-style-type: none"> 1. Added package information in Section 4 2. Modified Application Circuit in Section 7 	2007/11/10
1.4	<ol style="list-style-type: none"> 1. Modified PWM current in Section 6.3 2. Added PortC DC characteristic in Section 6.3 	2008/01/10
1.5	<ol style="list-style-type: none"> 1. Modified Application Circuits diagram in Section 7 2. Modified Algorithm support in Section 2 and 4 3. Added eSL032B, eSL128B, eSL256B, eSL512B, eSL512C 	2008/10/15
1.6	<ol style="list-style-type: none"> 1. Added algorithm-related section in Section 5 	2009/04/15
1.7	<ol style="list-style-type: none"> 1. Modify PC[7:0] pull-up resister in Section 7.3 2. Modified Application Circuit in Section 8 	2009/10/15

1 General Description

The ELAN eSL Series IC is a 16-bit DSP Sound Processor with multi-channel speech and instrument playback. It is based on ELAN 16-bit DSP platform. The series has a powerful 16-bit DSP architecture that handles most of the speech/melody functions. Speech and melody can be played back simultaneously. The speech synthesis is implemented by software, and it supports a wide range of compression bit rates and various volume levels. The ELAN eSL Series provides real instrument waveform to obtain good quality melody. The ELAN eSL peripheral includes ADC, RTC, Timer, WDT, SPI, DAC, PWM, etc.

The ELAN eSL Series IC offer Fast, Sleep, Green, and Slow modes of operation. The use of Green/Slow mode will further reduce the power consumption. Green mode also provides RTC function for wake-up purposes.

The ELAN eSL Series enhanced features make it suitable for versatile voice and sound effect product applications. These enhanced versatile features allow users to create products with a wide variety of new fancy ideas.

The ELAN eSL Series has extreme high performance in speech application based on powerful DSP architecture and good algorithm in audio compression.

2 Features

- MCU
 - 16-bit RISC CPU architecture
 - CPU clock: 20 MHz @ 3.3V
 - Programmable PLL
 - Four CPU operation modes: fast, slow, green, sleep
 - Powerful DSP Instruction Set supports multiplication, division, repeat, loop and soft interrupt instructions
 - Saturation mode is supported for multimedia applications
 - Eight general purpose registers (GPR)
 - 21 interrupt sources with 2-level priority
- Memory
 - 32K-word program memory
 - 2K-word data RAM
 - 032/128/256/512K-word data ROM
- Peripherals
 - Real Time Clock (RTC) with wake-up function
 - Four 8-bit timers, two general purpose timers, two multiple-function timers



- 8-bit Watchdog Timer (WDT) with general purpose timer capability
- 40 GPIO + 8 Outputs
- Serial Peripheral Interface (SPI)
- 12-bit Analog to Digital Converter (ADC) with touch panel and MIC inputs
- 12-bit current-steering Digital to Analog Converter (DAC)
- 10-bit resolution Pulse Width Modulation (PWM)

3 Block Diagram

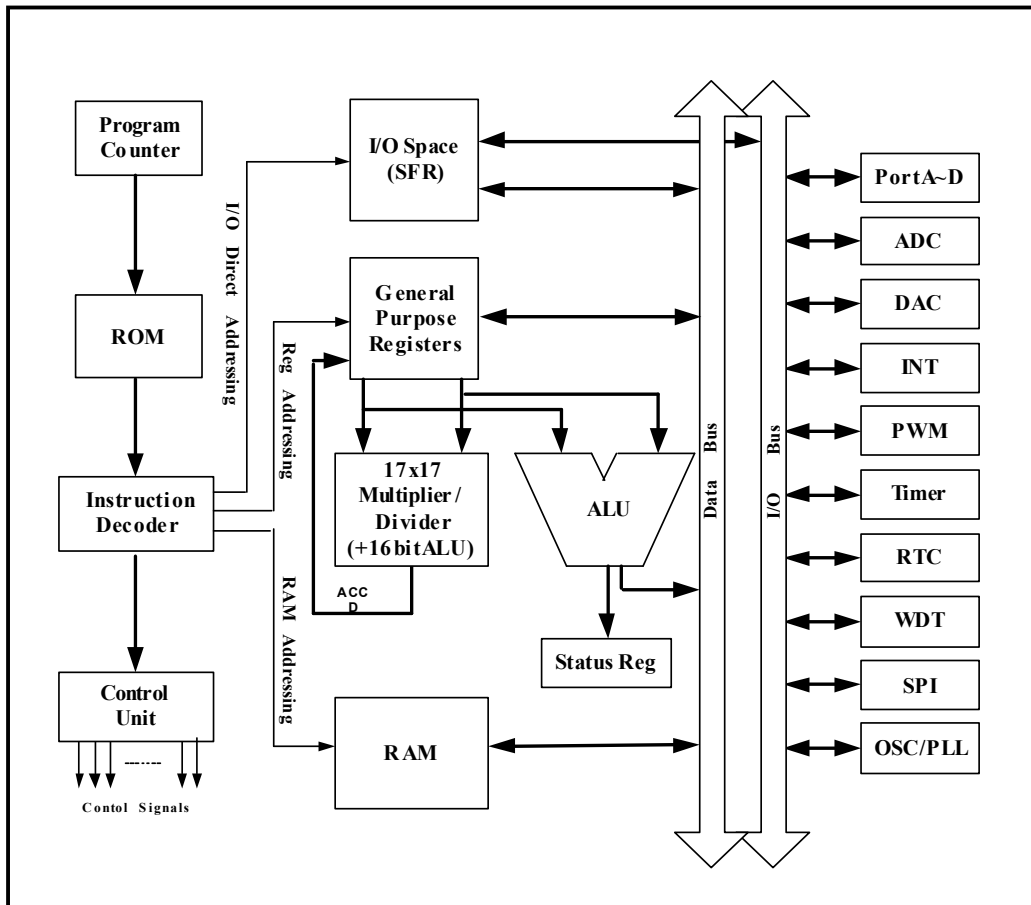


Figure 3-1 ELAN eSL System Block Diagram



4 Selection Table

The ELAN eSL Series integrates an extensive range of features, most of which are common to all devices, except for some distinctive features like, Data ROM, I/O count and Coding Type. For user convenience in the choice of the most suitable product for their application, the following table is provided, which enumerates the main features of each device.

Product No.	eSL032	eSL128	eSL256	eSL512
Pin Count	81			
Program ROM	32K × 16			
Data RAM	2K × 16			
Data ROM	32K×16	128K×16	256K×16	512K×16
Timer	4 × 8-bit timers			
Watchdog	Yes			
PWM	10-bit			
A/D Converter	12-bit			
Current D/A	12-bit			
SPI	1 set			
I/O	40 I/O ports + 8 Output ports			



Product No.	eSL032A*	eSL032B*	eSL128A*	eSL128B*	eSL256A*	eSL256B*	eSL512A*	eSL512B*	eSL512C*
Pin Count	81								
Program ROM	32K × 16								
Data RAM	2K × 16								
Data ROM	32K×16		128K×16		256K×16		512K×16		512K×16
Timer	4 × 8-bit timers								
Watchdog	Yes								
PWM	10-bit								
A/D Converter	12-bit								
Current D/A	12-bit								
SPI	1 set								
I/O	40 I/O ports + 8 Output ports								

* The product number "A,B,C" means advanced audio algorithm is supported.



5 Algorithm Selection Table

The ELAN eSL Series algorithm feature

- Built-in software voice synthesizer (0.8K ~ 96Kbps@8kHz)
- Multiple flash with volume level option
- Directly controls port output value by waveform (waveform control port)
- Supports mark number in waveform with ROM optimized configuration
- Up to 2-channel speech with different channel sample rate or 1-channel speech + 8-channel melody
- Voice recording in 12, 16, 20, 32, 40, 48 and 96 Kbps@8KHz
- Support beat tracking function to detect music tempo
- Support speed control to adjust playback speed
- Support pitch control to change voice pitch
- Support sound source detection function to detect the angle of sound position
- Support speaker dependent recognition to recognize voice command & control function which is dependent on speaker
- Support speaker independent recognition to recognize voice command & control function which is independent on speaker
- Support handwriting recognition engine to recognize characters, numeral, symbols, and gestures.

Product No.	eSL032	eSL128	eSL256	eSL512
Audio**	Up to 2-channel speech with different channel sample rate or 1-channel speech + 8-channel melody			
Coding Type**	12K/16K/20K/32K/40K/48K/96K bps @ 8KHz			
Sampling Rate Range**	6kHz ~ 48KHz			
Recording	Yes			



Product No.	eSL032A*	eSL128A*	eSL256A*	eSL512A*	eSL032B*	eSL128B*	eSL256A*	eSL512B*	eSL512C*
Audio**	Up to 2-channel speech with different channel sample rate or 1-channel speech + 8-channel melody								
Coding Type**	0.8K~96K bps @ 8KHz								12K/16K/20K/32K/40K /48K/96K bps @8KHz
Sampling Rate Range**	6kHz ~ 48KHz								
Recording	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
Beat Tracking	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
Speaker Independent Recognition	No	No	No	No	Yes	Yes	Yes	Yes	No
Speaker Dependent Recognition	No	No	No	No	Yes	Yes	Yes	Yes	No
Recording	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
Sound Source Detection	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
Speech Speed/Pitch Control	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Hand Writing Recognition	No	No	No	No	No	No	No	No	Yes

* The product number "A,B,C" means advanced algorithm is supported. A series support vocal high compress application. B series support voice recognition (SI/SD) application, C series support hand write recognition (HWR) application

** For more detailed information, refer to the Assembler Reference Manual, C Macro Reference Manual and related Application note.

6 Pin Description

6.1 Power Supply

Name	Type	Supply Voltage	Description
VDD_CPU	P	3V	Positive power supply for CPU, digital peripheral and DRAM
VDD_PM	P	3V	Positive power supply for PROM, DROM and POR
VDD_OSC	P	3V	Positive power supply for Oscillator system and PLL
IOVDD_PWM	P	3V, 5V	Positive power supply for Port D and PWM I/O pad
IOVDD_PB	P	3V, 5V	Positive power supply for Port A.2~15 and Port B I/O pad
IOVDD_PC	P	3V, 5V	Positive power supply for Port C I/O pad
VSS_CPU	P	GND	Negative power supply for CPU, digital peripheral and DRAM
VSS_PM	P	GND	Negative power supply for PROM, DROM and POR
VSS_OSC	P	GND	Negative power supply for Oscillator system and PLL
IOVSS_PWM	P	GND	Negative power supply for Port D and PWM I/O pad
IOVSS_PB	P	GND	Negative power supply for Port A.2~15 and Port B I/O pad
IOVSS_PC	P	GND	Negative power supply for Port C I/O pad
AVDD_AD	P	3V	Positive power supply for A/D
AVDD_DA	P	3V	Positive power supply for D/A
AVSS_AD	P	GND	Negative power supply for A/D
AVSS_DA	P	GND	Negative power supply for D/A
VREF	P	3V	External reference voltage input pin for A/D and MIC
RVIN	P	5V	Regulator voltage input
RVOUT	P	3V	Regulator voltage output 3.0V

NOTE

The AVDD_AD, VREF are analog voltage input that need to separate with other digital voltage input to reduce noise issue. For example, you can use on-chip regulator to be the analog voltage source. Or you can refer to development board reference circuit.

6.2 System Control

Name	Type	Description
RSTB	I	RSTB is the low active global reset input*
TEST	I	Test mode select pin (High active). Internal pull down. For chip internal test only, normally connect to VSS.
OSCI	I	Crystal or RC oscillator connecting pin RC or Crystal selection is by OSCS pin
OSCO	O	Crystal oscillator connecting pin
OSCS	I	RC or Crystal selection: 0 = RC 1 = Crystal
PLLCC	I	PLL loop filter capacitor **

* This pin has an internal pull-up 150KΩ resistor, refer to the Application Circuit

** This pin must connect a 47nF capacitor to ground, refer to the Application Circuit

6.3 DAC Output

Name	Type	Description
DACO	O	Current D/A output pin

6.4 Two-stage Amplifier & Touch Pad Positioning

Name	Type	Description
AMPO	O	Post Amplifier output
MIC	I	Microphone signal input (AC coupling from microphone signal)
AGC	I	Automatic Level Control adjustment pin
Xn	I	Touch Pad positioning for X axis under negative voltage level
Yn	I	Touch Pad positioning for Y axis under negative voltage level
XP/ADIN0	I	Touch Pad positioning for X axis under positive voltage level Analog input channel 0
YP/ADIN1	I	Touch Pad positioning for Y axis under positive voltage level Analog input channel 1

6.5 I/O Port

- Port A Attributes and Definitions

Name	Function	Type	Description
PA[0]	GPIO	I/O	General-purpose I/O function
	PWM0	O	PWM Output 0
PA[1]	GPIO	I/O	General-purpose I/O function
	PWM1	O	PWM Output 1
PA[2]	GPIO	I/O	General-purpose I/O function
PA[3]	GPIO	I/O	General-purpose I/O function
PA[4]	GPIO	I/O	General-purpose I/O function
	TEX12	I	External Timer 2 clock input
PA[5]	GPIO	I/O	General-purpose I/O function
	TEX13	I	External Timer 3 clock input
PA [6]	GPIO	I/O	General-purpose I/O function
PA [7]	GPIO	I/O	General-purpose I/O function
PA [8]	GPIO	I/O	General-purpose I/O function
	TCCP2	I/O	Timer 2 capture input or compare output
PA [9]	GPIO	I/O	General-purpose I/O function
	TCCP3	I/O	Timer 3 capture input or compare output
PA [10]	GPIO	I/O	General-purpose I/O function
	EXINT0	I	External Interrupt 0 input
PA [11]	GPIO	I/O	General-purpose I/O function
	EXINT1	I	External Interrupt 1 input
PA [12]	GPIO	I/O	General-purpose I/O function with programmable high current
	/SS	I	SPI function In Slave mode: used as chip select input In Master mode: used as I/O pin with programmable high current
PA [13]	GPIO	I/O	General-purpose I/O function with programmable high current
	MOSI	I/O	SPI function (Master output / Slave input) with programmable high current
PA [14]	GPIO	I/O	General-purpose I/O function with programmable high current
	MISO	I/O	SPI function (Master input / Slave output) with programmable high current
PA [15]	GPIO	I/O	General-purpose I/O function with programmable high current
	SCK	I/O	SPI function with programmable high current In Master mode: used as serial clock output In Slave mode: used as serial clock input

● Port B Attributes and Definitions

Name	Function	Type	Description
PB [7:0]	GPIO	I/O	General-purpose I/O function
		I	Wake-up function with programmable pull-up resistor
PB [15:8]	GPIO	I/O	General-purpose I/O function
		I	Wake-up function with programmable pull-up resistor

● Port C Attributes and Definitions

Name	Function	Type	Description
PC [1:0]	GPIO	I/O	General-purpose I/O function
		I	Input with programmable pull-up resistor
PC [7:2]	GPIO	I/O	General-purpose I/O function
		I	Input with programmable pull-up resistor
	ADIN2~7	I	Analog Input channels

Note: Port C [7:2] is pin-shared with ADC input. There is no **Schmitt Trigger Input** when input is from Port C [7:2]

● Port D Attributes and Definitions


Name	Function	Type	Description
PD [0]	GPO	O	General-purpose output function with high drive current (1 * Tg delay) [*]
PD [1]	GPO	O	General-purpose output function with high drive current (5 * Tg delay) [*]
PD [2]	GPO	O	General-purpose output function with high drive current (2 * Tg delay) [*]
PD [3]	GPO	O	General-purpose output function with high drive current (6 * Tg delay) [*]
PD [4]	GPO	O	General-purpose output function with high drive current (3 * Tg delay) [*]
PD [5]	GPO	O	General-purpose output function with high drive current (7 * Tg delay) [*]
PD [6]	GPO	O	General-purpose output function with high drive current (4 * Tg delay) [*]
PD [7]	GPO	O	General-purpose output function with high drive current (8 * Tg delay) [*]

^{*} Tg = 4 nano-second for low noise design consideration

7 Electrical Characteristics

7.1 CPU Voltage – Frequency Graph

The speed of a MOS device depends on voltage, temperature, and process variation. Performance analysis is based on a combination of these three factors. The central operating condition is characterized at 3.3V, 25°C, and typical process parameters.

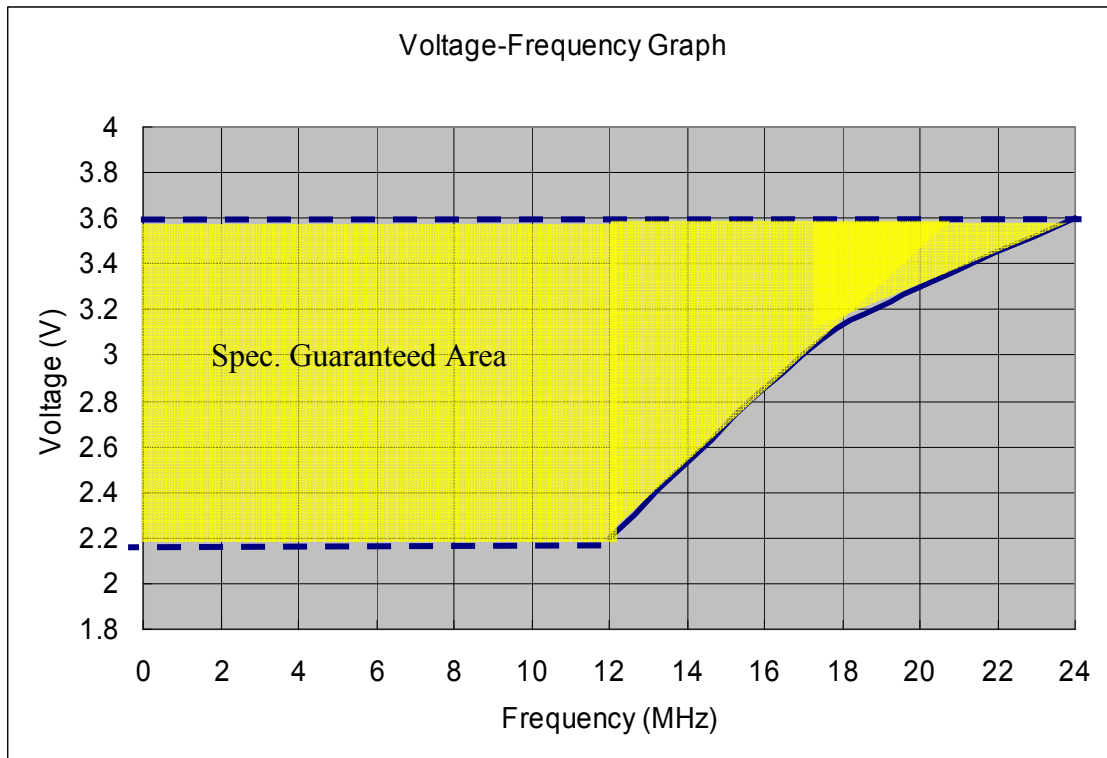

7.2 Absolute Maximum Ratings

Parameter	Pins	Symbol	Condition	Rated Value	Unit
Power supply voltage	VDD	V_{DD}	$T_A=25^\circ\text{C}$	-0.3 to +6.0	V
Input voltage	All Input	V_{IN}	$T_A=25^\circ\text{C}$	-0.3 to VDD+0.3	
Operating temperature range	—	T_A	—	-40 to +85	°C
Storage temperature range	—	T_{STR}	—	-65 to +150	

7.3 DC Characteristics

Standard operation conditions: VDD = 3V, GND=0V, $T_A = 25^\circ\text{C}$

Parameter	Pins	Symbol	Condition	Rated Value			Unit
				Min.	Typ.	Max.	
Power supply voltage	VDD ¹	V_{DD}	2 batteries	2.2	3.0	3.6	V
			3 batteries	3.6	4.5	5.5	
Input voltage	—	V_{IN1}	—	VDD×0.7	—	VDD	V
	—	V_{IN2}	—	0	—	VDD×0.3	
Input threshold voltage (Schmitt Trigger)	—	—	—	0.5×VDD	—	0.75×VDD	V
	—	—	—	0.2×VDD	—	0.4×VDD	
Pull-up resistor	PC [7:0]	V_{PU0L}	Vin=GND	50	100	150	kΩ
	/RESET	V_{PU1L}	Vin=GND	500	1000	1500	
	/RESET	V_{PU1H}	Vin=2V	80	100	120	
Pull-down resistor	TEST	R_{PD}	Vin=1V	80	100	120	kΩ

¹Refer to the User Manual Voltage Regulator section for details.

Parameter	Pins	Symbol	Condition	Rated Value			Unit
				Min.	Typ.	Max.	
Ports A, B,C output high current	IOH0	IOH0	VDD=3V VOH=2.4V	-2	-3	—	mA
Ports A, B,C output low current	IOL0	IOL0	VDD=3V VOL=0.4V	2	3	—	
Port D output high current	IOH1	IOH1	VDD=3V VOH=2.4V	-7	-10	—	
Port D output low current	IOL1	IOL1	VDD=3V VOL=0.4V	7	10	—	
Port A[12:15] high current (HD enabled)	IOH2	IOH2	VDD=3V VOH=2.4V	-7	-10	—	
Port A[12:15] low current (HD enabled)	IOL2	IOL2	VDD=3V VOL=0.4V	7	10	—	
PWM output high current	PWM0 PWM1	IPWMH	VDD=3V VOH=VDD/2 Max. volume	-140	-150	—	
PWM output low current	PWM0 PWM1	IPWML	VDD=3V VOL=VDD/2 Max. volume	140	150	—	
DAC output current	DACO	IDAC	VDD=2.2~3.3V	2.5	3	—	
Regulator output current	RVOUT	IOUT	RVIN=4.5V RVOUT=3.0V Fast, Slow mode	70	—	—	
			RVIN = 4.5V RVOUT = 3.0V Green, Sleep mode	7	—	—	
Fast mode current consumption increment per MHz	—	IFAST	VDD=3V No load DAC off	—	700	800	μA
Slow mode current consumption	—	ISLOW	VDD=3V No load DAC off	—	70	80	
Green mode current consumption	—	IGREEN	VDD=3V	—	8	10	
Sleep mode current consumption	—	ISLEEP	VDD=3V Regulator on	—	1.5	2	
			VDD = 3V Regulator off	—	1	1.2	
CPU operation frequency	—	Fsys	VDD = 3V	14	16	—	MHz

8 Application Circuits

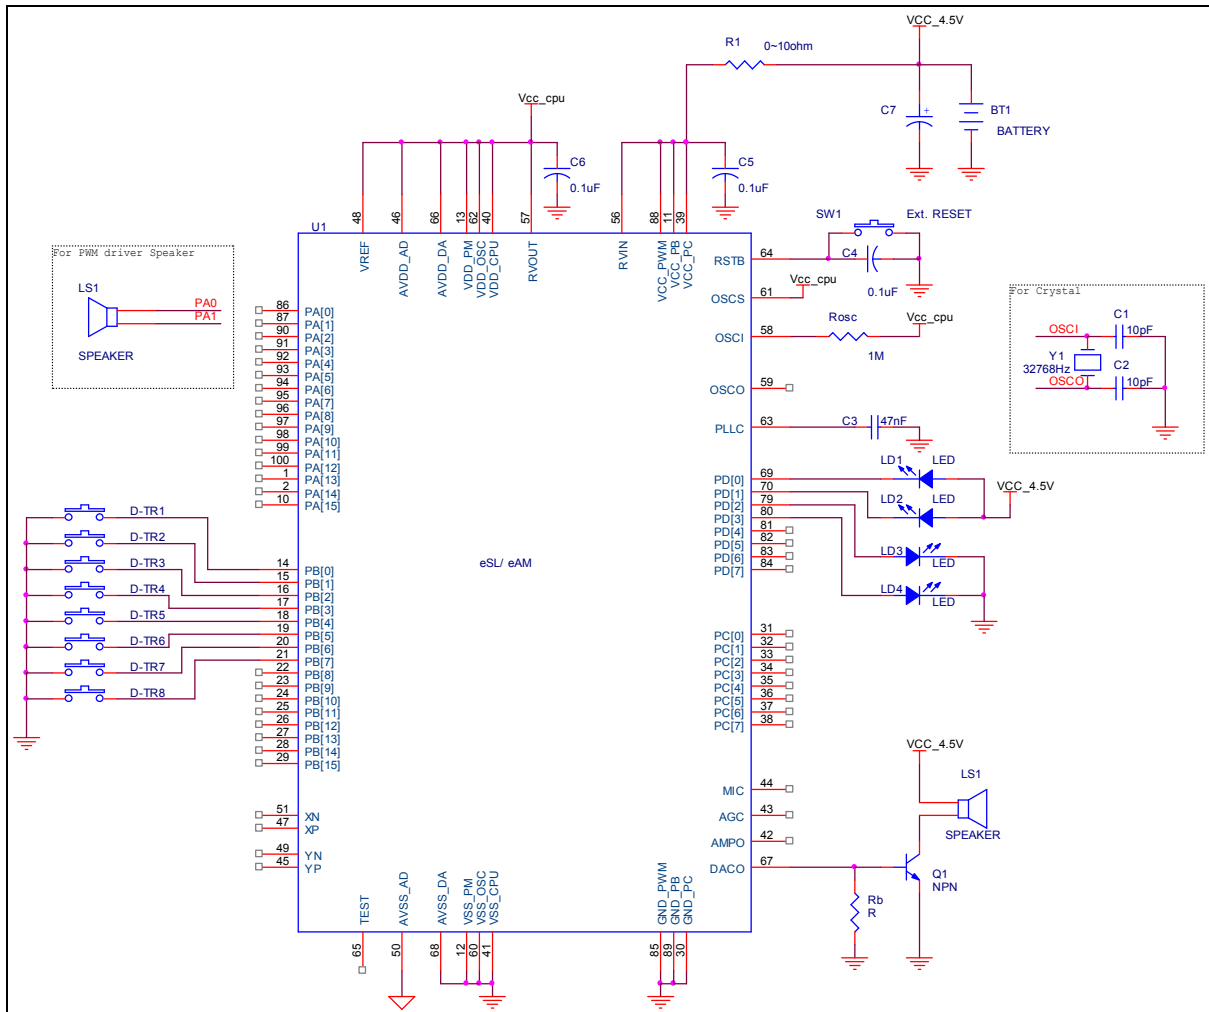


Figure 8-1 ELAN eSL Series Series with 4.5V No ADC Application Circuit Diagram

NOTE

The AVDD_AD, VREF are analog voltage input that need to separate with other digital voltage input to reduce noise issue. For example, you can use on-chip regulator to be the analog voltage source. Or you can refer to development board reference circuit.

