


10.7 Gb/s Driver Amplifier

PSPL5868 Datasheet

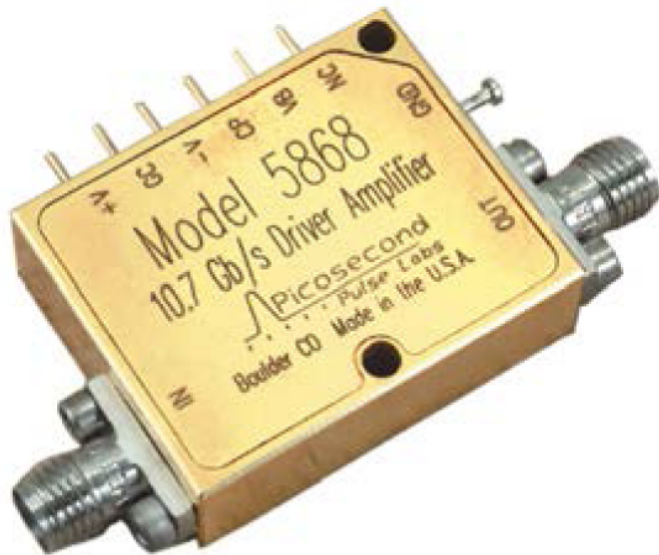


The Model PSPL5868 driver amplifier is intended for use as a modulator driver or as a linear amplifier. This device includes internal temperature compensation for excellent output stability over temperature, and exhibits both high output and low power dissipation. It also incorporates internal sequencing circuitry, making it insensitive to power supply application sequence.


Key performance specifications

- 11 V output amplitude 10.7 Gb/s Modulator Driver
- Linear amplifier with 28 dB gain
- 30 kHz to 11.8 GHz bandwidth
- Temperature compensated design for output stability
- Includes bias network, crossing point control & adjustable output voltage

Typical 10.7 Gb/s eye measurements

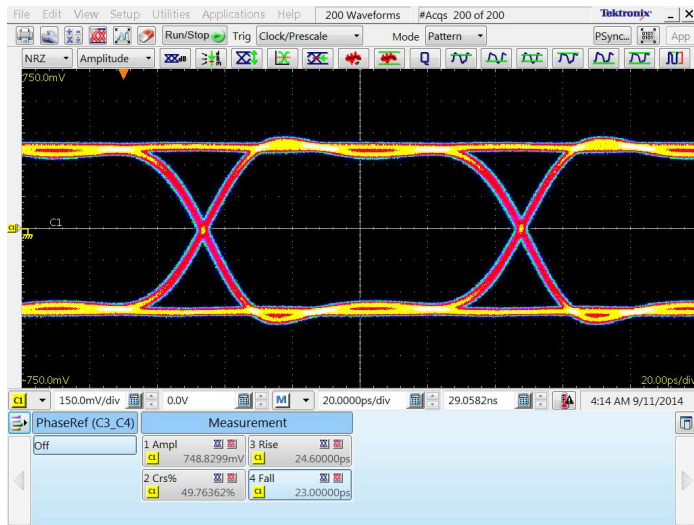


Input from Tektronix PPG1601, PRBS = 2²³-1, 750 mV

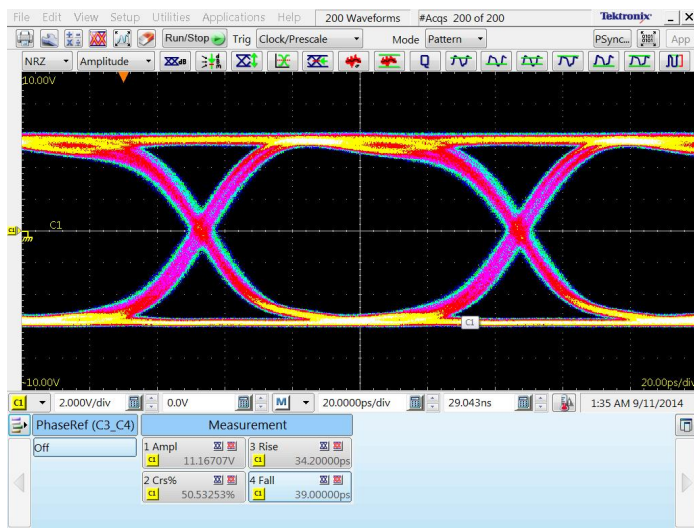


Output amplitude, 11 V

Typical performance

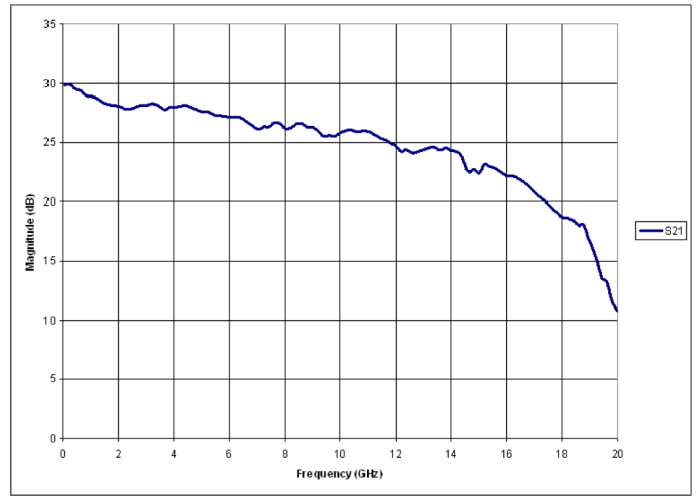


Typical small signal S₂₁ (measured at -20 dBm input power)

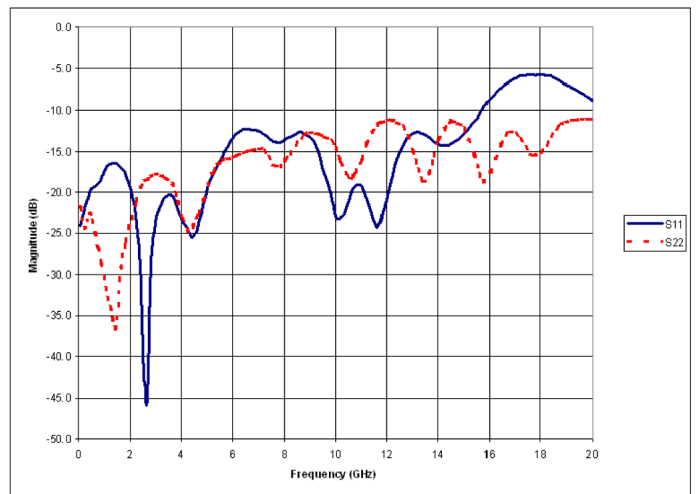


Typical small signal S₁₁ and S₂₂ (measured at -20 dBm input power)


Typical performance plots

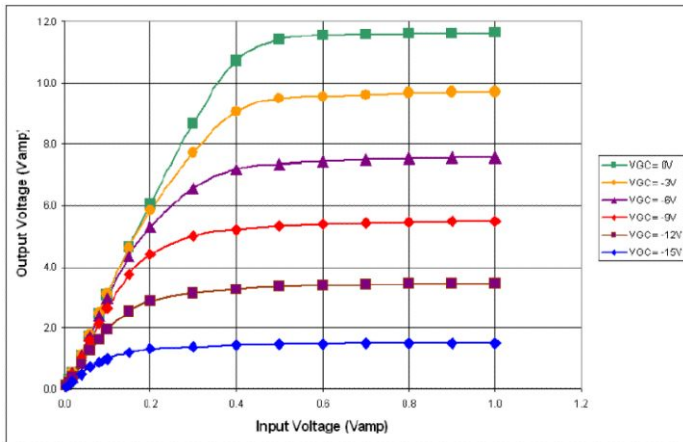

Output voltage vs. Input voltage (Gain control bias = V_{gc} , $T_{CASE} = 35\text{ }^{\circ}\text{C}$)

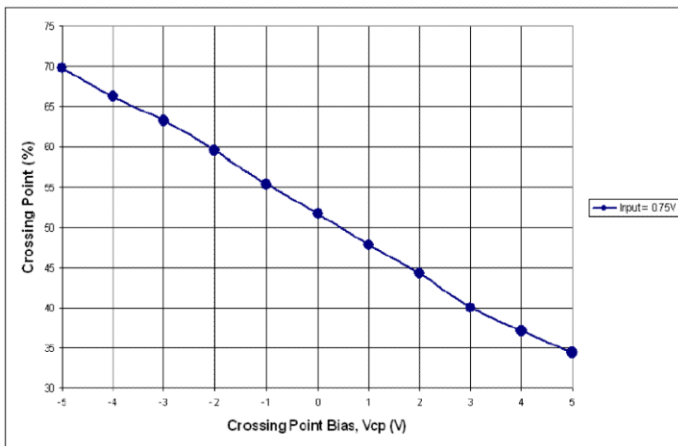

Crossing point vs. V_{cp}

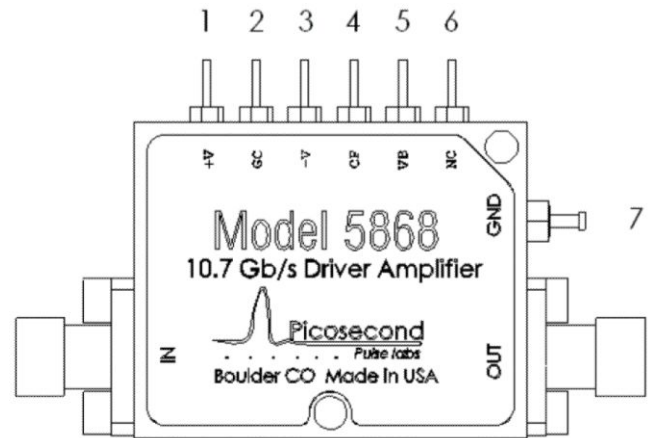

Pin Descriptions

Pin #	Pin Label	Description
	IN	SMA, signal input, $V_{amp} \leq 1.5\text{ V}$ (damage threshold)
1	+V	Positive DC voltage supply, $8.25\text{ V}^{1,2}$
2	GC	V_{gc} Variable output control, $-15\text{ V} \leq V_{gc} \leq 0\text{ V}^3$
3	-V	Negative DC voltage supply, $-5.25\text{ V} \leq V \leq -4.75\text{ V}^2$
4	CP	Crossing point adjust, $-5\text{ V} \leq V_{cp} \leq 5\text{ V}^4$
5	VB	DC Voltage bias, $-17 \leq VB \leq +33\text{ V}^5$
6	NC	No connection / Not used
7	GND	Ground connection
	OUT	SMA, signal output

Instructions

The PSPL5868 10.7 Gb/s modulator driver can be operated using only three of the available 7 pins. The DC pins required for operation are 1, 3, and 7. The RF connectors and DC pins are shown in the following drawing and table. **Warning:** To prevent damage, provide a ground connection at pin 7 before applying voltage to the PSPL5868.

- At 8.25 V, approximately 3 W is dissipated.
- No power sequencing is necessary. Voltages may be applied in any order after ground is applied.
- Output Control: With VGC at 0 V, or left floating (disconnected), the driver will provide maximum gain and maximum output voltage. The user can decrease VGC to decrease the RF signal gain when the driver is operating in the linear regime, or to reduce the output voltage level when the driver is operated in saturation (this will also reduce the power dissipated).
- The crossing point may vary until unit achieves thermal equilibrium. $V_{CP} > 0\text{ V}$ will lower the output crossing point and increase power dissipation. Care must be taken to ensure that the positive supply current does not exceed 400 mA.
- Voltage Bias: The VB pin allows the user to apply a low current (less than 3.5 mA) DC offset to the Signal Output for biasing electro-optic modulators through a 2.5 k Ω resistor.

Specifications

Parameter	Symbol	Units	Minimum	Typical	Maximum	Comments
Impedance	Z	ohms		50		
Upper 3 dB freq.	$f_{c,h}$	GHz		11.8		Relative to gain at 2 GHz
Lower 3 dB freq.	$f_{c,l}$	kHz		30		Relative to gain at 2 GHz
Small signal gain	S_{21}	dB		28.5		Measured at 2 GHz
Max Power Out (-1 dB gain comp)	$P_{1\text{ dB}}$	dBm		24.4		Measured at 2 GHz
Output Eye Voltage with $V_{GC} = 0\text{ V}$	V_{OUT}	V_{amp}	10.5	11		$V_{in} = 0.75 V_{amp}$, 10.7 Gb/s PRBS
Output Eye Voltage with $V_{GC} = -15\text{ V}$	V_{OUT}	V_{amp}		1.5	2.5	$V_{in} = 0.75 V_{amp}$, 10.7 Gb/s PRBS
Return Loss, Input and Output	S_{11}, S_{22}	dB		-16 -11		50 MHz < f < 5 GHz 5 GHz ≤ f < 12 GHz
Rise Time	t_r	ps		31		10-90%, $V_{in} = 0.75 V_{amp}$, 10.7 Gb/s PRBS
Fall Time	t_f	ps		36		
Additive Jitter RMS Peak-to-Peak		ps ps _{pp}		1.5 8		$V_{in} = 0.75 V_{amp}$, 10.7 Gb/s PRBS, measured at crossing point
Overshoot		%		5		10.7 Gb/s PRBS
Undershoot		%		5		10.7 Gb/s PRBS
Eff. Input RMS Noise Voltage		μV rms		152		
Noise Figure	NF	dB		5.75		$f = 1\text{ GHz}$
Output Eye Voltage Variation	ΔV_{OUT}	%		±5		$V_{gc} = 0\text{ V}$, $V_{in} = 0.75 V_{amp}$, $T_{CASE} = -5\text{ to }75\text{ °C}$
Crossing Point Adjust		%	±12	-13.5 / +17.5		±5 V input at V_{cp} , $V_{in} = 0.5 V_{amp}$
Crossing Point Variation		%		±5		$V_{in} = 0.75 V_{amp}$, 10.7 Gb/s PRBS, $T_{CASE} = -5\text{ to }75\text{ °C}$
Polarity	Non-Inverting					
Coupling	AC, input and output					
RF Connectors	SMA jacks (f)					
DC Connector	Solder pins					
Voltage Supply (+)	$+V_{DC}$	V	8	8.25	8.5	
Voltage Supply (-)	$-V_{DC}$	V	-5.25	-5	-4.75	
Supply Current (+)	$+I_{DC}$	mA		325		$V_{out} = 11 V_{amp}$ ⁶
Supply Current (-)	$-I_{DC}$	mA		20		
Power Dissipation	P_{diss}	W		3	3.3	$V_{out} = 11 V_{amp}$ ⁷
Max Allowed Input		V_{amp}			1.5	Input damage threshold
Output Voltage Bias	V_{bias}	V_{DC}	-17	0	33	No connection required ⁸
Gain Control Bias	V_{gc}	V_{DC}	-15	0	0	No connection required
Crossing Point Bias	V_{cp}	V_{DC}	-5	0	5	No connection required
Operating Temp	T_{CASE}	°C	-5		75	Case temperature


⁶ The PSPL5868 can be damaged by excessive heat that is produced when driving low duty cycle positive pulses. To ensure the amplifier will not be damaged by overheating, it is recommended the positive supply voltage has its current limit set to 400 mA.

⁷ V_{gc} can be used to lower the output level and power dissipated. $V_{cp} > 0\text{ V}$ will lower the crossing point and increase the power dissipated.

⁸ A 2.5 kΩ resistor is connected to the output from the V_{bias} pin for adding a low current (≤ 3.5 mA) DC bias.

Parameter	Symbol	Units	Minimum	Typical	Maximum	Comments
Storage Temp	T _{stor}	°C	-40		125	
Warranty	One year					

Mechanical dimensions

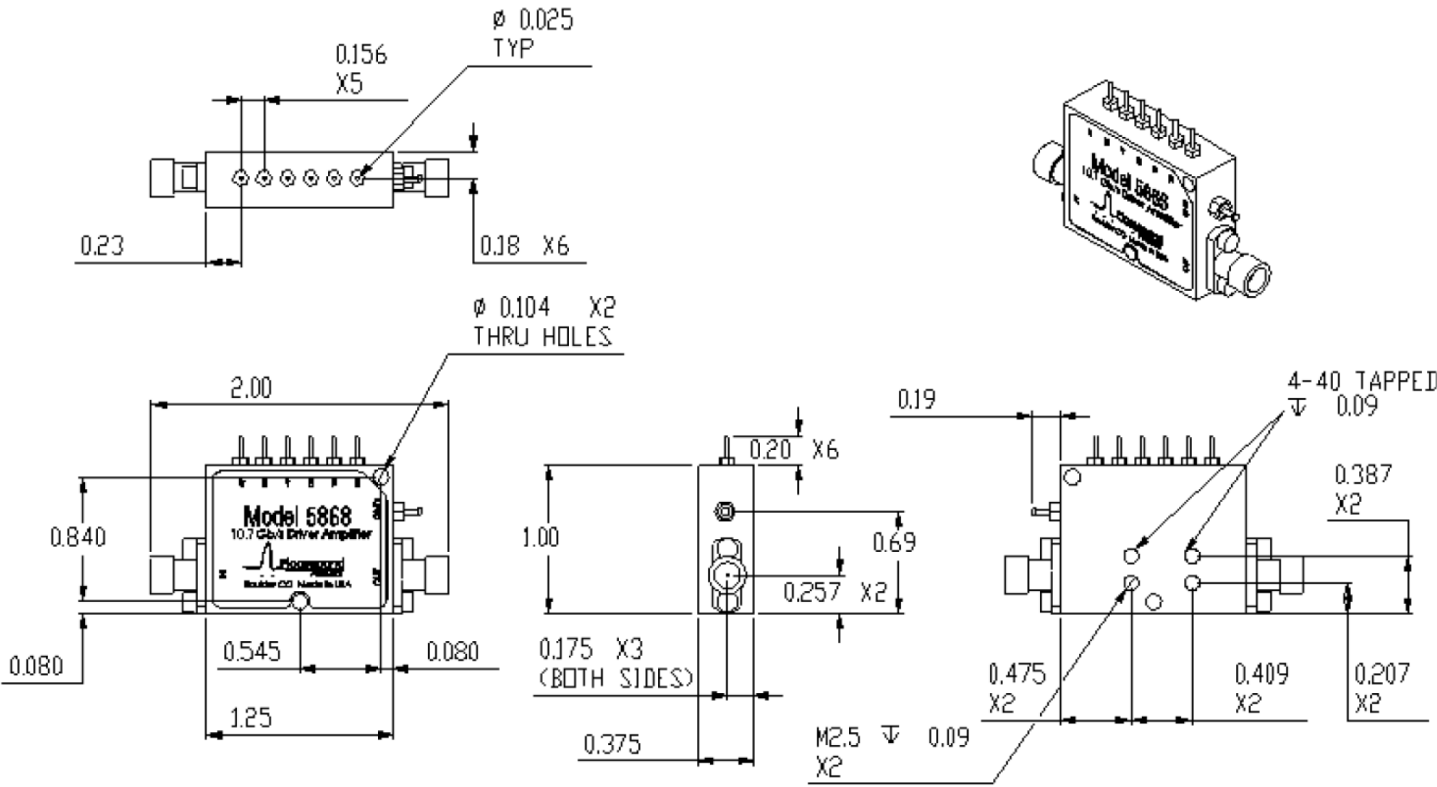

Ordering information

Models

PSPL5868

DRIVER AMPLIFIER, 10.7 Gb/s

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3010
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea 001 800 8255 2835
Spain 00800 2255 4835*
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



04 Mar 2015 1PW-30540-2

www.tektronix.com

