

**High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications**

**General Description**

The AAT3129 is a high efficiency charge pump DC/DC converter with tri-mode load switch (1X) fractional (1.5X) and doubling (2X) conversion for color LED applications. A single current source output provides a regulated current to drive R, G, and B LEDs via three internal switches. With a simple single wire serial bus, the RGB module can be easily controlled to display 4096 colors.

Skyworks' Advanced Simple Serial Control (AS<sup>2</sup>Cwire™) serial digital input is used to enable, disable, and set the duty cycle of each internal MOSFET switch. Low external parts count (two 1μF flying capacitors and two small bypass capacitors at V<sub>IN</sub> and OUT) makes the AAT3129 ideally suited for small battery-powered applications.

The AAT3129 has a thermal management system to protect the device in the event of a short-circuit condition on any of the output pins. Built-in soft-start circuitry prevents excessive inrush current during start-up. High switching frequency enables the use of small external capacitors. A low current shutdown feature disconnects the load from V<sub>IN</sub> and reduces quiescent current to less than 1μA.

The AAT3129 is available in a Pb-free, 12-pin TSOPJW package.

A typical application circuit is shown in Figure 1. The pin configurations are shown in Figure 2. A functional block diagram of the AAT3129 is provided in Figure 3.


**Features**

- V<sub>IN</sub> Range: 2.7V to 5.5V
- Common Anode RGB LED Control
- 4096 Color with Single Wire Digital Control
- 40mA to 180mA Fixed Current Source
- AS<sup>2</sup>Cwire Digital Brightness Control
- Low Noise Constant Frequency Operation
- Small Application Circuit
- Regulated Output Current
- No Inductors
- 1MHz Switching Frequency
- I<sub>Q</sub> < 1μA in Shutdown
- 12-Pin TSOPJW Package

**Applications**

- Fashion RGBs
- Mobile Handsets
- MP3 Players
- PDAs
- Portable Devices
- RGB Color LEDs
- RGB Photo Flash
- Smartphones


**Typical Application**

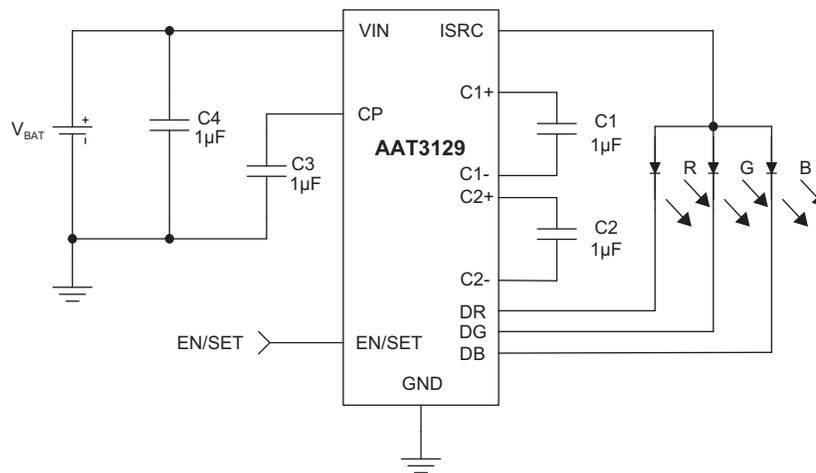

**Figure 1. Typical Application Circuit.**

**High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications****Pin Descriptions**

| Pin # | Symbol | Function   |
|-------|--------|--|
| 1     | C2+    | Flying capacitor 2 positive terminal. Connect a 1 $\mu$ F capacitor between C2+ and C2-. |
| 2     | CP     | Charge pump output. Requires 1 $\mu$ F capacitor connected between this pin and ground.  |
| 3     | C1-    | Flying capacitor 1 negative terminal.  |
| 4     | C1+    | Flying capacitor 1 positive terminal. Connect a 1 $\mu$ F capacitor between C1+ and C1-. |
| 5     | ISRC   | Current source output.   |
| 6     | EN/SET | AS <sup>2</sup> Cwire control pin.   |
| 7     | DB     | Open drain switch blue diode cathode.  |
| 8     | DG     | Open drain switch green diode cathode.   |
| 9     | DR     | Open drain switch red diode cathode.   |
| 10    | GND    | Ground.  |
| 11    | IN     | Input power supply. Requires 1 $\mu$ F capacitor connected between this pin and ground.  |
| 12    | C2-    | Flying capacitor 2 negative terminal.  |

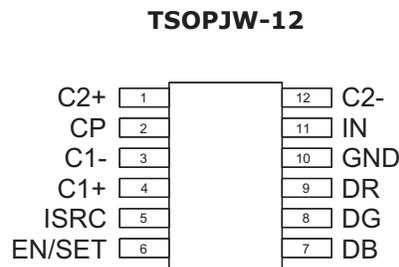**Pin Configuration**

**Figure 2. AAT3129 Pinout – 12-Pin TSOPJW (Top View).**

**High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications****Absolute Maximum Ratings<sup>1</sup>**

| Symbol            | Description                                      | Value      | Units |
|-------------------|--|------------|-------|
| $V_{IN}$          | Input Voltage                                    | -0.3 to 6  | V     |
| $V_{CP}$          | Charge Pump Output                               | -0.3 to 6  | V     |
| $V_{EN/SET}$      | EN/SET to GND Voltage                            | -0.3 to 6  | V     |
| $V_{EN/SET(MAX)}$ | Maximum EN/SET to Input Voltage                  | 0.3        | V     |
| $T_J$             | Operating Junction Temperature Range             | -40 to 150 | °C    |
| $T_{LEAD}$        | Maximum Soldering Temperature (at leads, 10 sec) | 300        | °C    |

**Thermal Information**

| Symbol        | Description                               | Value | Units |
|---------------|---|-------|-------|
| $P_D$         | Maximum Power Dissipation <sup>2, 3</sup> | 625   | mW    |
| $\theta_{JA}$ | Thermal Resistance                        | 160   | °C/W  |

1. Stresses above those listed in Absolute Maximum Ratings may cause permanent damage to the device. Functional operation at conditions other than the operating conditions specified is not implied. Only one Absolute Maximum Rating should be applied at any one time.

2. Mounted on an FR4 board.

3. Derate 6.25mW/°C above 25°C.

**High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications**

**Electrical Characteristics<sup>1</sup>**

$V_{IN} = 3.5V$ ,  $C3 = C4 = C1 = C2 = 1\mu F$ ;  $T_A = -40^\circ C$  to  $+85^\circ C$ . Unless otherwise noted, typical values are  $T_A = 25^\circ C$ .


| Symbol                    | Description              | Conditions  | Min | Typ | Max | Units    |
|---------------------------|--------------------------|---|-----|-----|-----|----------|
| <b>Input Power Supply</b> |                          |   |     |     |     |          |
| $V_{IN}$                  | Operation Range          |   | 2.7 |     | 5.5 | V        |
| $I_{CC}$                  | Operating Current        | $3.0 \leq V_{IN} \leq 5.5$ , CP = 1.5X, No Load Current |     | 1   | 3   | mA       |
| $I_{SHDN}$                | Shutdown Current         | EN = 0  |     |     | 1   | $\mu A$  |
| $I_{SRC}$                 | Output Current Accuracy  | $3.0 \leq V_{IN} \leq 5.5$                              | -5  |     | 5   | %        |
| <b>Charge Pump</b>        |                          |   |     |     |     |          |
| $T_S$                     | Start-Up Delay Time      |   |     | 200 |     | $\mu s$  |
| $F_{CLK}$                 | Clock Frequency          |   |     | 1   |     | MHz      |
| $\eta$                    | Efficiency               | $V_{IN} = 3.5V$   |     | 93  |     | %        |
| <b>Switches</b>           |                          |   |     |     |     |          |
| $R_{DS(ON)}$              | Switch On Resistance     | $V_{IN} = 3.5V$ , $T_A = 25^\circ C$                    |     |     | 1.5 | $\Omega$ |
| <b>EN/SET</b>             |                          |   |     |     |     |          |
| $V_{EN(L)}$               | Enable Threshold Low     | $V_{IN} = 2.7V$   |     |     | 0.4 | V        |
| $V_{EN(H)}$               | Enable Threshold High    | $V_{IN} = 5.5V$   | 1.4 |     |     | V        |
| $T_{EN/SET LO}$           | EN/SET Low Time          |   | 0.3 |     | 75  | $\mu s$  |
| $T_{EN/SET HI MIN}$       | Minimum EN/SET High Time |   |     | 50  |     | ns       |
| $T_{OFF}$                 | EN/SET Off Timeout       |   |     |     | 500 | $\mu s$  |
| $T_{LAT}$                 | EN/SET Latch Timeout     |   |     |     | 500 | $\mu s$  |
| $I_{EN/SET}$              | EN/SET Input Leakage     | $V_{EN/SET} = 5.5V$ , $V_{IN} = 5.5V$                   | -1  |     | 1   | $\mu A$  |

1. The AAT3129 is guaranteed to meet performance specifications over the  $-40^\circ C$  to  $+85^\circ C$  operating temperature range and is assured by design, characterization, and correlation with statistical process controls.

## High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications


### Typical Characteristics

**Turn-On to 1X Mode**  
( $V_{IN} = 4.2V$ ;  $I_{SRC} = 60mA$ )

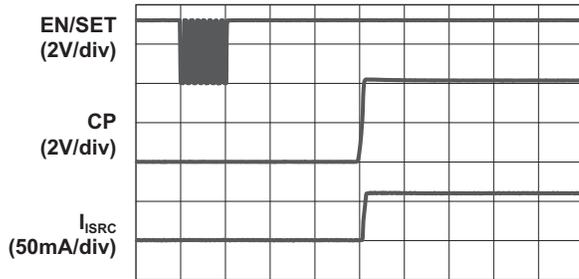


100 $\mu$ s/div

**Turn-On to 1.5X Mode**  
( $V_{IN} = 3.6V$ ;  $I_{SRC} = 60mA$ )

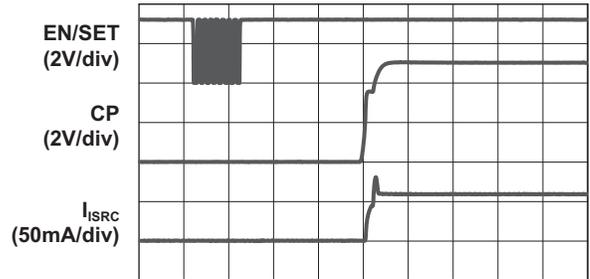


100 $\mu$ s/div

**Turn-On to 2X Mode**  
( $V_{IN} = 2.8V$ ;  $I_{SRC} = 60mA$ )

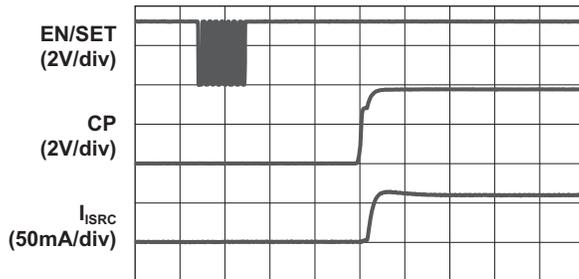

100 $\mu$ s/div

**Turn-Off from 1.5X Mode**  
( $V_{IN} = 3.6V$ ; Addr = 2; Data = 16)

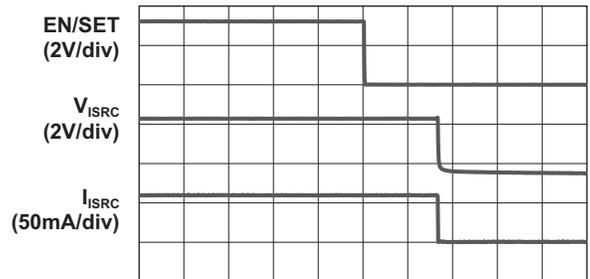


100 $\mu$ s/div


*High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications*

**Typical Characteristics**


**Operating Characteristics**  
 ( $V_{IN} = 4.2V$ ; DR, DB, and DG in 1X Mode)

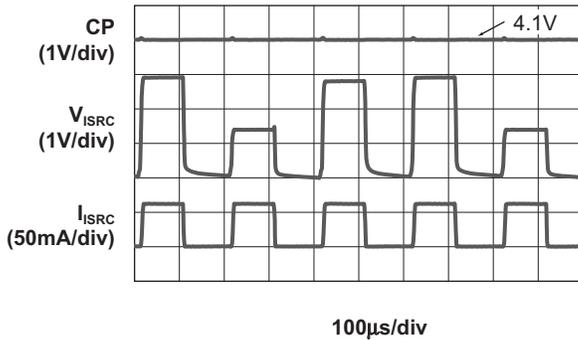


**Operating Characteristics**  
 ( $V_{IN} = 3.9V$ ; DR and DG in 1X Mode; DB in 1.5X Mode)

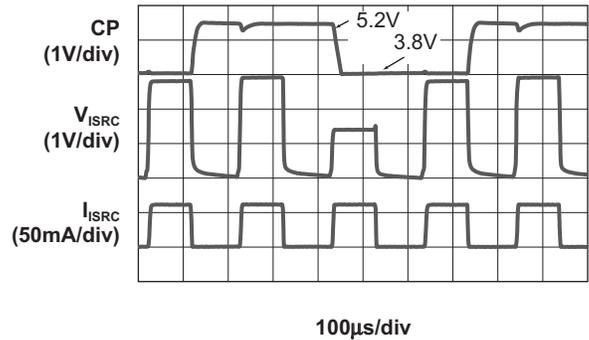


**Operating Characteristics**  
 ( $V_{IN} = 3.6V$ ; DR in 1X Mode; DG and DB in 1.5X Mode)

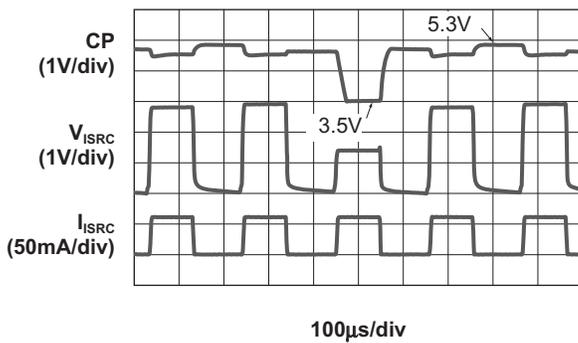

**Line Response**  
 (1X Mode;  $I_{ISRC} = 60mA$ )

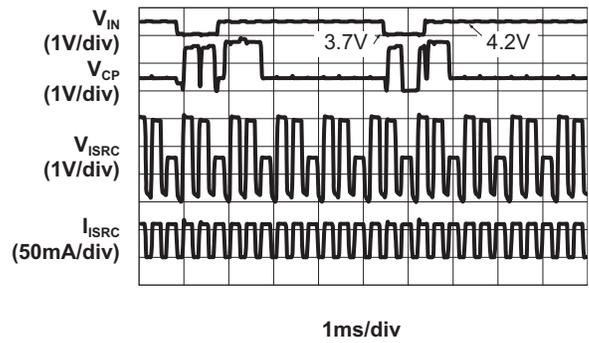


**Line Response**  
 (1X, 1.5X Mode;  $I_{ISRC} = 60mA$ )

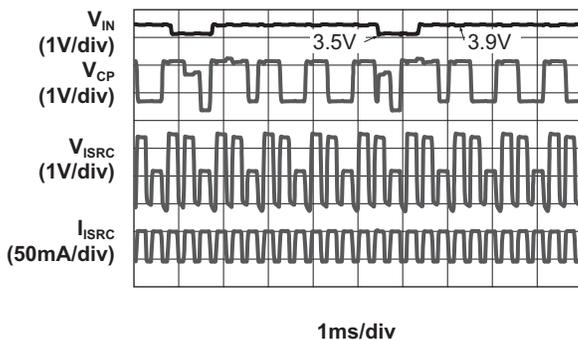


## High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications

### Typical Characteristics


Oscillator Frequency vs. Temperature

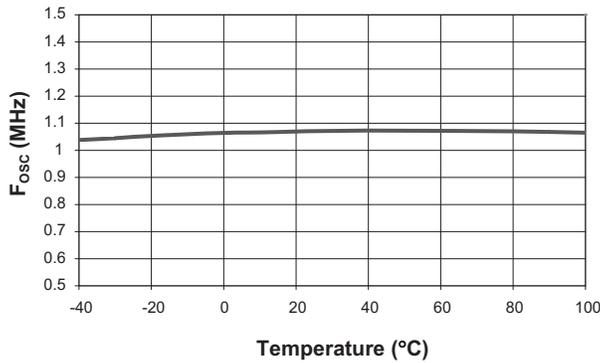


Shutdown Current vs. Temperature

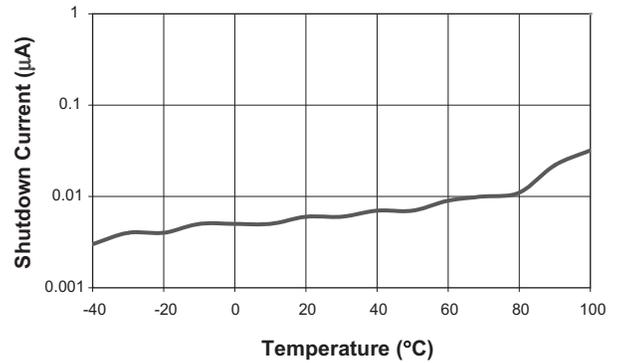


I<sub>ISRC</sub> vs. V<sub>IN</sub>  
(V<sub>F</sub> = 3.5V)

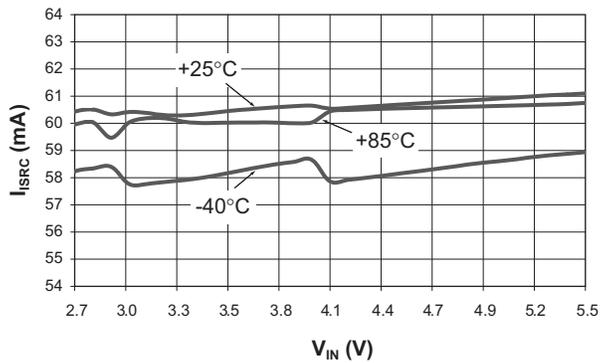


I<sub>ISRC</sub> vs. V<sub>F</sub>  
(V<sub>IN</sub> = 3.5V)

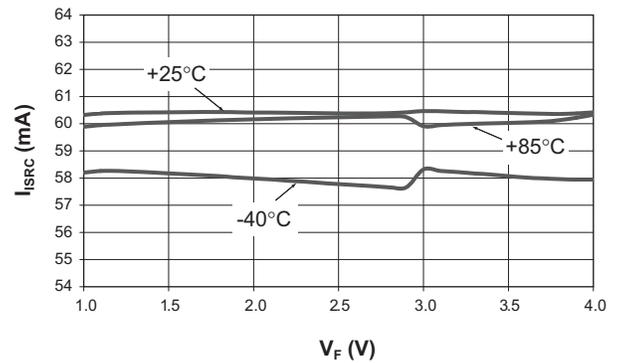

T<sub>LAT</sub> vs. V<sub>IN</sub>

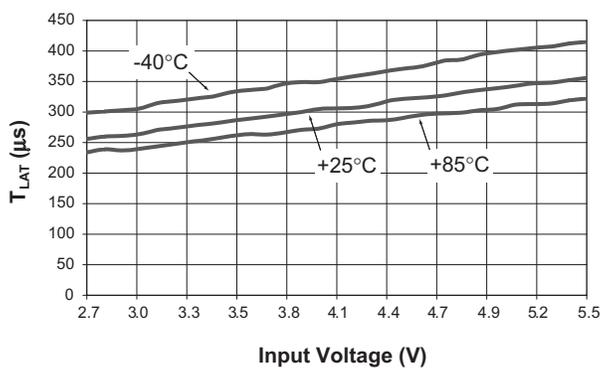

T<sub>OFF</sub> vs. V<sub>IN</sub>

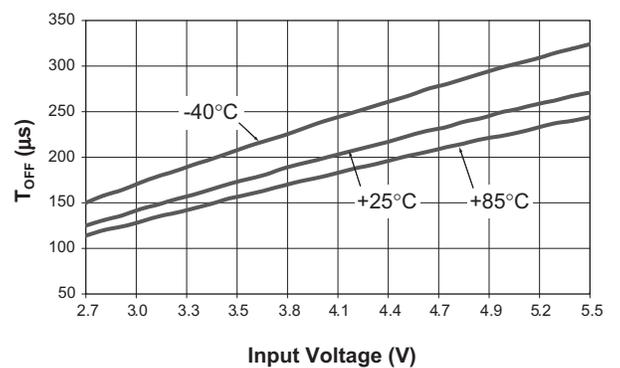


# AAT3129


## High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications

### Typical Characteristics


Switch Resistance vs. Supply Voltage

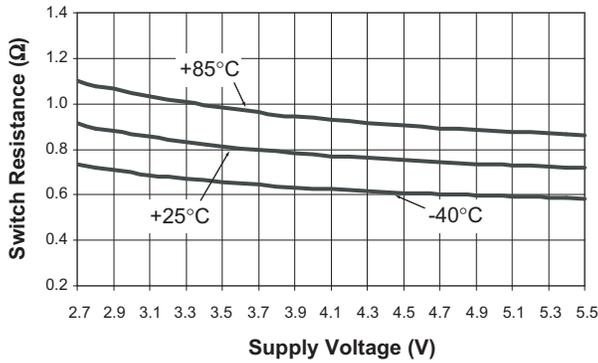


$V_{IH}$  vs.  $V_{IN}$

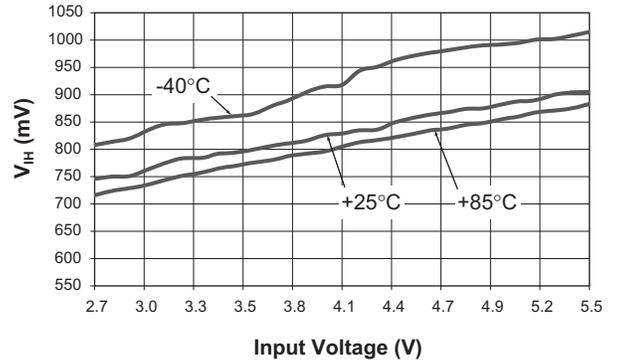

$V_{IL}$  vs.  $V_{IN}$

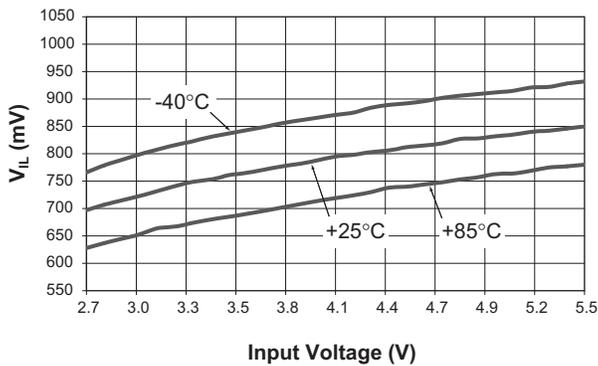

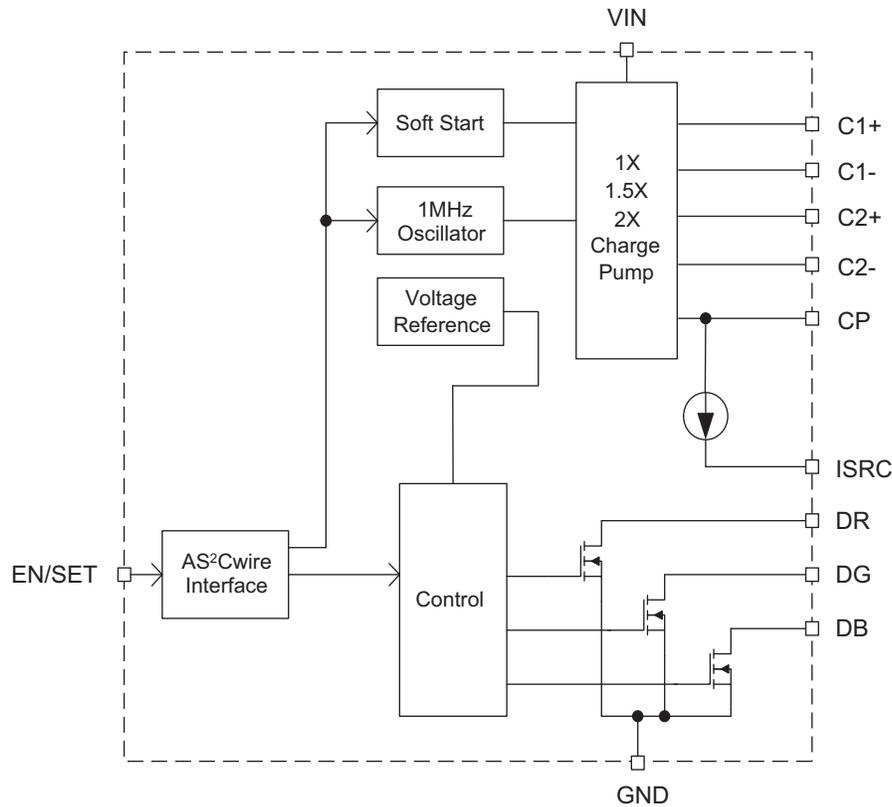**High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications****Functional Block Diagram****Figure 3. AAT3129 Functional Block Diagram.****Functional Description**

The AAT3129 is a tri-mode load switch (1X) and high efficiency (1.5X or 2X) charge pump device intended for fashion color LED lighting applications. To maximize power conversion efficiency, an internal sensing circuit monitors the voltage required on the constant current source output and sets the load switch and charge pump modes based on the input battery voltage and the current source output voltage. As the battery discharges over time, the AAT3129 charge pump is enabled when the current source output nears dropout. The charge pump initially starts in 1.5X mode. If the charge pump output drops enough for the current source output to

become close to dropout, the charge pump will automatically transition to 2X mode.

The AAT3129 requires only four external components: two 1 $\mu$ F ceramic capacitors for the charge pump flying capacitors (C1 and C2), one 1 $\mu$ F ceramic input capacitor (C4), and one 0.33 $\mu$ F to 1 $\mu$ F ceramic output capacitor (C3).

The color and brightness of an RGB color LED is maintained by PWM signals, which are programmed via the AS<sup>2</sup>Cwire interface. The control block generates three gate drive PWM signals for the N-channel MOSFET switches. Please refer to the interface description and timing in the following section for details.

## High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications

### Applications Information

#### AS<sup>2</sup>Cwire Serial Interface

The Advanced Simple Serial Control digital interface is used to set the color, overall intensity, and method of update for the R, G, and B channels. The intensity for each channel is set by dedicated 4-bit registers giving each channel 16 levels of brightness and resulting in 4096 possible color combinations. In addition to the three color registers, there is an intensity register and a mode register. The intensity register sets the overall intensity and provides 16 global brightness levels. The mode register toggles the method of update between two possibilities. Depending on the mode register setting, the AAT3129 will update the R, G, and B channels immediately or update them only when the intensity register is updated.

AS<sup>2</sup>Cwire relies on the number of rising edges of the EN/SET pin to address and load the registers. AS<sup>2</sup>Cwire latches data or address after the EN/SET pin has been

held high for time  $T_{LAT}$ . Address or data is differentiated by the number of EN/SET rising edges. Since the data registers are 4 bits each, the differentiating number of pulses is 24 or 16, so that address 1 is signified by 17 rising edges, address 2 by 18 rising edges, and so forth. Data is set to any number of rising edges between 1 and including 16. A typical write protocol is a burst of EN/SET rising edges, signifying a particular address, followed by a pause with EN/SET held high for the  $T_{LAT}$  timeout period, a burst of rising edges signifying data, and a  $T_{LAT}$  timeout for the data registers. Once an address is set, then multiple writes to the corresponding data register are allowed.

When EN/SET is held low for an amount of time greater than  $T_{OFF}$ , the AAT3129 enters into shutdown mode and draws less than  $1\mu A$  from the supply. Address 1 is the default address on the first rising edge after the AAT3129 has been disabled. When shutdown mode is entered, the Address and Data registers are reset to 1.

Figure 4 shows the AS<sup>2</sup>Cwire serial interface timing. Table 1 gives the AS<sup>2</sup>Cwire serial interface addressing.

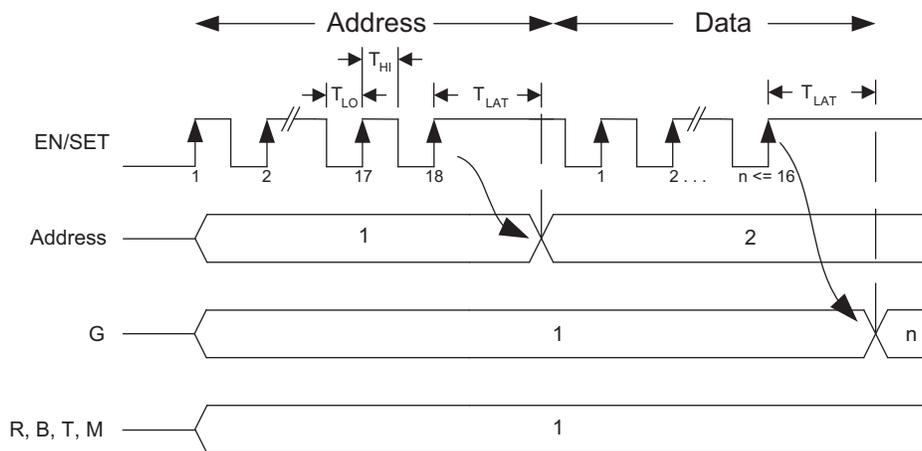


Figure 4. AS<sup>2</sup>Cwire Serial Interface Timing.

| Address | EN/SET Rising Edges | Data Register | Description |
|---------|---------------------|---------------|-------------|
| 1       | 17                  | R             | Red         |
| 2       | 18                  | G             | Green       |
| 3       | 19                  | B             | Blue        |
| 4       | 20                  | T             | Intensity   |
| 5       | 21                  | M             | Mode        |

Table 1. AS<sup>2</sup>Cwire Serial Interface Timing.

## High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications

### Color Registers R, G, and B

The individual color brightness is set using the three R, G, and B registers. The data register contents determine the on-time for each color channel during a PWM cycle. The first level is 0, or off, and is set with a single EN/SET rising edge. This setting eliminates a given color from the spectrum. The remaining 15 levels progressively increase the brightness for a particular color by increasing that channel's on-time. Using the red channel as an example, the resulting on-time is

$$\text{on-time} = (R - 1) \cdot 128\mu\text{s}$$

where R is the data setting (from 1 to 16). The same applies to G and B.

### Intensity Register T

The overall intensity level is set by the T register. Once a particular mixing of colors is set to produce the desired color, the overall intensity can be adjusted while keeping constant the ratio of colors to one another. The brightest level is set by programming the T register with 1 edge. Programming the T register with 16 edges produces the dimmest setting. The T register adjusts the overall intensity by controlling the PWM off-time. Under the dimmest setting, the off-time is the longest. The off-time that results from the data in the T register is

$$\text{off-time} = (T - 1) \cdot 512\mu\text{s}$$

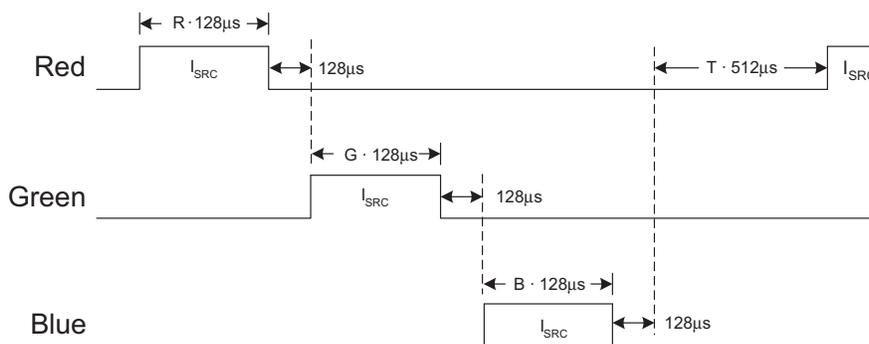


Figure 5. Diode Current Timing.

### Mode Register M

The mode register determines the method of update for the R, G, and B channels. When the mode register is set to 1, the addressed color updates immediately. When the mode register is set to 2, the colors will update when the T register is written (synchronized updating).

Under immediate updating, an addressed channel will update as soon as new data has latched for it. Under synchronized updating, the channels that have been assigned new data will not update until data for the T register latches.

By using synchronized updating, discrete changes in color can be achieved. Synchronized updating allows the intensity for all three colors to be updated simultaneously. All three color registers can be loaded with new data prior to the update. Then, upon loading the T register, all three colors will change to their new states together. This allows a user to transition from one mixed color to another without having to traverse intermediate colors. Under immediate updating color changes can only be achieved serially, or one color at a time.

Figure 5 shows the diode current timing. Table 2 gives the mode register settings.

| M Setting | Action   |
|-----------|--|
| 1         | R, G, B, T Registers Latched Independently         |
| 2         | R, G, B Registers Synchronized to T Register Latch |

Table 2. Mode Register Settings.

**High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications****LED Current**

The resulting DC current for each of the R, G, and B channels depends on the overall system settings. Using the overall settings, the current for a particular channel is calculated as

$$I_R = I_{SRC} \cdot \frac{R - 1}{4 \cdot (T - 1) + (R - 1) + (G - 1) + (B - 1) + CHLS\_ON}$$

$$I_G = I_{SRC} \cdot \frac{G - 1}{4 \cdot (T - 1) + (R - 1) + (G - 1) + (B - 1) + CHLS\_ON}$$

$$I_B = I_{SRC} \cdot \frac{B - 1}{4 \cdot (T - 1) + (R - 1) + (G - 1) + (B - 1) + CHLS\_ON}$$

where  $I_{SRC}$  is the factory programmed current and CHLS\_ON is the number of channels programmed to operate. Whenever a channel is programmed to Data = 1, that channel is programmed to off and must be removed from the CHLS\_ON count.

**Capacitor Selection**

Careful selection of the four external capacitors C1, C2, C3, and C4 is important because they will affect turn-on time, output ripple, and transient performance. Optimum performance will be obtained when low equivalent series resistance (ESR) ceramic capacitors are used. In general, low ESR may be defined as less than 100mΩ. For best overall performance, 1μF capacitors are recommended. Depending on ripple requirements, the input and output capacitor values can be increased or decreased accordingly. If lower ripple is desired, increase the capacitor value. The peak-to-peak ripple seen at the input or output increases or decreases with capacitor size.

**Capacitor Characteristics**

Ceramic composition capacitors are highly recommended over all other types of capacitors for use with the AAT3129. Ceramic capacitors offer many advantages over their tantalum and aluminum electrolytic counterparts. A ceramic capacitor typically has very low ESR, is lowest cost, has a smaller PCB footprint, and is non-polarized. Low ESR ceramic capacitors help maximize charge pump transient response. Since ceramic capacitors are non-polarized, they are not prone to incorrect connection damage.

**Equivalent Series Resistance**

ESR is an important characteristic to consider when selecting a capacitor. ESR is a resistance internal to a capacitor that is caused by the leads, internal connections, size or area, material composition, and ambient temperature. Capacitor ESR is typically measured in milliohms for ceramic capacitors and can range to more than several ohms for tantalum or aluminum electrolytic capacitors.

**Ceramic Capacitor Materials**

Ceramic capacitors less than 0.1μF are typically made from NPO or C0G materials. NPO and C0G materials typically have tight tolerance and are stable over temperature. Larger capacitor values are typically composed of X7R, X5R, Z5U, or Y5V dielectric materials. Large ceramic capacitors, typically greater than 2.2μF, are often available in low-cost Y5V and Z5U dielectrics, but capacitors greater than 1μF are typically not required for AAT3129 applications.

Capacitor area is another contributor to ESR. Capacitors that are physically large will have a lower ESR when compared to a smaller capacitor made from an equivalent material. These larger devices can improve circuit transient response when compared to an equal value capacitor in a smaller package size.

**Layout Considerations**


The AAT3129 is a high-performance device that operates with a high switching frequency. To ensure optimal device performance and accommodate the fast transients generated by the AAT3129 special attention should be given to the board layout.

The recommended layout is illustrated in Figure 1. The traces connecting C1 and C2 experience fast current transients. As a result, the trace lengths for C1 and C2 should be minimized by placing the components as closely as possible to the IC. This will minimize path resistance and reduce ringing due to the inductance associated with trace length. For best IC performance, C4 and C3 are placed as closely as possible to the IN and CP pins and are connected to a solid ground.

**High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications**

**AAT3129 Evaluation Board Description**


A schematic of the complete circuit is shown in Figure 6. The evaluation board layout details are provided in Figures 7 and 8.

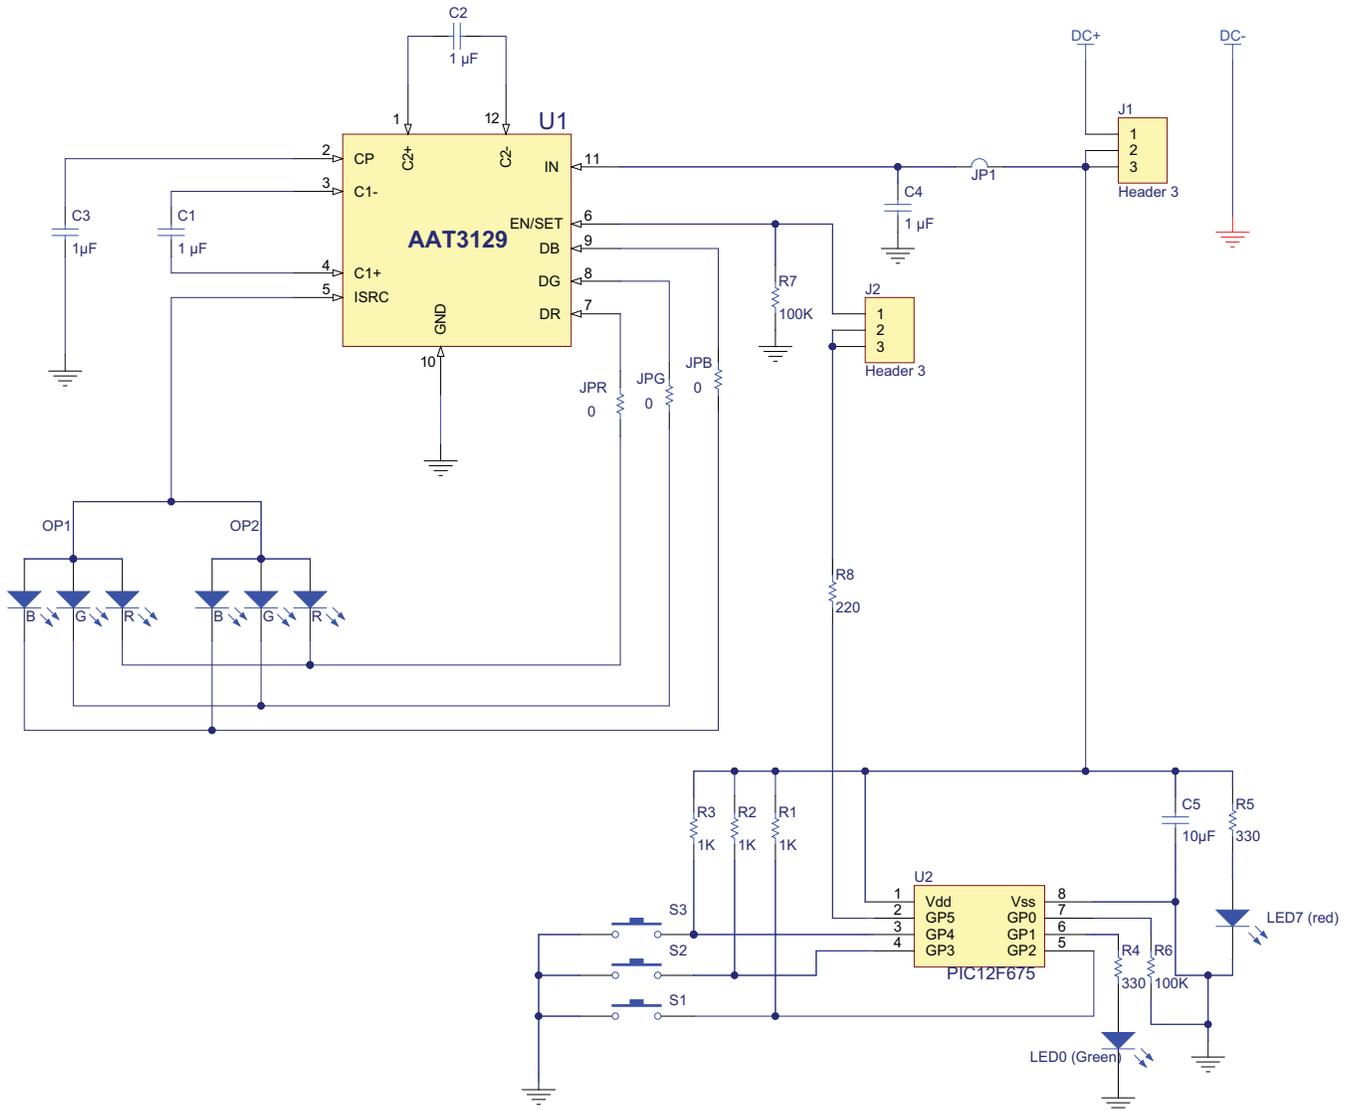


**Figure 6: AAT3129 Evaluation Board Schematic.**

# AAT3129

*High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications*

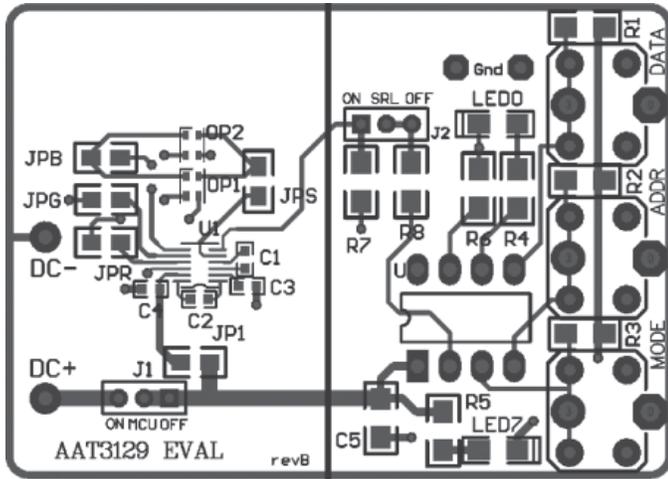

**Figure 7: AAT3129 Evaluation Board Component Side PCB Layout.**

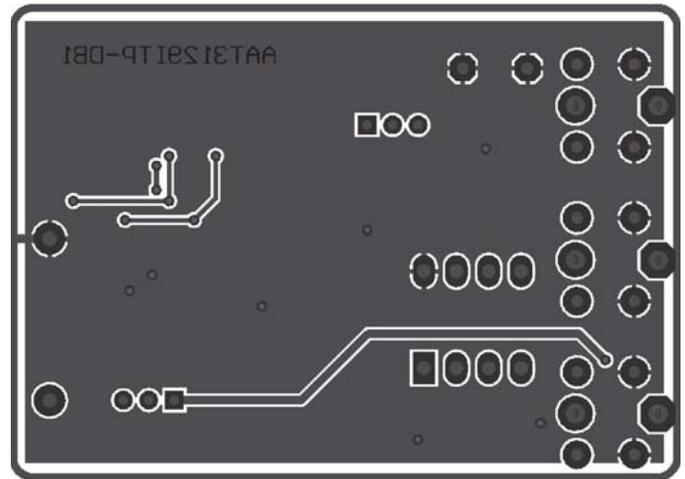

**Figure 8: AAT3129 Evaluation Board Solder Side PCB Layout.**

# AAT3129

## High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications

### Ordering Information

| Output Current | Package   | Marking <sup>1</sup> | Part Number (Tape and Reel) <sup>2</sup> |
|----------------|-----------|----------------------|--|
| 60mA           | TSOPJW-12 | NNXY                 | <b>AAT3129ITP-60-T1</b>                  |




Skyworks Green™ products are compliant with all applicable legislation and are halogen-free.

For additional information, refer to *Skyworks Definition of Green™*, document number SQ04-0074.

### Package Information

#### TSOPJW-12

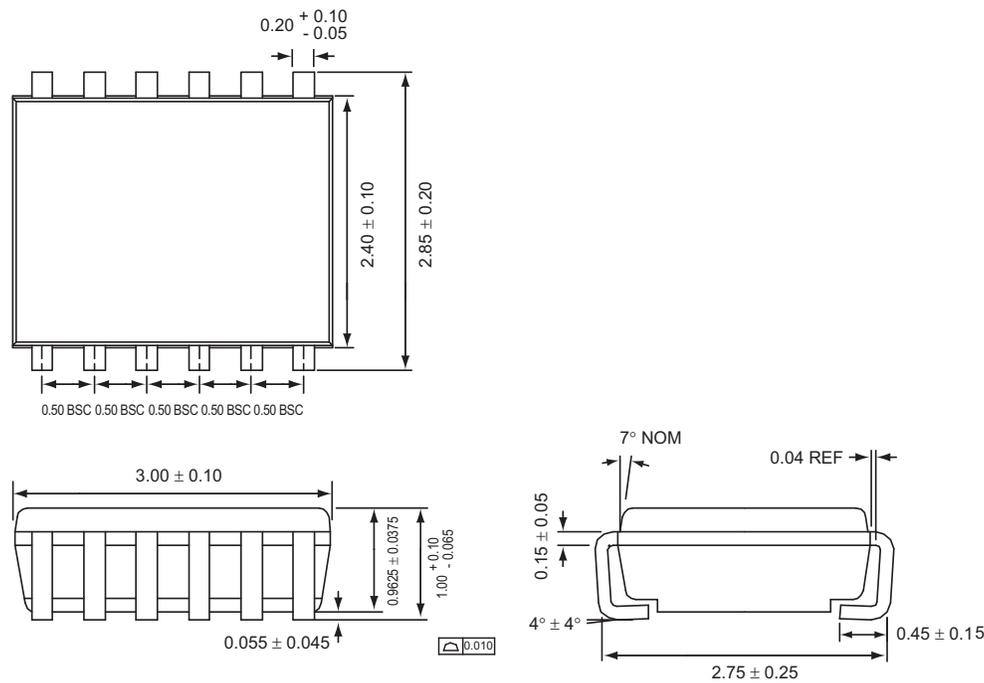

All dimensions in millimeters.

1. XYY = assembly and date code.  
 2. Sample stock is held on part numbers listed in **BOLD**.

---

**High Efficiency 1X/1.5X/2X Charge Pump for RGB Color LED Applications**

Copyright © 2012, 2013 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks, the Skyworks symbol, and "Breakthrough Simplicity" are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at [www.skyworksinc.com](http://www.skyworksinc.com), are incorporated by reference.