

## 12kV 100mA HIGH VOLTAGE DIODE

2CL2H is high reliability resin molded type high voltage diode in small size package which is sealed a multilayered mesa type silicon chip by epoxy resin.

### Features

- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage


### Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power

### Maximum Ratings and Characteristics

- Absolute Maximum Ratings

### Outline Drawings : mm

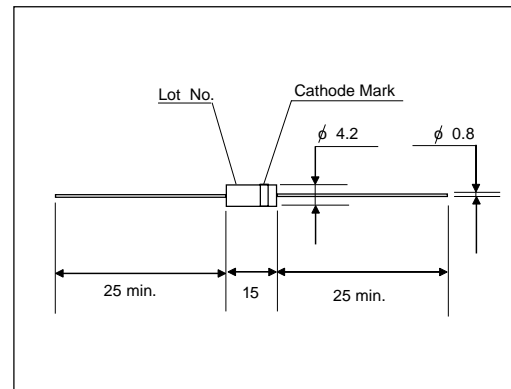

### Cathode Mark

Type	Mark
2CL2H	

Items	Symbols	Condition	2CL2H	Units
Repetitive Peak Reverse Voltage	$V_{RRM}$		12	kV
Average Output Current	$I_o$	Ta=25°C, Resistive Load	100	mA
Surge Current	$I_{FSM}$		20	A <sub>peak</sub>
Junction Temperature	$T_j$		155	°C
Allowable Operation Case Temperature	$T_c$		125	°C
Storage Temperature	$T_{stg}$		-40 to +155	°C

- Electrical Characteristics (Ta=25°C Unless otherwise specified)

Items	Symbols	Conditions	2CL2H	Units
Maximum Forward Voltage Drop	$V_F$	at 25°C, $I_F = 100\text{mA}$	13	V
Maximum Reverse Current	$I_{R1}$	at 25°C, $V_R = V_{RRM}$	2.0	uA
	$I_{R2}$	at 100°C, $V_R = V_{RRM}$	40	uA
Maximum Reverse Recovery Time	$T_{rr}$	at 25°C	-	nS
Junction Capacitance	$C_j$	at 25°C, $V_R = 0\text{V}$ , $f = 1\text{MHz}$	15	pF