

5.5V Maximum Output, 3A Valley Current, 1MHz Synchronous Boost with Auto Bypass Function

General Description

SY20489 is a high efficiency, synchronous, step-up Boost converter designed for one-cell Li-Ion or Li-polymer, or a two to three-cell alkaline Ni-Cd or Ni-MH battery powered applications. It can convert down to 2.5V input voltage and up to 5.5V output voltage. It adopts NMOS for the main switch and PMOS for the synchronous switch.

SY20489 can disconnect the output from input during the shutdown mode. When input voltage exceeds the regulated output voltage, SY20489 enters bypass mode automatically.

Features

- 2.5V Minimum Input Voltage
- Adjustable Output Voltage from 2.5V to 5.5V
- Min 3A Valley Current Limit
- Capable for Seamless Transition between Boost and Bypass Mode
- Load Disconnect during Shutdown
- Low $R_{DS(ON)}$ (Main Switch/Synchronous Switch) at 5.0V Output: 50mΩ/90mΩ
- Output OVP Protection
- Compact Package TSOT23-6

Applications

- All Single Cell Li or Dual Cell Battery Operated Products as MP-3 Player, PDAs, and Other Portable Equipment.

Ordering Information

SY20489 □ (□ □) □

└─ Temperature Code
└─ Package Code
└─ Optional Spec Code

Ordering Number	Package type	Note
SY20489ADC	TSOT23-6	----

Typical Applications


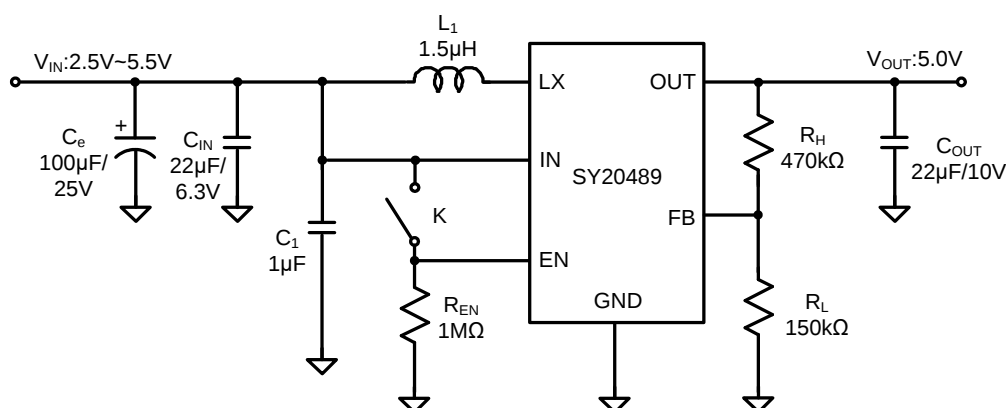


Figure 1. Schematic Diagram

Pinout (top view)

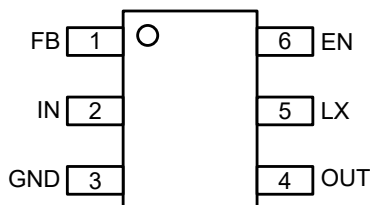

(TSOT23-6)

Top mark: **Ixyz** (Device code: Ie, x=year code, y=week code, z= lot number code)

Name	TSOT23-6	Description
FB	1	Output Feedback Pin. Connect this pin to the center point of the output resistor divider (as shown in Figure 1) to program the output voltage: $V_{OUT}=1.2 \times (1+R_H/R_L)$.
IN	2	Signal input pin. Decouple this pin to GND pin with at least 1uF ceramic cap for noise immunity consideration.
GND	3	Ground pin.
OUT	4	Output pin. Decouple this pin to GND pin with at least 22μF ceramic cap.
LX	5	Inductor node. Connect an inductor between IN pin and LX pin.
EN	6	Enable pin. Pull high to turn on. Do not leave it floating.

Absolute Maximum Ratings (Note 1)

All Pins	6.0V
Power Dissipation, P_D @ $T_A=25^\circ\text{C}$, TSOT23-6	1.92W
Package Thermal Resistance (Note 2)	
θ_{JA}	52°C/W
θ_{JC}	32°C/W
Junction Temperature Range	150°C
Lead Temperature (Soldering, 10 sec.)	260°C
Storage Temperature Range	65°C to 150°C

Recommended Operating Conditions (Note 3)

IN	2.5V to 5.5V
OUT	2.5V to 5.5V
EN, FB	0V to $V_{OUT}+0.3V$
All other pins	0-5.5V
Junction Temperature Range	-40°C to 125°C
Ambient Temperature Range	-40°C to 85°C

Electrical Characteristics

($V_{IN}=3.0V$, $V_{OUT}=5.0V$, $I_{OUT}=500mA$, $T_A = 25^{\circ}C$ unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage	V_{IN}		2.5		5.5	V
Output Voltage Range	V_{OUT}		2.5		5.5	V
Quiescent Current	V_{IN}	$I_o=0A, V_{EN}=V_{IN}=3.0V$, $V_{OUT}=5.0V, V_{FB}=105\%V_{REF}$		8		μA
	V_{OUT}			32		μA
Shutdown Current	I_{SHDN}	$V_{EN}=0V, V_{IN}=3.0V$		0.1	1	μA
Linear Charge Current	I_{CHARGE}	$V_{OUT}<0.5V_{IN}$		1.5		A
Input Vin UVLO Threshold	V_{UVLO}				2.5	V
V_{IN} UVLO Hysteresis	V_{SYS}			0.1		V
EN Rising Threshold	V_{ENH}		1.2			V
EN Falling Threshold	V_{ENL}				0.4	V
Low Side Main FET R_{ON}	$R_{DS(ON)1}$	$V_{OUT}=5.0V$		50		$m\Omega$
Synchronous FET R_{ON}	$R_{DS(ON)2}$	$V_{OUT}=5.0V$		90		$m\Omega$
Synchronous FET Current Limit	I_{LIM}		3.0			A
Switching Frequency	F_{SW}			1.0		MHz
Feedback Reference Voltage	V_{REF}		1.182	1.2	1.218	V
Minimum on time	T_{ON_MIN}			80		ns
Minimum off time	T_{OFF_MIN}			80		ns
OUT pin OVP Protection				6.0		V
OUT pin OVP Hysteresis	OVP_{HYS}			0.25		V
Thermal Shutdown Temperature	T_{SD}			150		$^{\circ}C$
Thermal Shutdown Hysteresis	T_{HYS}			20		$^{\circ}C$

Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions may affect device reliability.







Note 2: θ_{JA} is measured in the natural convection at $T_A = 25^{\circ}C$ on a two-layer Silergy Evaluation Board.

Note 3: The device is not guaranteed to function outside its operating conditions.


Block Diagram

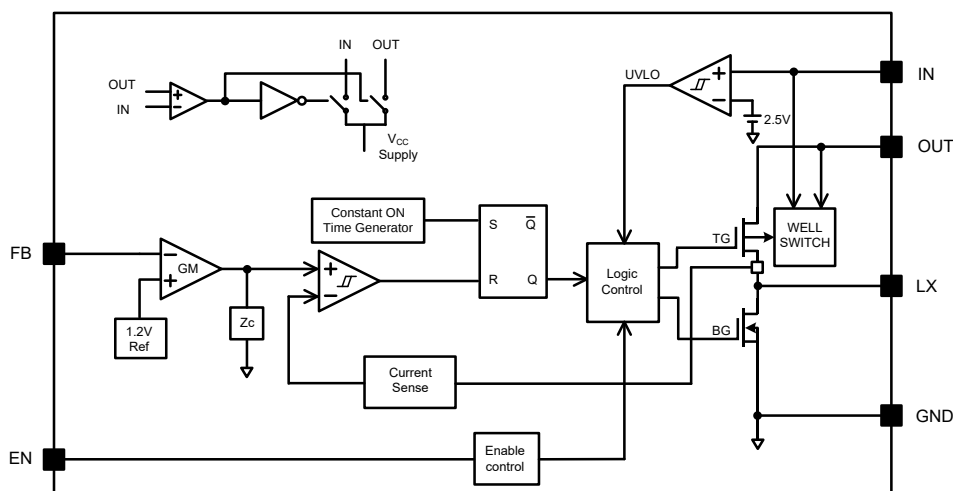

Typical Performance Characteristics

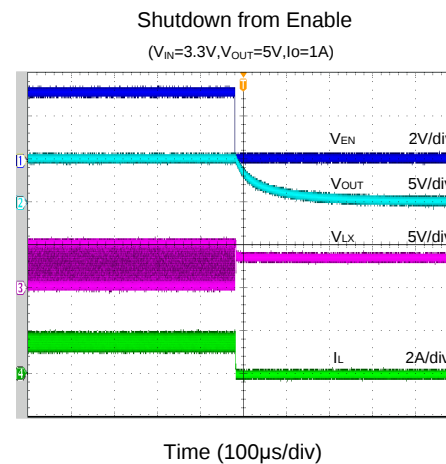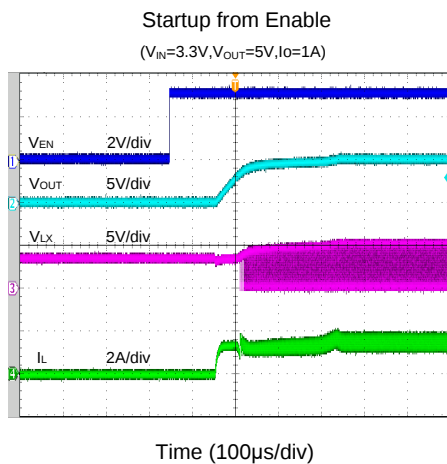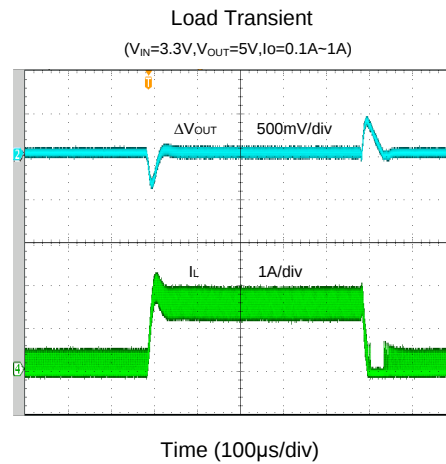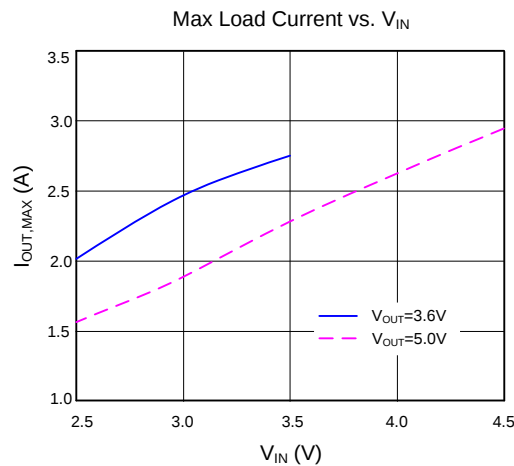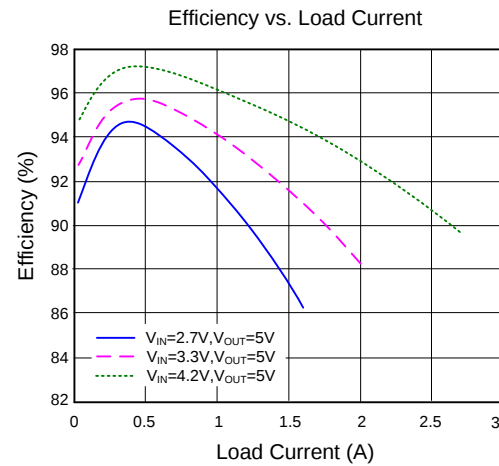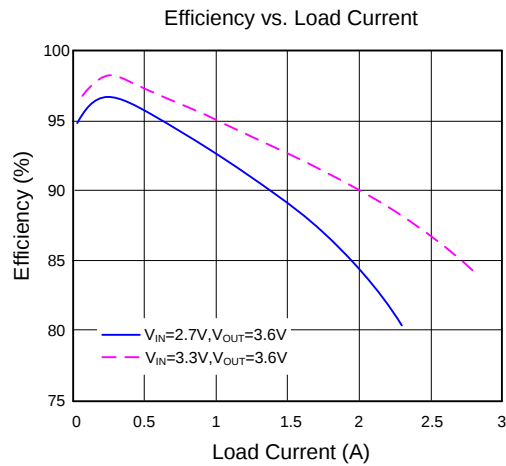


Short Circuit Protection
($V_{IN}=3.3V, V_{OUT}=5V, I_O$ to Short)

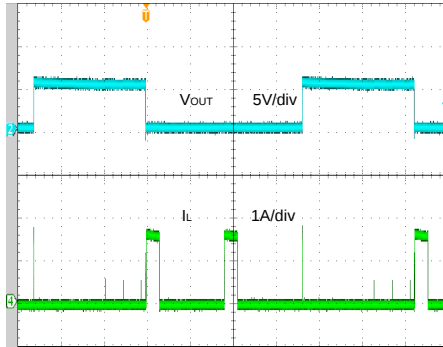


Time (20ms/div)

Short Circuit Protection
($V_{IN}=3.3V, V_{OUT}=5V, I_O=1A$ to Short)

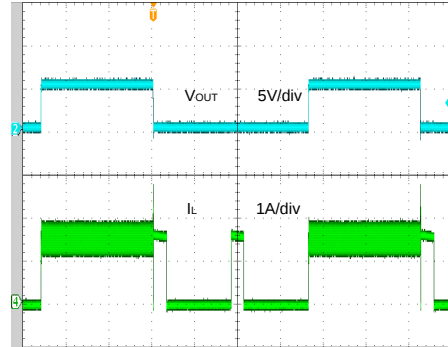


Time (20ms/div)

Seamless Transition: Boost Mode→Bypass Mode
($V_{IN}=3.3V\sim5.5V, V_{OUT}=5.0V, I_O=1.0A$)

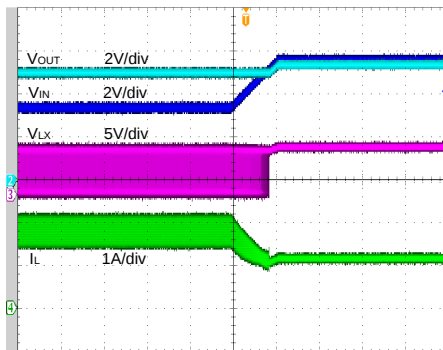

Time (10ms/div)


Seamless Transition: Bypass Mode→Boost Mode
($V_{IN}=5.5V\sim3.3V, V_{OUT}=5.0V, I_O=1.0A$)

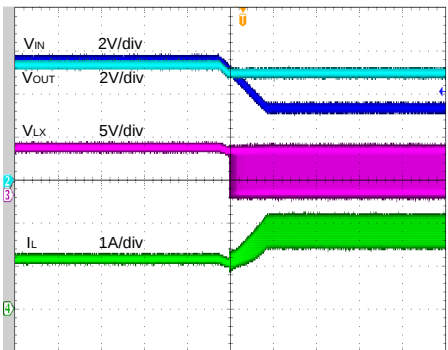

Time (10ms/div)

Output Ripple

($V_{IN}=3.3V, V_{OUT}=5V, I_O=1A$)

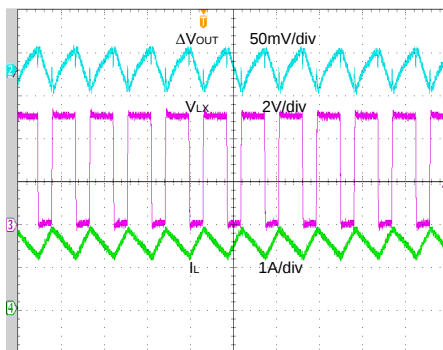


Time (1μs/div)

Applications Information

Because of the high integration for SY20489, only input capacitor C_{IN} , output capacitor C_{OUT} , inductor L and feedback resistors (R_H and R_L) need to be selected for the targeted applications specifications.

Feedback resistor dividers R_H and R_L :

Choose R_H and R_L to program the proper output voltage. To minimize the power consumption under light loads, it is desirable to choose large resistance values for both R_H and R_L . A value of between $10k\Omega$ and $1M\Omega$ is recommended for both resistors. If V_{OUT} is 5.0V, $R_H=470k\Omega$ is chosen, using following equation, then R_L can be calculated to be $148.4k\Omega$:

$$R_L = \frac{1.2V}{V_{OUT} - 1.2V} R_H$$


Input capacitor C_{IN} :

The ripple current through input capacitor is calculated as:




$$I_{CIN_RMS} = \frac{V_{IN} \times (V_{OUT} - V_{IN})}{2\sqrt{3} \times L \times F_{SW} \times V_{OUT}}$$

To minimize the potential noise problem, place a typical X5R or better grade ceramic capacitor really close to the IN and GND pins. Care should be taken to minimize the loop area formed by C_{IN} , and IN/GND pins. In this case, a $22\mu F$ low ESR ceramic capacitor is recommended.

Li-Ion battery hot plug consideration:

In the mass production stage, the Li-Ion Battery will always hot plug in between IC IN and GND pin. The hot plug may lead to large voltage spike and even lead to IC EOS fail. To avoid this potential risk, 1pcs $22\mu F$ ceramic cap serial with 0.1Ω resistor is recommended to absorb the input voltage spike.

With the recommended input absorb solution, the voltage spike can be reduced from 6.12V to 5.2V.

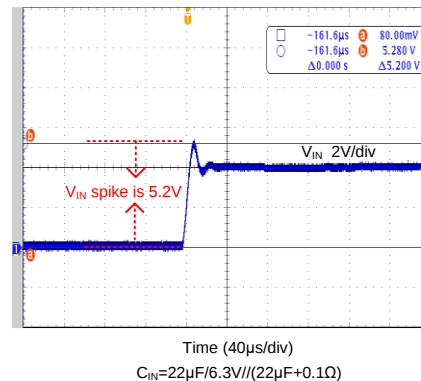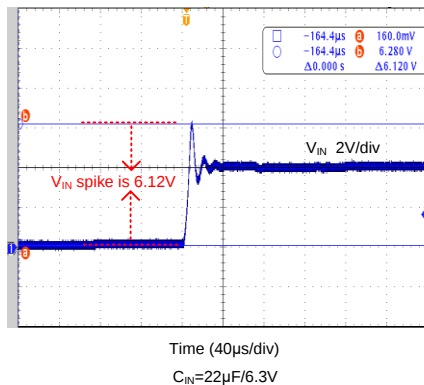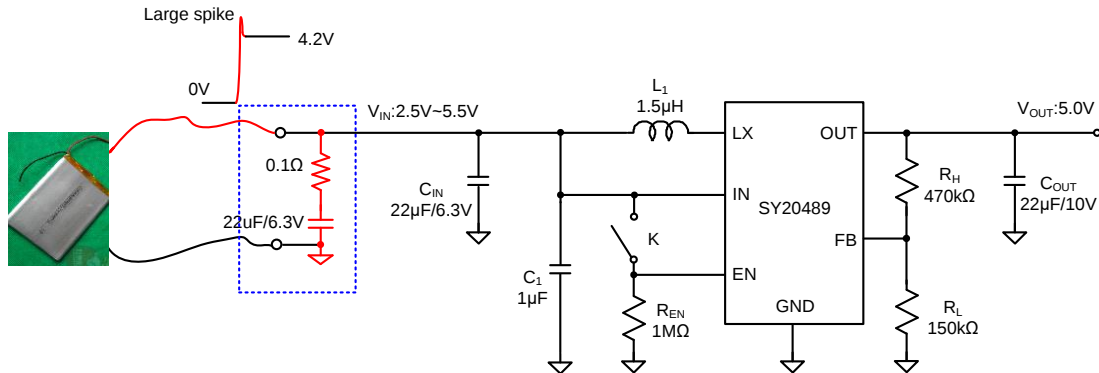

Output capacitor C_{OUT}:

The output capacitor is selected to handle the output ripple noise requirements. Both steady state ripple and transient requirements must be taken into consideration when selecting this capacitor. For the best performance, it is recommended to use X5R or better grade ceramic capacitor with 10V rating and greater than 22μF capacitance.

Output inductor L:

There are several considerations in choosing this inductor.

- 1) Choose the inductance to provide the desired ripple current. It is suggested to choose the ripple current to be about 40% of the maximum output current. The inductance is calculated as:

$$L = \left(\frac{V_{IN}}{V_{OUT}} \right)^2 \frac{(V_{OUT} - V_{IN})}{F_{SW} \times I_{OUT,MAX} \times 40\%}$$

where F_{SW} is the switching frequency and $I_{OUT,MAX}$ is the maximum load current.

The SY20489 regulator IC is quite tolerant of different ripple current amplitude. Consequently, the final choice of inductance can be slightly off the calculation value without significantly impacting the performance.

- 2) The saturation current rating of the inductor must be selected to be greater than the peak inductor current under full load conditions.

$$I_{SAT,MIN} > \left(\frac{V_{OUT}}{V_{IN}} \right) \times I_{OUT,MAX} + \frac{V_{IN}}{V_{OUT}} \frac{(V_{OUT} - V_{IN})}{2 \times F_{SW} \times L}$$

- 3) The DCR of the inductor and the core loss at the switching frequency must be low enough to achieve the desired efficiency requirement. It is

desirable to choose an inductor with $DCR < 50m\Omega$ to achieve a good overall efficiency.


Enable Operation

Pulling the EN pin low ($< 0.4V$) will shut down the device. During shutdown mode, the SY20489 shutdown current drops to lower than 1μA. Driving the EN pin high ($> 1.2V$) will turn on the IC again.


Layout Design:

To achieve a higher efficiency and better noise immunity, following components should be placed close to the IC: C_{IN} , C_{OUT} , L , R_H and R_L .


- 1) It is desirable to maximize the PCB copper area connecting to GND pin to achieve the best thermal and noise performance. If the board space allowed, a ground plane is highly desirable. GND pin is recommended to connect to exposed paddle directly. Reasonable via holes are recommended to be placed under the exposed paddle for the better performance consideration.
- 2) For boost converter, the output current is discontinuous. So the loop area formed by C_{OUT} , OUT and GND must be minimized.
- 3) The decoupling capacitor of IN to GND C_{IN} must be placed as close as possible with IN pin.
- 4) The PCB copper area associated with LX pin must be minimized to improve the noise immunity.
- 5) The components R_H , R_L and the trace connecting to the FB pin must NOT be adjacent to the LX node on the PCB layout to minimize the noise coupling to FB pin.

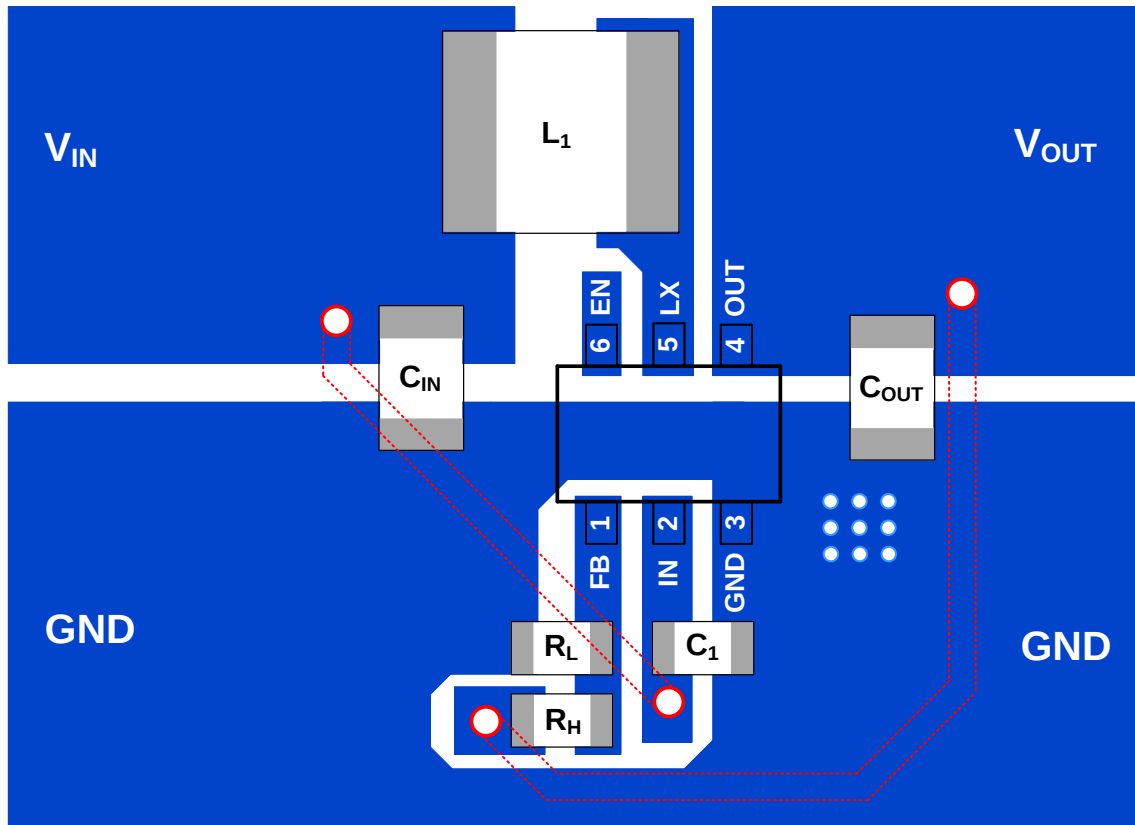

TSOT23-6 Package outline & PCB layout

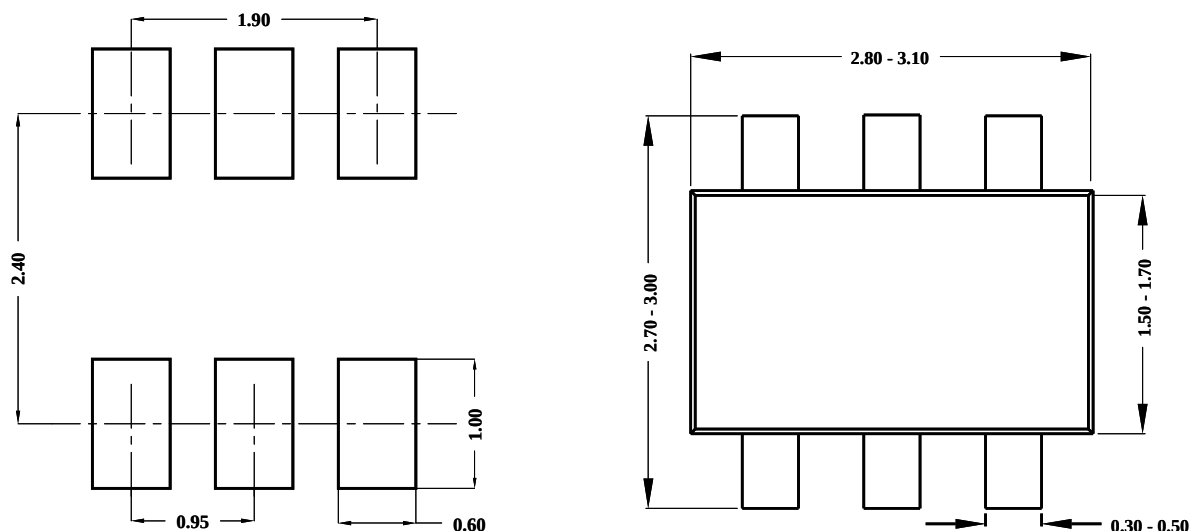

Recommended Pad Layout

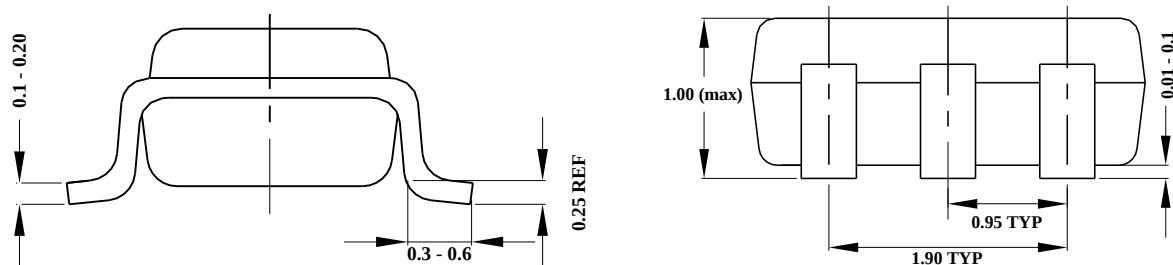


Notes: **All dimensions are in millimeters**
All dimensions don't include mold flash & metal burr


Taping & Reel Specification

1. Taping orientation

TSOT23-6

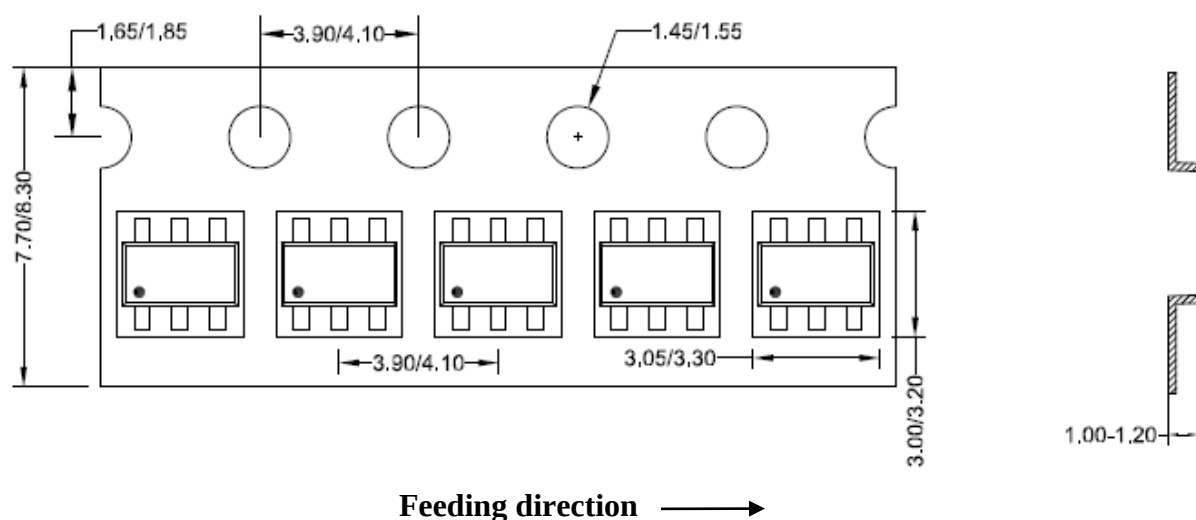

2. Carrier Tape & Reel specification for packages

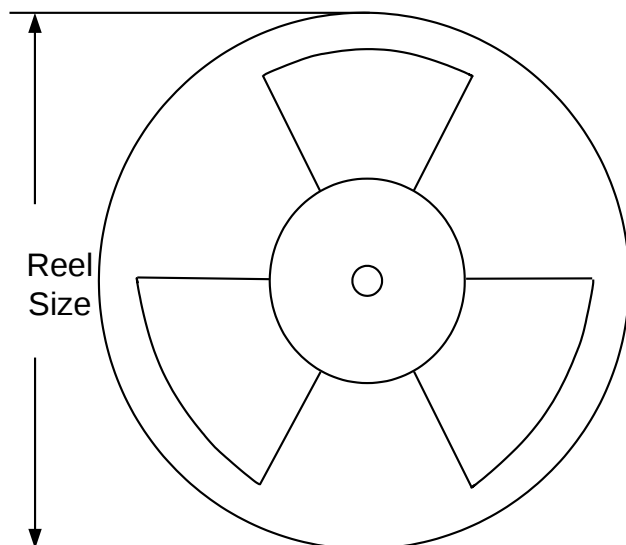

Package type	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer length(mm)	Leader length (mm)	Qty per reel
TSOT23-6	8	4	7	400	160	3000

3. Others: NA

IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.

2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.

3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.

4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.

6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2018 Silergy Corp.

All Rights Reserved.