


Single channel high-side switch with current sense



Product status link

[IPS1024H](#)

Product label



Features

- $R_{ON(Max.)} (@T_J = 25\text{ }^{\circ}\text{C}) = 12\text{ m}\Omega$
- Very low standby current
- 3.3 V CMOS compatible inputs
- Optimized electromagnetic emission
- Very low electromagnetic susceptibility
- Proportional load current sense
- Very low current sense leakage
- High current sense precision for wide range currents
- Current sense disable
- Undervoltage shutdown
- Overvoltage clamp
- Load current limitation
- Self limiting of fast thermal transients
- Protection against loss of ground and loss of VCC
- Designed to drive DC-13 loads according to EN 60947-5-1
- Designed to meet IEC 61131-2, IEC 61000-4-2, IEC 61000-4-4, IEC 61000-4-5
- PowerSSO-24 package

Applications

- Programmable logic control
- Industrial PC peripheral input/output
- Numerical control machines
- Suitable as LED driver
- General high-side switch applications

Description

The **IPS1024H** is a monolithic device made using STMicroelectronics VIPower technology, intended for driving resistive, inductive and capacitive loads with one side connected to the ground. Active VCC pin voltage clamp protects the device against low energy spikes.

The device integrates an analog current sense, which delivers a current proportional to the load current (according to a known ratio) when CS_DIS is driven low or left open. The sensed current of output channel is available on the current sense pin.

When CS_DIS is driven high, the current sense pin is in a high impedance condition.

In case of overtemperature, fault condition is reported via the current sense pin.

Output current limitation protects the device in overload conditions. In case of long overload duration, the device limits the dissipated power to safe level up to thermal shutdown intervention.

Thermal shutdown with automatic restart allows the device to recover normal operation as soon as fault condition disappears.

1 Block diagram and pin description

Figure 1. Block diagram

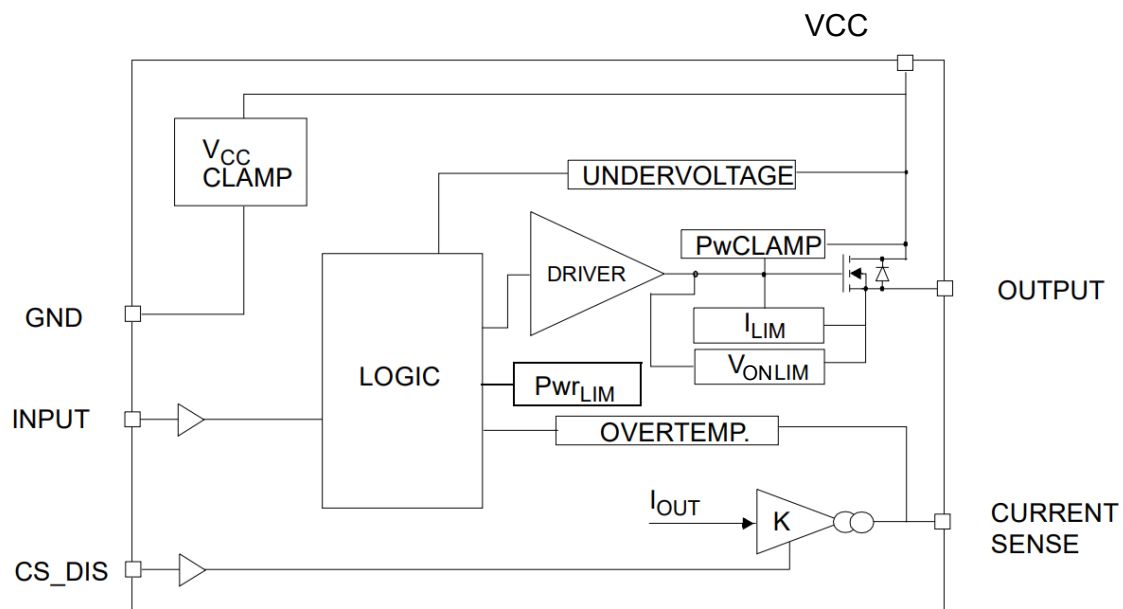
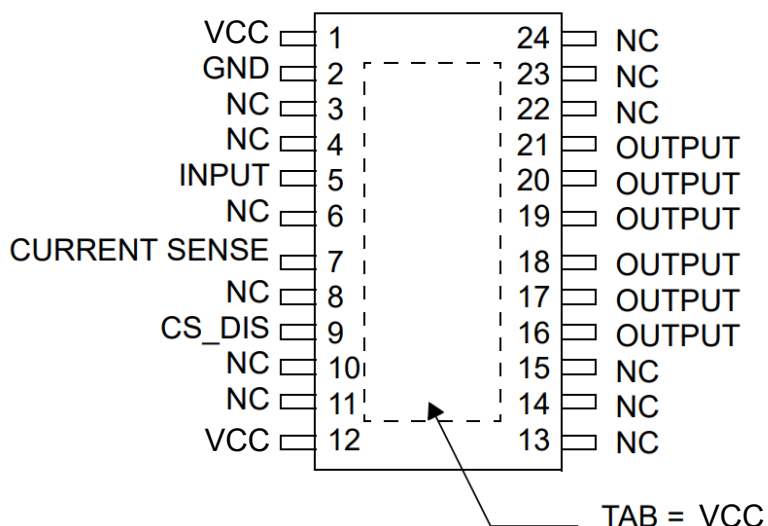


Table 1. Pin function

Pin	Name	Type	Function
1, 12, TAB	VCC	Supply	Power supply
2	GND	Supply	Ground connection
3, 4, 6, 8, 10, 11, 13, 14, 15, 22, 23, 24	NC	-	Not connected
5	INPUT	Logic input	Voltage controlled input pin with hysteresis, CMOS compatible. It controls output switch state
7	CURRENT SENSE	Analog output	Analog current sense pin. It delivers a current proportional to the load current
9	CS_DIS	Logic input	Active high CMOS compatible pin, to disable the current sense pin
16 to 21	OUTPUT	Analog output	Power output

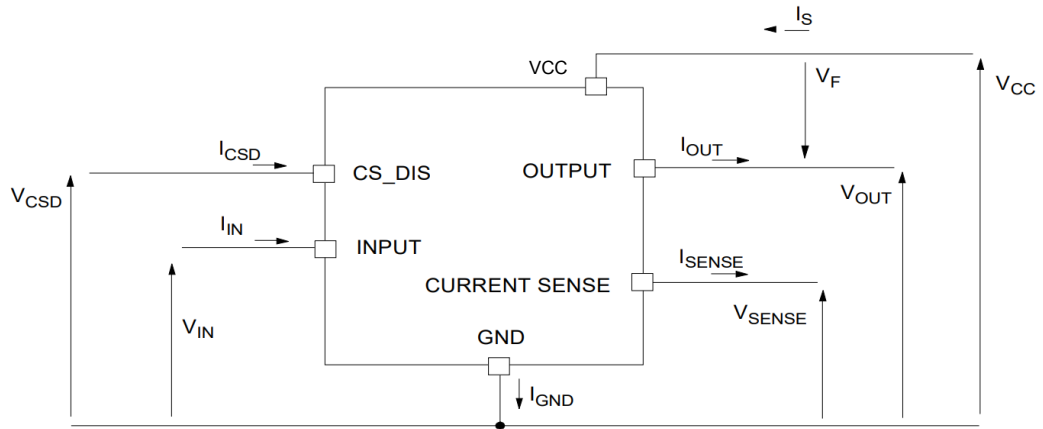
Figure 2. Configuration diagram PowerSSO-24 (top view)

Table 2. Suggested connections for unused and not connected pins

Connection/pin	Current Sense	NC	Output	Input	CS_DIS
Floating	Not Recommended	X	X	X	X
To ground	Through 1 kΩ resistor	X	Not Recommended	Through 10 kΩ resistor	Through 10 kΩ resistor

Note: X = don't care.

2 Electrical specification

Figure 3. Current and voltage conventions



Note: $V_F = V_{OUT} - V_{CC}$ during reverse polarity condition.

2.1 Absolute maximum ratings

Stressing the device above the ratings listed in the Table 3 may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the operating sections of this specification is not implied. Exposure to the conditions reported in this section for extended periods may affect device reliability.

Table 3. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CC}	DC supply voltage	41	V
$-V_{CC}$	Reverse DC supply voltage	0.3	V
$-I_{GND}$	DC reverse ground pin current	200	mA
I_{OUT}	DC output current	Internally limited	A
$-I_{OUT}$	Reverse DC output current	30	A
I_{IN}	DC input current	-1 to 10	mA
I_{CSD}	DC current sense disable input current	-1 to 10	mA
$-I_{SENSE}$	DC reverse CS pin current	200	mA
V_{SENSE}	Current sense maximum voltage	V_{DEMAG} to V_{CC}	V
E_{MAX}	Maximum switching energy $L = 1.25$ mH; $R_L = 0$ Ω ; $V_{CC} = 13.5$ V; $T_{jstart} = 150$ $^{\circ}$ C; $I_{OUT} = I_{limL}(Typ.)$	508	mJ
V_{ESD}	Electrostatic discharge (human body model: $R = 1.5$ k Ω , $C = 100$ pF)	INPUT	4000
		CURRENT SENSE	2000
		CS_DIS	4000
		OUTPUT	5000
		VCC	5000

Symbol	Parameter	Value	Unit
T_J	Junction operating temperature	-40 to 150	°C
T_{STG}	Storage temperature	-55 to 150	°C

2.2 Thermal data

Table 4. Thermal data

Symbol	Parameter	Max. Value	Unit
R_{thJC}	Thermal resistance, junction-to-case	0.4	°C/W
R_{thJA}	Thermal resistance, junction-to-ambient	See Figure 31	°C/W

2.3

Electrical characteristics

8 V < V_{CC} < 36 V, -40 °C < T_J < 150 °C, unless otherwise specified.

Table 5. Power section

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V _{CC}	Operating supply voltage		4.5		36	V
V _{USD}	Undervoltage shutdown			3.5	4.5	V
V _{USDhyst}	Undervoltage shutdown hysteresis			0.5		V
R _{ON}	On-state resistance	I _{OUT} = 5 A, T _J = 25 °C			12	mΩ
		I _{OUT} = 5 A, T _J = 150 °C			24	
		I _{OUT} = 5 A, T _J = 25 °C, V _{CC} = 5 V			16	
V _{clamp}	Clamp voltage	I _S = 20 mA	41	46	52	V
I _{LGND}	Output current at GND disconnection	V _{CC} = V _{IN} = V _{GND} = 24 V; V _{OUT} = 0 V			0.5	mA
I _S	Supply current	Off-state, V _{CC} = 13 V, T _J = 25 °C, V _{IN} = V _{OUT} = V _{SENSE} = V _{CSD} = 0 V,		2 ⁽¹⁾	5 ⁽¹⁾	μA
		On-state, V _{CC} = 13 V, V _{IN} = 5 V, I _{OUT} = 0 A		1.5	3	mA
I _{L(off)}	Off-state output current	V _{IN} = V _{OUT} = 0 V, V _{CC} = 13 V, T _J = 25 °C	0	0.01	3	μA
		V _{IN} = V _{OUT} = 0 V, V _{CC} = 13 V, T _J = 125 °C	0		5	
V _F	Output - V _{CC} diode voltage	-I _{OUT} = 8 A, T _J = 150 °C			0.7	V

1. Power MOSFET leakage included.

Table 6. Switching (V_{CC} = 13 V, T_J = 25 °C)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
t _{d(on)}	Turn-on delay time	R _L = 2.6 Ω (see Figure 8)		30		μs
t _{d(off)}	Turn-off delay time	R _L = 2.6 Ω (see Figure 8)		55		μs
(dV _{OUT} /dt) _(on)	Turn-on voltage slope	R _L = 2.6 Ω	see Figure 21			V/μs
(dV _{OUT} /dt) _(off)	Turn-off voltage slope	R _L = 2.6 Ω	see Figure 22			V/μs
W _{ON}	Switching energy losses during t _{won}	R _L = 2.6 Ω (see Figure 8)		1.2		mJ
W _{OFF}	Switching energy losses during t _{woff}	R _L = 2.6 Ω (see Figure 8)		0.7		mJ

Table 7. Logic inputs

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V _{IL}	INPUT pin low level voltage				0.9	V
I _{IL}	INPUT pin low level current	V _{IN} = 0.9 V	1			μA
V _{IH}	INPUT pin high level voltage		2.1			V
I _{IH}	INPUT pin high level current	V _{IN} = 2.1 V			10	μA
V _{I(hyst)}	INPUT pin hysteresis voltage		0.25			V

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{ICL}	INPUT pin clamp voltage	$I_{IN} = 1 \text{ mA}$	5.5		7	V
		$I_{IN} = -1 \text{ mA}$		-0.7		
V_{CSDL}	CS_DIS pin low level voltage				0.9	V
I_{CSDL}	CS_DIS pin low level current	$V_{CSD} = 0.9 \text{ V}$	1			μA
V_{CSDH}	CS_DIS pin high level voltage		2.1			V
I_{CSDH}	CS_DIS pin high level current	$V_{CSD} = 2.1 \text{ V}$			10	μA
$V_{CSD(hyst)}$	CS_DIS pin hysteresis voltage		0.25			V
V_{CSCL}	CS_DIS pin clamp voltage	$I_{CSD} = 1 \text{ mA}$	5.5		7	V
		$I_{CSD} = -1 \text{ mA}$		-0.7		V

Table 8. Protections and diagnostics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{limH}	DC short circuit current	$V_{CC} = 13 \text{ V}$	45	65	90	A
		$5 \text{ V} < V_{CC} < 36 \text{ V}$			90	
I_{limL}	Short circuit current during thermal cycling	$V_{CC} = 13 \text{ V}, T_R < T_J < T_{TSD}$		24		A
T_{TSD}	Shutdown temperature		150	175	200	$^{\circ}\text{C}$
T_R	Reset temperature		$T_{RS} + 1$	$T_{RS} + 5$		$^{\circ}\text{C}$
T_{RS}	Thermal reset status threshold ⁽¹⁾		135			$^{\circ}\text{C}$
T_{HYST}	Thermal hysteresis ($T_{TSD} - T_R$)			7		$^{\circ}\text{C}$
V_{DEMAG}	Turn-off output voltage clamp	$I_{OUT} = 2 \text{ A}, V_{IN} = 0 \text{ V}, L = 6 \text{ mH}$	$V_{CC} - 41$	$V_{CC} - 46$	$V_{CC} - 52$	V
V_{ON}	Output voltage drop limitation	$I_{OUT} = 0.5 \text{ A}, T_J = -40 \text{ }^{\circ}\text{C}$ to $150 \text{ }^{\circ}\text{C}$ (see Figure 9)		25		mV

1. See Section 3.3: Thermal shutdown for details.

Table 9. Current sense ($8 \text{ V} < V_{CC} < 16 \text{ V}$)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
K_0	I_{OUT}/I_{SENSE}	$I_{OUT} = 0.25 \text{ A}, V_{SENSE} = 0.5 \text{ V}, V_{CSD} = 0 \text{ V}; T_J = -40 \text{ }^{\circ}\text{C}$ to $150 \text{ }^{\circ}\text{C}$	3090	5080	7070	
K_1	I_{OUT}/I_{SENSE}	$I_{OUT} = 5 \text{ A}, V_{SENSE} = 0.5 \text{ V}, V_{CSD} = 0 \text{ V}; T_J = -40 \text{ }^{\circ}\text{C}$	3590	4480	5370	
		$I_{OUT} = 5 \text{ A}, V_{SENSE} = 0.5 \text{ V}, V_{CSD} = 0 \text{ V}; T_J = 25 \text{ }^{\circ}\text{C}$ to $150 \text{ }^{\circ}\text{C}$	3790	4480	5170	
$dK_1/K_1^{(1)}$	Current sense ratio drift	$I_{OUT} = 5 \text{ A}, V_{SENSE} = 0.5 \text{ V}, V_{CSD} = 0 \text{ V}; T_J = -40 \text{ }^{\circ}\text{C}$ to $150 \text{ }^{\circ}\text{C}$	-8		8	%
K_2	I_{OUT}/I_{SENSE}	$I_{OUT} = 10 \text{ A}, V_{SENSE} = 4 \text{ V}, V_{CSD} = 0 \text{ V}; T_J = -40 \text{ }^{\circ}\text{C}$	4080	4510	4980	
		$I_{OUT} = 10 \text{ A}, V_{SENSE} = 4 \text{ V}, T_J = 25 \text{ }^{\circ}\text{C}$ to $150 \text{ }^{\circ}\text{C}$	4160	4510	4860	

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$dK_2/K_2^{(1)}$	Current sense ratio drift	$I_{OUT} = 10\text{ A}$, $V_{SENSE} = 4\text{ V}$, $V_{CSD} = 0\text{ V}$; $T_J = -40\text{ }^\circ\text{C}$ to $150\text{ }^\circ\text{C}$	-5		5	%
K_3	I_{OUT}/I_{SENSE}	$I_{OUT} = 25\text{ A}$, $V_{SENSE} = 4\text{ V}$, $V_{CSD} = 0\text{ V}$; $T_J = -40\text{ }^\circ\text{C}$	4420	4600	4780	
		$I_{OUT} = 25\text{ A}$, $V_{SENSE} = 4\text{ V}$, $V_{CSD} = 0\text{ V}$; $T_J = 25\text{ }^\circ\text{C}$ to $150\text{ }^\circ\text{C}$	4460	4600	4740	
$dK_3/K_3^{(1)}$	Current sense ratio drift	$I_{OUT} = 25\text{ A}$, $V_{SENSE} = 4\text{ V}$, $V_{CSD} = 0\text{ V}$; $T_J = -40\text{ }^\circ\text{C}$ to $150\text{ }^\circ\text{C}$	-4		4	%
I_{SENSE0}	Analog sense leakage current	$I_{OUT} = 0\text{ A}$, $V_{SENSE} = 0\text{ V}$, $V_{CSD} = 5\text{ V}$, $V_{IN} = 0\text{ V}$, $T_J = -40\text{ }^\circ\text{C}$ to $150\text{ }^\circ\text{C}$	0		1	μA
		$I_{OUT} = 0\text{ A}$, $V_{SENSE} = 0\text{ V}$, $V_{CSD} = 0\text{ V}$, $V_{IN} = 5\text{ V}$, $T_J = -40\text{ }^\circ\text{C}$ to $150\text{ }^\circ\text{C}$	0		2	
		$I_{OUT} = 2\text{ A}$, $V_{SENSE} = 0\text{ V}$, $V_{CSD} = 5\text{ V}$, $V_{IN} = 5\text{ V}$, $T_J = -40\text{ }^\circ\text{C}$ to $150\text{ }^\circ\text{C}$	0		1	
I_{OL}	Openload on-state current detection threshold	$V_{IN} = 5\text{ V}$, $I_{SENSE} = 5\text{ }\mu\text{A}$	10		45	mA
V_{SENSE}	Max. analog sense output voltage	$I_{OUT} = 15\text{ A}$, $V_{CSD} = 0\text{ V}$	5			V
V_{SENSEH}	Analog sense output voltage in over temperature condition	$V_{CC} = 13\text{ V}$, $R_{SENSE} = 2.2\text{ k}\Omega$		9		V
I_{SENSEH}	Analog sense output current in over temperature condition	$V_{CC} = 13\text{ V}$, $V_{SENSE} = 5\text{ V}$		8		mA
$t_{DSENSE1H}$	Delay response time from falling edge of CS_DIS pin	$V_{SENSE} < 4\text{ V}$, $1.5\text{ A} < I_{OUT} < 25\text{ A}$, $I_{SENSE} = 90\%$ of $I_{SENSE\text{ max}}$ (see Figure 4)		50	100	μs
$t_{DSENSE1L}$	Delay response time from rising edge of CS_DIS pin	$V_{SENSE} < 4\text{ V}$, $1.5\text{ A} < I_{OUT} < 25\text{ A}$, $I_{SENSE} = 10\%$ of $I_{SENSE\text{ max}}$ (see Figure 4)		5	20	μs
$t_{DSENSE2H}$	Delay response time from rising edge of INPUT pin	$V_{SENSE} < 4\text{ V}$, $1.5\text{ A} < I_{OUT} < 25\text{ A}$, $I_{SENSE} = 90\%$ of $I_{SENSE\text{ max}}$ (see Figure 4)		270	400	μs
$\Delta t_{DSENSE2H}$	Delay response time between rising edge of output current and rising edge of current sense	$V_{SENSE} < 4\text{ V}$, $I_{SENSE} = 90\%$ of $I_{SENSE\text{ max}}$, $I_{OUT} = 90\%$ of $I_{OUT\text{ max}}$, $I_{OUT\text{ max}} = 5\text{ A}$ (see Figure 5)			300	μs
$t_{DSENSE2L}$	Delay response time from falling edge of INPUT pins	$V_{SENSE} < 4\text{ V}$, $1.5\text{ A} < I_{OUT} < 25\text{ A}$, $I_{SENSE} = 10\%$ of $I_{SENSE\text{ max}}$ (see Figure 4)		100	250	μs

1. Specified by design, not tested in production.

Figure 4. Current sense delay characteristics

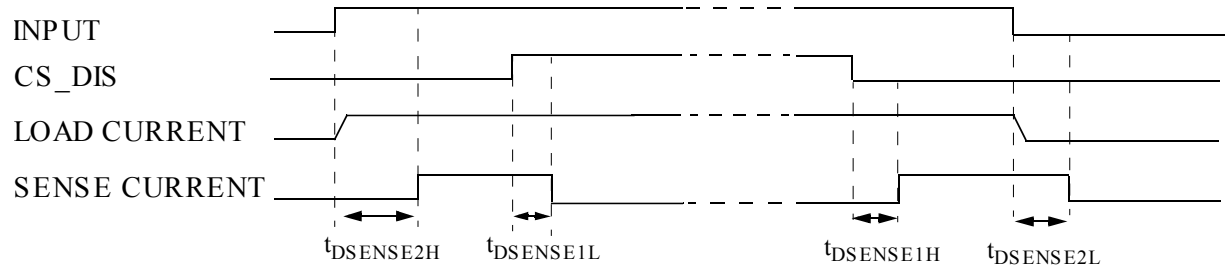


Figure 5. Delay response time between rising edge of output current and rising edge of current sense (current sense enabled)

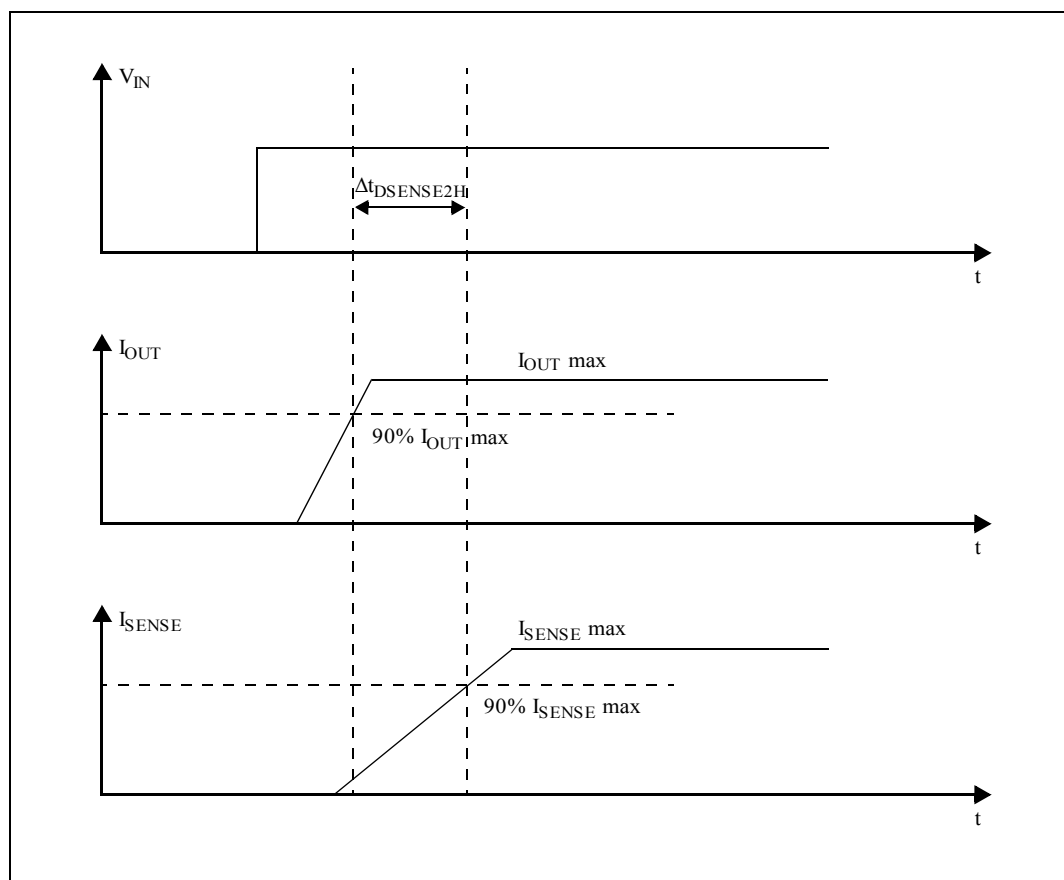


Figure 6. I_{OUT}/I_{SENSE} vs I_{OUT}

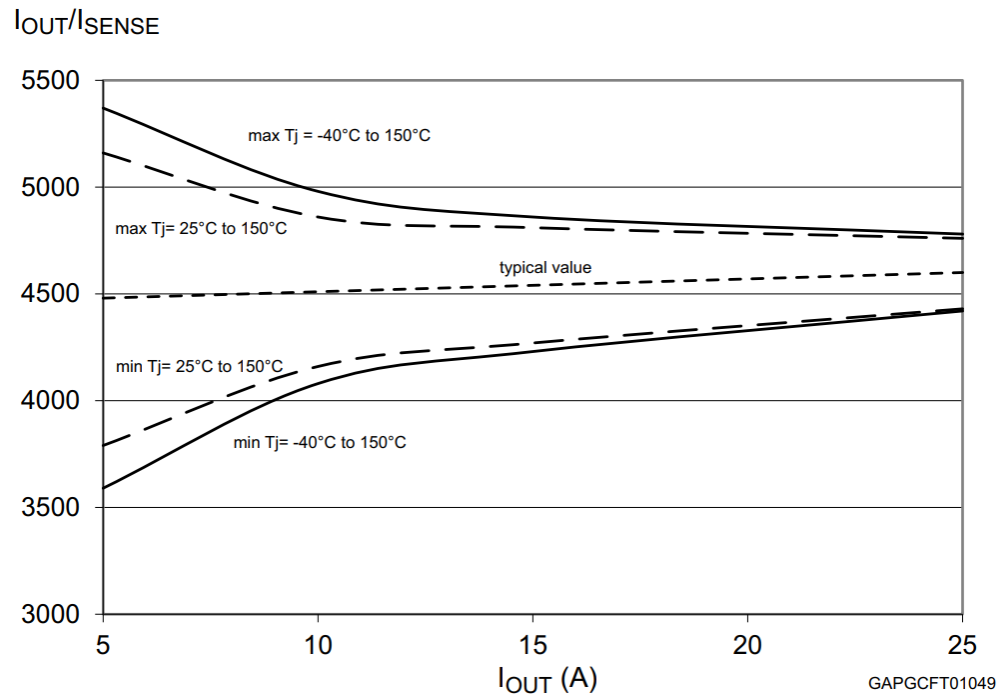


Figure 7. Maximum current sense ratio drift vs load current

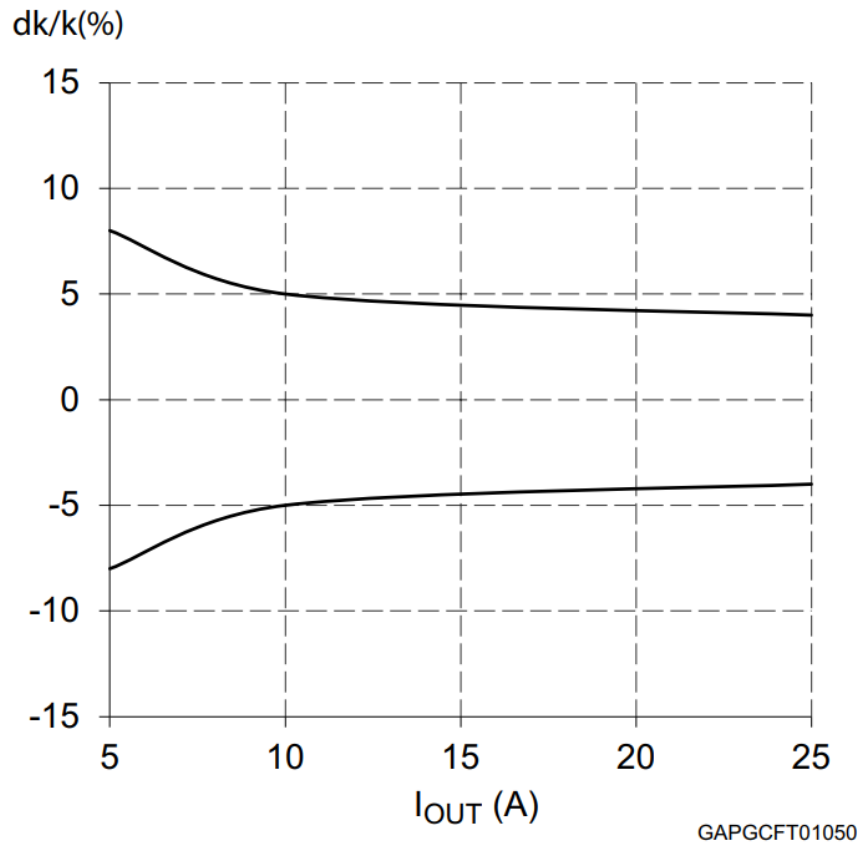


Table 10. Functional table

Device status	INPUT _x	OUTPUT _x	SENSE (V _{CSD} =0 V) ⁽¹⁾
Normal operation	L	L	0
	H	H	Nominal
Overtemperature	L	L	0
	H	L	V _{SENSEH}
Undervoltage	L	L	0
	H	L	0
Short circuit to GND (R _{sc} ≤ 10 mΩ)	L	L	0
	H	L	0 if T _j < T _{TSD}
	H	L	V _{SENSEH} if T _j > T _{TSD}
Short circuit to V _{CC}	L	H	0
	H	H	< Nominal
Negative output voltage clamp	L	Negative	0

1. If the V_{CSD} is high, the SENSE output is at a high impedance, its potential depends on leakage currents and external circuit.

Figure 8. Switching characteristics

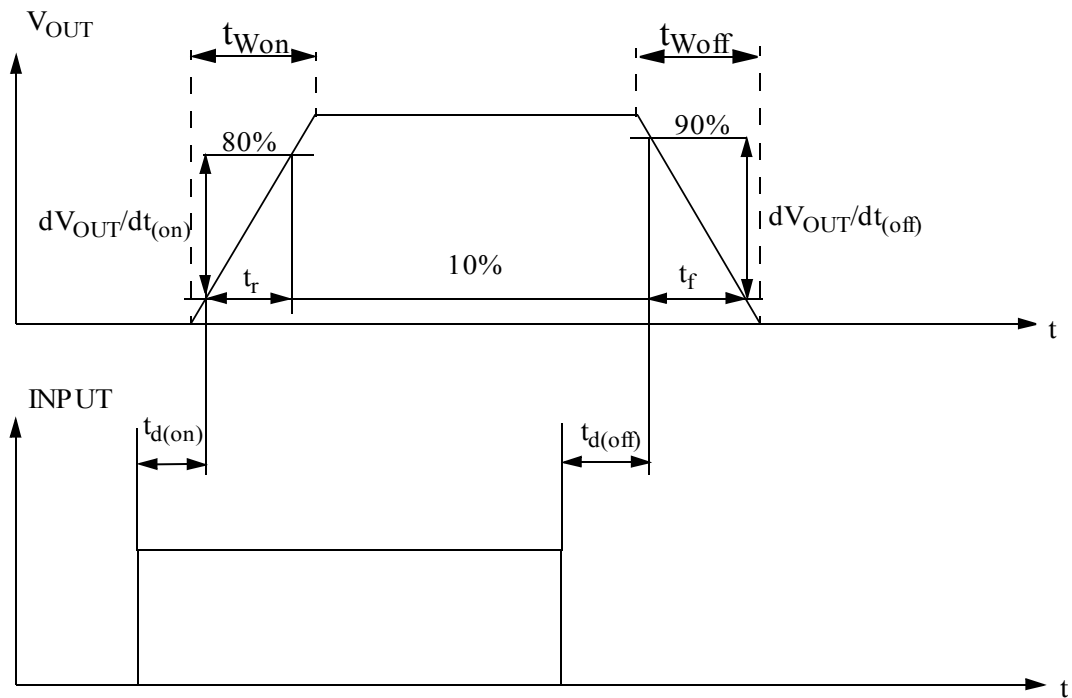


Figure 9. Output voltage drop limitation


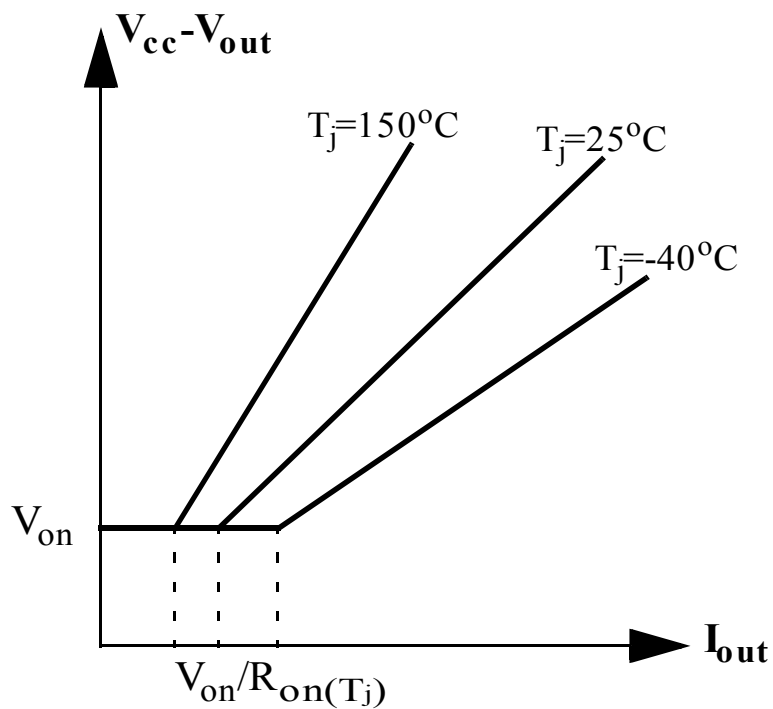


Figure 10. Waveforms

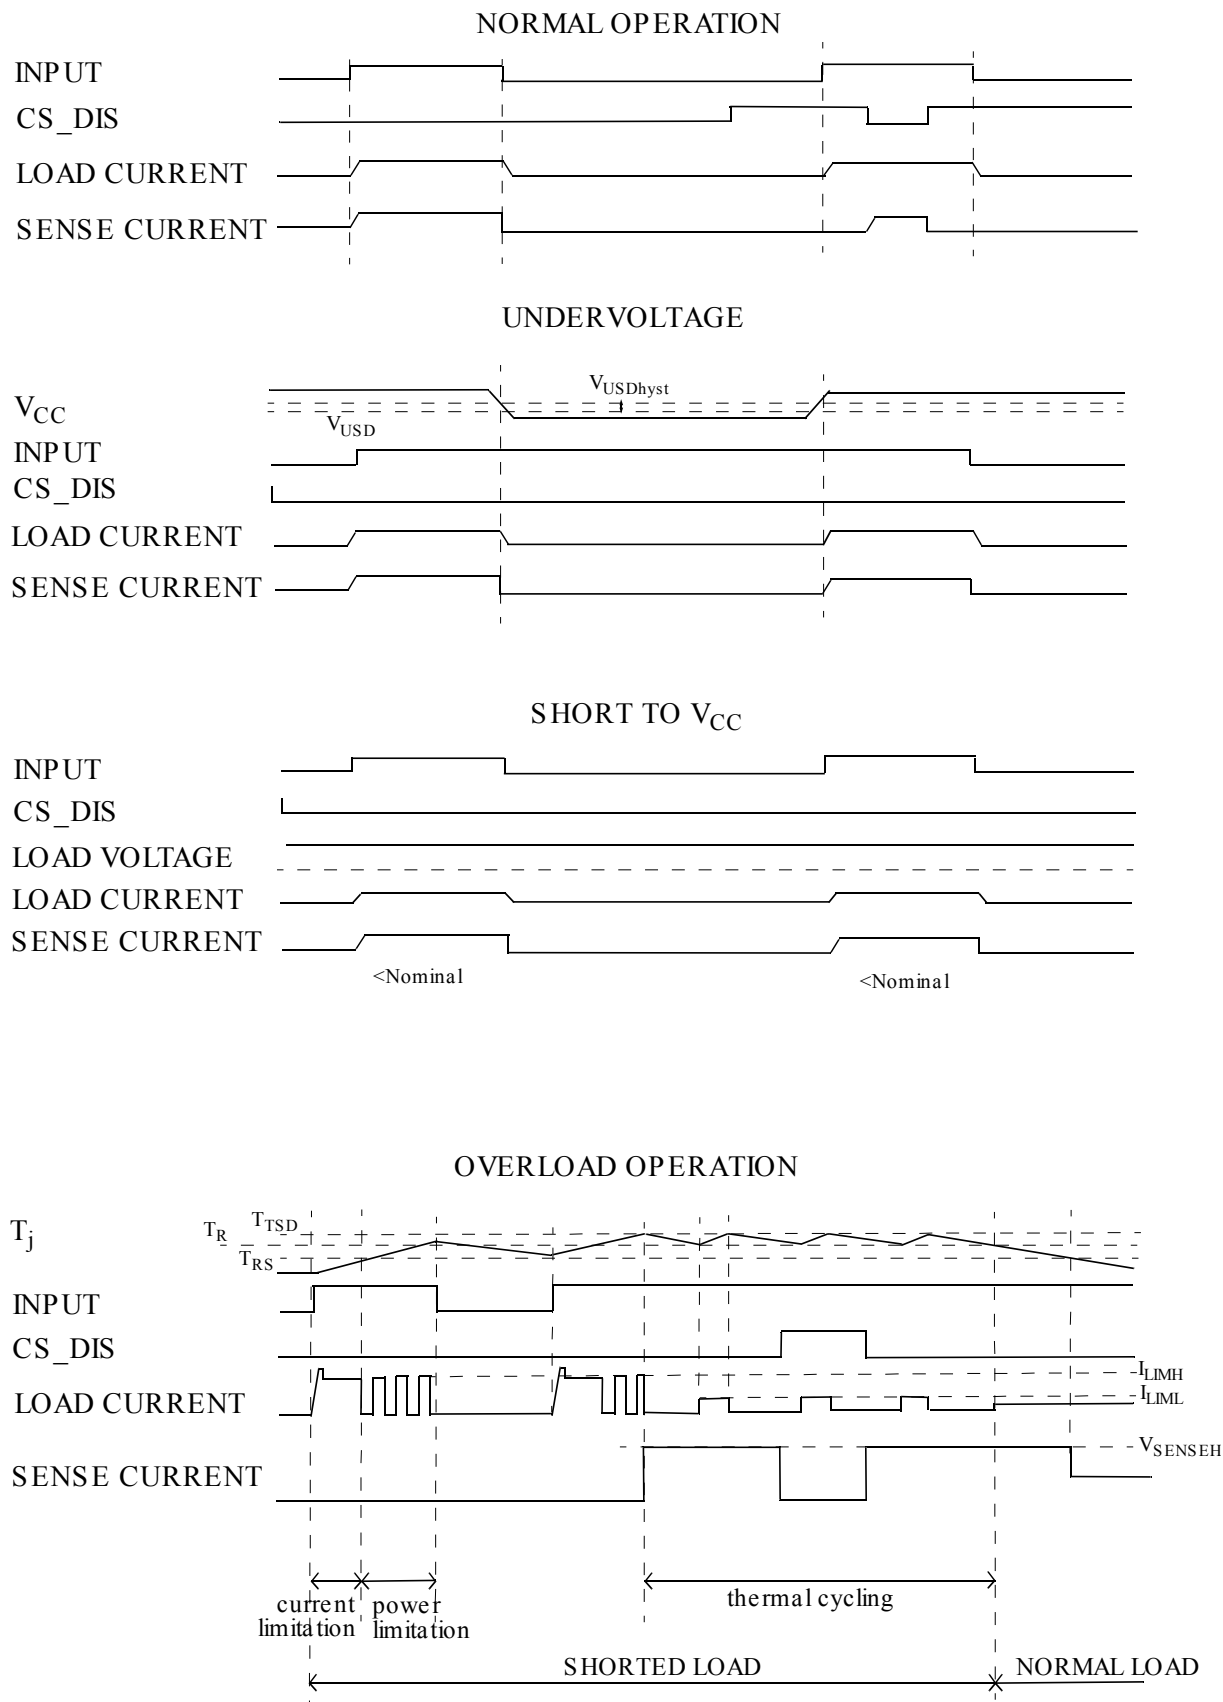

2.4 Electrical characteristics (curves)

Figure 11. Off-state output current

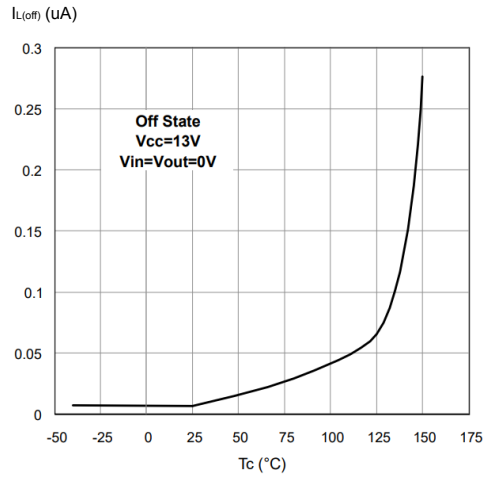


Figure 12. High level input current

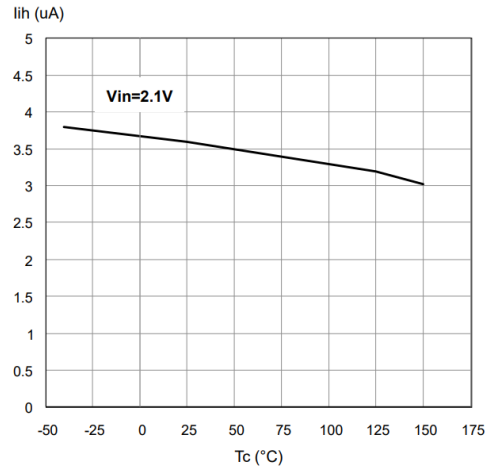


Figure 13. Input clamp voltage

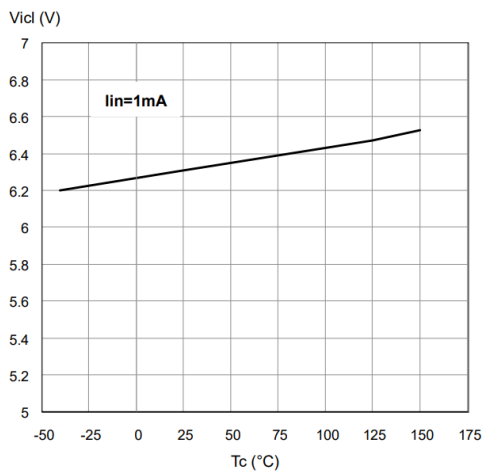


Figure 14. Input high level voltage

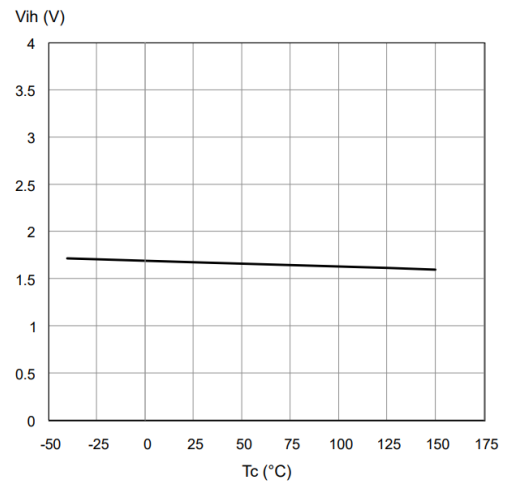


Figure 15. Input low level voltage

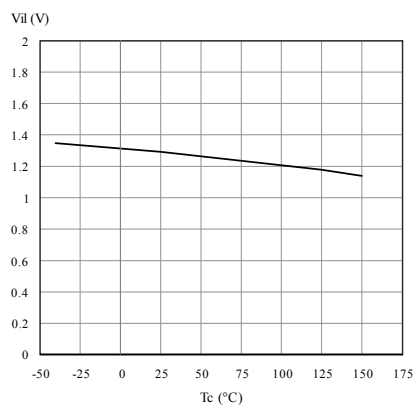


Figure 16. Input hysteresis voltage

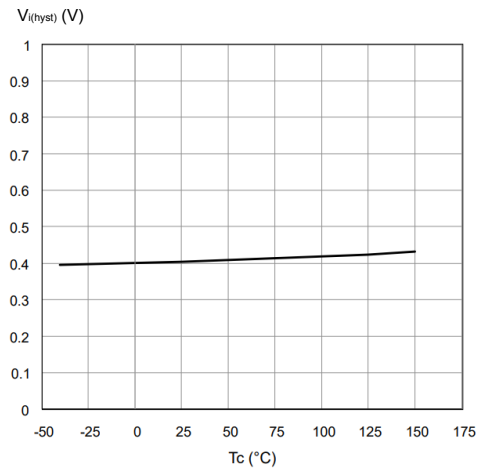


Figure 17. On-state resistance vs T_{CASE}

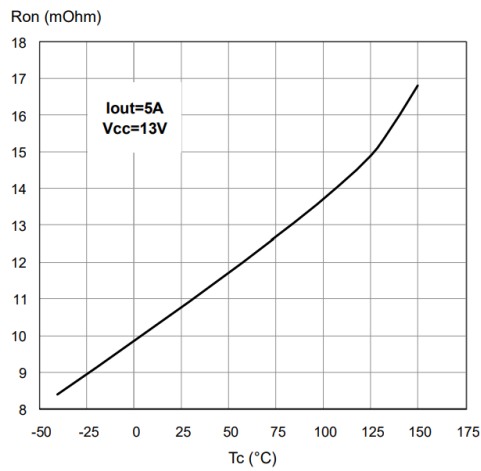


Figure 18. On-state resistance vs V_{CC}

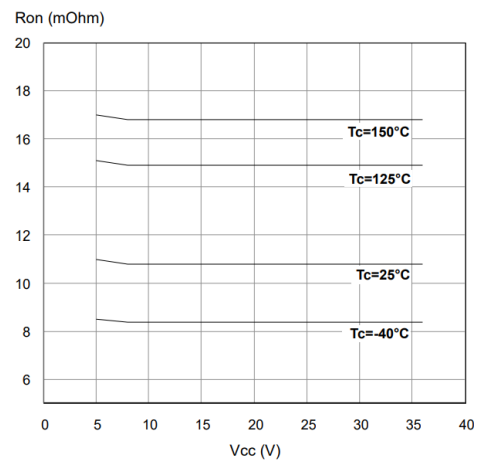


Figure 19. Undervoltage shutdown

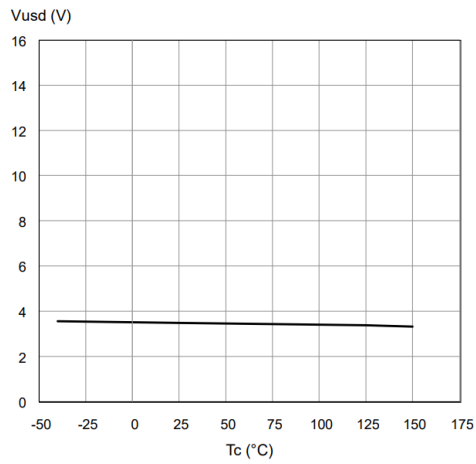


Figure 20. I_{limH} vs T_{CASE}

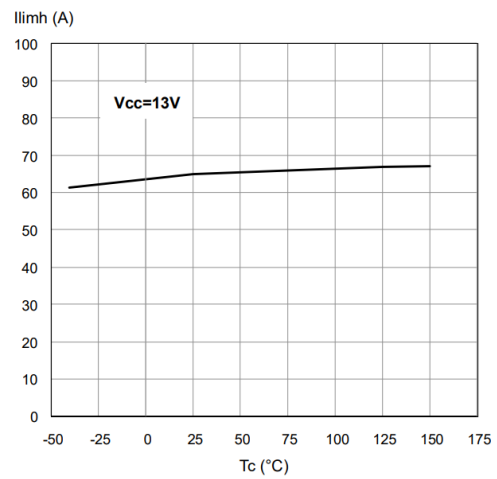


Figure 21. Turn-on voltage slope

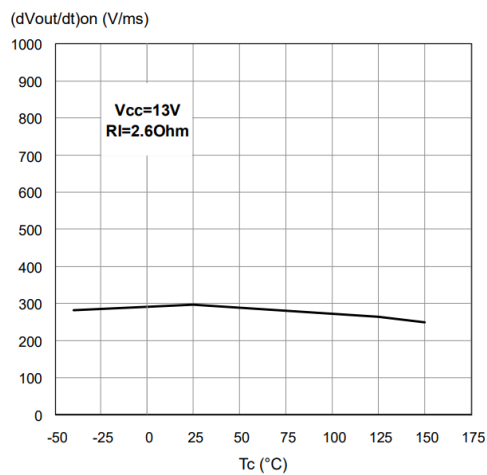


Figure 22. Turn-off voltage slope

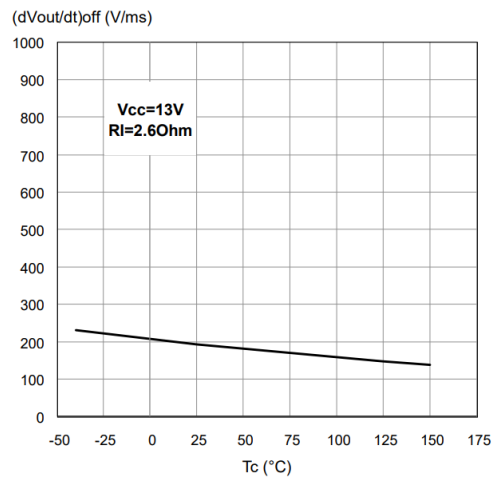


Figure 23. CS_DIS high level voltage

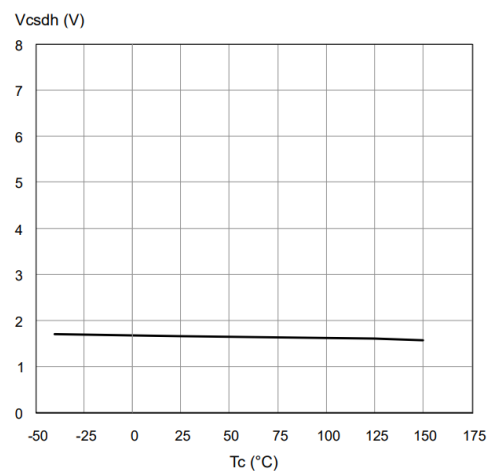


Figure 24. CS_DIS clamp voltage


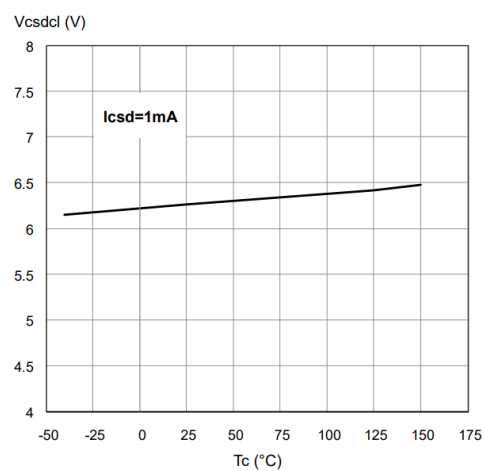


Figure 25. CS_DIS low level voltage

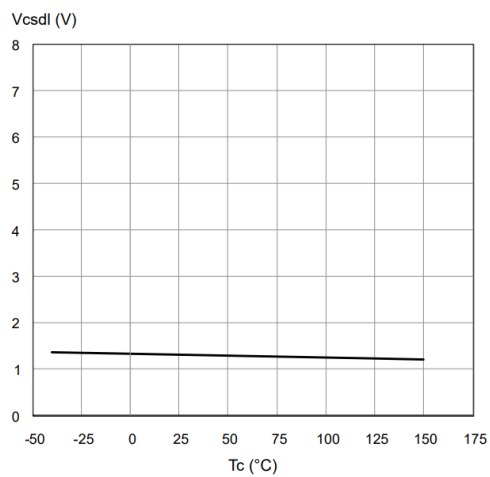

3 Protections

3.1 Current limitation

The device is equipped with an output current limiter in order to protect the silicon from excessive current flow. Consequently, in case of short-circuit or overload, the output current is clamped to a safety level, I_{limH} ; in case the device enters thermal cycling a lower current limitation level, I_{limL} , is triggered.

3.2 Power limitation

The basic working principle of this protection consists of an indirect measurement of the junction temperature swing through the direct measurement of the spatial temperature gradient on the device surface.

If a faulty load event occurs, the drain current is limited to I_{limH} and the extreme power dissipation will cause a large thermal gradient on the device surface.

When the gradient temperature exceeds a safety threshold, output MOSFET is automatically turned off.

The device starts cool down and when the temperature decreases, the channel will be switched on again, limiting at I_{limH} .

The protection prevents fast thermal transient effects.

3.3 Thermal shutdown

If the device junction temperature exceeds the T_{TSD} threshold, the affected output is turned off and the device enters thermal cycling operation. During thermal cycling, the current is limited to I_{limL} and a fault condition is indicated on CURRENT SENSE pin than rises to the V_{SENSEH} value.

The output remains off until the junction temperature falls below the thermal reset temperature, T_R . The driver then automatically restarts and continues to limit the current at I_{limL} until the thermal shutdown condition is reached again. The thermal cycling process repeats until the overload condition is removed.

When the temperature decreases under T_{RS} , the fault condition is removed.

T_{RS} is lower than T_R to ensure a stable fault indication during a faulty load condition.

3.4 Negative voltage clamp

In case the device drives inductive load, the output voltage reaches a negative value during turn off. A negative voltage clamp structure limits the maximum negative voltage to a certain value, V_{DEMAG} , allowing the inductor energy to be dissipated without damaging the device (see also [Section 4](#)).

4 Active clamp

Active clamp is also known as **Fast Demagnetization of inductive loads** or **Fast Current Decay**. When a high-side driver turns off an inductance, an undervoltage on the output is detected (see Figure 26).

The OUT pin is pulled down to V_{DEMAG} . The conduction state is modulated by an internal circuitry in order to keep the OUT pin voltage at $\sim V_{\text{DEMAG}}$ until the load energy has been dissipated. The energy is dissipated in both IC internal switch and load resistance.

Figure 26. Active clamp typical waveforms



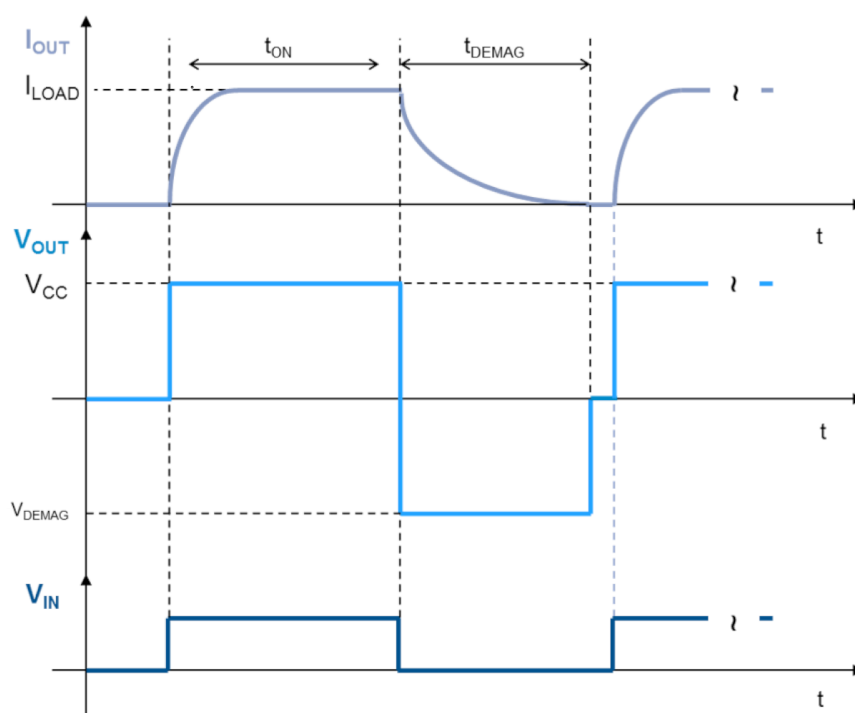


Figure 27. Maximum turn off current versus inductance ($V_{CC} = 13.5\text{ V}$)

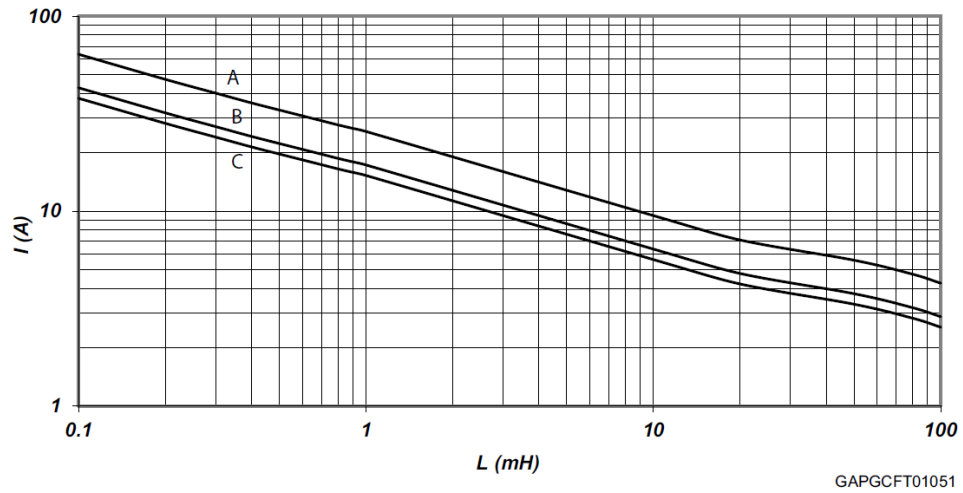

- A: $T_{jstart} = 150^{\circ}\text{C}$ single pulse
- B: $T_{jstart} = 100^{\circ}\text{C}$ repetitive pulse
- C: $T_{jstart} = 125^{\circ}\text{C}$ repetitive pulse

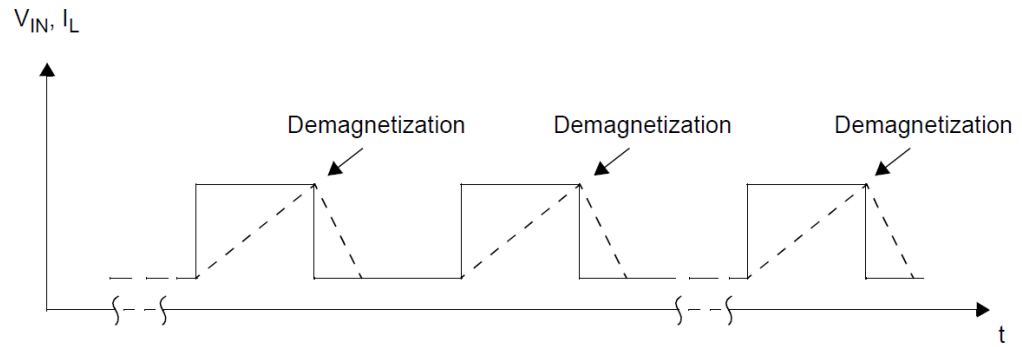

Note: Values are generated with $R_L = 0\ \Omega$. In case of repetitive pulses, T_{jstart} (at beginning of each demagnetization) of every pulse must not exceed the temperature specified above for curves A and B.

For this reason, the TVS must be selected with appropriate V_{BR} and V_{CL} values for the maximum operating voltage of the application.

5.3 MCU I/Os protection

If a ground protection network is used and a negative transient is present on the VCC line, the control pins are pulled negative. ST recommends placing a resistor (R_{prot}) in series to protect the microcontroller I/O pins from latch-up.

The value of these resistors is a compromise between the leakage current of the microcontroller and the current required by the HSD I/Os (Input levels compatibility) with the latch-up limit of microcontroller I/Os.

Equation: R_{prot} range calculation

$$-V_{CCpeak} / I_{latchup} \leq R_{prot} \leq (V_{OH\mu C} - V_{IH} - V_{GND}) / I_{IHmax}$$

Calculation example:

For $V_{CCpeak} = -100\text{ V}$ and $I_{latchup} \geq 20\text{ mA}$; $V_{OH\mu C} \geq 4.5\text{ V}$

$$5\text{ k}\Omega \leq R_{prot} \leq 180\text{ k}\Omega.$$


Recommended value: $R_{prot} = 10\text{ k}\Omega$, $C_{EXT} = 10\text{ nF}$.

5.4 Analog current sense

Diagnostic information on device and load status are provided by the analog output pin CURRENT SENSE.

5.4.1 Principle of current sense signal generation

Figure 29. Current sense block diagram

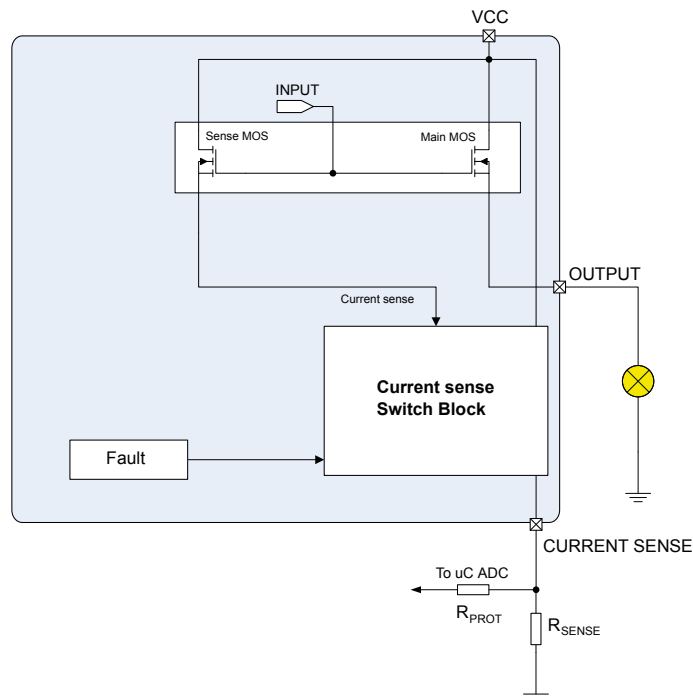

Current sense

The output is capable of providing:

- Current mirror proportional to the load current in normal operation, delivering current proportional to the load according to a known ratio named K
- Diagnostics flag in fault conditions delivering fixed voltage V_{SENSEH}

The current delivered by the current sense circuit, I_{SENSE} , can be easily converted into a voltage V_{SENSE} by using an external sense resistor, R_{SENSE} , allowing continuous load monitoring and abnormal condition detection.

Normal operation (channel ON, no fault)

While the device is operating in normal conditions (no fault intervention), V_{SENSE} calculation can be done using simple equations.

Current provided by CURRENT SENSE pin: $I_{SENSE} = I_{OUT} / K$

Voltage on R_{SENSE} : $V_{SENSE} = R_{SENSE} \cdot I_{SENSE} = R_{SENSE} \cdot I_{OUT} / K$

Where:

- V_{SENSE} is the voltage measurable on the R_{SENSE} resistor
- I_{SENSE} is the current provided from CURRENT SENSE pin in current output mode
- I_{OUT} is the current flowing through output
- K factor represents the ratio between PowerMOS cells and SenseMOS cells; its spread includes geometric factor spread, current sense amplifier offset and process parameters spread of overall circuitry specifying the ratio between I_{OUT} and I_{SENSE} .

Failure flag indication

In case of over-temperature, $T_J > T_{TSD}$, the fault is indicated by the CURRENT SENSE pin, which is switched to a "current limited" voltage source, V_{SENSEH} .


In any case, the current sourced by the CURRENT SENSE pin in this condition is limited to I_{SENSEH}

The failure indication disappears when the junction temperature drops below the thermal reset status threshold T_{RS} (see also [Table 10](#) and [Figure 10](#)).

6 Package and PCB thermal data

6.1 PowerSSO-24 thermal data

Figure 30. PowerSSO-24 PCB

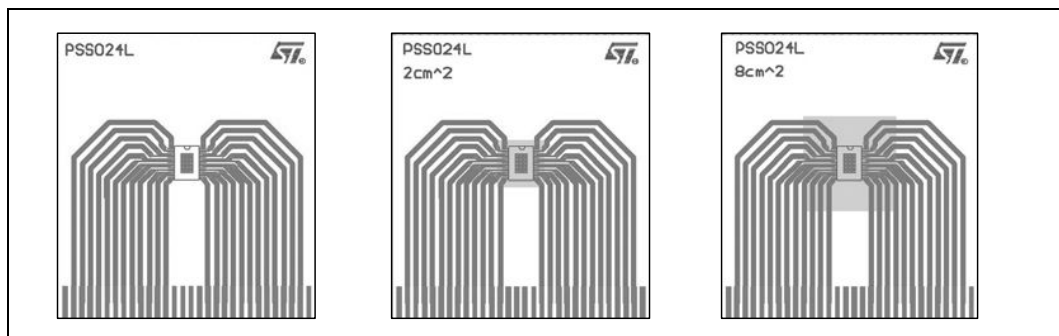

Note: Layout condition of R_{th} and Z_{th} measurements (PCB: Double layer; Thermal Vias, FR4 area= 77 mm x 86 mm, PCB thickness=1.6mm, Cu thickness=70 μ m (front and back side), Copper areas: from minimum pad lay-out to 8 cm²).

Figure 31. R_{thJA} vs PCB copper area in open box free air condition

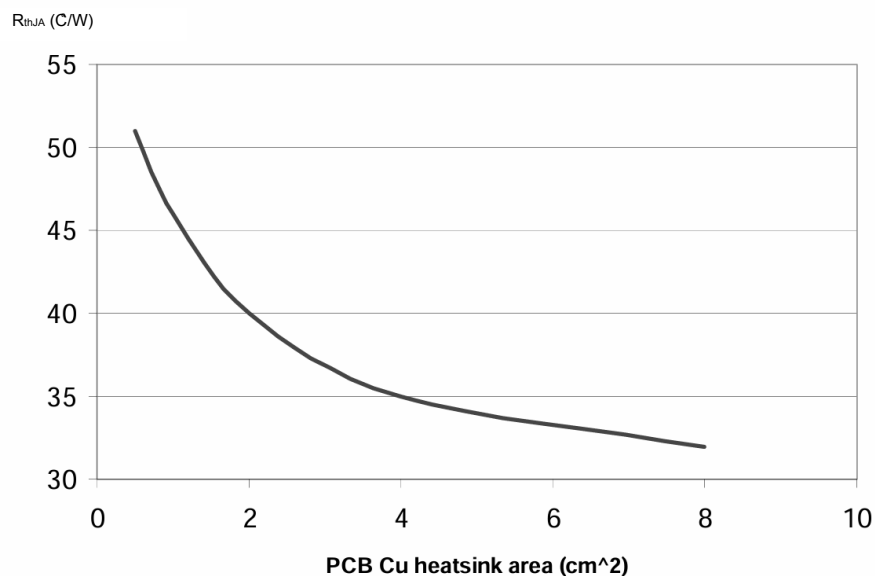


Figure 32. PowerSSO-24 thermal impedance junction ambient single pulse


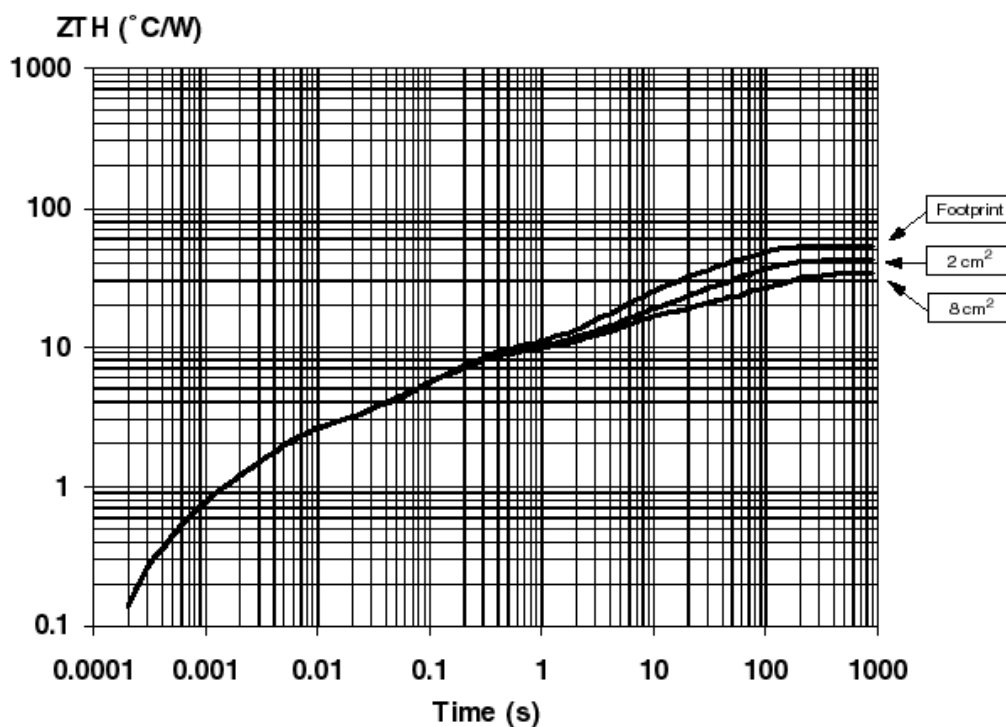


Figure 33. Thermal fitting model of a single channel HSD in PowerSSO-24

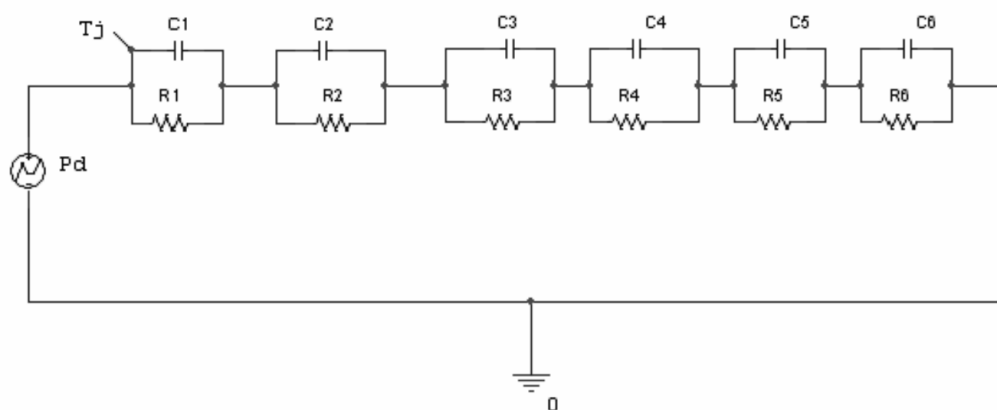

The fitting model is a simplified thermal tool and is valid for transient evolutions where the embedded protections (power limitation or thermal cycling during thermal shutdown) are not triggered.

Equation: pulse calculation formula

$$Z_{th\delta} = R_{th} \cdot \delta + Z_{thp} (1 - \delta)$$

where $\delta = t_p / T$

Table 11. Thermal parameters

Area / island (cm ²)	Footprint	2	8
R1 (°C/W)	0.1		
R2 (°C/W)	0.3		
R3 (°C/W)	6		
R4 (°C/W)	7.7		
R5 (°C/W)	9	9	8
R6 (°C/W)	28	17	10
C1 (W.s/°C)	0.0025		
C2 (W.s/°C)	0.0024		
C3 (W.s/°C)	0.025		
C4 (W.s/°C)	0.75		
C5 (W.s/°C)	1	4	9
C6 (W.s/°C)	2.2	5	17

7 Package information

To meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: www.st.com. ECOPACK is an ST trademark.

7.1 PowerSSO-24 package information

Figure 34. PowerSSO-24 package dimensions


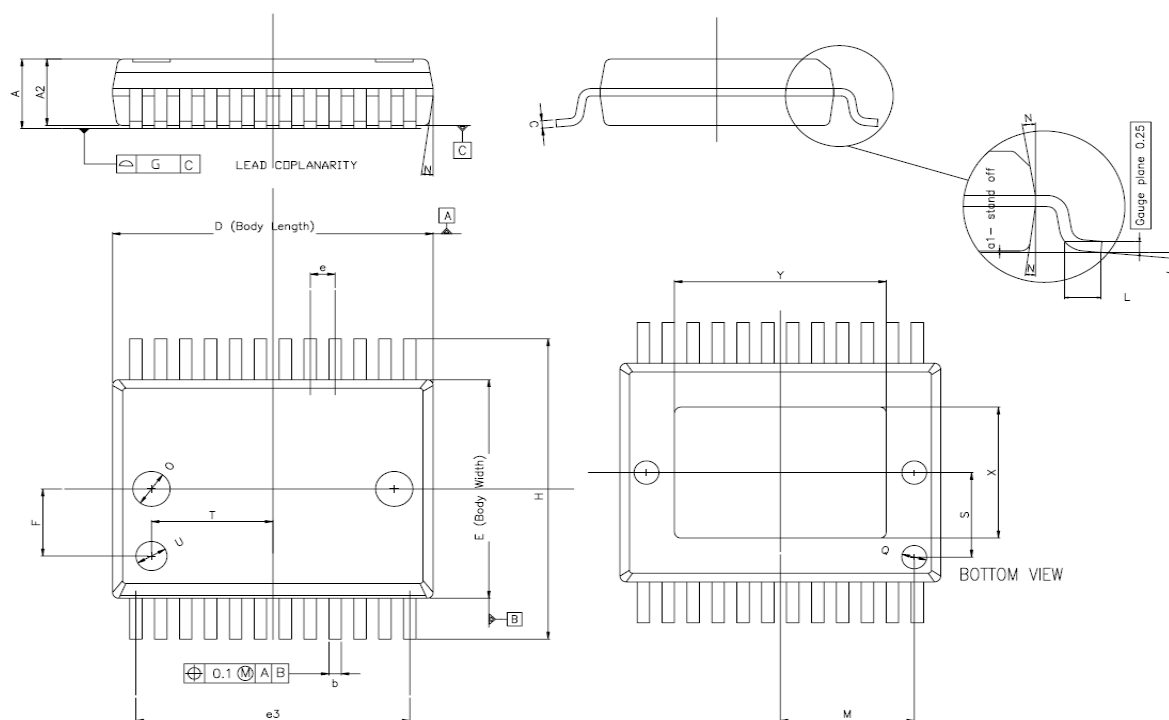


Table 12. PowerSSO-24 mechanical data

Symbol	Millimeters		
	Min.	Typ.	Max.
A			2.45
A2	2.15		2.35
a1	0		0.1
b	0.33		0.51
c	0.23		0.32
D	10.10		10.50
E	7.4		7.6
e		0.8	
e3		8.8	
F		2.3	
G			0.1
H	10.1		10.5
h			0.4
k	0°		8°
L	0.55		0.85
O		1.2	
Q		0.8	
S		2.9	
T		3.65	
U		1.0	
N			10°
X	4.1		4.7
Y	6.5		7.1

7.2 PowerSSO-24 packing information

Figure 35. PowerSSO-24 tape and reel shipment

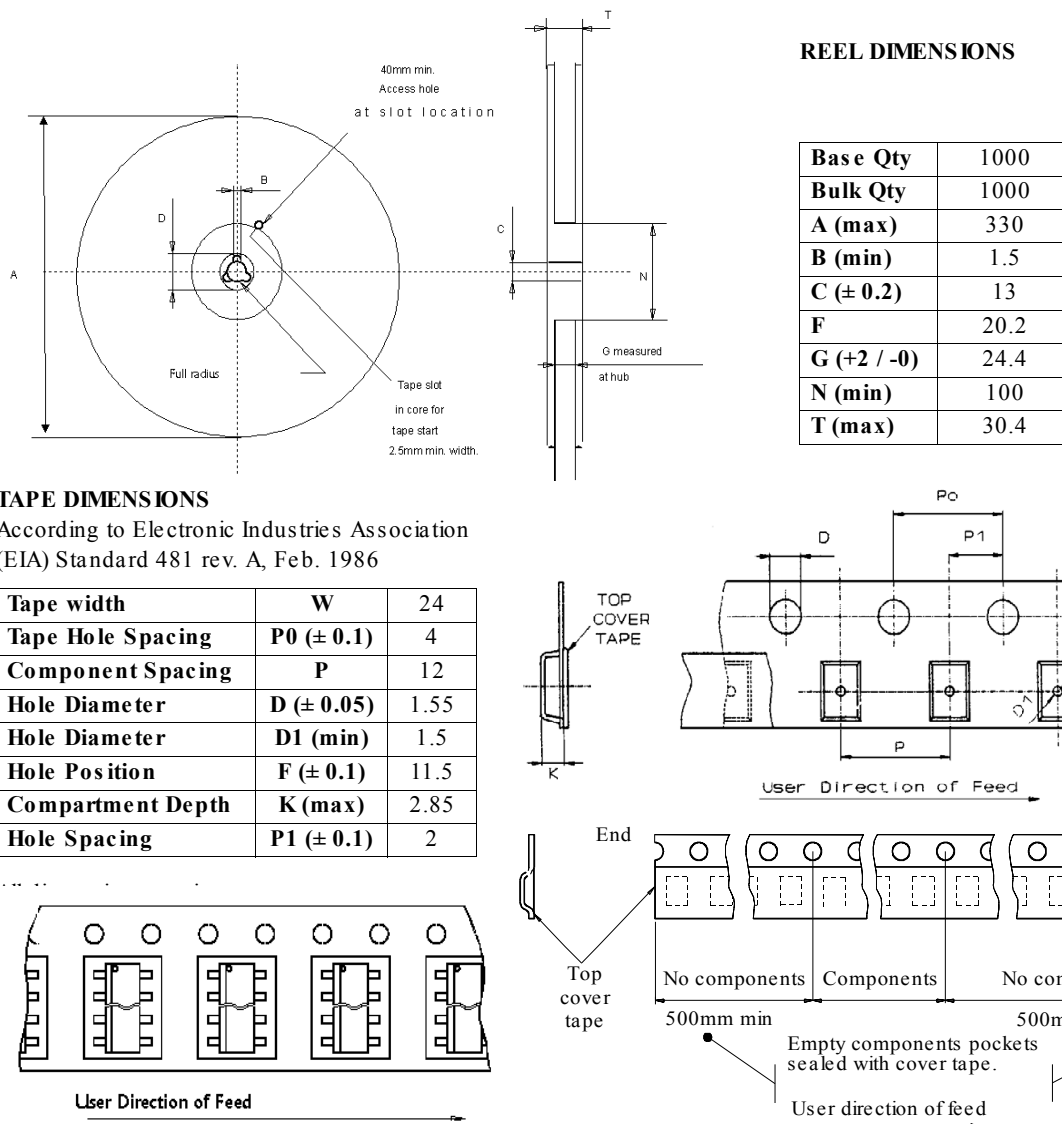

8 Ordering information

Table 13. Ordering information

Part number	Package	Packing
IPS1024HK	PowerSSO-24	Tape and Reel

Revision history

Table 14. Document revision history

Date	Revision	Changes
13-Aug-2026	1	Initial release.

Contents

1	Block diagram and pin description	2
2	Electrical specification	4
2.1	Absolute maximum ratings	4
2.2	Thermal data	5
2.3	Electrical characteristics	6
2.4	Electrical characteristics (curves)	14
3	Protections	17
3.1	Current limitation	17
3.2	Power limitation	17
3.3	Thermal shutdown	17
3.4	Negative voltage clamp	17
4	Active clamp	18
5	Application information	20
5.1	GND protection network against reverse polarity	20
5.1.1	Solution 1: resistor in the ground line (R_{GND} only)	20
5.1.2	Solution 2: diode (D_{GND}) in the ground line	20
5.2	Vcc overshoot protection	20
5.3	MCU I/Os protection	21
5.4	Analog current sense	21
5.4.1	Principle of current sense signal generation	21
6	Package and PCB thermal data	23
6.1	PowerSSO-24 thermal data	23
7	Package information	26
7.1	PowerSSO-24 package information	26
7.2	PowerSSO-24 packing information	28
8	Ordering information	29
	Revision history	30
	List of tables	32
	List of figures	33

List of tables

Table 1.	Pin function	3
Table 2.	Suggested connections for unused and not connected pins	3
Table 3.	Absolute maximum ratings	4
Table 4.	Thermal data	5
Table 5.	Power section	6
Table 6.	Switching ($V_{CC} = 13\text{ V}$, $T_J = 25\text{ °C}$)	6
Table 7.	Logic inputs	6
Table 8.	Protections and diagnostics	7
Table 9.	Current sense ($8\text{ V} < V_{CC} < 16\text{ V}$)	7
Table 10.	Functional table	11
Table 11.	Thermal parameters	25
Table 12.	PowerSSO-24 mechanical data	27
Table 13.	Ordering information	29
Table 14.	Document revision history	30

List of figures

Figure 1.	Block diagram	2
Figure 2.	Configuration diagram PowerSSO-24 (top view)	3
Figure 3.	Current and voltage conventions	4
Figure 4.	Current sense delay characteristics	9
Figure 5.	Delay response time between rising edge of output current and rising edge of current sense (current sense enabled)	9
Figure 6.	I_{OUT}/I_{SENSE} vs I_{OUT}	10
Figure 7.	Maximum current sense ratio drift vs load current	10
Figure 8.	Switching characteristics	11
Figure 9.	Output voltage drop limitation	12
Figure 10.	Waveforms	13
Figure 11.	Off-state output current	14
Figure 12.	High level input current	14
Figure 13.	Input clamp voltage	14
Figure 14.	Input high level voltage	14
Figure 15.	Input low level voltage	14
Figure 16.	Input hysteresis voltage	14
Figure 17.	On-state resistance vs T_{CASE}	15
Figure 18.	On-state resistance vs V_{CC}	15
Figure 19.	Undervoltage shutdown	15
Figure 20.	I_{limH} vs T_{CASE}	15
Figure 21.	Turn-on voltage slope	15
Figure 22.	Turn-off voltage slope	15
Figure 23.	CS_DIS high level voltage	16
Figure 24.	CS_DIS clamp voltage	16
Figure 25.	CS_DIS low level voltage	16
Figure 26.	Active clamp typical waveforms	18
Figure 27.	Maximum turn off current versus inductance ($V_{CC} = 13.5\text{ V}$)	19
Figure 28.	Application schematic	20
Figure 29.	Current sense block diagram	21
Figure 30.	PowerSSO-24 PCB	23
Figure 31.	R_{thJA} vs PCB copper area in open box free air condition	23
Figure 32.	PowerSSO-24 thermal impedance junction ambient single pulse	24
Figure 33.	Thermal fitting model of a single channel HSD in PowerSSO-24	24
Figure 34.	PowerSSO-24 package dimensions	26
Figure 35.	PowerSSO-24 tape and reel shipment	28

■ Disclaimer

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice.

In the event of any conflict between the provisions of this document and the provisions of any contractual arrangement in force between the purchasers and ST, the provisions of such contractual arrangement shall prevail.

The purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

The purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of the purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

If the purchasers identify an ST product that meets their functional and performance requirements but that is not designated for the purchasers' market segment, the purchasers shall contact ST for more information.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2026 STMicroelectronics – All rights reserved