DESCRIPTION

KS51840, a 4-bit single-chip CMOS microcontroller, consists of the reliable SMCS-51 CPU core with on-chip ROM and RAM. Eight input pins and 11 output pins provide the flexibility for various I/O requirements. Auto reset circuit generates reset pulse every certain period, and every halt mode termination time. The KS51840 microcontroller has been designed for use in small system control applications that require a low-power, cost-sensitive design solution. In addition, the KS51840 has been optimized for remote control transmitter.

FEATURES

- ROM Size ..... 1,024 bytes
- RAM Size ..... 32 nibbles
- Instruction Set ..... 39 instructions
- Instruction Cycle Time ..... 13.2 µsec at Fxx=455 kHz
- Input Ports ..... Two 4-bit ports(24 pins)/One 4-bit port, one 2-bit ports(20 pins)
- Output Ports ..... One 4-bitport,Seven1-bitports(24pins)/One 4-bit port, Five1-bit ports(20pins)
- Built-in Oscillator ..... Crystal/Ceramic resonator
- Built-in Power-on reset and auto reset circuit for generating reset pulse every 131072/Fxx(288ms at Fxx=455kHz)
- Four Transmission Frequencies ..... Fxx/12 (1/4 duty), Fxx/12 (1/3 duty), Fxx/8 (1/2 duty), and no-carrier frequency
- Supply Voltage ..... 1.8V–3.6V(Fosc:250kHz–3.9MHz),2.2V–3.6V(Fosc:4MHz–6MHz)
- Power Consumption ..... Halt mode: 1 µA (maximum)
  Normal mode: 0.5 mA (typical)
- Operating temperature ..... -20°C to 85°C
- Package Type ..... 24 SOP, 20 DIP, 20 SOP
- Oscillator Frequency divide select ..... Mask Option= Fosc or Fosc/8

BLOCK DIAGRAM

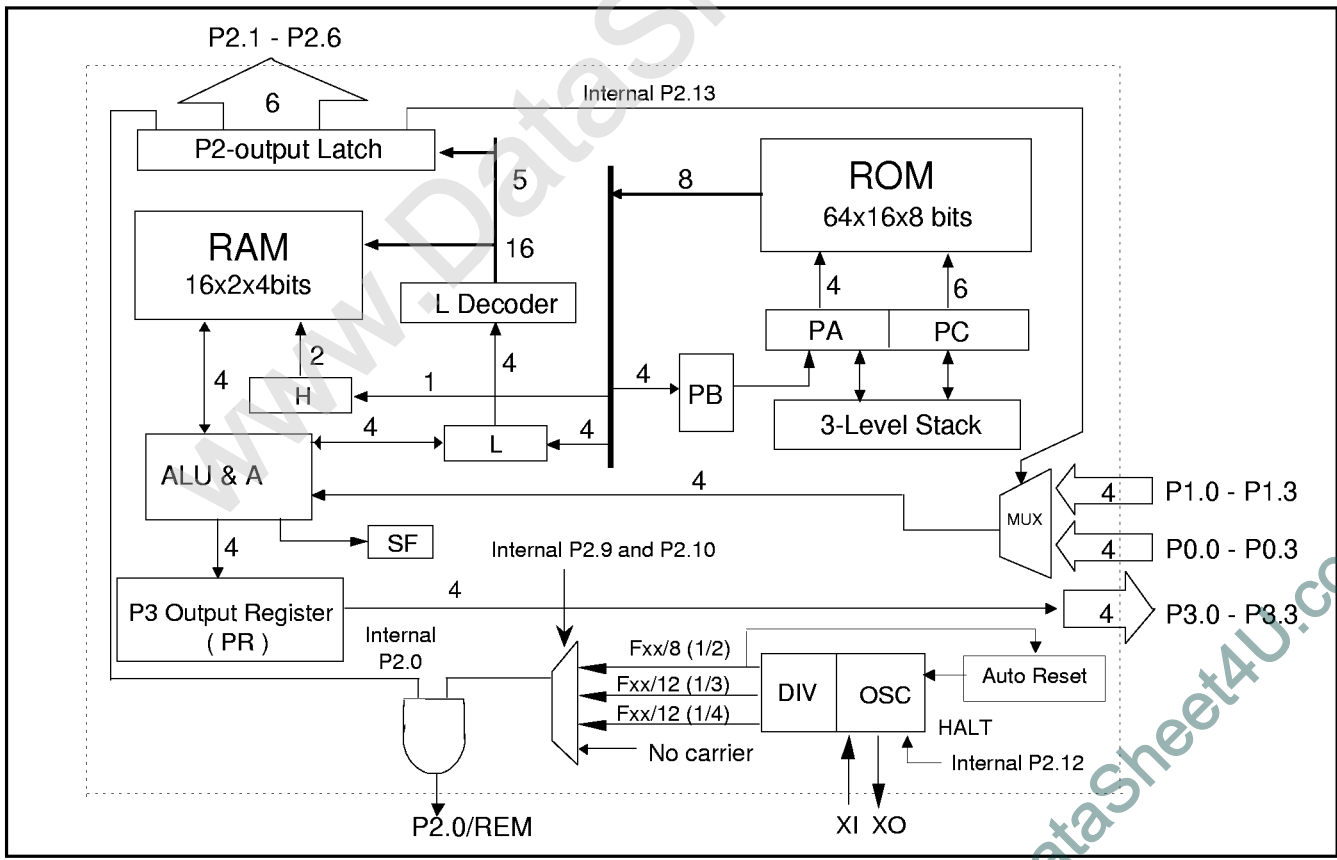

www.DataSheet4U.com

PIN CONFIGURATION (24 SOP)

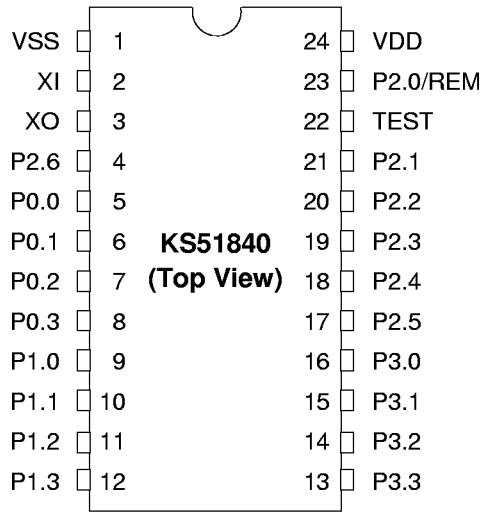

PIN DESCRIPTION FOR 24 PINS

Symbols	Pin No.	Type	Functions	I/O Circuit Type
P0.0 - P0.3	5, 6, 7, 8	Input	4-bit input port when P2.13 is low	A
P1.0 - P1.3	9,10,11,12	Input	4-bit input port when P2.13 is high	A
P2.0/REM	23	Output	1-bit individual output for remote carrier frequency (1)	B
P2.2 - P2.5	20,19,18, 17	Output	1-bit individual output port	C
P2.1, P2.6	21,4			D
P3.0 - P3.3	16,15,14,13	Output	4-bit parallel output port	C
TEST	22	Input	Input pin for test (Normally connected to VSS)	—
XI	2	Input	Oscillation clock input	—
XO	3	Output	Oscillation clock output	—
VDD	24	—	Power supply	—
VSS	1	—	Ground	—

NOTES:
1.The carrier can be selected by software as Fxx/12 (1/3 duty), Fxx/12 (1/4 duty), Fxx/8 (1/2 duty), or no-carrier frequency.
2.Package type can be selected as 24 SOP in the ordering sheet.

PIN CONFIGURATION (20 DIP, 20 SOP)

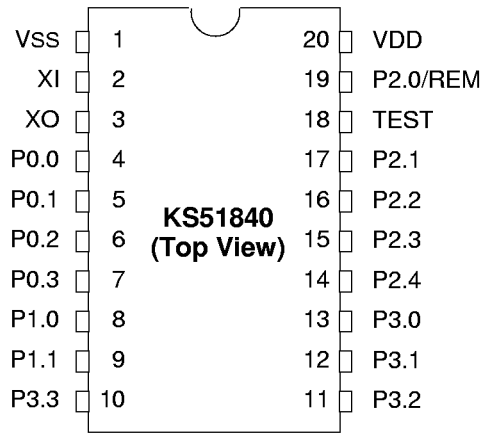

PIN DESCRIPTION FOR 20 PINS

Symbols	Pin No.	Type	Functions	I/O Circuit Type
P0.0 - P0.3	4, 5, 6, 7	Input	4-bit input port when P2.13 is low	A
P1.0 - P1.1	8, 9	Input	2-bit input port when P2.13 is high	A
P2.0/REM	19	Output	1-bit individual output for remote carrier frequency (1)	B
P2.2 - P2.4	16,15, 14	Output	1-bit individual output port	C
P2.1	17			D
P3.0 - P3.3	13,12,11,10	Output	4-bit parallel output port	C
TEST	18	Input	Input pin for test (Normally connected to VSS)	—
XI	2	Input	Oscillation clock input	—
XO	3	Output	Oscillation clock output	—
VDD	20	—	Power supply	—
VSS	1	—	Ground	—

NOTES:
1. The carrier can be selected by software as Fxx/12 (1/3 duty), Fxx/12 (1/4 duty), Fxx/8 (1/2 duty), or no-carrier frequency.
2. Package type can be selected as 20 DIP, or 20 SOP in the ordering sheet.

I/O CIRCUIT SCHEMATICS

TYPE A

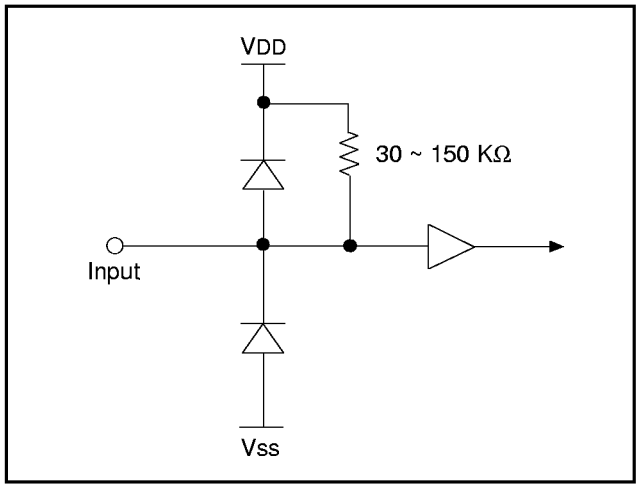

TYPE B

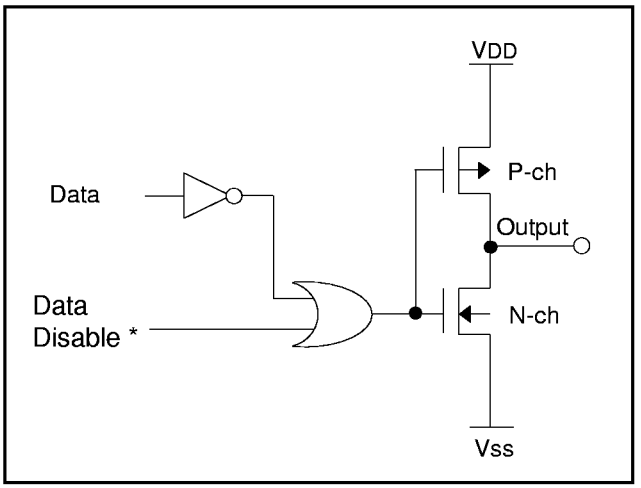

TYPE C

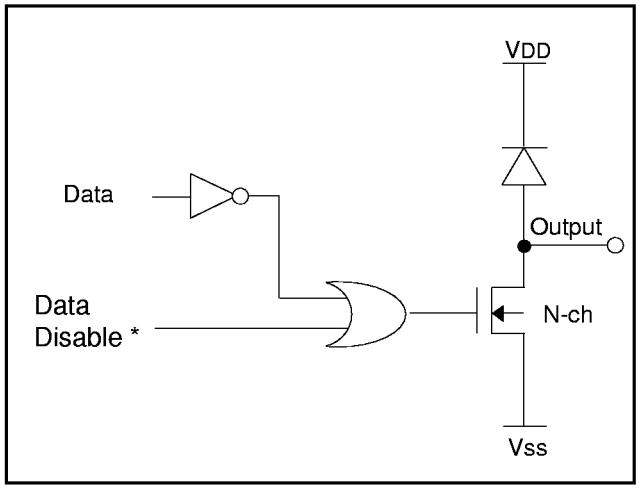

TYPE D

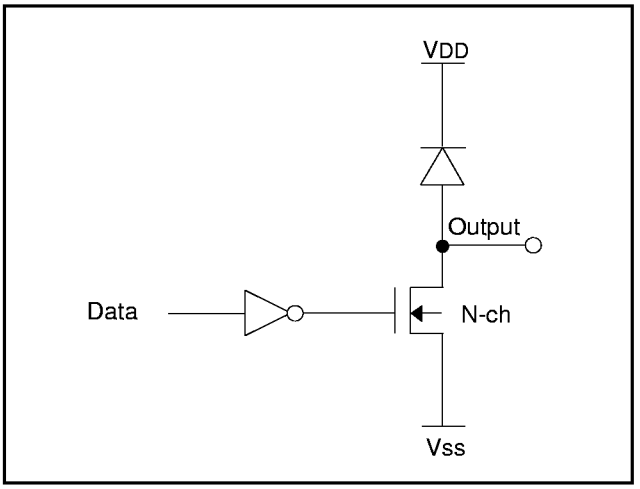

NOTE: If data disable signal is active, halt mode, the output becomes low state.

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbols	Ratings	Units
Supply Voltage	VDD	- 0.3 to 6	V
Input Voltage	VI	- 0.3 to VDD + 0.3	V
Output Voltage	VO	- 0.3 to VDD + 0.3	V
Soldering Temperature	Tsld	260 (10 sec)	°C
Storage Temperature	Tstg	- 55 to 125	°C

DC CHARACTERISTICS (VDD = 3 V, TA = 25 °C)

Parameters		Symbols	Test Conditions	Min.	Typ.	Max.	Units
Supply Voltage		VDD	Fosc: 250kHz-3.9MHz	1.8	3.0	3.6	V
			Fosc: 4MHz-6MHz	2.2	3.0	3.6	
Operating Temperature		TA	—	-20	—	85	° C
High-Level Input Voltage		VIH1	All input pins except XIN	0.7VDD	—	VDD	V
		VIH2	XIN	VDD-0.3	—	VDD	V
Low-Level Input Voltage		VIL1	All input pins except XIN	0	—	0.3VDD	V
		VIL2	XIN	0	—	0.3	V
High-Level Output Current P2.0		IOH1	VO = 2.0 V	-6.0	-9	-14	mA
Low-Level Output Current P2.0		IOL1	VO = 0.4 V	1.5	3.0	4.5	mA
Low-Level Output Current	P3 Output	IOL2	VO = 0.4 V	0.5	1.0	2.0	mA
	P2.1 - P2.3			1.5	3.0	4.5	
	P2.4 - P2.6			0.5	1.0	2.0	
High-Level Input Leakage Current		ILIH1	VI = VDD All input pins except XIN	—	—	3	µA
		ILIH2	XIN	—	3	10	
Low-Level Input Leakage Current		ILIL1	XIN	—	–3	–10	
High-Level Output Leakage Current		ILOH	VO=VDD All output pins except P2.0	—	—	3	µA
Pull-up Resistance of Input Port		R	VDD = 3 V VI = 0 V	30	70	150	KΩ
Average Supply Current		IDD	VDD=3V crystal/resonator Non–divided option Fosc=1MHz	—	0.5	1.0	mA
			8–divided option Fosc=6MHz				
HALT Current		IDDh	Fosc = 0	—	—	1.0	µA
Clock Frequency		Fxx	Crystal/Ceramic	250	—	1000	kHz
Oscillator Frequency		Fosc	Crystal/Ceramic Non-divide Option	250	—	1000	
			Crystal/Ceramic Divide-8 Option	2000	—	6000	

FUNCTIONAL DESCRIPTION

Program Memory (ROM)

The KS51840's program memory consists of a 1024-byte ROM, organized in 16 pages. Each page is 64 bytes long. (See Figure 1–3).

ROM addressing is supported by a 10-bit register made up of two sub-registers: a 4-bit Page Address register (PA), and a 6-bit Program Counter (PC).

Pages 0 through 15 (FH) can each access 64 (3FH) bytes.

ROM addressing occurs as follows: The 10-bit register selects one of the ROM's 1024-bytes. A new address is then loaded into the PC register during each instruction cycle.
Unless a transfer-of- control instruction such as JP, CALL, or RET is encountered, the PC is loaded with the next sequential 6-bit address in the page, PC + 1. In this case, the next address of 3FH would be 00H.

Only the PAGE instruction can change the Page Buffer (PB) to a specified value.

When a JP or CALL instruction is executed, and if the Status Flag is set to "1", the contents of the PB are loaded into the PA register. If the Status Flag is "0", however, the JP or CALL is executed like NOP instruction in an instruction cycle and the Status Flag is set to "1". After that, program execution proceeds.

● Page-In Addressing

All instructions, including JP and CALL, can be executed by page. (See Figure 1–1). When the Status Flag is "1" , a JP or CALL causes a program to branch to its address (operand) in a page.

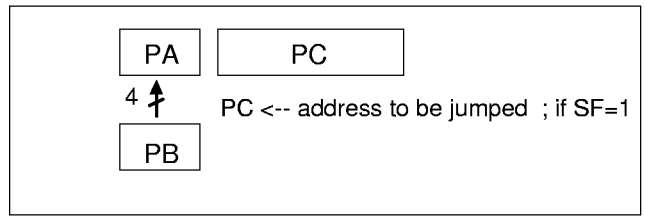

Figure 1–1. Page-In Addressing

● Page-To-Page Addressing

When a PAGE instruction occurs, and if the Status Flag is "1", a JP or CALL instruction will cause a program to branch to its address (operand) across the page (see Figure 1–2).

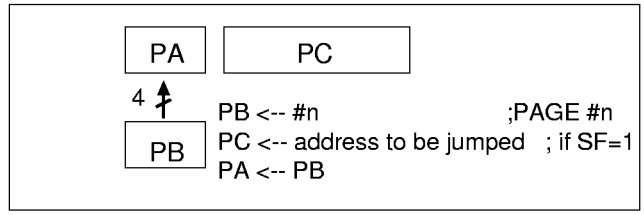

NOTE: If SF = 0 then PC <-- PC+1.

Figure 1–2. Page-To-Page Addressing



The 10-bit register points one of 1024 bytes at addresses 0000H to 0F3FH.
After reset, it points to 0FXXH for execution in the first instruction cycle. It then becomes 0F00H in the next instruction cycle.

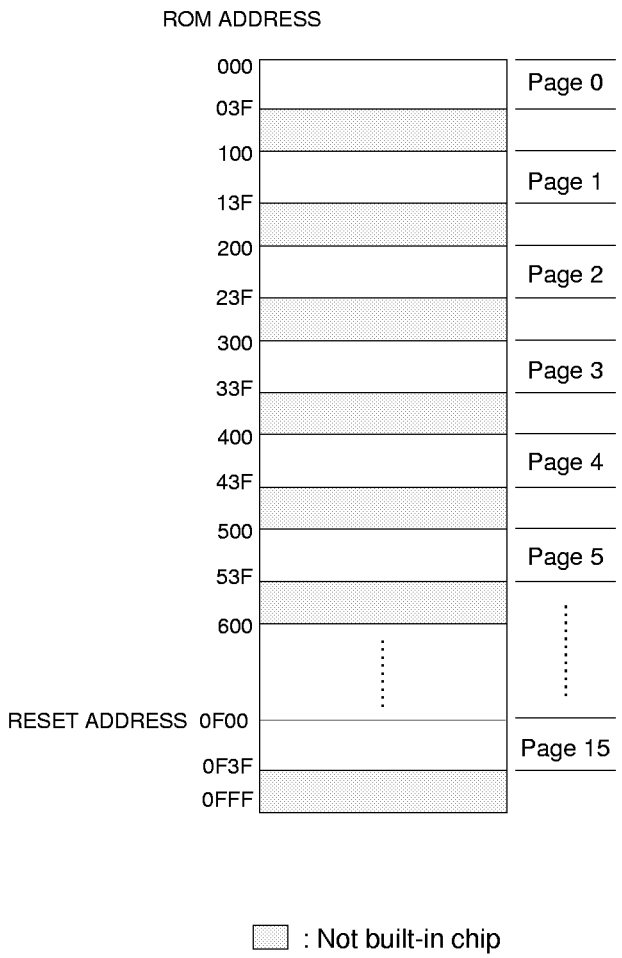

Figure 1–3. KS51840 Program Memory Map

DATA MEMORY (RAM)

The KS51840's data memory consists of a 32-nibble RAM which is organized into two files of 16 nibbles each (see Figure 1–4).
RAM addressing is implemented by a 7-bit register, HL.
Its upper 3-bit register (H) selects one of two files and its lower 4-bit register (L) selects one of 16 nibbles in the selected file.

Instructions which manipulate the H and L registers are as follow :

Select a file :

- MOV H,#n ; H <-- #n, where n must be 0,4
- NOT H ; Complement MSB of H register

Select a nibble in a selected file :

- MOV L,A ; L <-- A
- MOV L,@HL ; L <-- M(H,L)
- MOV L,#n ; L <-- #n, where 0 ≤ n ≤0FH
- INCS L ; L <-- L+1
- DECS L ; L <-- L-1

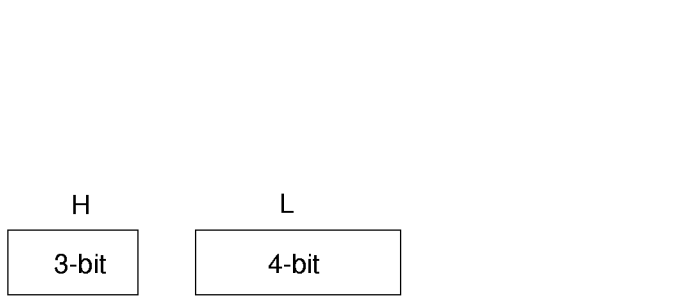

The 7-bit HL register pair points to one of the 32 nibbles.

H register selects one of two files; 0, 4
L register selects one of 16 nibbles; 0 to 0FH

After reset, the H and L registers to unknown state.

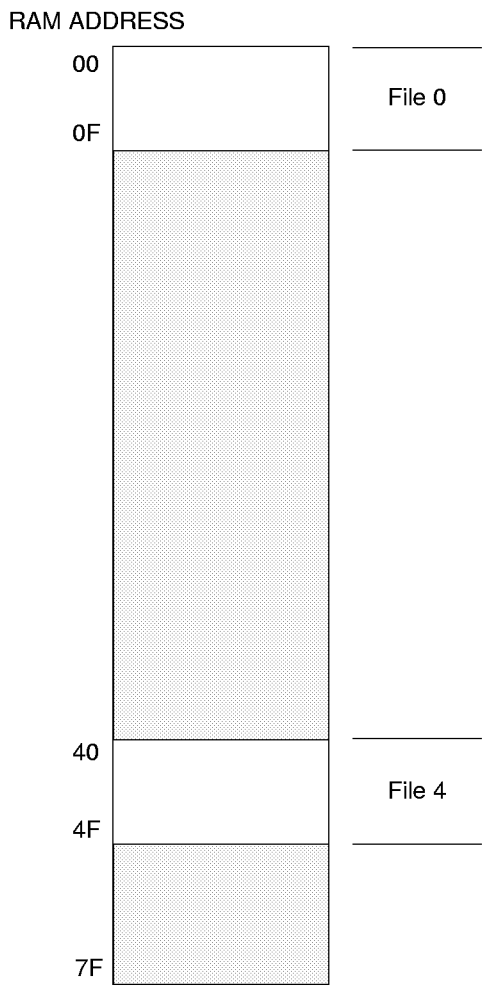

: Not built-in chip

Figure 1–4. KS51840 Data Memory Map

REGISTER DESCRIPTIONS

Stack Register (SR)

Three levels of subroutine nesting are supported by a three-level stack as shown in Figure 1–5.

Each subroutine call (CALL) pushes the next PA and PC address into the stack. The latest stack to be stored will be overwritten and lost. Each return instruction (RET) pops the stack back into the PA and PC registers.

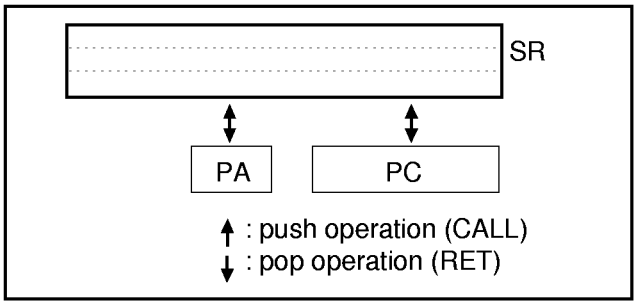

Figure 1–5. Stack Operations

Page Address Register(PA), Page Buffer Register(PB)

The Page Address Register (PA) and Page Buffer Register (PB) are 4-bit registers. The PA always specifies the current page.

A page select instruction (PAGE #n) loads the value "n" into the PB. When JP or CALL instruction is executed, and if the Status Flag (SF) is set to 1, the contents of PB are loaded into PA. If SF is "0", however, the JP or CALL is executed like NOP instruction and SF is set to "1". The contents of PB don't be loaded. Figure 1–6 illustrates this concept.

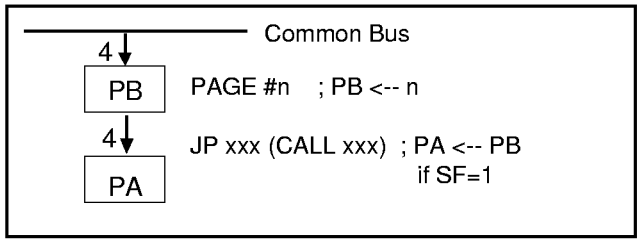

Figure 1–6. PA, PB Operations

Arithmetic Logic Unit (ALU), Accumulator (A)

The SMCS-51 CPU contains an ALU and its own 4-bit register (accumulator) which is the source and destination register for most I/O, arithmetic, logic, and data memory access operations.

Arithmetic functions and logical operations will set the status flag (SF) to "0" or "1".

Status Latch (SL)

The Status Latch (SL) flag is an 1-bit flip-flop register. Only the "CPNE L,A" instruction can change the value of SL.

If the result of a "CPNE L,A" instruction is true, the SL is set to "1"; If not true, to "0".

Status Flag : SF

The Status Flag (SF) is a 1-bit flip-flop register which enables programs to conditionally skip an instruction. All instructions, including JP and CALL, are executed when SF is "1".

But if SF is "0", the program executes NOP instruction instead of JP or CALL and resets SF to "1". Then,program execution proceeds. The following instructions set the SF to "0":

Status Flag (SF) (Continued)

- **Arithmetic Instructions**

```
ADDS    A,#n        ; if no carry
ADDS    A,@HL       ; if no carry
INCS    A,@HL       ; if no carry
INCS    A           ; if no carry
INCS    L           ; if no carry
SUBS    A,@HL       ; if borrow
DECS    A,@HL       ; if borrow
DECS    A           ; if borrow
DECS    L           ; if borrow
```

- **Compare Instructions**

```
CPNE    @HL,A       ; if M(H,L)=(A)
CPNZ    @HL         ; if M(H,L)=0
CPNE    L,#n        ; if (L)=#n
CPNE    L,A         ; if (L)=(A)
CPLE    A,@HL       ; if (A)>M(H,L)
CPNZ    P0          ; if (P0)=0
CPBT    @HL,b       ; if M(H,L).b≠1
```

- **Data Transfer Instructions**

```
MOV     @HL+,A      ; if no carry
MOV     @HL-,A      ; if borrow
```

- **Logical Instructions**

```
NOTI    A           ; if (A) ≠ 0 after operation
```

INPUT PORTS : P0, P1

The P0 and P1 input ports have internal pull-up 30 –150 KΩ resistors, (see I/O circuit type A), each multiplexed to a common bus (see Figure 1–7). If the P2.13 pin is programmed to low, then port 0 is selected as the input port. Otherwise, if the P2.13 pin high, port 1 is selected.

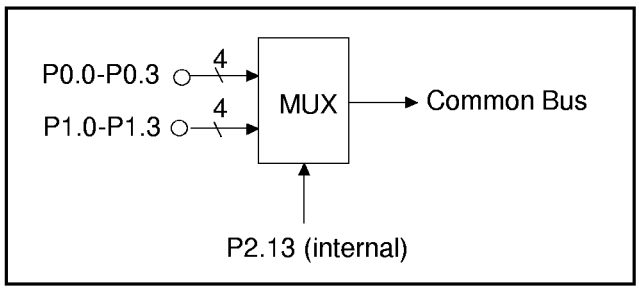

Figure 1–7. KS51840 Input Port

OUTPUT PORTS : P2, P3

The P2 and P3 output ports can be configured as push-pull (P2.0/REM only) and open drain (P2.1-P2.6, P3.0-P3.3) as follows:

- Standard push-pull : A CMOS push-pull buffer with N-channel transistor to ground in conjunction with a P-channel transistor to VDD, compatible with CMOS and TTL. (see I/O Circuit Type B).

- N-channel open drain: An N-channel transistor to ground, compatible with CMOS and TTL. (see I/O Circuit Type C and D). P2.2-P2.5 and P3.0-P3.3 pins become low state in halt mode.

  The L register specifies P2 output pins (P2.0/REM-P2.6, P2.9-P2.10, P2.12, and P2.13) individually as follows:

- SETB P2.(L) : Set port 2 bits to correspond to L- register contents.

- CLRB P2.(L) : Clear port 2 bits to correspond to L- register contents.

P3 output pins P3.0-P3.3 are parallel output pins.

For the KS51840, only the 4-bit accumulator outputs its value to the P3 port by the output instruction "OUT P3, @SL+A" (the value of the Status Latch (SL) does not matter).

TRANSMISSION CARRIER FREQUENCY

One of four carrier frequencies can be selected and transmitted through the P2.0/REM pin by programming the internal P2.9, P2.10 and P2.0 pins (see Table 1–1). Figure 1–8 shows a simplified diagram of the various transmission circuits.

P2.10	P2.9	Carrier Frequency of P2.0/REM Pin
0	0	Fxx/12, 1/3 duty
0	1	Fxx/8, 1/2 duty
1	0	Fxx/12, 1/4 duty
1	1	No carrier

Table 1–1 Carrier Frequency Selection Table

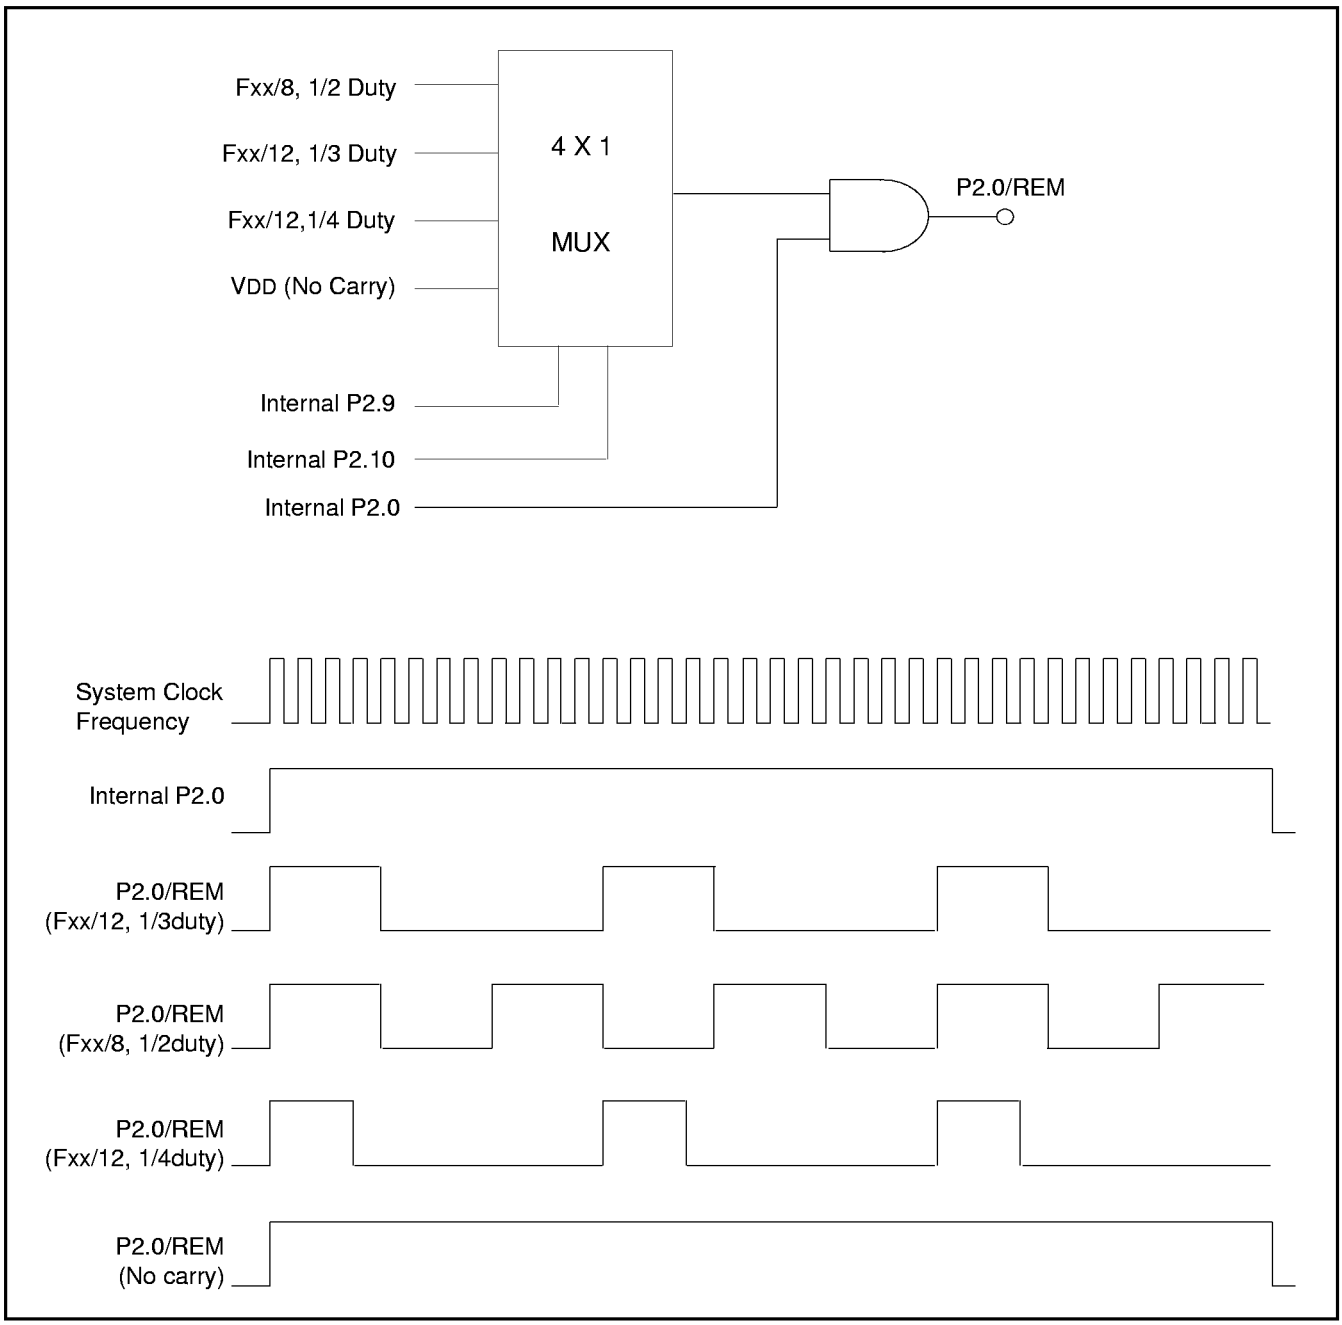

Figure 1–8. Diagram of Transmission Circuits

HALT MODE

The HALT mode is used to reduce power consumption by stopping the clock and holding the states of all internal operations fixed. This mode is very useful in battery-powered instruments. It also holds the controller in wait status for external stimulus to start some event. The KS51840 can be halted by programming the P2.12 pin high, and by forcing P0 input pins (P0.0-P0.3) to high and P1 input pins (P1.0- P1.3) to high, concurrently (see Figure 1–9). When in HALT mode, the internal circuitry does not receive any clock signal, and all P2, P3 output pins become low states. However, P2.1 and P2.6 pins retain their programmed values until the device is re-started as follows:

- Forcing any P0 and P1 input pins to low: system reset occurs and it continues to operate from the reset address.

An oscillation stabilization time of 13 msec in Fxx=455 KHz crystal oscillation is needed for stability (see Figure 1–10).

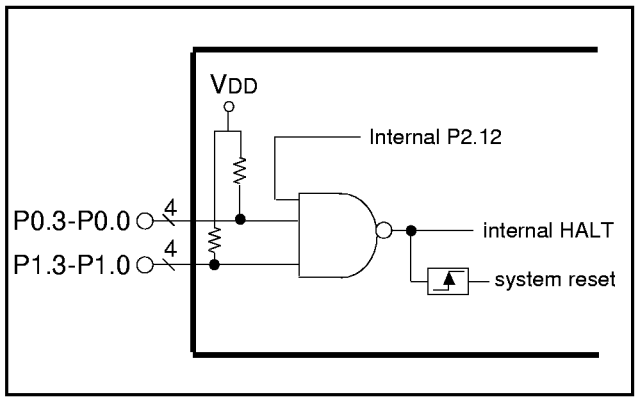

Figure 1–9. Block Diagram of HALT Logic

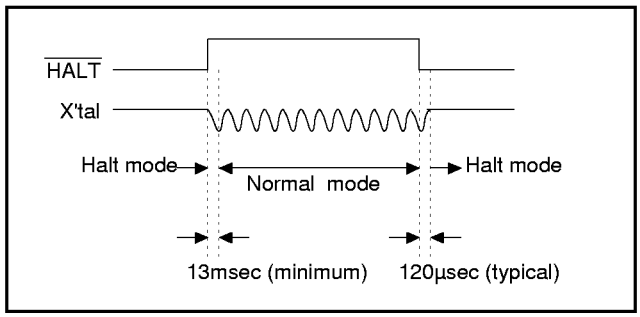

Figure 1–10. Release Timing for HALT or RESET to Normal Mode in Crystal Oscillation

RESET

All reset operations are internal in the KS51840. It has an internal power-on reset circuit consisting of a 7 pF capacitor, a 1MΩ resistor, and a Schmitt Trigger (see Figure 1–11). The controller also contains an auto-reset circuit that resets the chip every 131,072 oscillator clock cycles (288 ms at a Fxx=455KHz clock frequency). The auto-reset counter is cleared by the rising edge of a internal P2.0 pin, by HALT, or by the power-on reset pulse (see Figure 1–12). Therefore, no clocks are sent to the counter and the time-out is suspended in HALT mode. When a reset occurs during program execution, a transient condition occurs. The PA register is immediately initialized to 0FH. The PC, however, is not reset to 0H until one instruction cycle later. For example, if PC is 1AH when a reset pulse is generated, the instruction at 0F1AH is executed, followed by the instruction at 0F00H.

After a reset, approximately 13 msec is needed before program execution proceeds (assuming Fxx=455 KHz ceramic oscillation).

Upon initialization, registers are set as follows:

- PC register to 0 in next instruction cycle
- PA and PB registers to 0FH (15th page)
- SF and SL registers to 1
- H,L registers to unknown state
- All internal/external output pins (P3.0-P3.3, P2.0/REM-P2.6, P2.9, P2.10, P2.12 and P2.13) to low

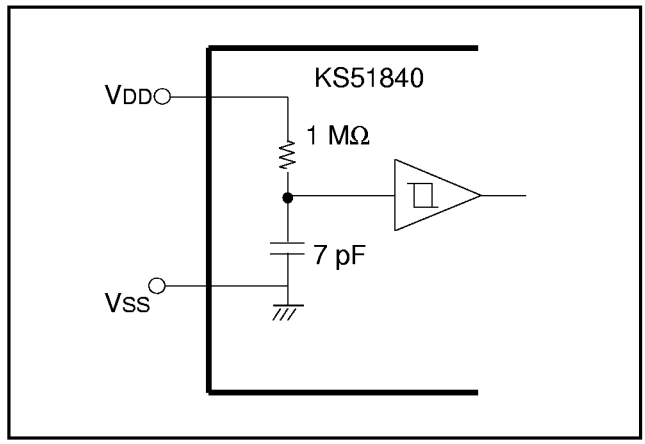

Figure 1–11. KS51840's Power-on Reset Circuit

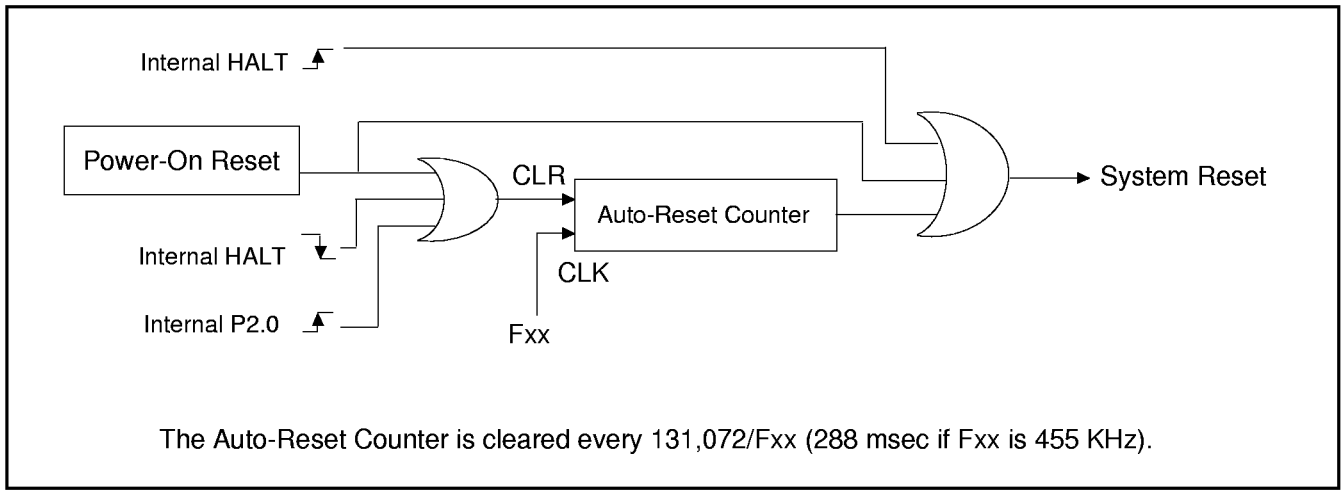

Figure 1–12. Auto Reset Block Diagram

OSC DIVIDE OPTION CIRCUIT

The OSC Divide Option Circuit provides a maximum 1MHz Fxx system clock. Fosc which is generated in oscillation circuit is divided eight or non–divided in this circuit to produce Fxx. This dividing ratio will be chosen by mask option. (see Figure 1–13)
Fosc : Oscillator clock
Fxx : System clock (Fosc or Fosc/8)
Fcpu : CPU clock (Fcpu = Fxx/6)
1 instruction cycle clock

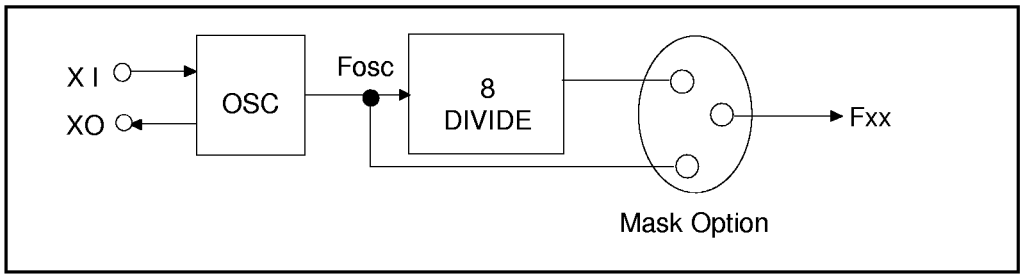

Figure 1–13 KS51840 OSC Divide Option Circiut

PACKAGE DIMENSIONS

24 SOP-375

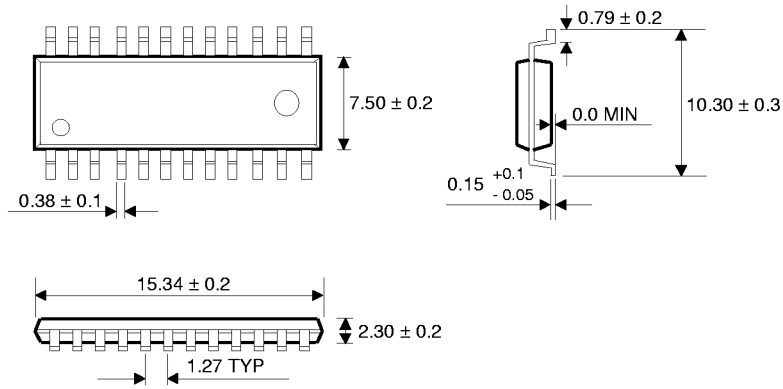

20 SOP-375

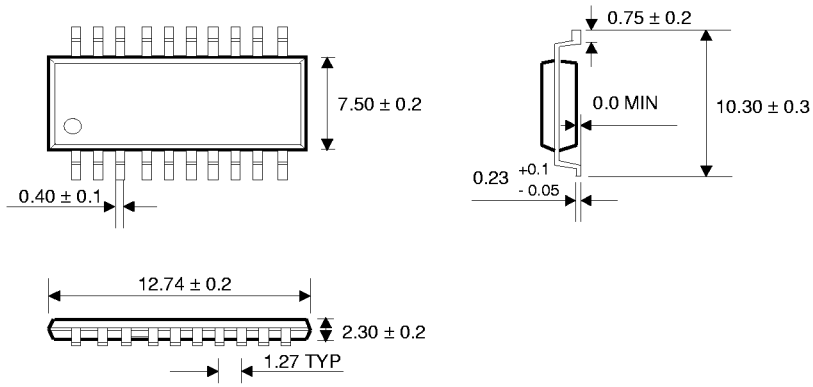

20 DIP-300A

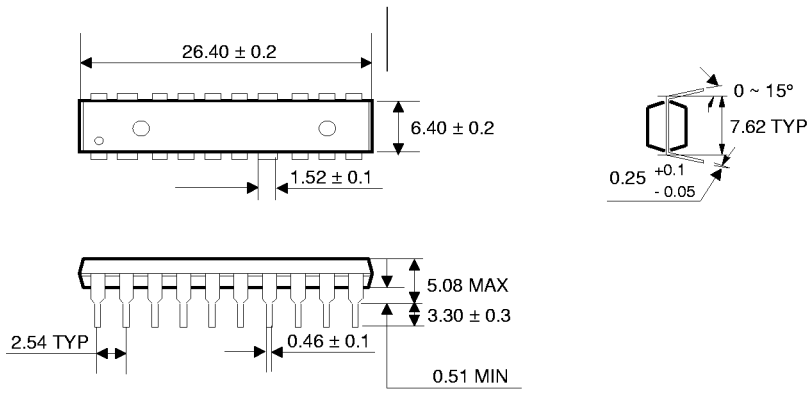

SAMSUNG ELECTRONICS

DESCRIPTION

KS51845, a 4-bit single-chip CMOS microcontroller, consists of the reliable SMCS-51 CPU core with on-chip ROM and RAM. 6 input pins and 9 output pins provide the flexibility for various I/O requirements. Auto reset circuit generates reset pulse every certain period, and every halt mode termination time. The KS51845 microcontroller has been designed for use in small system control applications that require a low-power, cost-sensitive design solution. In addition, the KS51845 has been optimized for remote control transmitter.

FEATURES

- ROM Size ..... 512 bytes
- RAM Size ..... 32 nibbles
- Instruction Set ..... 39 instructions
- Instruction Cycle Time ..... 13.2 µsec at Fxx=455 kHz
- Input Ports ..... One 4-bit port, one 2-bit port
- Output Ports ..... One 4-bit port, Five 1-bit ports
- Built-in Oscillator ..... Crystal/Ceramic resonator
- Built-in Power-on reset and auto reset circuit for generating reset pulse every 131072/Fxx(288ms at Fxx=455kHz)
- Four Transmission Frequencies ..... Fxx/12 (1/4 duty), Fxx/12 (1/3 duty), Fxx/8 (1/2 duty), and no-carrier frequency
- Supply Voltage ..... 1.8V–3.6V(Fosc:250kHz–3.9MHz),2.2V–3.6V(Fosc:4MHz–6MHz)
- Power Consumption ..... Halt mode: 1 µA (maximum)
Normal mode: 0.5 mA (typical)
- Operating temperature ..... -20°C to 85°C
- Package Type ..... 20 DIP, 20 SOP
- Oscillator Frequency divide select ..... Mask Option= Fosc or Fosc/8

BLOCK DIAGRAM

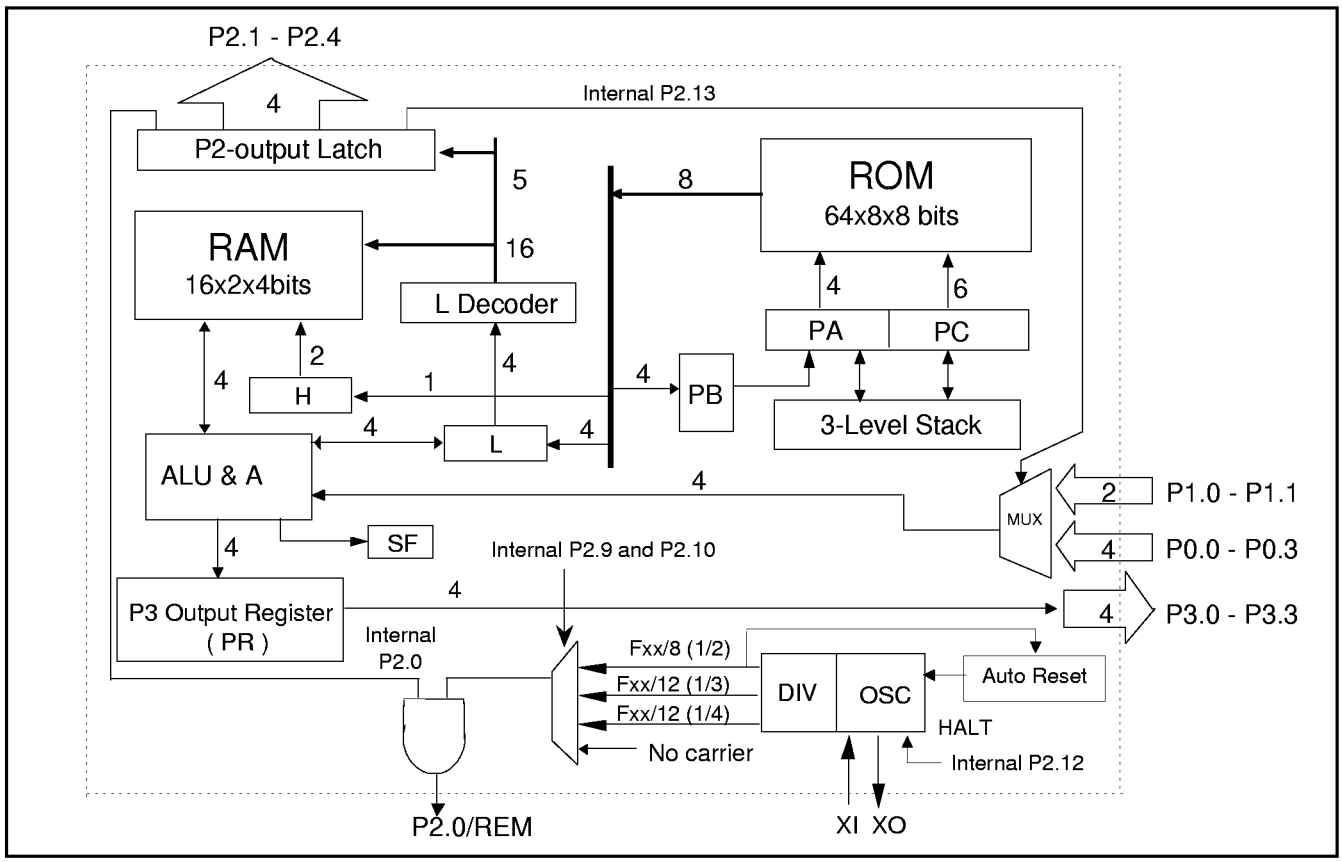

PIN CONFIGURATION (20 DIP, 20 SOP)

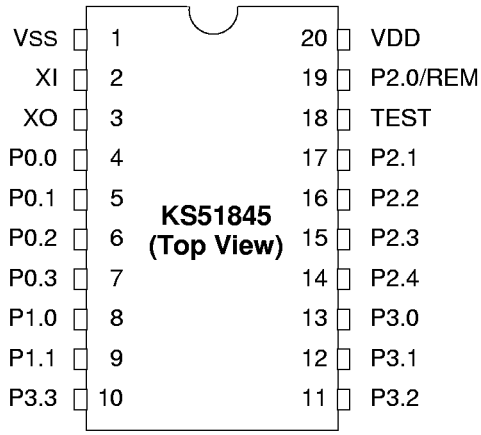

PIN DESCRIPTION FOR 20 PINS

Symbols	Pin No.	Type	Functions	I/O Circuit Type
P0.0 - P0.3	4, 5, 6, 7	Input	4-bit input port when P2.13 is low	A
P1.0 - P1.1	8, 9	Input	2-bit input port when P2.13 is high	A
P2.0/REM	19	Output	1-bit individual output for remote carrier frequency (1)	B
P2.2 - P2.4	16,15, 14	Output	1-bit individual output port	C
P2.1	17			D
P3.0 - P3.3	13,12,11,10	Output	4-bit parallel output port	C
TEST	18	Input	Input pin for test (Normally connected to VSS)	
XI	2	Input	Oscillation clock input	
XO	3	Output	Oscillation clock output	
VDD	20		Power supply	
VSS	1		Ground	

NOTES:
1.The carrier can be selected by software as Fxx/12 (1/3 duty), Fxx/12 (1/4 duty), Fxx/8 (1/2 duty), or no-carrier frequency.
2.Package type can be selected as 20 DIP, or 20 SOP in the ordering sheet.

I/O CIRCUIT SCHEMATICS

TYPE A

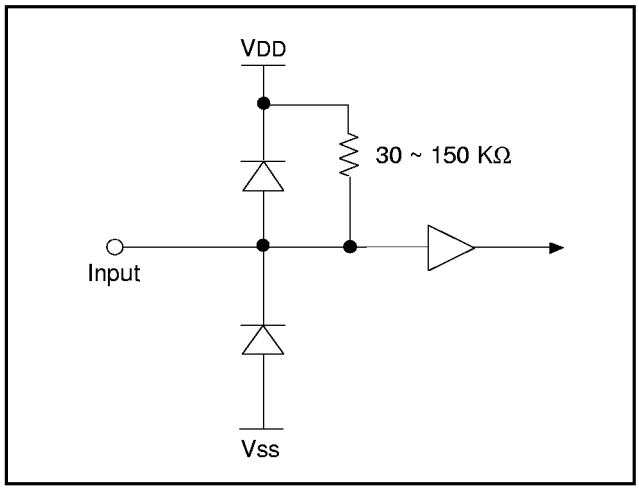

TYPE B

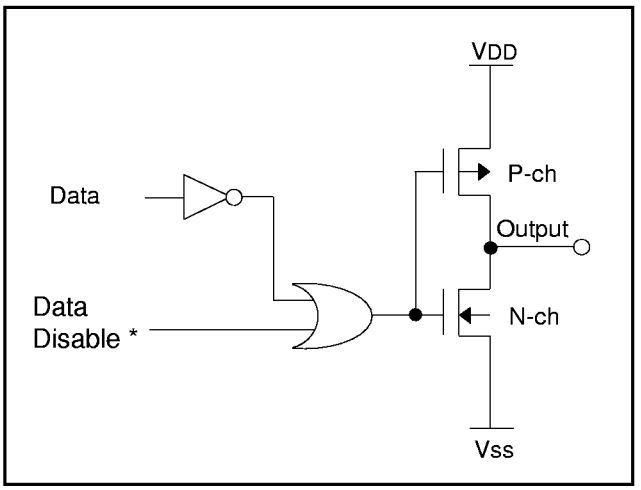

TYPE C

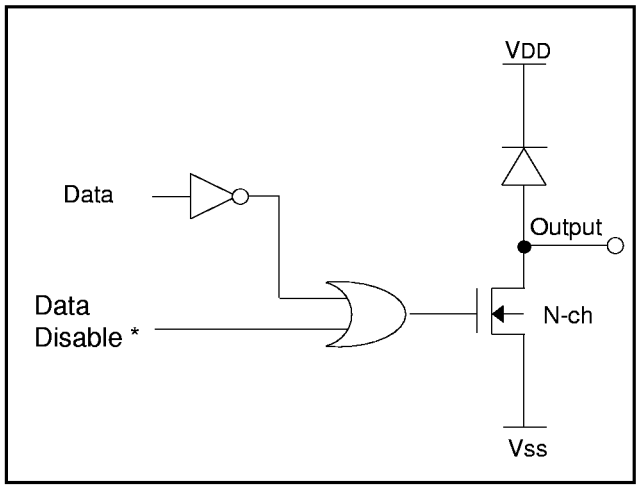

TYPE D

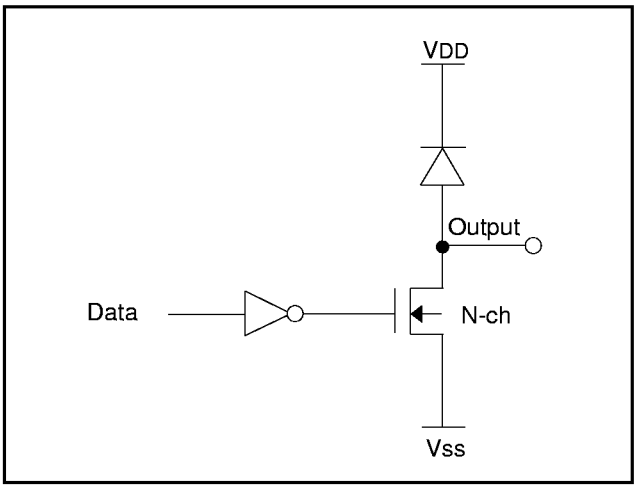

NOTE: If data disable signal is active, halt mode, the output becomes low state.

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbols	Ratings	Units
Supply Voltage	VDD	- 0.3 to 6	V
Input Voltage	VI	- 0.3 to VDD + 0.3	V
Output Voltage	VO	- 0.3 to VDD + 0.3	V
Soldering Temperature	Tsld	260 (10 sec)	°C
Storage Temperature	Tstg	- 55 to 125	°C

DC CHARACTERISTICS (VDD = 3 V, TA = 25 °C)

Parameters		Symbols	Test Conditions	Min.	Typ.	Max.	Units
Supply Voltage		VDD	Fosc: 250kHz-3.9MHz	1.8	3.0	3.6	V
			Fosc: 4MHz-6MHz	2.2	3.0	3.6	
Operating Temperature		TA	—	-20	—	85	° C
High-Level Input Voltage		VIH1	All input pins except XIN	0.7VDD	—	VDD	V
		VIH2	XIN	VDD-0.3	—	VDD	V
Low-Level Input Voltage		VIL1	All input pins except XIN	0	—	0.3VDD	V
		VIL2	XIN	0	—	0.3	V
High-Level Output Current P2.0		IOH1	VO = 2.0 V	-6.0	-9	-14	mA
Low-Level Output Current P2.0		IOL1	VO = 0.4 V	1.5	3.0	4.5	mA
Low-Level Output Current	P3 Output	IOL2	VO = 0.4 V	0.5	1.0	2.0	mA
	P2.1 - P2.3			1.5	3.0	4.5	
	P2.4			0.5	1.0	2.0	
High-Level Input Leakage Current		ILIH1	VI = VDD All input pins except XIN	—	—	3	µA
		ILIH2	XIN	—	3	10	
Low-Level Input Leakage Current		ILIL1	XIN	—	–3	–10	
High-Level Output Leakage Current		ILOH	VO=VDD All output pins except P2.0	—	—	3	µA
Pull-up Resistance of Input Port		R	VDD = 3 V VI = 0 V	30	70	150	KΩ
Average Supply Current		IDD	VDD=3V crystal/resonator Non–divided option Fosc=1MHz	—	0.5	1.0	mA
			8–divided option Fosc=6MHz				
HALT Current		IDDh	Fosc = 0	—	—	1.0	µA
Clock Frequency		Fxx	Crystal/Ceramic	250	—	1000	kHz
Oscillator Frequency		Fosc	Crystal/Ceramic Non-divide Option	250	—	1000	
			Crystal/Ceramic Divide-8 Option	2000	—	6000	

FUNCTIONAL DESCRIPTION

Program Memory (ROM)

The KS51845's program memory consists of a 512-byte ROM, organized in 8 pages. Each page is 64 bytes long. (See Figure 2–3).

ROM addressing is supported by a 10-bit register made up of two sub-registers: a 4-bit Page Address register (PA), and a 6-bit Program Counter (PC).

Pages 0 through 6 and page15(FH) can each access 64 (3FH) bytes.

ROM addressing occurs as follows: The 10-bit register selects one of the ROM's 512-bytes. A new address is then loaded into the PC register during each instruction cycle.
Unless a transfer-of- control instruction such as JP, CALL, or RET is encountered, the PC is loaded with the next sequential 6-bit address in the page, PC + 1. In this case, the next address of 3FH would be 00H.

Only the PAGE instruction can change the Page Buffer (PB) to a specified value.

When a JP or CALL instruction is executed, and if the Status Flag is set to "1", the contents of the PB are loaded into the PA register. If the Status Flag is "0", however, the JP or CALL is executed like NOP instruction in an instruction cycle and the Status Flag is set to "1". After that, program execution proceeds.

● Page-In Addressing

All instructions, including JP and CALL, can be executed by page. (See Figure 2–1). When the Status Flag is "1" , a JP or CALL causes a program to branch to its address (operand) in a page.

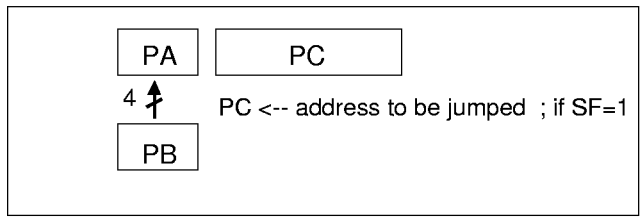

Figure 2–1. Page-In Addressing

● Page-To-Page Addressing

When a PAGE instruction occurs, and if the Status Flag is "1", a JP or CALL instruction will cause a program to branch to its address (operand) across the page (see Figure 2–2).

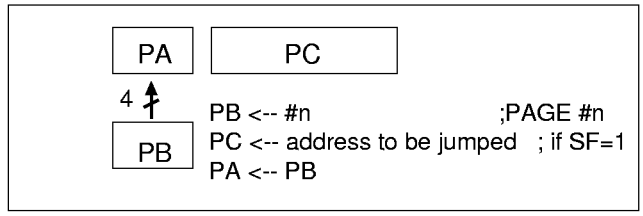

NOTE: If SF = 0 then PC <-- PC+1.

Figure 2–2. Page-To-Page Addressing



The 10-bit register points one of 512 bytes at addresses 0000H to 063FH and 0F00H to 0F3FH. After reset, it points to 0FXXH for execution in the first instruction cycle. It then becomes 0F00H in the next instruction cycle.

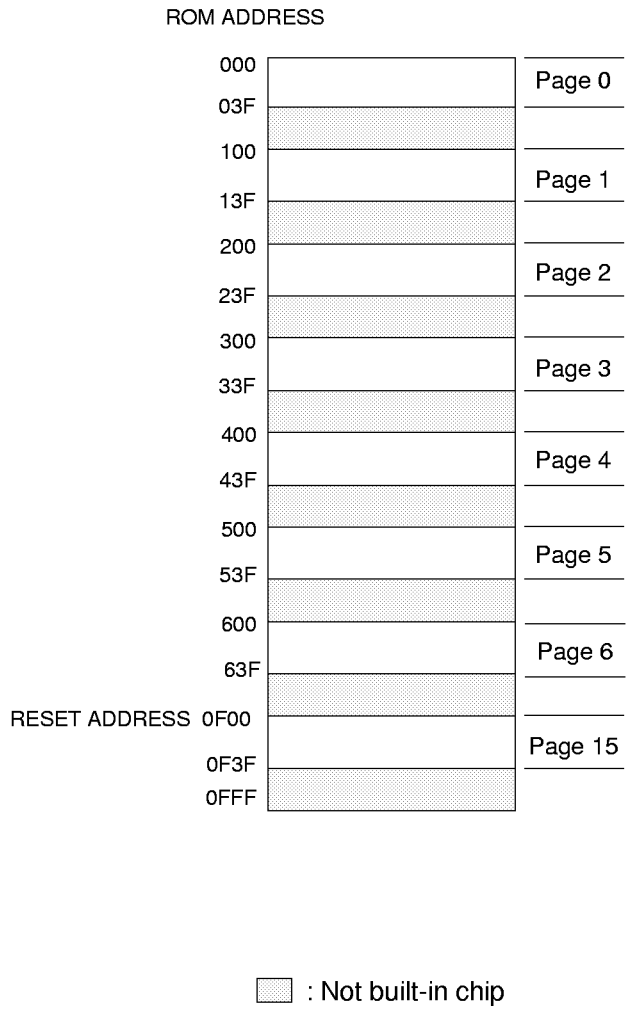

Figure 2–3. KS51845 Program Memory Map

Data Memory (RAM)

The KS51845's data memory consists of a 32-nibble RAM which is organized into two files of 16 nibbles each (see Figure 2–4).
RAM addressing is implemented by a 7-bit register, HL.
Its upper 3-bit register (H) selects one of two files and its lower 4-bit register (L) selects one of 16 nibbles in the selected file.

Instructions which manipulate the H and L registers are as follow :

Select a file :

- MOV H,#n ; H <-- #n, where n must be 0,4
- NOT H ; Complement MSB of H register

Select a nibble in a selected file :

- MOV L,A ; L <-- A
- MOV L,@HL ; L <-- M(H,L)
- MOV L,#n ; L <-- #n, where 0 ≤ n ≤0FH
- INCS L ; L <-- L+1
- DECS L ; L <-- L-1

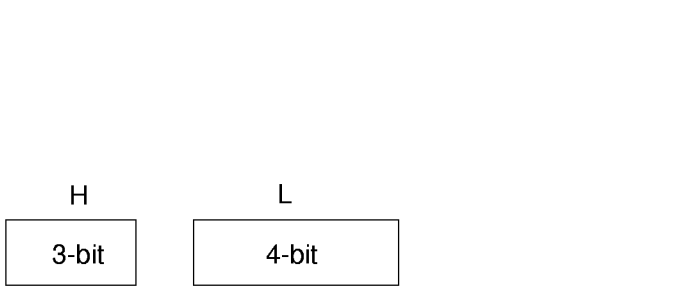

The 7-bit HL register pair points to one of the 32 nibbles.

H register selects one of two files; 0, 4
L register selects one of 16 nibbles; 0 to 0FH

After reset, the H and L registers to unknown state.

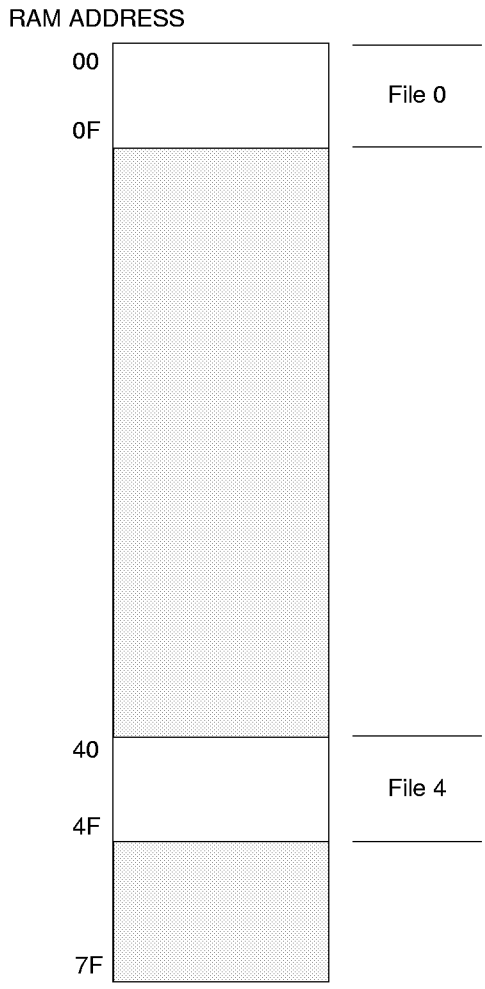

: Not built-in chip

Figure 2–4. KS51845 Data Memory Map

REGISTER DESCRIPTIONS

Stack Register (SR)

Three levels of subroutine nesting are supported by a three-level stack as shown in Figure 2–5.

Each subroutine call (CALL) pushes the next PA and PC address into the stack. The latest stack to be stored will be overwritten and lost. Each return instruction (RET) pops the stack back into the PA and PC registers.

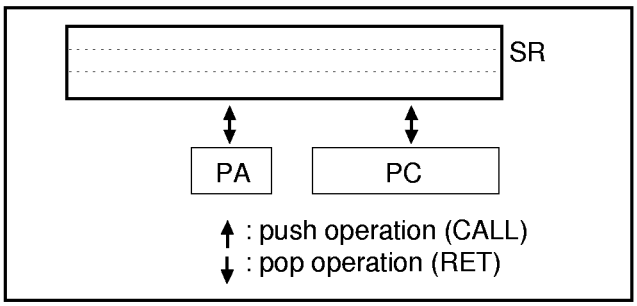

Figure 2–5. Stack Operations

Page Address Register (PA), Page Buffer Register (PB)

The Page Address Register (PA) and Page Buffer Register (PB) are 4-bit registers. The PA always specifies the current page.

A page select instruction (PAGE #n) loads the value "n" into the PB. When JP or CALL instruction is executed, and if the Status Flag (SF) is set to 1, the contents of PB are loaded into PA. If SF is "0", however, the JP or CALL is executed like NOP instruction and SF is set to "1". The contents of PB don't be loaded. Figure 2–6 illustrates this concept.

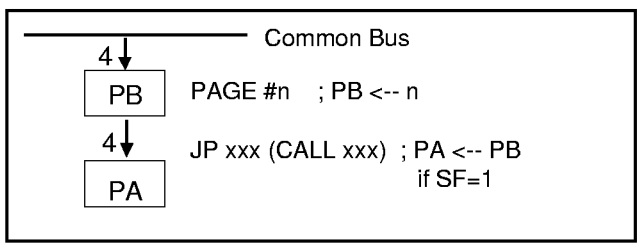

Figure 2–6. PA, PB Operations

Arithmetic Logic Unit (ALU), Accumulator (A)

The SMCS-51 CPU contains an ALU and its own 4-bit register (accumulator) which is the source and destination register for most I/O, arithmetic, logic, and data memory access operations.

Arithmetic functions and logical operations will set the status flag (SF) to "0" or "1".

Status Latch (SL)

The Status Latch (SL) flag is an 1-bit flip-flop register. Only the "CPNE L,A" instruction can change the value of SL.

If the result of a "CPNE L,A" instruction is true, the SL is set to "1"; If not true, to "0".

Status Flag : SF

The Status Flag (SF) is a 1-bit flip-flop register which enables programs to conditionally skip an instruction. All instructions, including JP and CALL, are executed when SF is "1".

But if SF is "0", the program executes NOP instruction instead of JP or CALL and resets SF to "1". Then,program execution proceeds. The following instructions set the SF to "0":

Status Flag (SF) (Continued)

- **Arithmetic Instructions**

```
ADDS    A,#n        ; if no carry
ADDS    A,@HL       ; if no carry
INCS    A,@HL       ; if no carry
INCS    A           ; if no carry
INCS    L           ; if no carry
SUBS    A,@HL       ; if borrow
DECS    A,@HL       ; if borrow
DECS    A           ; if borrow
DECS    L           ; if borrow
```

- **Compare Instructions**

```
CPNE    @HL,A       ; if M(H,L)=(A)
CPNZ    @HL         ; if M(H,L)=0
CPNE    L,#n        ; if (L)=#n
CPNE    L,A         ; if (L)=(A)
CPLE    A,@HL       ; if (A)>M(H,L)
CPNZ    P0          ; if (P0)=0
CPBT    @HL,b       ; if M(H,L).b≠1
```

- **Data Transfer Instructions**

```
MOV     @HL+,A      ; if no carry
MOV     @HL-,A      ; if borrow
```

- **Logical Instructions**

```
NOTI    A           ; if (A) ≠ 0 after operation
```

INPUT PORTS : P0, P1

The P0 and P1 input ports have internal pull-up 30 – 150 KΩ resistors, (see I/O circuit type A), each multiplexed to a common bus (see Figure 2–7). If the P2.13 pin is programmed to low, then port 0 is selected as the input port. Otherwise, if the P2.13 pin high, port 1 is selected.

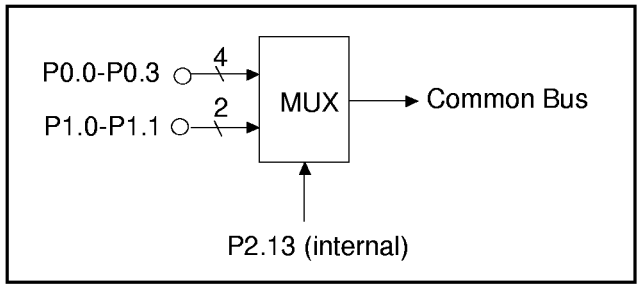

Figure 2–7. KS51845 Input Port

OUTPUT PORTS : P2, P3

The P2 and P3 output ports can be configured as push-pull (P2.0/REM only) and open drain (P2.1-P2.4, P3.0-P3.3) as follows:

- Standard push-pull : A CMOS push-pull buffer with N-channel transistor to ground in conjunction with a P-channel transistor to VDD, compatible with CMOS and TTL. (see I/O Circuit Type B).

- N-channel open drain: An N-channel transistor to ground, compatible with CMOS and TTL. (see I/O Circuit Type C and D).
  P2.2-P2.4 and P3.0-P3.3 pins become low state in halt mode.

  The L register specifies P2 output pins (P2.0/REM-P2.4, P2.9-P2.10, P2.12, and P2.13) individually as follows:

- SETB P2.(L) : Set port 2 bits to correspond to L- register contents.

- CLRB P2.(L) : Clear port 2 bits to correspond to L- register contents.

P3 output pins P3.0-P3.3 are parallel output pins.

For the KS51845, only the 4-bit accumulator outputs its value to the P3 port by the output instruction "OUT P3, @SL+A" (the value of the Status Latch (SL) does not matter).

TRANSMISSION CARRIER FREQUENCY

One of four carrier frequencies can be selected and transmitted through the P2.0/REM pin by programming the internal P2.9, P2.10 and P2.0 pins (see Table 2–1). Figure 2–8 shows a simplified diagram of the various transmission circuits.

P2.10	P2.9	Carrier Frequency of P2.0/REM Pin
0	0	Fxx/12, 1/3 duty
0	1	Fxx/8, 1/2 duty
1	0	Fxx/12, 1/4 duty
1	1	No carrier

Table 2–1 Carrier Frequency Selection Table

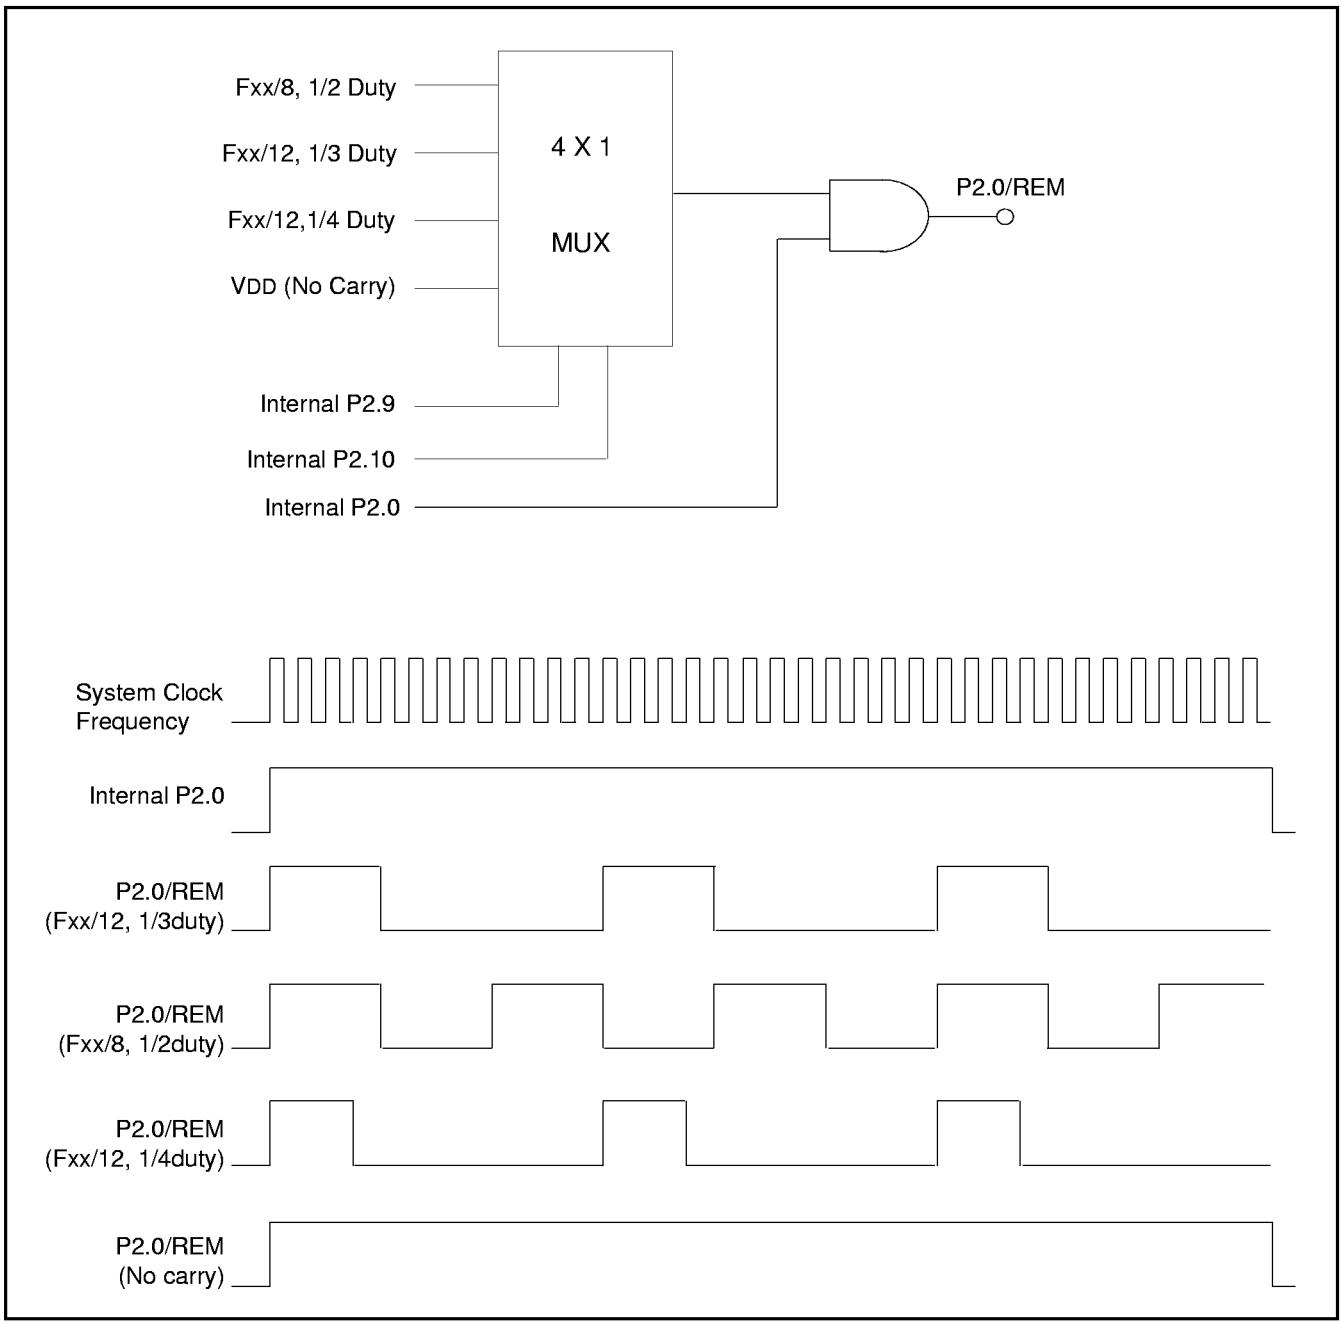

Figure 2–8. Diagram of Transmission Circuits

HALT MODE

The HALT mode is used to reduce power consumption by stopping the clock and holding the states of all internal operations fixed. This mode is very useful in battery-powered instruments. It also holds the controller in wait status for external stimulus to start some event. The KS51845 can be halted by programming the P2.12 pin high, and by forcing P0 input pins (P0.0 –P0.3) to high and P1 input pins (P1.0 – P1.1) to high, concurrently (see Figure 2–9). When in HALT mode, the internal circuitry does not receive any clock signal, and all P2, P3 output pins become low states. However, P2.1 pin retains its programmed value until the device is re-started as follows:

- Forcing any P0 and P1 input pins to low: system reset occurs and it continues to operate from the reset address.

An oscillation stabilization time of 13 msec in Fxx=455 KHz crystal oscillation is needed for stability (see Figure 2–10).

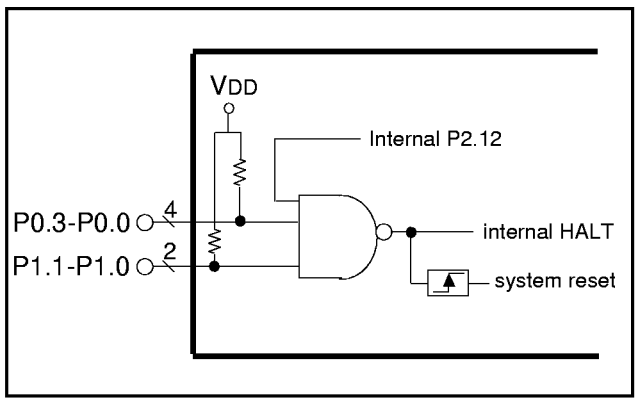

Figure 2–9. Block Diagram of HALT Logic

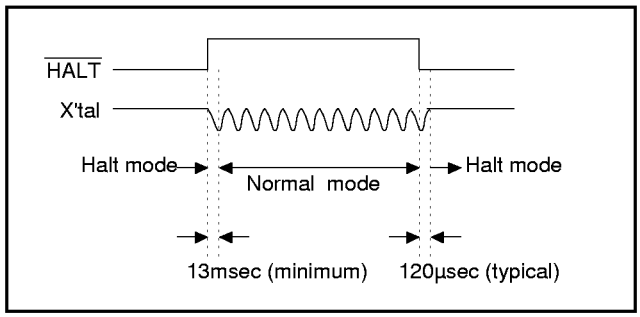

Figure 2–10. Release Timing for HALT or RESET to Normal Mode in Crystal Oscillation

RESET

All reset operations are internal in the KS51845. It has an internal power-on reset circuit consisting of a 7 pF capacitor, a 1MΩ resistor, and a Schmitt Trigger (see Figure 2–11). The controller also contains an auto-reset circuit that resets the chip every 131,072 oscillator clock cycles (288 ms at a Fxx=455KHz clock frequency). The auto-reset counter is cleared by the rising edge of a internal P2.0 pin, by HALT, or by the power-on reset pulse (see Figure 2–12). Therefore, no clocks are sent to the counter and the time-out is suspended in HALT mode. When a reset occurs during program execution, a transient condition occurs. The PA register is immediately initialized to 0FH. The PC, however, is not reset to 0H until one instruction cycle later. For example, if PC is 1AH when a reset pulse is generated, the instruction at 0F1AH is executed, followed by the instruction at 0F00H.

After a reset, approximately 13 msec is needed before program execution proceeds (assuming Fxx=455 KHz ceramic oscillation).

Upon initialization, registers are set as follows:

- PC register to 0 in next instruction cycle
- PA and PB registers to 0FH (15th page)
- SF and SL registers to 1
- H,L registers to unknown state.
- All internal/external output pins (P3.0-P3.3, P2.0/REM–P2.4, P2.9, P2.10, P2.12 and P2.13) to low

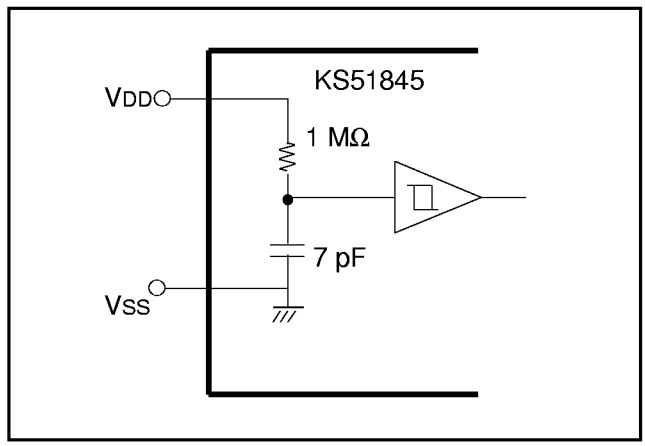

Figure 2–11. KS51845's Power-on Reset Circuit

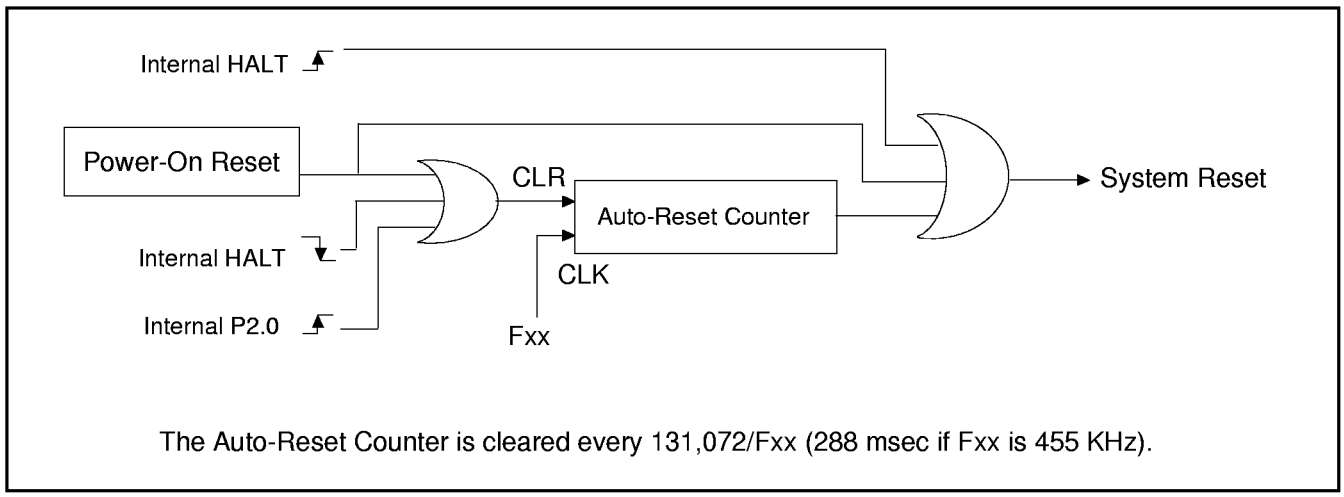

Figure 2–12. Auto Reset Block Diagram

OSC DIVIDE OPTION CIRCUIT

The OSC Divide Option Circuit provides a maximum 1MHz Fxx system clock. Fosc which is generated in oscillation circuit is divided eight or non–divided in this circuit to produce Fxx. This dividing ratio will be chosen by mask option. (see Figure 2–13)
Fosc : Oscillator clock
Fxx : System clock (Fosc or Fosc/8)
Fcpu : CPU clock (Fcpu = Fxx/6)
1 instruction cycle clock

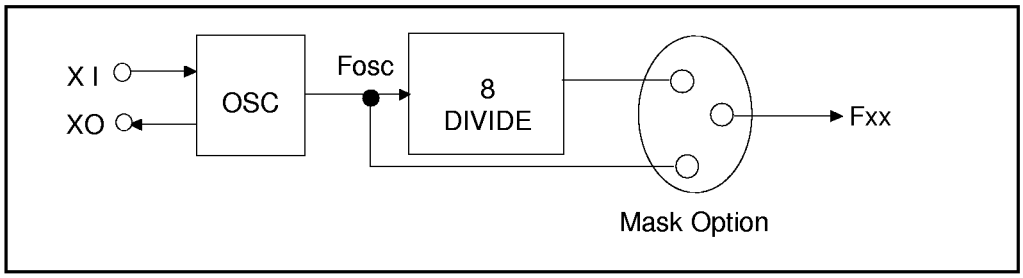

Figure 2–13 KS51845 OSC Divide Option Circiut

PACKAGE DIMENSIONS

20 SOP-375

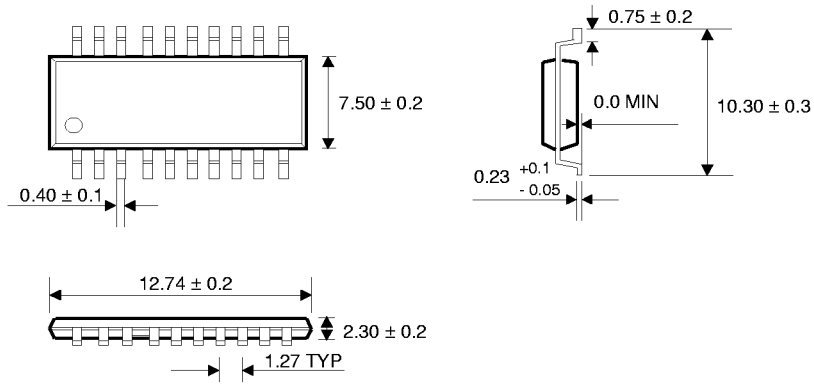

20 DIP-300A

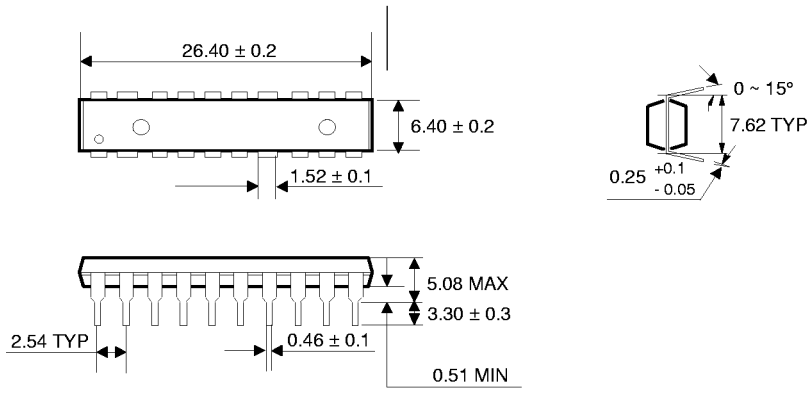

KS51 OPCODE MAP

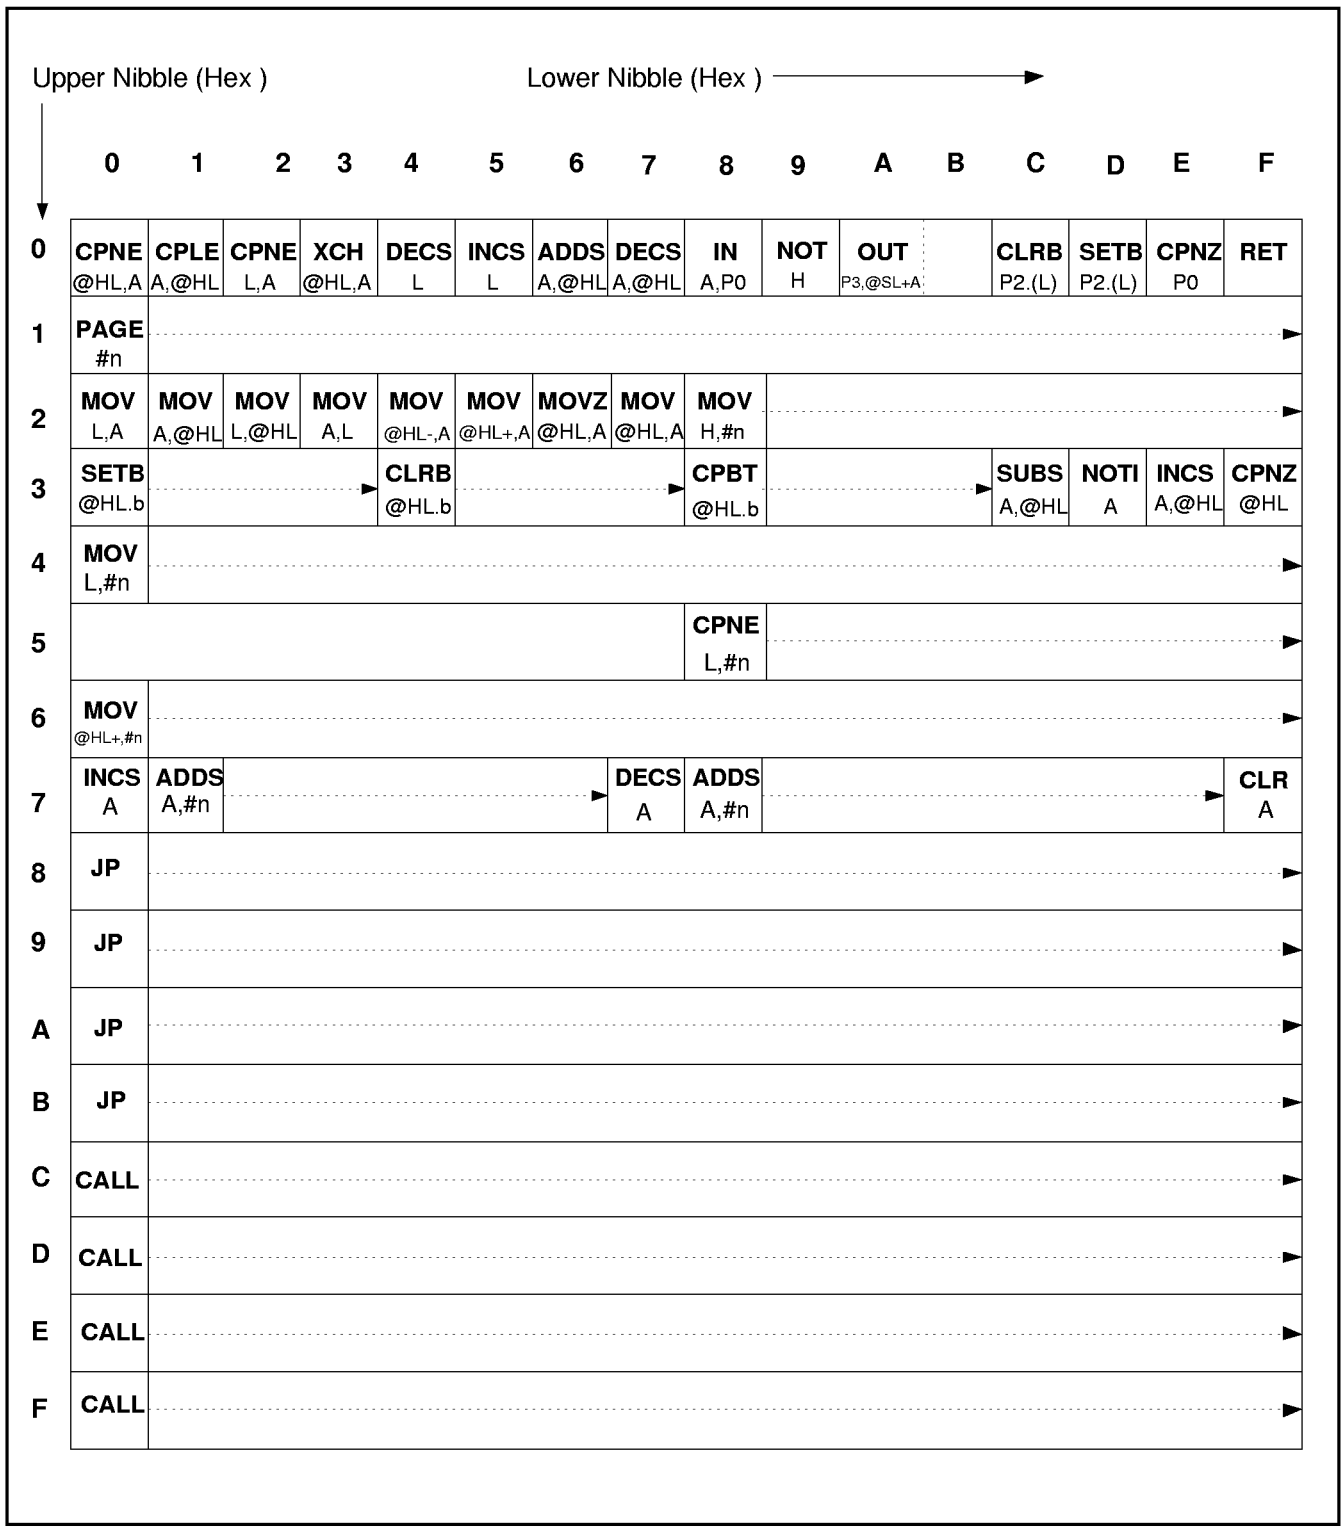

MOV L,A

Binary Code : | 0 0 1 0 | 0 0 0 0 |

Description : The contents of the accumulator are moved to register L.
The contents of the source operand are not affected.

Operation : (L) <-- (A)

Flags : SF : Set to one
SL : Unaffected

Example :
```
CLR     A       ; Clear the contents of A
MOV     L,A     ; Move 0H to REG L
```

MOV A,L

Binary Code : | 0 0 1 0 | 0 0 1 1 |

Description : The contents of register L are moved to the accumulator.
The contents of the source operand are not affected.

Operation : (A) <-- (L)

Flags : SF : Set to one
SL : Unaffected

Example :
```
MOV     L,#3H   ; Move 3H to REG L
MOV     A,L     ; Move 3H to A
```

MOV @HL,A

Binary Code : | 0 0 1 0 | 0 1 1 1 |

Description : The contents of the accumulator are moved to the data memory whose address is specified by registers H and L.
The contents of the source operand are not affected.

Operation : M [(H,L)] <-- (A)

Flags : SF : Set to one
SL : Unaffected

Example :
```
CLR     A       ; Clear the contents of A
MOV     H,#0H   ; Move 0H to REG H
MOV     L,#3H   ; Move 3H to REG L
MOV     @HL,A   ; Move 0H to RAM address 03H
```

MOV A,@HL

Binary Code : | 0 0 1 0 | 0 0 0 1 |

Description : The contents of the data memory addressed by registers H and L are moved to accumulator. The contents of the source operand are not affected.

Operation : (A) <-- M [(H,L)]

Flags : SF : Set to one
SL : Unaffected

Example :

```
                                Assume HL contains 04H
MOV     A,@HL       ; Move contents of RAM address 04H to A
```

MOV L,@HL

Binary Code : | 0 0 1 0 | 0 0 1 0 |

Description : The contents of the data memory addressed by registers H and L are moved to register L. The contents of the source operand are not affected.

Operation : (L) <-- M [(H,L)]

Flags : SF : Set to one
SL : Unaffected

Example :

```
                                Assume HL contains 04H
MOV     L,@HL       ; Move contents of RAM address 4H to REG L
CPNE    L,#5H       ; Compare 5H to REG L values
JP      XX          ; Jump to XX if REG L value is not 5H
JP      YY          ; Jump to YY if REG L value is 5H
```

MOV @HL+,A

Binary Code : | 0 0 1 0 | 0 1 0 1 |

Description : The contents of the accumulator are moved to the data memory addressed by registers H, L; L register contents are incremented by one.
The contents of the source operand are not affected.

Operation : M [(H,L)] <-- (A), L <-- L + 1

Flags : SF : Set if carry occurs; cleared otherwise
SL : Unaffected

Example :

```
MOV     H,#0H
MOV     L,#0FH
CLR     A
MOV     @HL+,A      ; Move 0H to RAM address 0FH and increment REG L value by one
JP      PRT         ; Jump to PRT, since there is a carry from increment
```

MOV @HL-,A

Binary Code : | 0 0 1 0 | 0 1 0 0 |

Description : The contents of accumulator are moved to the data memory addressed by registers H, L;
L register contents are decremented by one.
The contents of the source operand are not affected.

Operation : M [(H,L)] <-- (A), L <-- L - 1

Flags : SF : Set if no borrow; cleared otherwise
SL : Unaffected

Example :
```
MOV     H,#0H
MOV     L,#3H
CLR     A
MOV     @HL-,A
JP      ABC
```

MOV L,#n

Binary Code : | 0 1 0 0 | d d d d |

Description : The 4-bit value specified by n (data) is loaded into register L.
The contents of the source operand are not affected.

Operation : (L) <-- #n

Flags : SF : Set to one
SL : Unaffected

Example :
```
MOV     L,#8H       ; 8H is moved to REG L
```

MOV H,#n

Binary Code : | 0 0 1 0 | 1 d d d |

Description : The 3-bit value specified by n (data) is moved to register H.
The contents of the source operand are not affected.

Operation : (H) <-- #n

Flags : SF : Set to one
SL : Unaffected

Example :
```
MOV     H,#4H       ; 4H is moved into REG H
```

MOV @HL+,#n

Binary Code : | 0 1 1 0 | d d d d |

Description : The 4-bit value specified by n (data) is moved to data memory addressed by registers H, L; L register contents are incremented by one. The contents of the source operand are not affected.

Operation : M [(H,L)] <-- #n, L <-- L + 1

Flags : SF : Set to one
SL : Unaffected

Example :
```
MOV     H,#0H
MOV     L,#7H
MOV     @HL+,#9H    ; Move 9H to RAM address 07H and increment REG L value by one,
                    then REG L contains 8H
```

MOVZ @HL,A

Binary Code : | 0 0 1 0 | 0 1 1 0 |

Description : The contents of the accumulator are moved to the data memory addressed by registers H, L; accumulator contents are cleared to zero.

Operation : M [(H,L)] <-- (A), (A) <-- 0

Flags : SF : Set to one
SL : Unaffected

Example :
```
MOV     L,#3H
MOV     A,L
MOVZ    @HL,A   ; Move 3H to indirect RAM and clear A to zero
MOV     L,A     ; Move 0H to REG L
SETB    P2.(L)  ; Set P2.0 to 1
```

XCH @HL,A

Binary Code : | 0 0 0 0 | 0 0 1 1 |

Description : This instruction exchanges the contents of the data memory addressed by registers H and L with the accumulator contents.

Operation : M [(H,L)] <--> (A)

Flags : SF : Set to one
SL : Unaffected

Example :
```
MOV     H,#0H
MOV     L,#6H
CLR     A       ; Clear A to zero
ADDS    A,#5H   ; Add 5H to A
XCH     @HL,A   ; Exchange 5H with contents of RAM address 06H
```

PAGE #n

Binary Code :

0 0 0 1	d d d d

Description : The immediate 4-bit value specified by n (data) is loaded into the PB register.

Operation : (PB) <-- #n

Flags : SF : Set to one
SL : Unaffected

Example :

```
PAGE    #3H     ; Move 3H to page buffer
JP      AN      ; Jump to label AN located at page 3 if SF is one;
                  otherwise, it is skipped
```

CPNE @HL,A

Binary Code :

0 0 0 0	0 0 0 0

Description : The contents of accumulator are compared to the contents of indirect data memory; an appropriate flag is set if their values are not equal.
The contents of both operands are unaffected by the comparison.

Operation : M [(H,L)] ≠ (A)

Flags : SF : Set if not equal, cleared otherwise
SL : Unaffected

Example :

```
CLR     A
ADDS    A,#3H
MOV     H,#0H
MOV     L,#6H
CPNE    @HL,A   ; Acc value 3H is compared to contents of RAM address 06H
JP      OA      ; Jump to OA if values of RAM address 06H are not 3H
JP      OB      ; Jump to OB if values of RAM address 06H are 3H
```

CPNZ @HL

Binary Code :

0 0 1 1	1 1 1 1

Description : This instruction compares the magnitude of indirect data memory with zero, and the appropriate flag is set if their values are not equal, i.e., if the contents of indirect data memory are not zero.
The contents of operand are unaffected by the comparison.

Operation : M [(H,L)] ≠ 0

Flags : SF : Set if not zero, cleared otherwise
SL : Unaffected

Example :

```
                ; Assume the contents of RAM address are 4H
CPNZ    @HL     ; Compare 4H with zero
JP      EQ      ; Jump to EQ because the result is not equal
JP      WAIT
```

CPNE L,A

Binary Code : | 0 0 0 0 | 0 0 1 0 |

Description : The contents of the accumulator are compared to the contents of register L ; the appropriate flags are set if their values are not equal.
The contents of both operands are unaffected by the comparison.

Operation : (L) ≠ (A)

Flags : SF : Set if not equal, cleared otherwise
SL : Set if not equal, cleared otherwise

Example :

```
                        ; Assume REG L contains 5H, A contains 4H
CPNE    L,A             ; Compare A to REG L values
JP      K1              ; Jump to K1 because the result is not equal
JP      K2
```

CPNE L,#n

Binary Code : | 0 1 0 1 | d d d d |

Description : This instruction compares the immediate 4 bit data n with the contents of register L, and sets an appropriate flag if their values are not equal.
The contents of both operands are unaffected by the comparison.

Operation : (L) ≠ #n

Flags : SF : Set if not equal, cleared otherwise
SL : Unaffected

Example :

```
CLR     A
ADDS    A,#4H
MOV     L,A
CPNE    L,#5H           ; Compare immediate data 5H to REG L values
JP      K3              ; Jump to K3 because the result is not equal
```

CPLE A,@HL

Binary Code : | 0 0 0 0 | 0 0 0 1 |

Description : The contents of indirect data memory are compared to the contents of the accumulator. Appropriate flags are set if the contents of the accumulator are less than or equal to the contents of indirect data memory.
The contents of both operands are unaffected by the comparison.

Operation : (A) ≤ M [(H,L)]

Flags : SF : Set if less than or equal to, cleared otherwise
SL : Unaffected

Example :

```
                        Assume RAM address holds 8H
CPLE    A,@HL           ; Compare 8H to A values
JP      MAR             ; Jump to MAR if 0H ≤ A ≤ 8H
JP      BPR             ; Jump to BPR if 9H ≤ A ≤ 0FH
```

CPNZ P0

Binary Code : | 0 0 0 0 | 1 1 1 0 |

Description : This instruction compares the contents of Port 0 with zero. Appropriate flags are set if their values are not equal, i.e., if the contents of Port 0 are not zero.
The contents of the operand are unaffected by the comparison.

Operation : (P0) ≠ 0

Flags : SF : Set if not zero, cleared otherwise
SL : Unaffected

Example :
```
MOV     L,#0DH
CLRB    P2.(L)      ; Clear P2.13, i.e., select P0 input
CPNZ    P0          ; Compare P0 to zero
JP      KEYIN       ; Jump to KEYIN if P0 ≠ 0
JP      NOKEY       ; Jump to NOKEY if P0 = 0
```

CPBT @HL.b

Binary Code : | 0 0 1 1 | 1 0 d d |

Description : CPBT tests indirect data memory bit and sets appropriate flags if the bit value is one.
The contents of operand are unaffected by the test.

Operation : M [(H,L,b)] = 1

Flags : SF : Set if one, cleared otherwise
SL : Unaffected

Example :
```
MOV     H,#0H
MOV     L,#0BH
CPBT    @HL.3       ; Test RAM address 0BH bit 3
JP      Q1          ; Jump to Q1 if RAM address bit 3 is 1
JP      Q2          ; Jump to Q2 if RAM address bit 3 is 0
```

JP dst

Binary Code : | 1 0 d d | d d d d |

Description : The JP transfers program control to the destination address if the SF is one.
The conditional jump replaces the contents of the program counter with the address indicated and transfers control to that location.
Had the SF flag not been set, control would have proceeded with the next instruction.

Operation : If SF=1 ; PC <-- I (W), PA <-- PB

Flags : SF : Set to one
SL : Unaffected

Example :
```
JP      SUTIN1      ; This instruction will cause program execution to branch to the
                      instruction at label SUTIN1; SUTIN1 must be within the
                      current page
```

CALL dst

Binary Code : | 1 1 d d | d d d d |

Description : If the SF flag is set to 1, this instruction calls a subroutine located at the indicated address, and then pushes the current contents of the program counter to the top of the stack. The program counter value used is the address of the first instruction following the CALL instruction. The specified destination address is then loaded into the program counter and points to the first instruction of a procedure. At the end of the procedure, the return (RET) instruction can be used to return to the original program flow.

Operation : If SF=1 ; SRi <-- PC + 1, PSRi <-- PA
PC <-- I (W), PA <-- PB

Flags : SF : Set to one
SL : Unaffected

Example :
```
CALL    ACD1    ; CALL subroutine located at the label ACD1 where ACD1 must be
                  within the current page
```

RET

Binary Code : | 0 0 0 0 | 1 1 1 1 |

Description : This instruction is normally used to return to the previously executing procedure at the end of a procedure entered by a CALL instruction. The contents of the location addressed by the stack pointer are popped into the program counter. The next statement executed is that addressed by the new contents of the program counter.

Operation : PC <-- SRi, PB <-- PSRi
PA <-- PB

Flags : SF : Set to one
SL : Unaffected

Example :
```
RET                 ;Return from subroutine
```

SETB P2.(L)

Binary Code : | 0 0 0 0 | 1 1 0 1 |

Description : This instruction sets the Port 2 bit addressed by register L without affecting any other bits in the destination.

Operation : P2.(L) <-- 1

Flags : SF : Set to one
SL : Unaffected

Example :
```
MOV     L,#0H
SETB    P2.(L)      ; Set P2.0 to 1
```

CLRB P2.(L)

Binary Code : | 0 0 0 0 | 1 1 0 0 |

Description : This instruction clears the Port 2 bit addressed by register L without affecting any other bits in the destination.

Operation : P2.(L) <-- 0

Flags : SF : Set to one
SL : Unaffected

Example :

```
MOV     L,#0H
CLRB    P2.(L)      ; Clear P2.0 to 0
```

IN A,P0

Binary Code : | 0 0 0 0 | 1 0 0 0 |

Description : Data present on Port n is transferred (read) to the accumulator.

Operation : (A) <-- (Pn) (n=0, 1)

Flags : SF : Set to one
SL : Unaffected

Example :

```
IN      A,P0        ; Input port 0 data to Acc
MOV     L,A
CPNE    L,#3H
JP      OX          ; Jump to OX if port 0 data ≠ 3H
JP      QP          ; Jump to QP if port 0 data = 3H
```

OUT P3,@SL+A

Binary Code : | 0 0 0 0 | 1 0 1 0 |

Description : The contents of the accumulator and SL are transferred to the P3 Output register.

Operation : (P3 Output register) <-- (A) + (SL)

Flags : SF : Set to one
SL : Unaffected

Example :

```
CLR     A
OUT     P3,@SL+A    ; Zero output on port 3
```

NOTI A

Binary Code :

0 0 1 1	1 1 0 1

Description : The contents of the accumulator are complemented; all 1 bits are changed to 0, and vice-versa, and then incremented by one.

Operation : (A) <-- $\overline{(A)}$, (A) <-- (A) + 1

Flags : SF : Set if the result is zero, cleared otherwise
SL : Unaffected

Example :

```
CLR     A
ADDS    A,#7H
NOTI    A       ; Complement 7H (0111B) and increment the result by one; the
                  instruction NOTI A then leaves 9H (1001B) in A
```

NOT H

Binary Code :

0 0 0 0	1 0 0 1

Description : The MSB of register H is complemented.

Operation : (H) <-- $\overline{(H)}$

Flags : SF : Set to one
SL : Unaffected

Example :

```
MOV     H,#4H
NOT     H       ; Complement 4H (100B), then it leaves 00H (000B) in REG H
```

CLR A

Binary Code : | 0 1 1 1 | 1 1 1 1 |

Description : The contents of the accumulator are cleared to zero (all bits set on zero).

Operation : (A) <-- 0

Flags : SF : Set to one
SL : Unaffected

Example :
```
CLR     A       ; A values are cleared to zero
```

ADDS A,@HL

Binary Code : | 0 0 0 0 | 0 1 1 0 |

Description : ADDS adds the contents of indirect data memory to accumulator, leaving the result in the accumulator.
The contents of the source operand are unaffected.

Operation : (A) <-- M [(H,L)] + (A)

Flags : SF : Set if a carry occurred, cleared otherwise
SL : Unaffected

Example :
```
                        Assume RAM address holds 5H
CLR     A       ; Clear A to zero
ADDS    A,@HL   ; This instruction will leave 5H in A
```

ADDS A,#n

Binary Code : | 0 1 1 1 | d d d d |

Description : The specified 4-bit data n is added to the accumulator and the sum is stored in the accumulator.

Operation : (A) <-- (A) + #n

Flags : SF : Set if a carry occurred, cleared otherwise
SL : Unaffected

Example :
```
CLR     A       ; Clear A to zero
ADDS    A,#4H   ; Add 4H to A, it leaves 4H in A
```

SUBS A,@HL

Binary Code : | 0 0 1 1 | 1 1 0 0 |

Description : SUBS subtracts the contents of accumulator from the contents of indirect data memory, leaving the result in the accumulator.
The contents of source operand are unaffected.

Operation : (A) <-- M [(H,L)] - (A)

Flags : SF : Set if no borrow occurred, cleared otherwise
SL : Unaffected

Example :

```
                        Assume RAM address holds 0CH
MOV     L,#8H
MOV     A,L
SUBS    A,@HL   ; Subtract A from 0CH ; it will leave 4H in A
```

INCS A,@HL

Binary Code : | 0 0 1 1 | 1 1 1 0 |

Description : The contents of indirect data memory are incremented by one and the result is loaded into the accumulator.
The contents of indirect data memory are unaffected.

Operation : (A) <-- M [(H,L)] + 1

Flags : SF : Set if a carry occurred, cleared otherwise
SL : Unaffected

Example :

```
                        Assume RAM address holds 6H
CLR     A       ; Clear A to zero
INCS    A,@HL   ; Increment 6H by one and leave 7H in A
```

INCS L

Binary Code : | 0 0 0 0 | 0 1 0 1 |

Description : The contents of the L register are incremented by one.

Operation : (L) <-- (L) + 1

Flags : SF : Set if a carry occurred, cleared otherwise
SL : Unaffected

Example :

```
MOV     L,#5H
INCS    L       ; Increment REG L value 5H by one
```

INCS A

Binary Code : | 0 1 1 1 | 0 0 0 0 |

Description : The contents of the accumulator are incremented by one.

Operation : (A) <-- (A) + 1

Flags : SF : Set if a carry occurred, cleared otherwise
SL : Unaffected

Example :
```
MOV     L,#5H
MOV     A,L
INCS    A       ; Increment 5H by one
```

DECS A

Binary Code : | 0 1 1 1 | 0 1 1 1 |

Description : The contents of the accumulator are decremented by one.

Operation : (A) <-- (A) - 1

Flags : SF : Set if no borrow occurred, cleared otherwise
SL : Unaffected

Example :
```
MOV     L,#0BH
MOV     A,L
DECS    A       ; This instruction leaves the value 0AH in A
```

DECS A,@HL

Binary Code : | 0 0 0 0 | 0 1 1 1 |

Description : The contents of the data memory addressed by the H and L registers are decremented by one and the result is loaded in the accumulator. But the contents of data memory are not affected.

Operation : (A) <-- M [(H,L)] - 1

Flags : SF : Set if no borrow occurred, cleared otherwise
SL : Unaffected

Example :
```
                        Assume RAM address holds 5H
MOV     L,#0AH
MOV     A,L
DECS    A,@HL   ; Decrement the value 5H by one, and the result value 4H is loaded in A
```

DECS L

Binary Code : | 0 0 0 0 | 0 1 0 0 |

Description : The contents of the L register are decremented by one.

Operation : (L) <-- (L) - 1

Flags : SF : Set if no borrow occurred, cleared otherwise
SL : Unaffected

Example :
```
MOV     L,#3H
DECS    L       ; This instruction leaves the value 2H in REG L
```

SETB @HL.b

Binary Code : | 0 0 1 1 | 0 0 d d |

Description : This instruction sets indirect data memory bit addressed by registers H and L without affecting any other bits in the destination.

Operation : b <-- 1 (b=0,1,2,3)

Flags : SF : Set to one
SL : Unaffected

Example :
```
MOV     H,#0H
MOV     L,#5H
SETB    @HL.2   ; Set RAM address 05H bit 2 to 1
```

CLRB @HL.b

Binary Code : | 0 0 1 1 | 0 1 d d |

Description : This instruction clears the indirect data memory bit addressed by registers H and L without affecting any other bits in the destination.

Operation : b <-- 1 (b=0,1,2,3)

Flags : SF : Set to one
SL : Unaffected

Example :
```
MOV     H,#0H
MOV     L,#5H
CLRB    @HL.3   ; Clear RAM address 05H bit 3 to zero
```

NOTES

SMDS

The Samsung Microcontroller Development System, SMDS, is a complete PC-based development environment for KS51840/51845 microcontroller. The SMDS is powerful, reliable, and portable. The SMDS tool set includes a versatile debugging utility, trace with built-in logic analyzer, and performance measurement applications.

Its window-oriented program development structure makes SMDS easy to use. SMDS has three components:

— IBM PC-compatible SMDS software, all device-specific development files, and the SAMA assembler.

— Development system kit including main board, personality board, SMDS manual, and target board adapter, if required.

— Device-specific target board.

SMDS Product Versions

As of the date of this publication, two versions of the SMDS are being supported:

— SMDS Version 4.8 (S/W) and SMDS Version 3.6 (H/W); last release: January, 1994.

— SMDS2 Version 5.3 (S/W) and SMDS2 Version 1.3 (H/W); last release: November, 1995.

The new SMDS2 Version 1.3 is intended to replace the older Version 3.6 SMDS. The SMDS2 contains many enhancements to both hardware and software. These development systems are also supported by the personality boards of Samsung's microcontroller series: KS56, KS57, and KS88.

SAMA ASSEMBLER

The Samsung Arrangeable Microcontroller (SAM) Assembler, SAMA, is a universal assembler, and generates object code in standard hexadecimal format.

Compiled program code includes the object code that is used for ROM data and required SMDS program control data. To compile programs, SAMA requires a source file and an auxiliary definition (DEF) file with device-specific information.

TARGET BOARDS and PIGGYBACKS

Target boards are available for KS51840/51845 microcontroller. All required target system cables and adapters are included with the device-specific target board.

Piggyback chips are provided to customers in limited quantities for KS51840/51845 microcontroller. The KS51840 piggyback chips, PB51840/51845-20 and PB51840-24 are now available.

PB51840/51845-20 is 20 DIP piggyback chip for 20 DIP, 20 SOP package device of KS51840/51845 microcontroller.
PB51840-24 is 24 DIP piggyback chip for 24 SOP package device of KS51840 microcontroller.

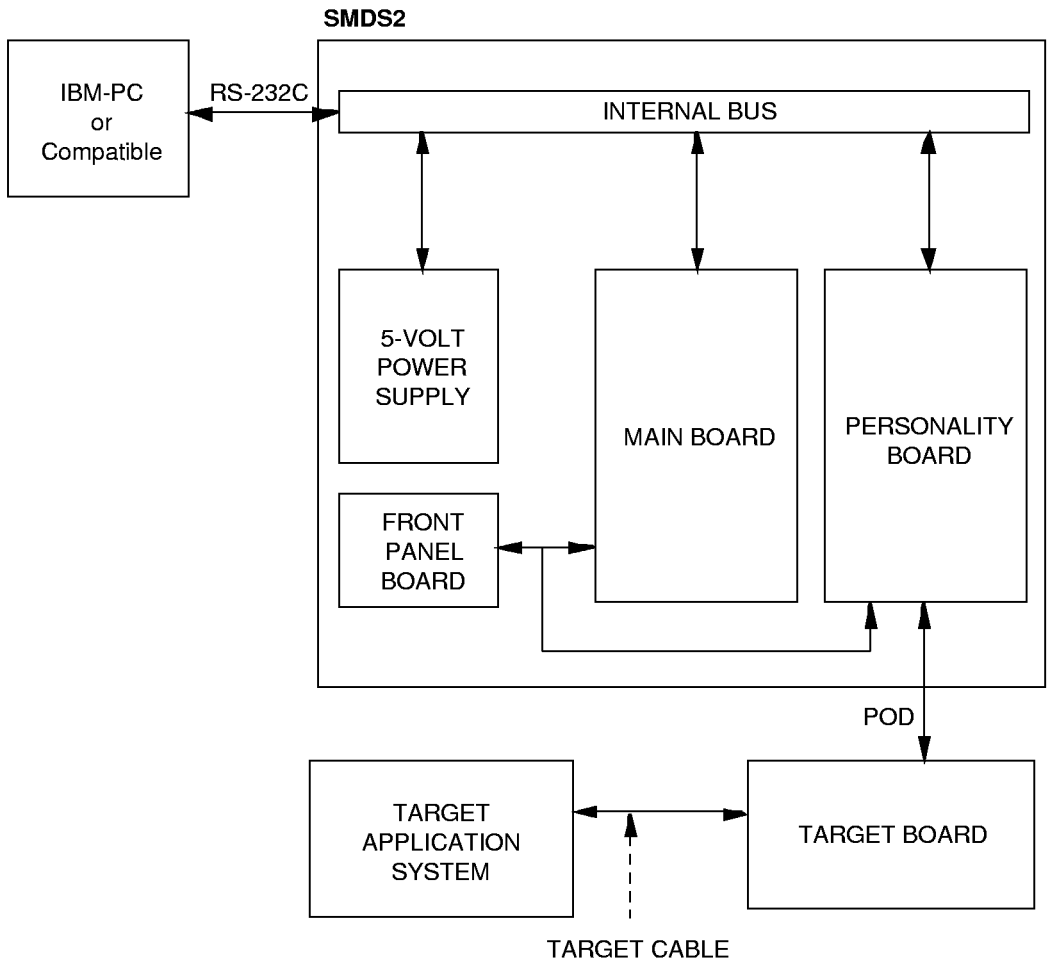

Figure4–1. SMDS Product Configuration (SMDS2)

TB51840/51845A TARGET BOARD

The TB51840/51845A target board is used for the KS51840/51845 microcontroller. It is supported by the SMDS2 development system only.

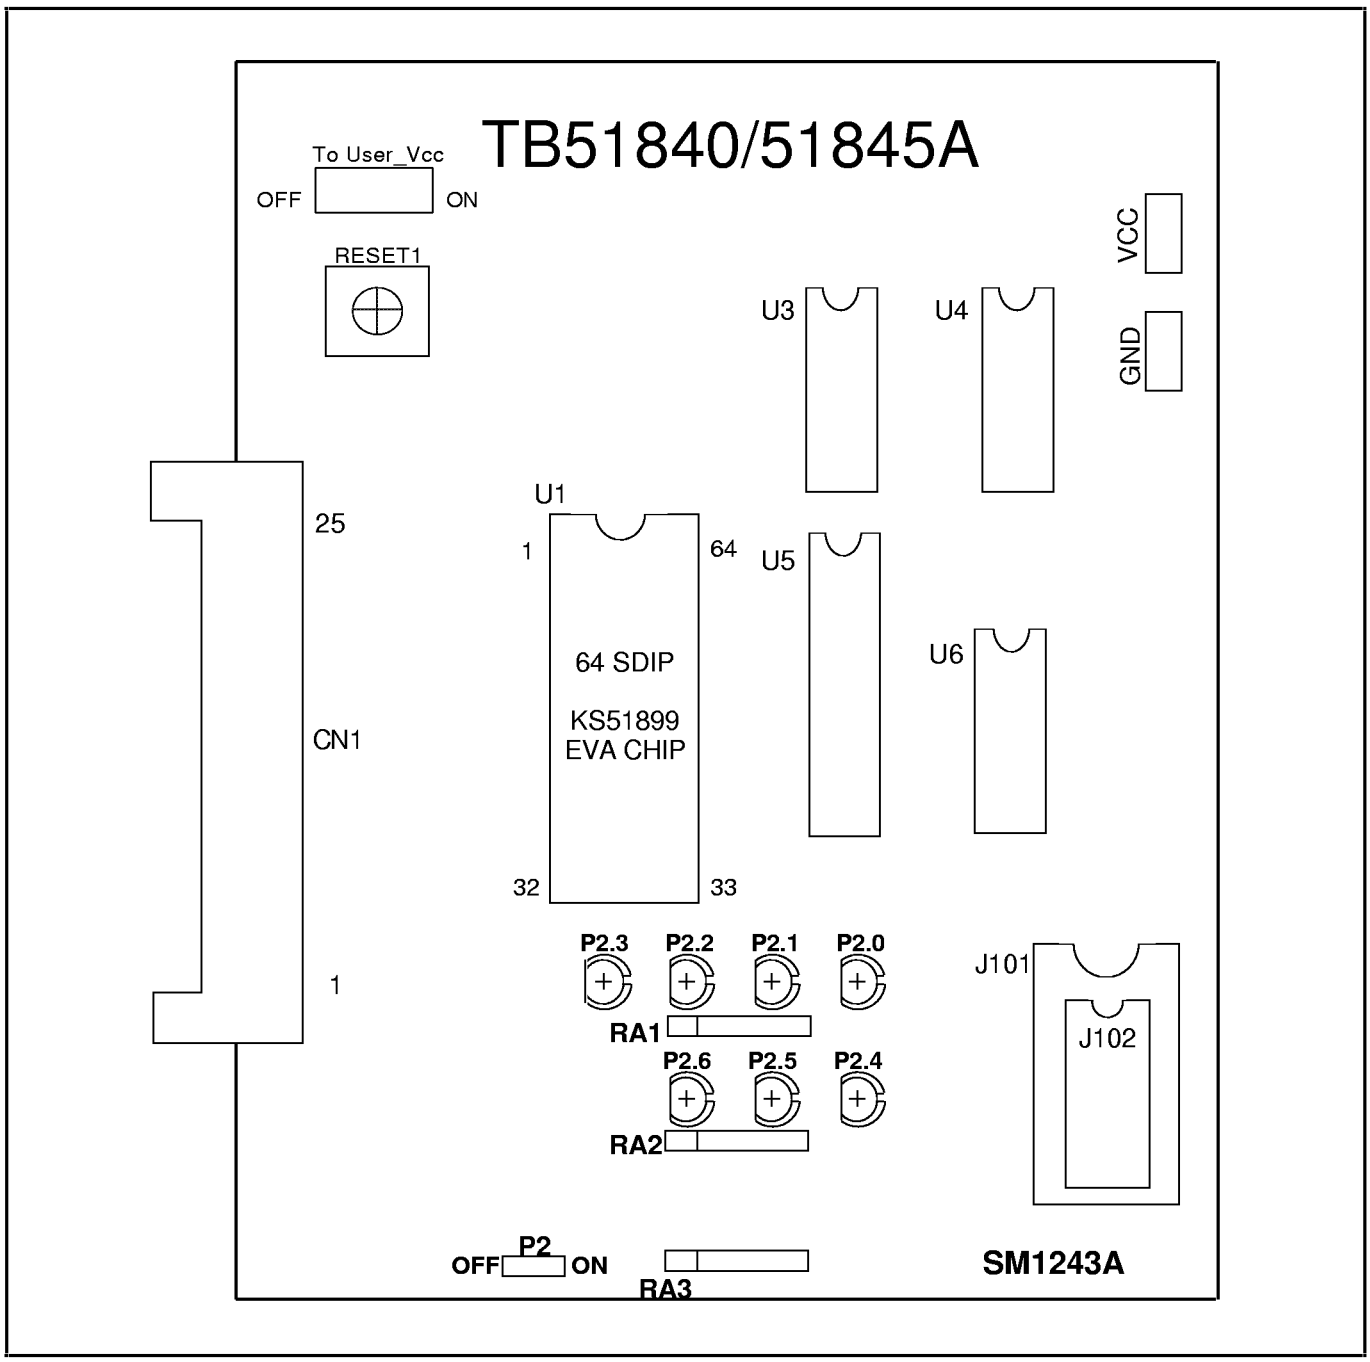

Figure 4–2. TB51840/51845A Target Board Configuration

Table 4–1. Power Selection Settings for TB51840/51845A

'To User_Vcc' Settings	Operating Mode	Comments
To User_Vcc OFF ON	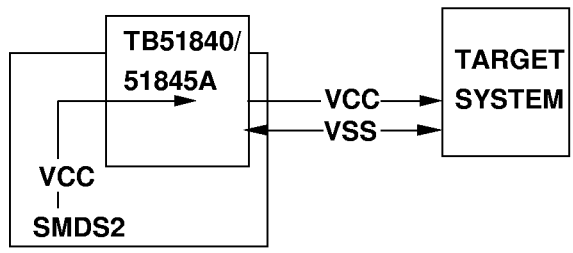	The SMDS2 supplies V_{CC} to the target board (evaluation chip) and the target system.
To User_Vcc OFF ON	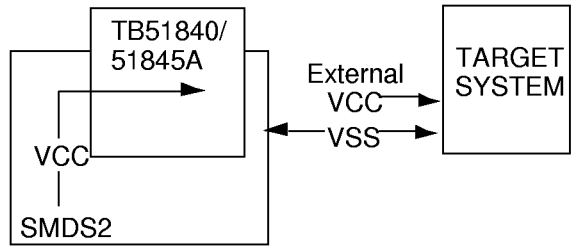	The SMDS2 supplies V_{CC} only to the target board (evaluation chip). The target system must have its own power supply.

LED2.0 – LED2.6 :

These LEDs are used to display value of the P2.0–P2.6. It will be turn on, if the value is Low.

P2 OPTION SWITCH:

Switch ON: You can see the port value using the LED display.

Switch OFF: You can't see the port value. That is, the LED won't be turn ON by the port value.

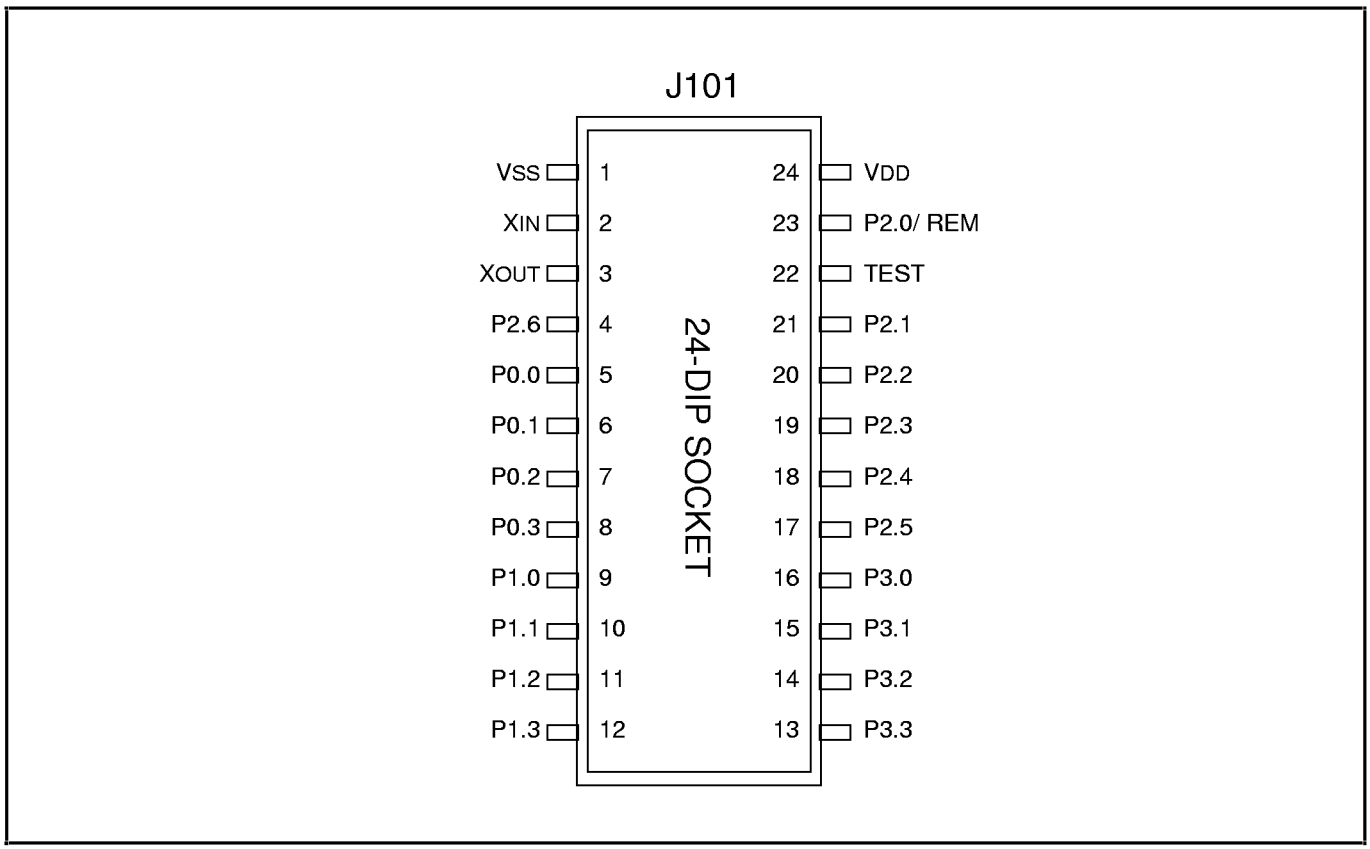

Figure 4–3. 24 DIP Socket for TB51840A (KS51840, 24 SOP)

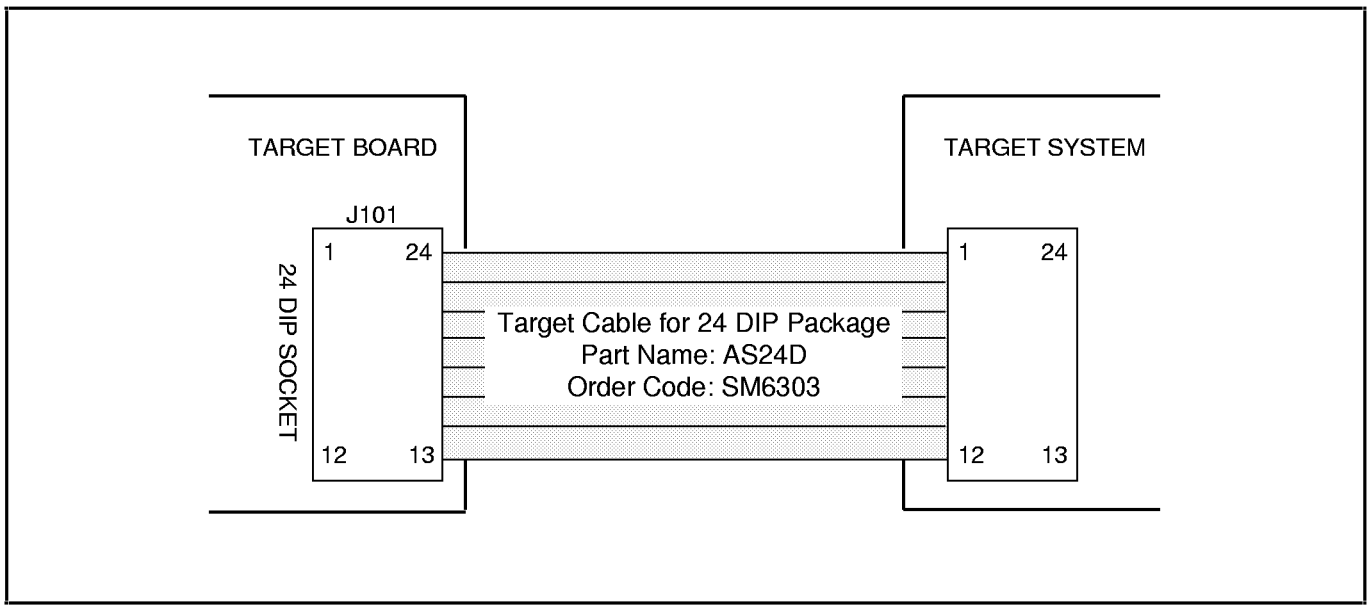

Figure 4–4. TB51840A Cable for 24 DIP Package

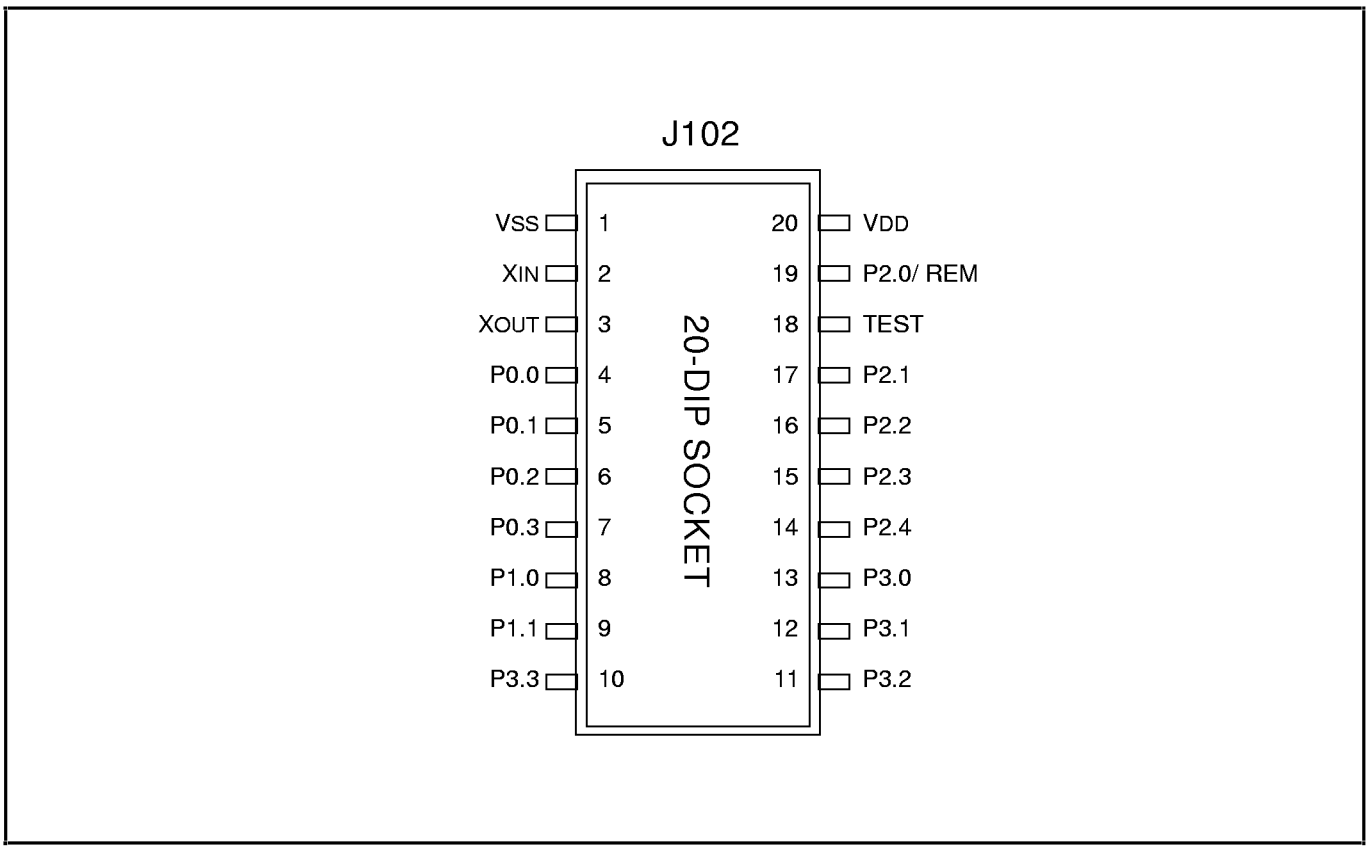

Figure 4–5. 20 DIP Socket for TB51840/51845A (KS51840/51845, 20 DIP, 20 SOP)

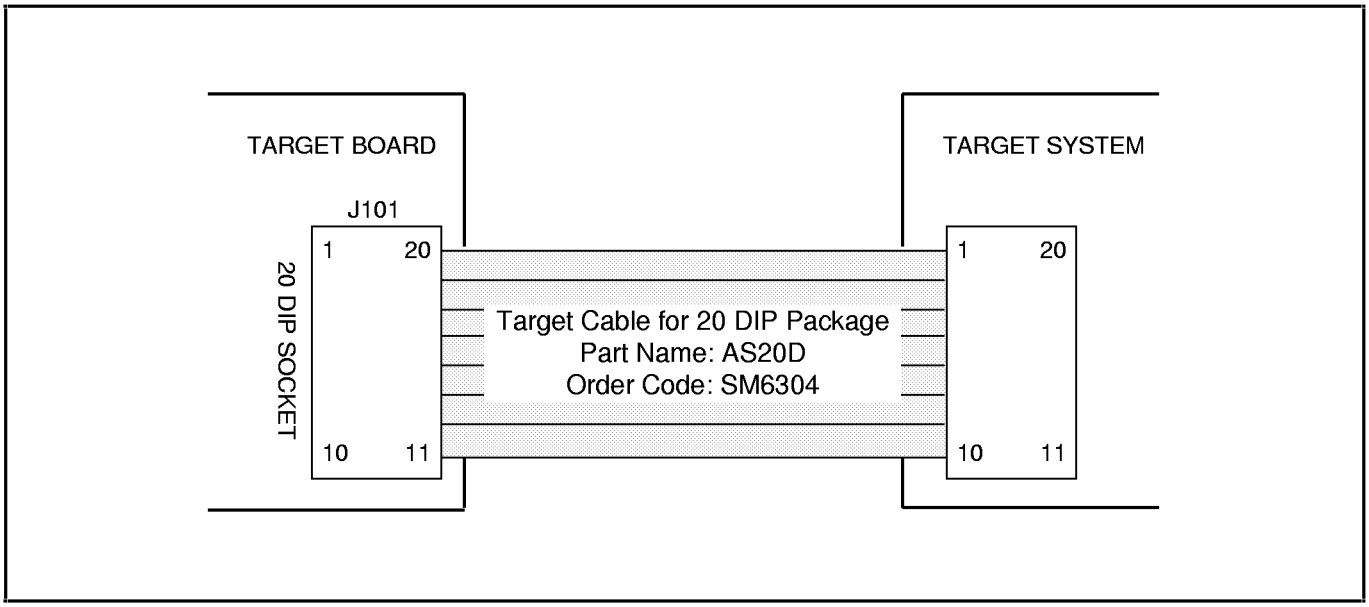

Figure 4–6. TB51840/51845A Cable for 20 DIP Package

DESCRIPTION OF THE KS51840/51845 MCUS

The KS51840/51845 4-bit single-chip CMOS microcontroller is designed using the reliable SMCS-51 CPU core with on-chip ROM and RAM. An auto-reset circuit generates a RESET pulse in regular intervals, and can be used to initiate a Halt mode release. The KS51840/51845 microcontroller is intended for use in small system control applications that require a low-power and cost-sensitive design solution. In addition, the KS51840/51845 has been optimized for remote control transmitters. To flexibly support various I/O requirements, the KS51840 of 24-pin has eight input pins and 11 output pins, the KS51840/51845 of 20-pin has six input pins and nine output pins.

FEATURES

Table 5–1. KS51840/51845 Features

Feature	KS51840 (24-pin)	KS51840 (20-pin)	KS51845 (20-pin)
ROM	1024 bytes	1024 bytes	512 bytes
RAM	32 x 4 bits	32 x 4 bits	32 x 4 bits
Output pin	11 pins	9 pins	9 pins
Input pin	8 pins	6 pins	6 pins
Carrier frequency	fxx/12, fxx/8, no carrier	fxx/12, fxx/8, no carrier	fxx/12, fxx/8, no carrier
Operating voltage	Fosc: 250kHz–3.9MHz 1.8V to 3.6V, Fosc: 4MHz–6MHz 2.2V to 3.6V	Fosc: 250kHz–3.9MHz 1.8V to 3.6V, Fosc: 4MHz–6MHz 2.2V to 3.6V	Fosc: 250kHz–3.9MHz 1.8V to 3.6V, Fosc: 4MHz–6MHz 2.2V to 3.6V
Package	24 SOP	20 DIP, SOP	20 DIP, SOP

Table 5–2. KS51840/51845 Functions

	Description
Automatic reset by Halt mode release	When Halt mode is released, the chip is reset after an oscillator stabilization interval of 9 ms. (Fxx=455kHz)
Output pin state retention function	When the system enters Halt mode, P3.0–P3.3, P2.0, and P2.2–P2.5 go low level in 24 pins. P3.0–P3.3, P2.0, and P2.2–P2.4 go low level in 20 pins.
Auto-reset	With oscillation on and with no change to the IP2.0 output pin, a reset is activated every 288 ms at Fxx=455 kHz.
Osc. stabilization time	CPU instructions are executed after oscillation stabilization time has elapsed.
Power-on reset circuit	Pull-up resistor: 1 MΩ, capacitor value: 7 pF.
Other functions	Carrier frequency generator. Halt wake-up function.

RESET

The KS51840/51845 has three kinds of reset operations:
-- POR (Power-On Reset)
-- Auto-reset
-- Automatic reset by Halt mode release

Power-On Reset Circuits

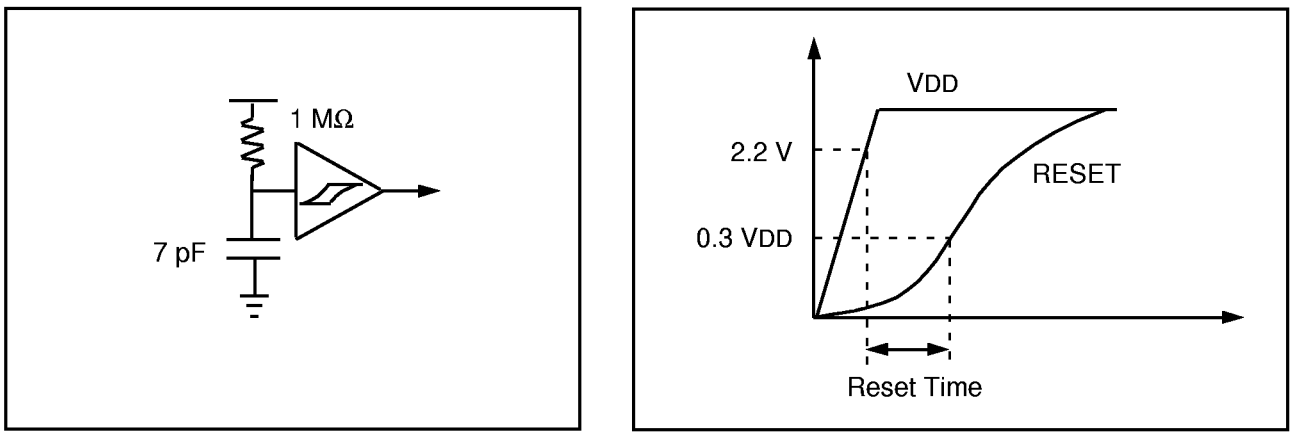

Figure 5–1. Power-On Reset Circuits

Auto-Reset

The auto-reset function resets the CPU every 131,072 oscillator cycles (288 ms at Fxx=455 kHz). The auto-reset counter is cleared when a rising edge is detected at IP2.0, or by a HALT or RESET pulse.

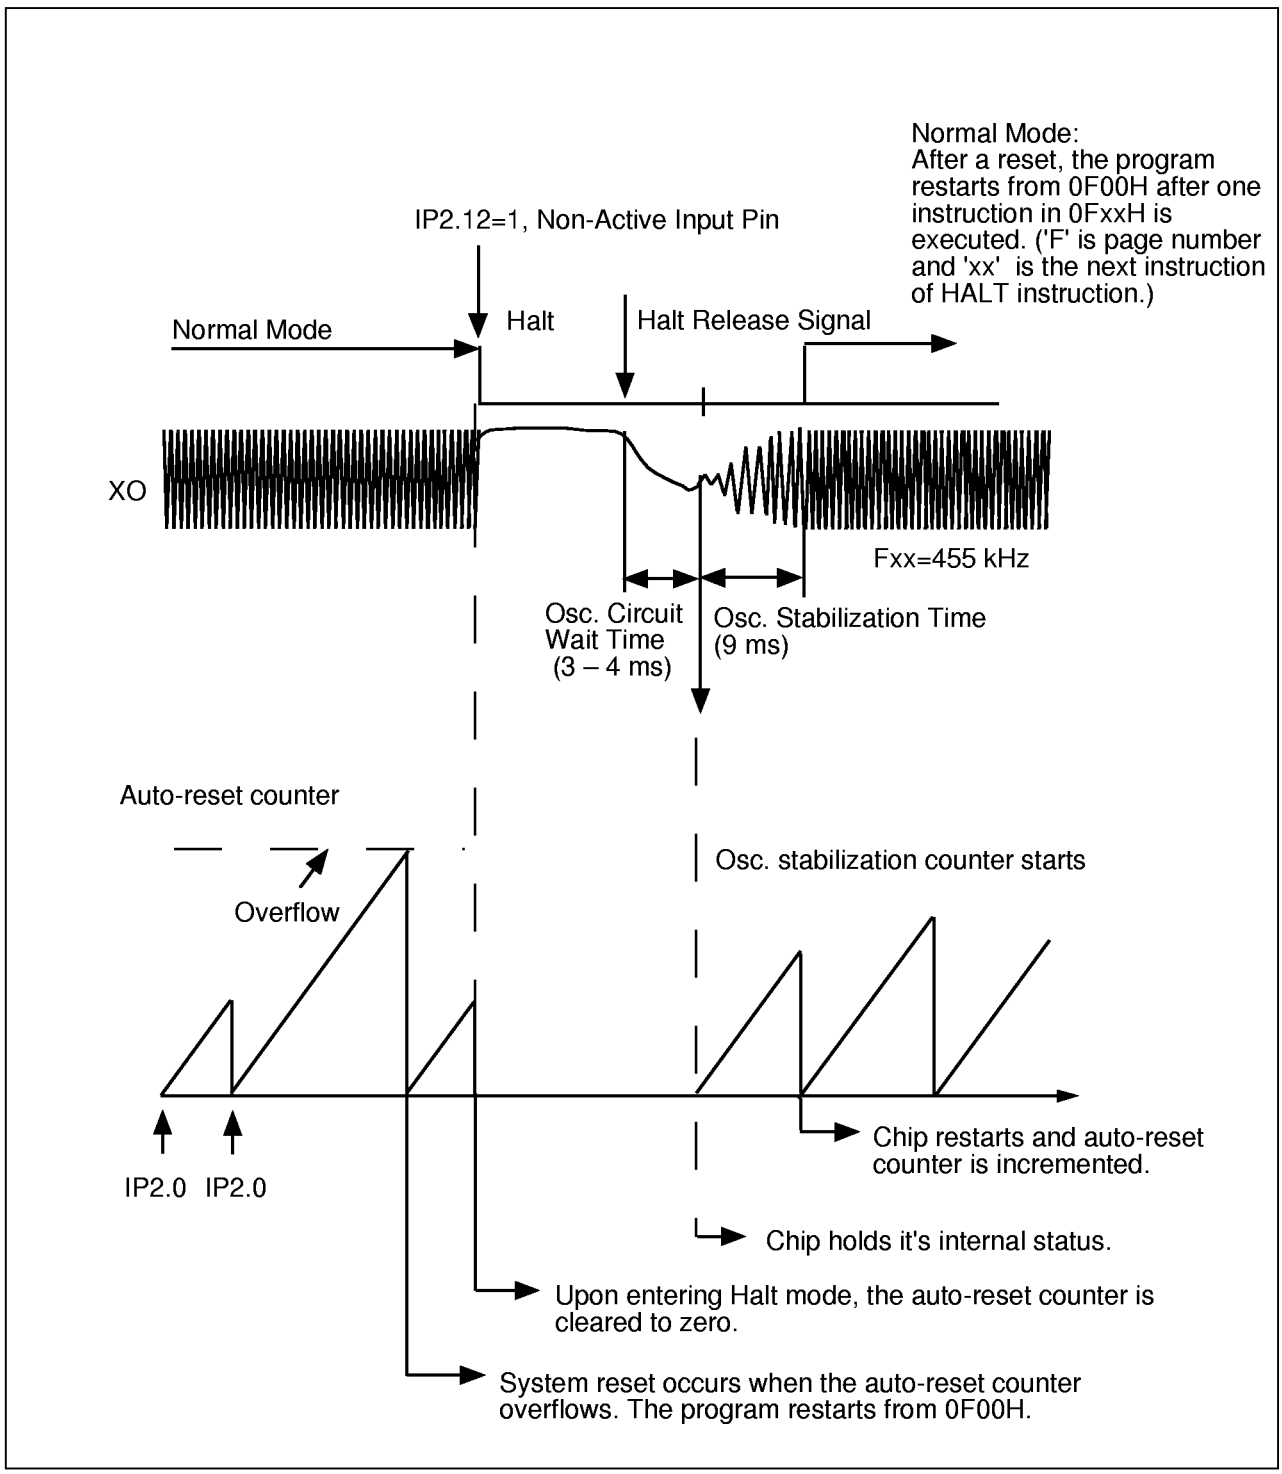

Figure 5–2. Auto-Reset Counter Function

Automatic Reset by Halt Mode Release

This function resets the CPU by releasing Halt mode. The CPU is reset to its initial operating status and program execution starts from the reset address.

Halt Mode and Automatic Reset by Halt Release

Halt mode is used to reduce power consumption by stopping the oscillation and holding the internal state. Halt mode can be entered by forcing IP2.12 to high level (remaining input pins are non-active).

Before entering Halt mode, programmer should pre-set all key strobe output pins to active state even though Halt mode causes some pins to remain active.
For the 24 pins, P3.0–P3.3, P2.0, P2.2–2.4, and P2.5 are sent low and for 20 pins, P3.0–P3.3, P2.0, P2.2–P2.4 are sent low.
Forcing any key input port to active state causes the clock oscillation logic to start system initialization. At this time, the system is reset after the oscillation stabilization time elapses. A system reset causes program execution to start from address 0F00H.

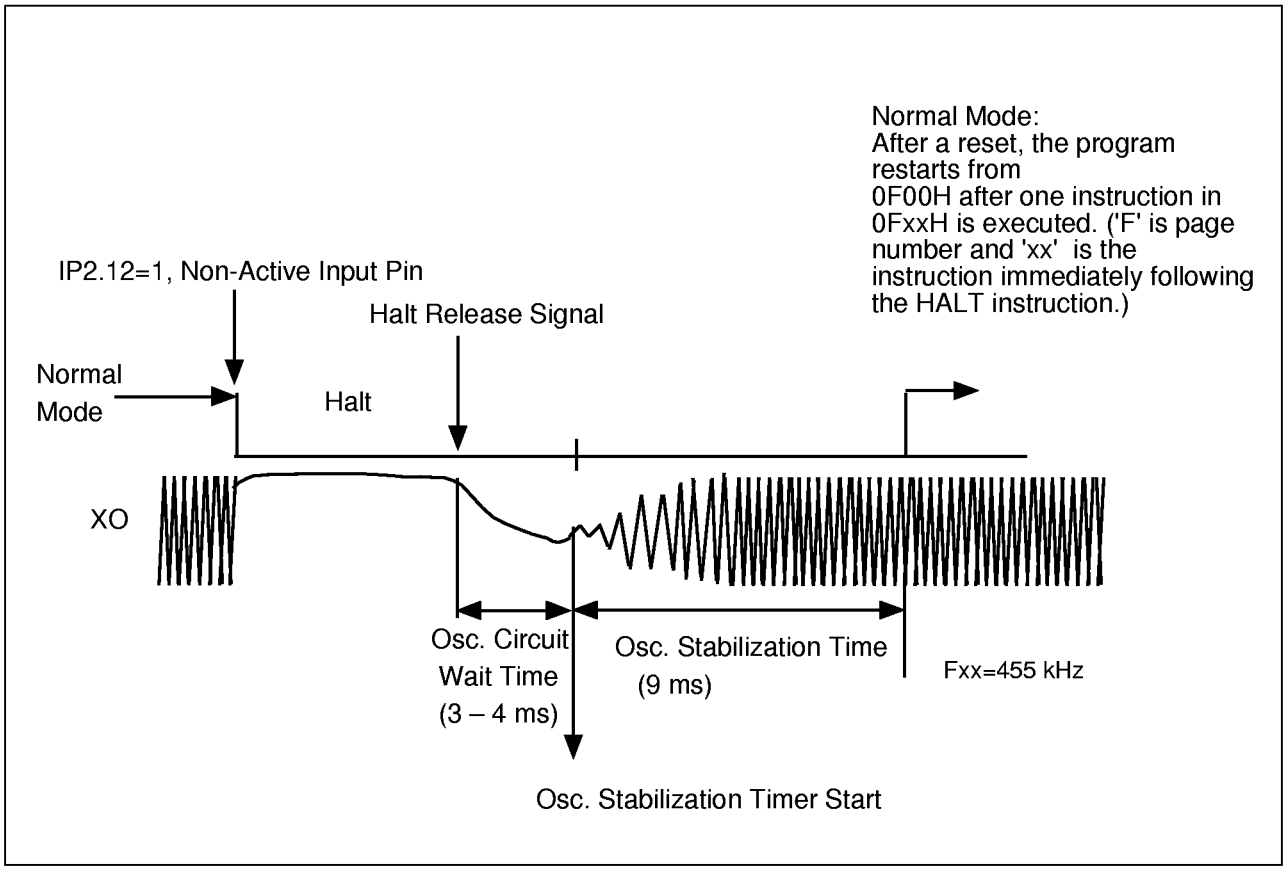

Figure 5–3. Reset Timing Diagram

KS51840 Application Circuit Example

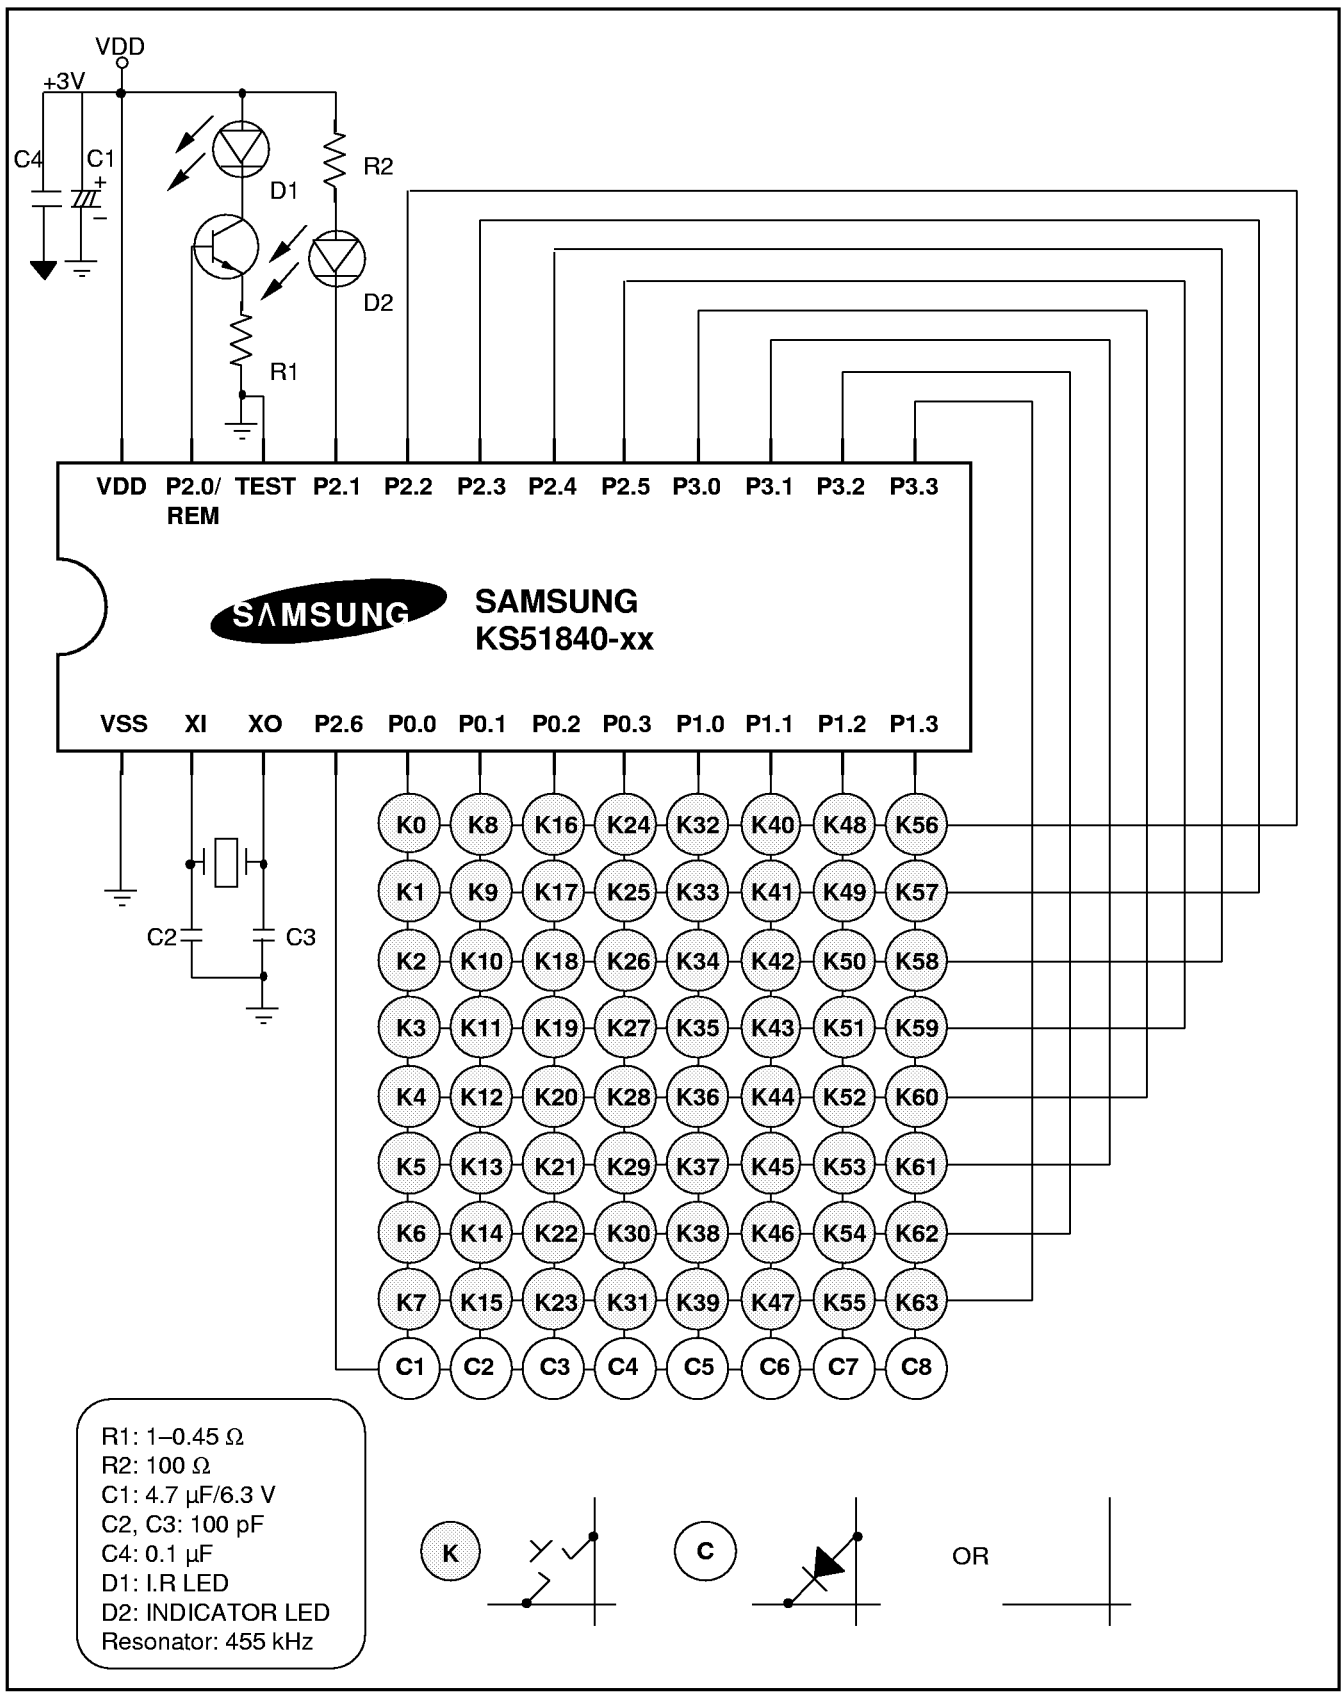

RESET and HALT Logic Diagram

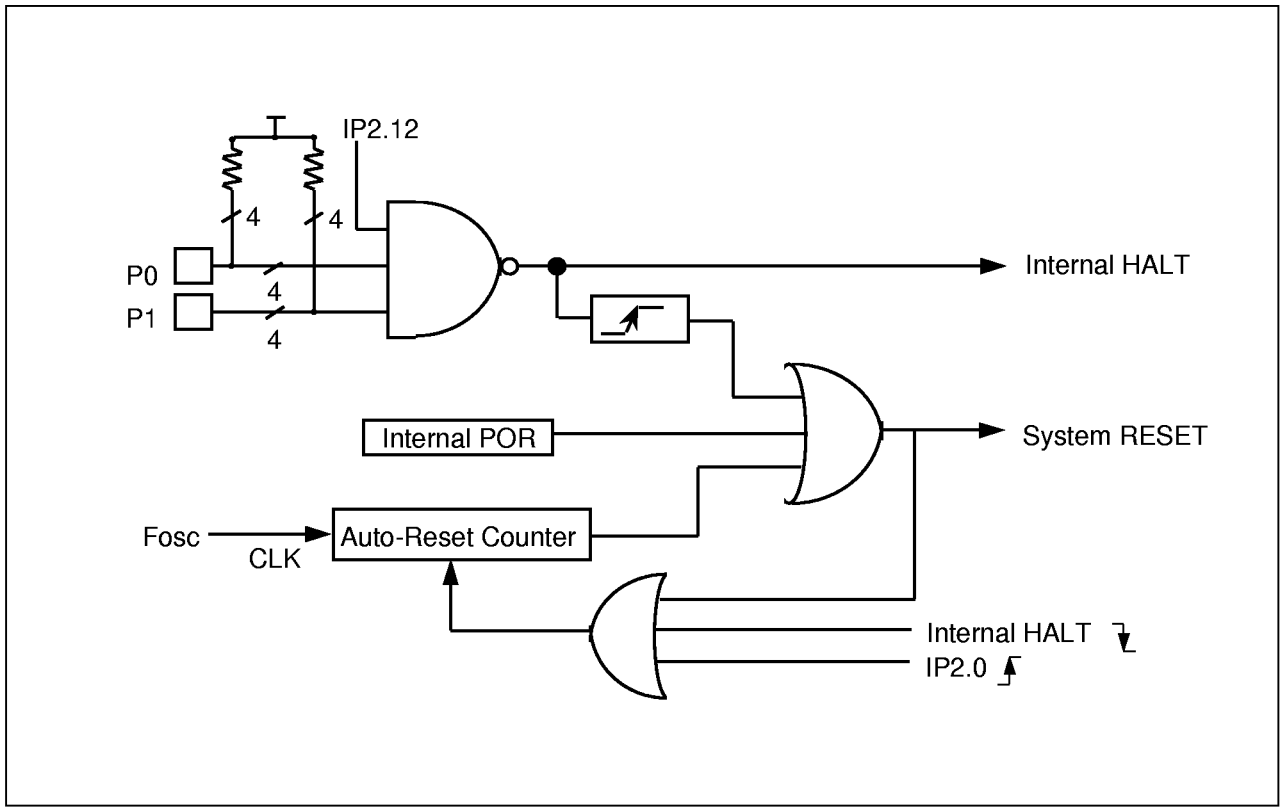

Figure 5–4. RESET and HALT Logic Diagram

HALT mode programing

The KS51840/51845 can enter Halt mode by setting the IP2.12 pin to high level and forcing P0 and P1 input to a normal state. If IP2.12 is high and any input is active, the chip cannot enter Halt mode. Therefore, the next instruction is executed, which must be a clear command for IP2.12.

```
        MOV     L,#5
KEYOLO  CLRB    P2.(L)      ;P2.5,4,3,2<- Low
        DECS    L
        CPNE    L,#1
        JP      KEYOLO
        CLR     A           ;Acc. <- #0h
        OUT     P3,@SL+A    ;P3.0,1,2,3 <- Low
        MOV     L,#0DH
        CLRB    P2.(L)      ;Select the P0 input
        IN      A,P0
        INCS    A           ;P0 input check
        JP      .+2
        JP      KEYCHK      ;If any key pressed in P0, jump to KEYCHK routine
        SETB    P2.(L)      ;Select the P1 input
timea   IN      A,P0
        INCS    A           ;P1 input check
        JP      .+2
timeb   JP      KEYCHK      ;If any key pressed in P1, jump to KEYCHK routine
        MOV     L,#0CH      ;No key pressed
        SETB    P2.(L)      ;Halt mode
```

;When no key is pressed, the chip enters Halt mode. Pressing any key while in Halt mode causes the chip to be initialized and restarted from the reset address.
;If any key is pressed between timea and timeb, the following instruction is executed.

```
        MOV     L,#0CH
        CLRB    P2,(L)
```

;These two instructions remove the condition of re-entering Halt mode.

OUTPUT PIN DESCRIPTIONS

Indicator LED Drive Output

To drive the indicator LED, the programmer should use P2.1 of the KS51840/51845 (which have higher current drive capability than other pins) in order to retain the pre-programmed status during Halt mode. Be careful to turn on the LED when a reset signal is generated. Because a reset signal sends all of the internal and external output pins to low level, the programmer must set LED output P2.1 to high state using a reset subroutine.

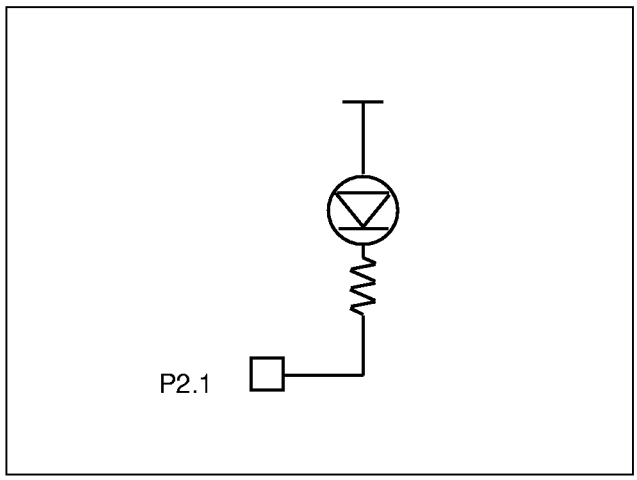

Figure5– 5. LED Drive Output Circuit

Strobe Output Option

To activate the optional strobe output function for TV and VCR remocon applications, the programmer must use the option selection strobe output pin (P2.6).
This pin has lower current drive capability than other pins and retain the pre-programmed status while in Halt mode. Be careful to turn on the option strobe output pin when a reset signal is generated. Because the reset sends all internal and external output pins to low level, the option strobe output pin should always be non-active state (H-Z). The pin should be active only when you are checking option status to reduce current consumption.

Pin Usage	Key Output	LED Drive	Option Selection
P3.0–P3.3 P2.2–P2.5	oo	x	x
P2.1	o	oo	o
P2.6	o	o	oo

x :not allowed
o :good
oo :better

Output Pin Circuit Type

P3.0-P3.3, P2.2-P2.5 → Low output retention function in Halt mode is used for key strobe output only.

Halt	Data	Port
0	0	0
0	1	H-Z
1	X	0

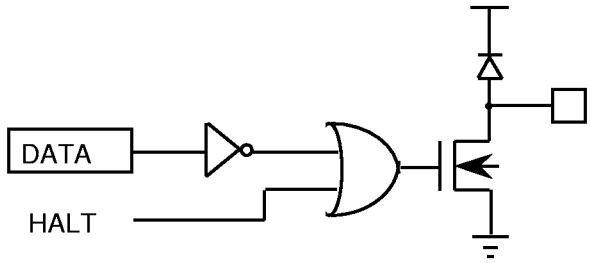

P2.1, P2.6 →

P2.6 : For option pin or key-out

P2.1 : For LED drive pin or key-out

Halt	Data	Port
X	0	0
X	1	H-Z

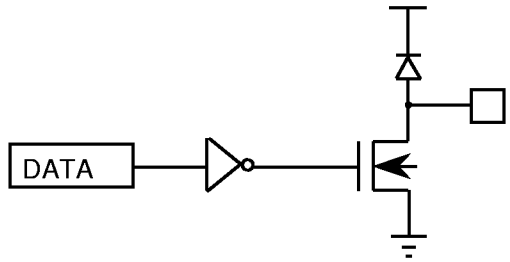

Figure 5–6. Output Pin Circuits

Soft Ware Delay Routine

To obtain a constant time value, the KS51840/51845 use a software delay routine (there is not an internal timer interrupt). One instruction cycle is six oscillator clocks. Using a ceramic resonator with a constant frequency, you can calculate the time delay as follows:

t = 6 / Fxx x Number of Instructions

Where t: Elapsed time and Fxx: System clock.

Programming Tip

To program a 1-ms delay:1 ms = 6 / 455 kHz x n, where Fxx = 455 kHz
Therefore, n = 75.8 = 76 instructions

```
DLY1MS      CLR     A
            ADDS    A,#0BH          ;Two instructions
DLY         MOV     H,#0            ;Dummy instruction
            MOV     H,#0            ;Dummy instruction
            MOV     H,#0            ;Dummy instruction
            MOV     H,#0            ;Dummy instruction
            DECS    A
            JP      DLY             ;DLY loop : 6 instructions
;2 +  (ACC+1) x instructions in loop = 2 + (11+1) x 6 = 74
            CLR     A
            CLR     A               ;Two instructions.
;Total number of instructions for DLY1MS is 76.
```

NOTE

In order to lengthen the delay time, you can use an arithmetic instruction combination of L register and Accumulater. The L register causes the address lower pointer to access RAM space and the output port pointer to control the P2 (individual/serial output) port status.

– RAM manipulation instruction : RAM address pointer.
  MOV A,@HL CPNE @HL,A ADDS A,@HL
  SETB @HL.b

– P2 output control instruction : P2 pointer.
  SETB P2.(L) CLRB P2.(L)

PROGRAMMING GUIDELINES

When programming KS51840/51845 microcontroller, please follow the guidelines presented in this subsection.

PCB Artwork

For remote control applications, turning the IR LED on and off may cause variations in transmission current ranging from a few hundred μA to a few hundred mA. This current variation generates overshoot and undershoot noise on the power line, causing a system malfunction.

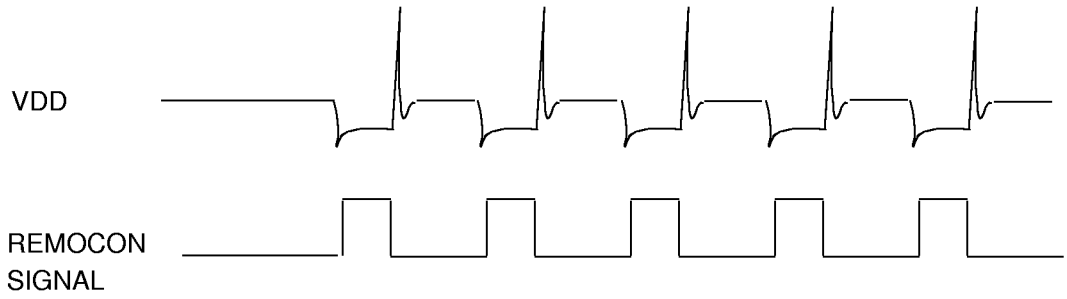

To reduce noise and to stabilize the chip's operation, we recommend that the application designer reduce overshooting of the I.R. LED drive current and design PCB for the remote controller as follows: (The noise level should be limited to around 0.5 Vp-p, where Vp-p is the peak-to-peak voltage)

– Oscillation circuit should be located as near as possible to the chip.
– PCB pattern for VDD/VSS should be as wide and short as possible.
– I.R. LED drive TR and I.R. LED should be located as far as possible from the chip.
– Power supply battery and power capacitor should be located as near as possible to the chip.

SMDS

When a breakpoint or single-step instruction is executed in area of PAGE and JP or CALL instruction, the JP or CALL may jump to the wrong address. We therefore recommend using a JPL or CALLL instruction (instead of PAGE and JP or PAGE and CALL) to avoid this problems. Note that JPL and CALLL are 2-byte instructions.

Programming Guidelines for Reset Subroutine

1. We recommend that you initialize a H register to either "0" or "4".
2. Do not write the instructions CALLL(PAGE + CALL) or JPL(PAGE + JP) to the reset address 0F00H. In other words, do not use a PAGE instruction at 0F00H.
3. Turn off the LED output pin.
4. To reduce current consumption, do not set the option output pin to active state.
5. Pre-set the remocon carrier frequency (to Fxx/12, Fxx/8, and so on) before remocon signal transmission.
6. Because the program is initialized by an auto-reset or Halt mode release, even in normal operating state, do not pre-set all RAM data. If necessary, pre-set only the RAM area you need.
7. Be careful to control output pin status because some pins are automatically changed to active state.
8. To enter Halt mode, the internal port, IP2.12, should be set to high level and all of the input pins should be set to normal state.
9. To release Halt mode, an active level signal is supplied to input pins. If pulse width is less than 9 ms at Fxx=455 kHz, nothing happens and program re-enters Halt mode. That is, the external circuit should maintain the input pulse over a 9-ms interval in order to release Halt mode. After Halt mode is released, the hardware is reset. The hardware reset sends all internal and external output pins low and clears the stack to zero. However, H,L and A registers retain their previous status.
10. If a rising edge is not generated at IP2.0, a reset signal occurs every 288 ms at Fxx=455 kHz. To prevent an auto-reset, IP2.0 should be forced low and then high at regular intervals (within 288 ms at Fxx=455 kHz).

Program Flowchart (This program is only apply to KS51840)

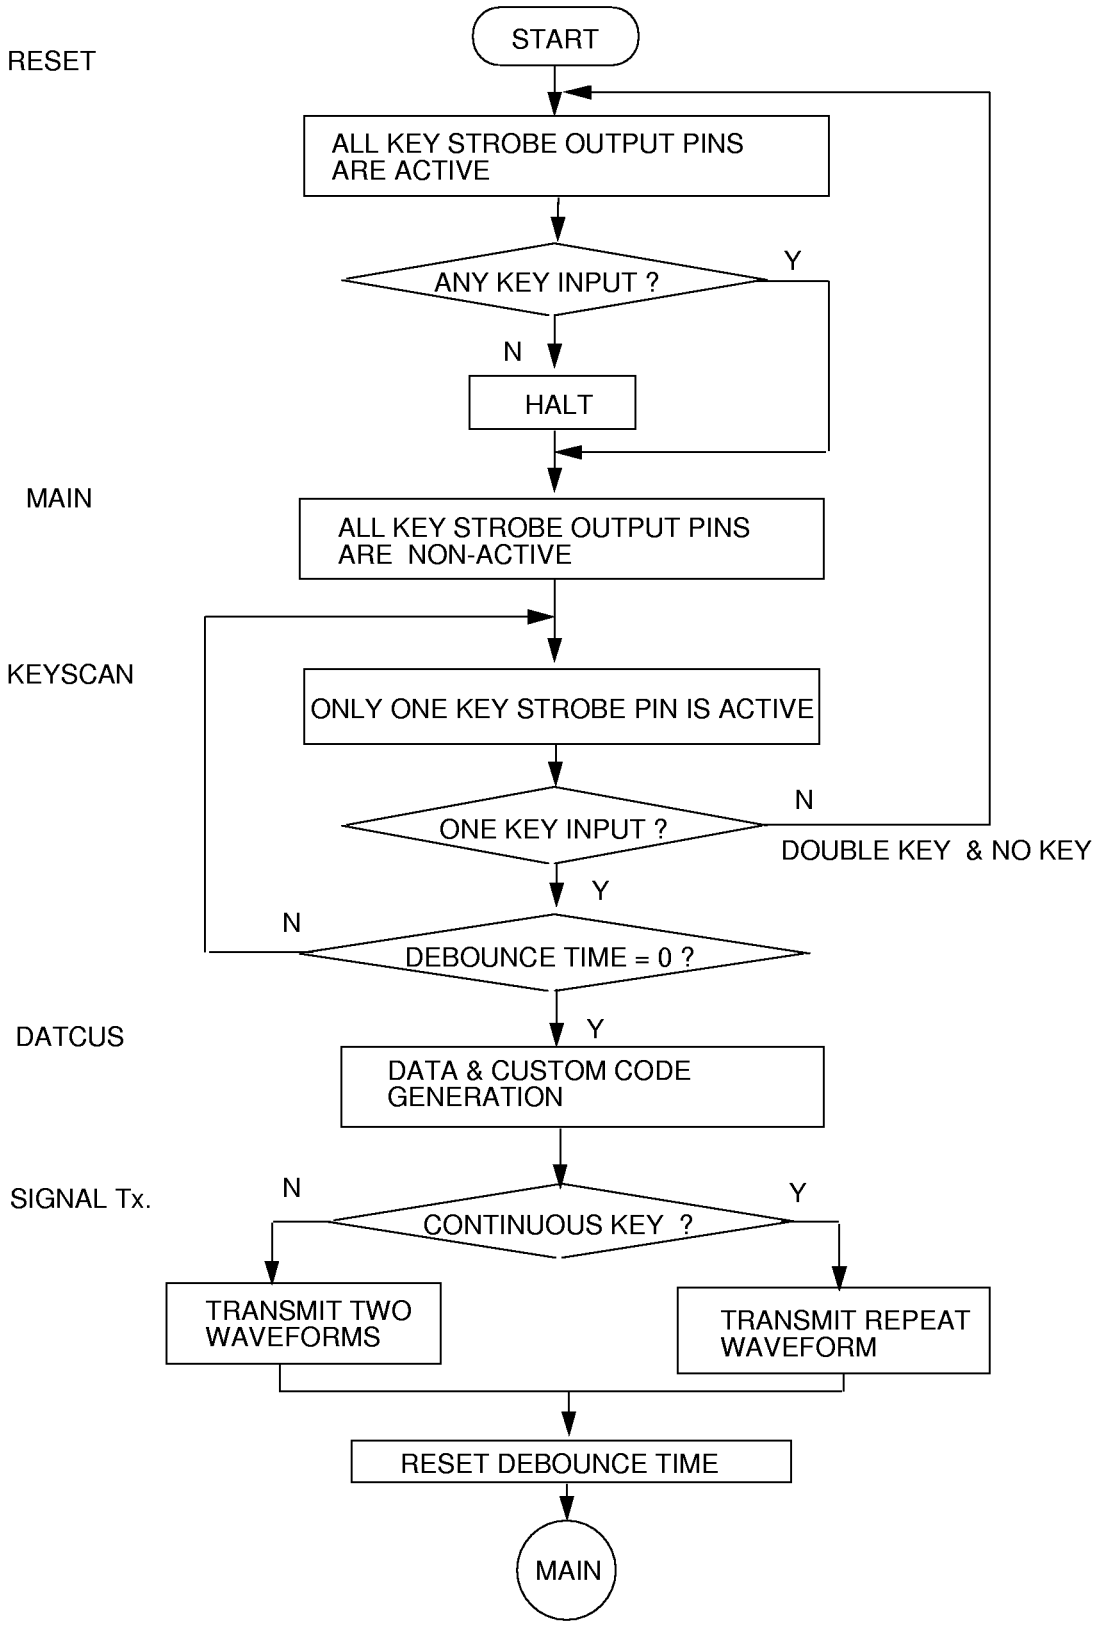

KS51840 KEYSCAN FUNCTION

Description

This program has an 8 x 9 key matrix, which consists of input P0 and P1 and output P2 and P3. Because pull-up resistors are connected, the normal state for all input pins is high level. The operating method for the keyscan function is as follows:

- All output pins remain active state (= low).
- If key is pressed, set all output pins to non-active state and rotate the pins to set only a pin to active state during debounce time.
- If key is pressed more than one or if no key is pressed, go to reset label.
- If a new key is pressed, reset debounce time, continuous flag, and key-in flag.

RAM Assignment

H register selects #0

HL -> 00H 01H 05H 09H

O_INP0	N_INP0	O_INP1	N_INP1	O_OUTP	N_OUTP	I_TWICE	DEBOCNT	CONKEY	KFLG

O_INP0:	The old value of P0
N_INP0:	The new value of P0
O_INP1:	The old value of P1
N_INP1:	The new value of P1
O_OUTP:	The old value of output port
N_OUTP:	The new value of output port
I_TWICE:	Double number increment
DEBOCNT:	Debounce time
CONKEY:	Continuous key flag
KFLG:	Key input flag

Program Flowchart (This program is only apply to KS51840)

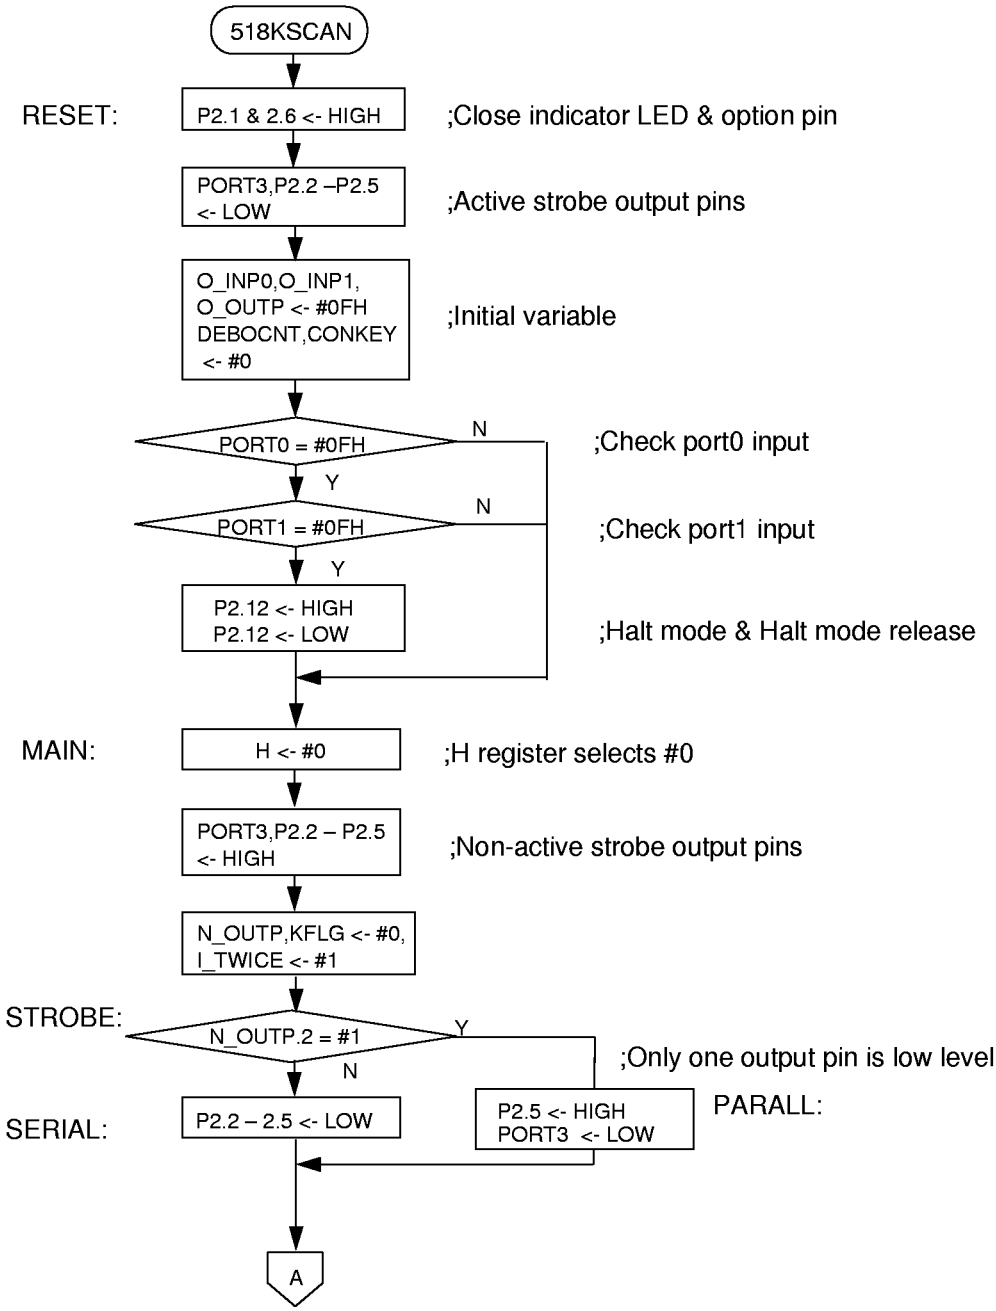

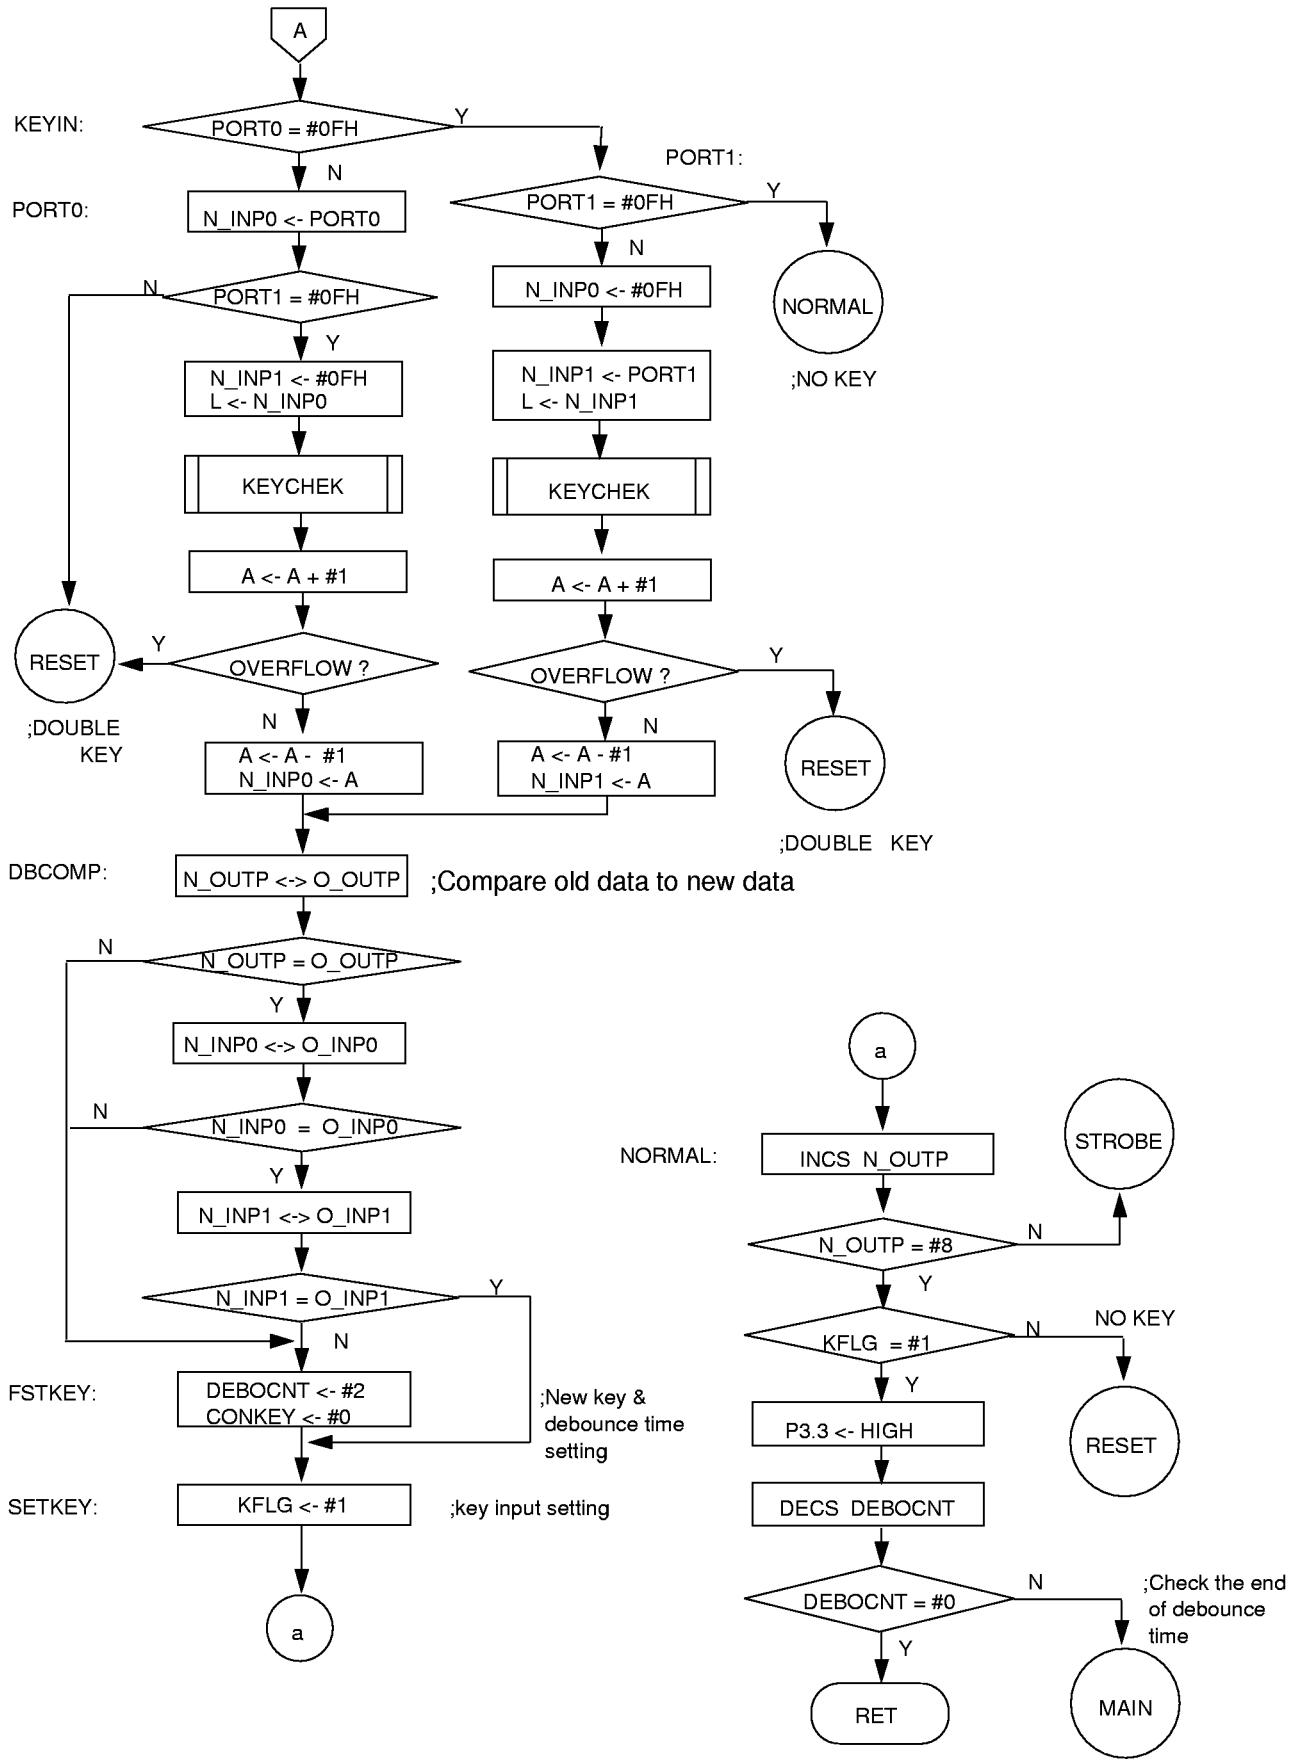
A
KEYIN:
PORT0 = #0FH
Y
N
PORT0:
N_INP0 <- PORT0
PORT1 = #0FH
N
Y
N_INP1 <- #0FH
L <- N_INP0
KEYCHEK
A <- A + #1
RESET
OVERFLOW ?
Y
N
;DOUBLE KEY
A <- A - #1
N_INP0 <- A
PORT1:
PORT1 = #0FH
Y
N
N_INP0 <- #0FH
N_INP1 <- PORT1
L <- N_INP1
KEYCHEK
A <- A + #1
OVERFLOW ?
Y
N
A <- A - #1
N_INP1 <- A
RESET
;DOUBLE KEY
NORMAL
;NO KEY
DBCOMP:
N_OUTP <-> O_OUTP
;Compare old data to new data
N_OUTP = O_OUTP
N
Y
N_INP0 <-> O_INP0
N_INP0 = O_INP0
N
Y
N_INP1 <-> O_INP1
N_INP1 = O_INP1
Y
N
FSTKEY:
DEBOCNT <- #2
CONKEY <- #0
;New key & debounce time setting
SETKEY:
KFLG <- #1
;key input setting
a
NORMAL:
a
INCS N_OUTP
N_OUTP = #8
N
Y
STROBE
KFLG = #1
N
NO KEY
Y
P3.3 <- HIGH
RESET
DECS DEBOCNT
DEBOCNT = #0
N
;Check the end of debounce time
Y
RET
MAIN

KS51840 Keycheck Subroutine (This program is only apply to KS51840)

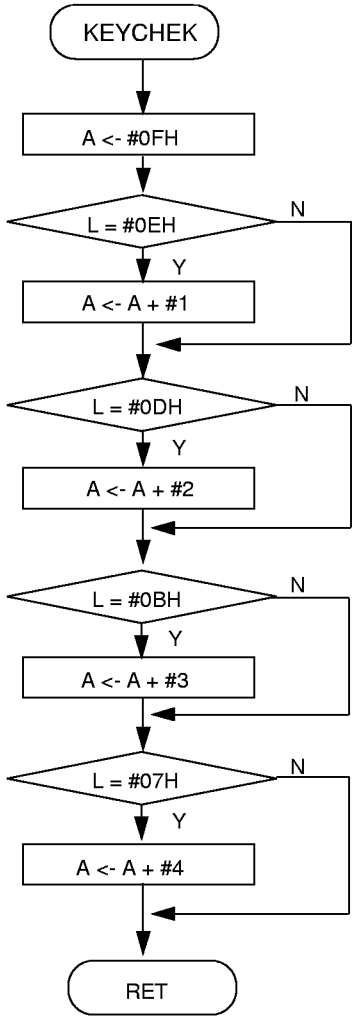

```
;*****************************
            ORG     0F00H
;*****************************
;If reset occurs, PA register is immediately initialized to #0FH
RESET       MOV     L,#1                ;close indicator LED
            SETB    P2.(L)              ;
            MOV     L,#6                ;non-select p2.6
            SETB    P2.(L)              ;


PRTCLR      CLR     A                   ;
            OUT     P3,@SL+A            ;low  all the output ports
            MOV     L,#5                ;(except p2.0,p2.1,p2.6)
            CLRB    P2.(L)              ;
            DECS    L                   ;
            CPNE    L,#1                ;
            JP      .-3                 ;

;;; initial all of the variables ---------------------------------
;;; --> Input ports are connected with pull-up resistor
;;; --> Therefore, normal state -> high
            MOV     H,#0                ;H register selects file #0
            MOV     L,#O_INP0           ;port0 is #0fh
            MOV     @HL+,#0FH
            MOV     L,#O_INP1           ;port1 is #0fh
            MOV     @HL+,#0FH
            MOV     L,#O_OUTP           ;the strobe out is #0fh
            MOV     @HL+,#0FH
            MOV     L,#DEBOCNT          ;debounce count is #0
            MOV     @HL+,#0
            MOV     L,#CONKEY           ;continuous key is #0
            MOV     @HL+,#0

;;;check each input port (= key input) ------------------------------
            MOV     L,#0DH              ;check port0
            CLRB    P2.(L)              ;
            IN      A,P0                ;
            MOV     L,A                 ;
            CPNE    L,#0FH              ;
            JP      DELAYP0             ;

            MOV     L,#0DH              ;check port1
            SETB    P2.(L)              ;
            IN      A,P0                ;
            MOV     L,A                 ;
            CPNE    L,#0FH              ;
            JP      J_MAIN

;;; halt mode ,after halt mode release, go to reset. (only KS51840)---
            MOV     L,#0CH
            SETB    P2.(L)              ;halt mode
            CLRB    P2.(L)              ;halt mode release
            JP      RESET
```

```
PRTSET   CLR     A                ;
         ADDS    A,#0FH           ;high all the output ports
         OUT     P3,@SL+A         ;(p3, p2.2 - p2.5)
         MOV     L,#5             ;
         SETB    P2.(L)           ;
         DECS    L                ;
         CPNE    L,#1             ;If p2.0 is high, datatx.
         JP      .-3              ;and auto reset counter clear
         RET

DELAYP0  MOV     H,#0             ;for the match of delay time
         MOV     H,#0             ;
         MOV     H,#0             ;
         MOV     H,#0             ;
         MOV     H,#0             ;
         MOV     H,#0             ;
J_MAIN    JPL    MAIN
;
;
;
;
;
;*********************************
         ORG     0000H
         JPL     RESET
;*********************************
MAIN     MOV     H,#0             ;H register selectsfile #0
                                  ;useful when continuous pulsetx.
                                  ;
         CALLL   PRTSET           ;high all the output ports

;;initial useful variable  in main routine --------------------------
         MOV     L,#N_OUTP        ;N_OUTP← #0
         MOV     @HL+,#0          ;
         MOV     L,#I_TWICE       ;I_TWICE(double increment)← #1
         MOV     @HL+,#1          ;
         MOV     L,#KFLG          ;KFLG ← #0 (input key flag)
         MOV     @HL+,#0          ;

;;select output pin  by one and one ---------------------------------
STROBE   MOV     L,#N_OUTP
         CPBT    @HL.2            ;If N_OUTP.2 is set, go toparall (parallel port)
         JP      PARALL           ;otherwise, go to serial (serial port)
SERIAL   MOV     L,@HL            ;
         INCS    L                ;
         SETB    P2.(L)           ;low p2.2 - p2.5
         INCS    L                ;
         CLRB    P2.(L)           ;
         JPL     KEYIN

PARALL   MOV     L,#5             ;high  p2.5
         SETB    P2.(L)           ;
```

```
;;;-----------------------------------------------------------------
;;; A ← #0fh
;;; A ←  A - I_TWICE
;;; output P3
;;; I_TWICE ← I_TWICE + I_TWICE
;;;-----------------------------------------------------------------
            CLR     A                   ;A ← #0FH
            ADDS    A,#0FH              ;
            MOV     L,#I_TWICE          ;
            XCH     @HL,A               ;A ← A - I_TWICE
            SUBS    A,@HL               ;
            OUT     P3,@SL+A            ;low port 3
            SUBS    A,@HL               ;
            MOV     @HL,A               ;recover I_TWICE
            ADDS    A,@HL               ;
            MOVZ    @HL,A               ;I_TWICE ← I_TWICE + I_TWICE
            JPL     KEYIN

;;;-----------------------------------------------------------------
;;check double key at each port
;;if a key pressed, do adds instruction
;;otherwise, induce overflow occurrence
;;;-----------------------------------------------------------------
KEYCHEK CLR     A
            ADDS    A,#0FH              ;A ← #0fh
            CPNE    L,#0EH
            JP      .+2
            ADDS    A,#1                ;A ← #0
            CPNE    L,#0DH
            JP      .+2
            ADDS    A,#2                ;A ← #1
            CPNE    L,#0BH
            JP      .+2
            ADDS    A,#3                ;A ← #2
            CPNE    L,#7
            JP      .+2
            ADDS    A,#4                ;A ← #3
            RET
;
;
;
;
;*********************************
            ORG     0100H
            JPL     RESET
;*********************************
KEYIN       MOV     L,#0DH
            CLRB    P2.(L)
;;;select port0 ------------------------------------------------
            IN      A,P0
            MOV     L,A
            CPNE    L,#0FH              ;is key pressed in port 0 ?
            JP      PORT0
            JP      PORT1
```

```
PORT0   MOV     L,#N_INP0       ;setting at N_INP0
        MOV     @HL,A           ;
        MOV     L,#0DH          ;
        SETB    P2.(L)          ;
        IN      A,P0            ;
        MOV     L,A             ;
        CPNE    L,#0FH          ;
        JP      DBKEY           ;If also port1 input a key,
;                               ; it is double key
        MOV     L,#N_INP1       ;Only N_INP0 input
        MOV     @HL+,#0FH       ;but N_INP1 is set to #0fh
        MOV     L,#N_INP0       ;
        MOV     L,@HL           ;
        CALLL   KEYCHEK         ;
        ADDS    A,#1            ;
        JP      DBKEY           ;if overflowoccurs,it is double key
        DECS    A               ;because input value ranges
        MOV     L,#N_INP0       ;from #0 to #3
        MOVZ    @HL,A           ;N_INP0 ← A
        JPL     DBCOMP

;;; select port1 ----------------------------------------------------
PORT1   MOV     L,#0DH
        SETB    P2.(L)
        IN      A,P0
        MOV     L,A
        CPNE    L,#0FH          ;is key pressed in port 1 ?
        JP      .+3
        JPL     NORMAL          ;no key , go to NORMAL
        MOV     L,#N_INP0       ;setting N_INP0 to #0fh
        MOV     @HL+,#0FH       ;Only N_INP1 input
        MOV     L,#N_INP1       ;
        MOV     @HL,A           ;
        MOV     L,A             ;L ←N_INP1
        CALLL   KEYCHEK
        ADDS    A,#1            ;if overflow occurs, go to double key
        JP      DBKEY           ;
        DECS    A               ;because input value ranges from
;                               ; #0 to #3
        MOV     L,#N_INP1       ;N_INP1 ←A
        MOVZ    @HL,A
        JPL     DBCOMP

;;; If double key occurs, go to reset ------------------------------
DBKEY   JPL     RESET
;
;
;
;
;
```

```
;*********************************
            ORG     0200H
            JPL     RESET
;*********************************
;;;compare for the recognition of a new key ------------------------
DBCOMP  MOV     L,#N_OUTP       ;compare N_OUTP to O_OUTP
            MOV     A,@HL
            MOV     L,#O_OUTP
            XCH     @HL,A
            CPNE    @HL,A
            JP      FSTKEY
            MOV     L,#N_INP0       ;compare N_INP0 to O_INP0
            MOV     A,@HL
            MOV     L,#O_INP0
            XCH     @HL,A
            CPNE    @HL,A
            JP      FSTDLY
            MOV     L,#N_INP1       ;compare N_INP1 to O_INP1
            MOV     A,@HL
            MOV     L,#O_INP1
            XCH     @HL,A
            CPNE    @HL,A
            JP      FSTKEY
            JP      SETKEY
FSTDLY  MOV     H,#0            ;for match of delay time
            MOV     H,#0
            MOV     H,#0
            MOV     H,#0
            MOV     H,#0
;;; when new key input ---------------------------------------------------
FSTKEY  MOV     L,#DEBOCNT      ;DEBOCNT← #2
            MOV     @HL+,#2
            MOV     L,#CONKEY       ;CONKEY ← #0
            MOV     @HL+,#0
SETKEY  MOV     L,#KFLG         ;KFLG ← #1
            MOV     @HL+,#1

;-----------------------------------------------------------------
;;; Increase N_OUTP
;;; check N_OUTP is equal to #8
;;; check no key (= KFLAG)
;;; check debounce time (= DEBOCNT)
;-----------------------------------------------------------------
NORMAL  MOV     L,#N_OUTP       ;increase N_OUTP
            INCS    A,@HL
            MOVZ    @HL,A
            ADDS    A,#8            ;A ← #8
            CPNE    @HL,A           ;compare N_OUTP to A
            JP      J_STRO          ;go to strobe label
            MOV     L,#KFLG         ;
            CPBT    @HL.0           ;check key flag
            JP      ONKEY

            JPL     RESET           ;no key
```

```
ONKEY    CLR     A
         ADDS    A,#0FH
         OUT     P3,@SL+A          ;set port3 to '1'
         MOV     L,#DEBOCNT        ;decrease DEBOCNT
         DECS    A,@HL
         XCH     @HL,A
         CPNZ    @HL               ;compare DEBOCNT to #0
         JP      J1_MAIN
         JPL     KEYSCAN
J1_MAIN  JPL     MAIN
J_STRO   JPL     STROBE

;*****************  The END of  KS51840  KEYSCAN ************************
```

KS51840 CODE GENERATION

Description

This program generates data code and custom code. The custom code is determined according to diodes between input ports and output pin (p2.6). The data code is as follows:

RAM -> DAT0 (D0-D3), DAT1 (D4-D7)

	D0	D1	D2	D3	D4	D5	D6	D7
KEY0	0	0	0	0	0	0	0	0
KEY1	1	0	0	0	0	0	0	0
. .				. .				
KEY31	1	1	1	1	1	0	0	0
KEY32	0	0	0	0	0	0	1	0
KEY33	1	0	0	0	0	0	1	0
. .				. .				
KEY63	1	1	1	1	1	0	1	0

RAM -> DAT0 (D0-D3), DAT1_0 (D4-D7)

	D0	D1	D2	D3	D4	D5	D6	D7
KEY0	0	0	0	0	0	0	0	0
KEY1	1	0	0	0	0	0	0	0
. .				. .				
KEY31	1	1	1	1	1	0	0	0
KEY32	0	0	0	0	0	1	0	0
KEY33	1	0	0	0	0	1	0	0
. .				. .				
KEY63	1	1	1	1	1	1	0	0

RAM Assignment

H register selects #4

HL -> 40H 41H 45H 49H

CUS0	CUS1	CUS2	CUS3	DAT0	DAT1	DAT2	DAT3	DAT1 0	DAT3 0

CUS0: Custom code (c0 - c3)
CUS1: Custom code (c4 - c7)
CUS2: The complement of CUS0
CUS3: The complement of CUS1
DAT0: Data code (d0 - d3)
DAT1: Data code (d4 - d7)
: --> 32key: 00000010, 63key: 11111010
DAT2: The complement of DAT0
DAT3: The complement of DAT1
DAT1_0: Data code (d4 - d7)
: --> 32key: 00000100, 63key: 11111100
DAT3_0: The complement of DAT1_0

Program Flowchart (This program is only apply to KS51840)

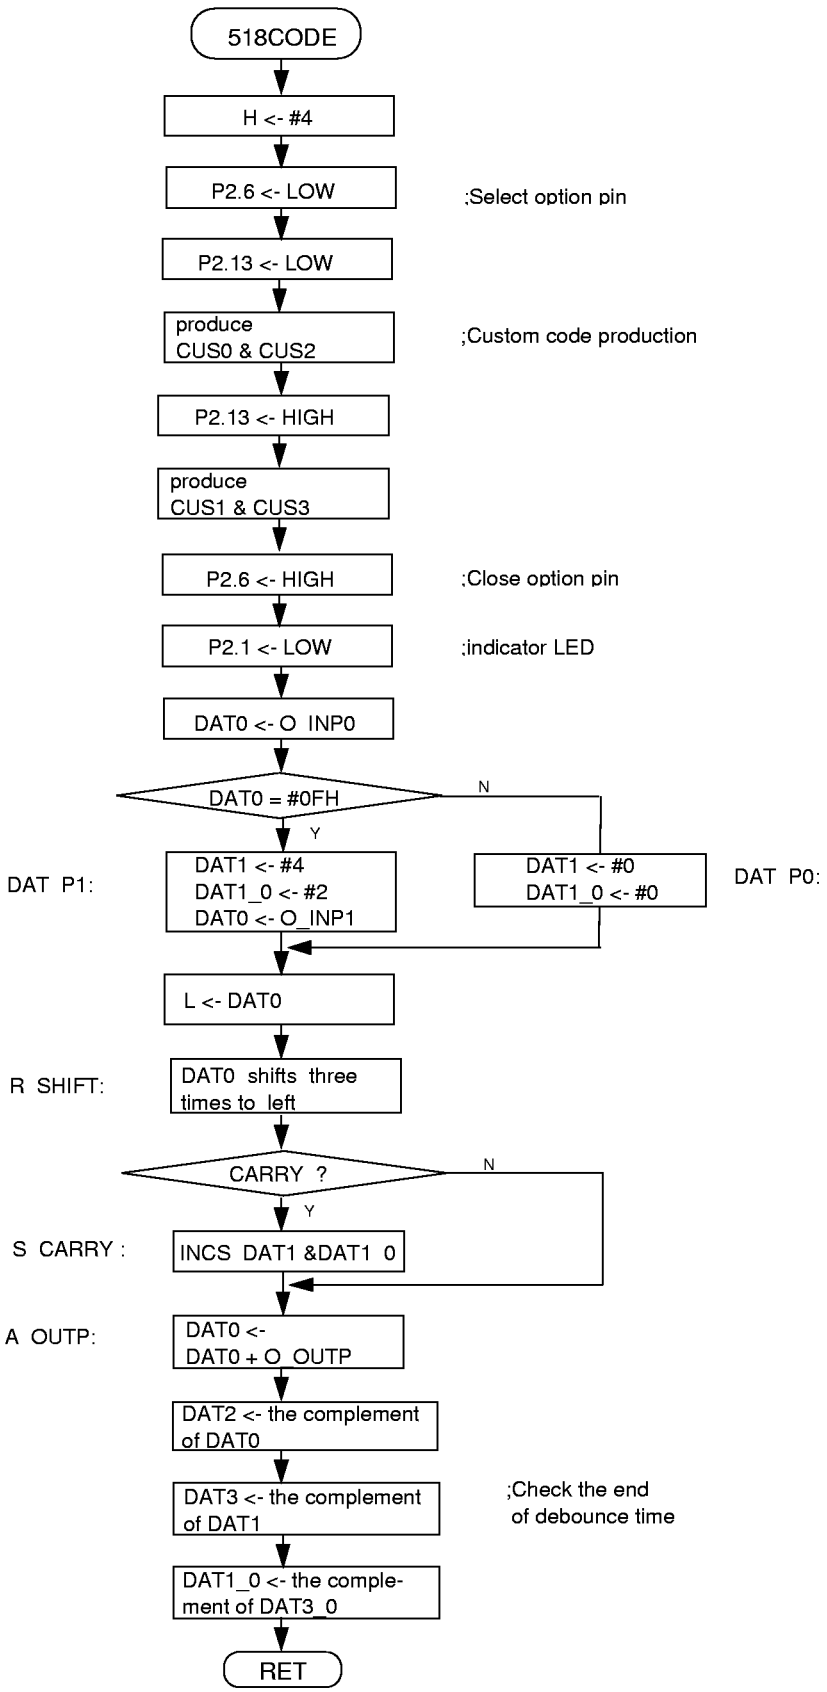

```
;*********************************
            ORG     0300H
            JPL     RESET
;*********************************
;;select only a key ------------------------------------------------
KEYSCAN  MOV        H,#4

;;;product custom code ----------------------------------------------
            MOV     L,#6                ;p2.6 ← low
            CLRB    P2.(L)              ;check custom code

            MOV     L,#0DH              ;
            CLRB    P2.(L)              ;
            IN      A,P0                ;
            MOV     L,#CUS2             ;CUS2 is the complement of CUS0
            MOV     @HL,A               ;
            NOTI    A                   ;
            DECS    A                   ;
            MOV     L,#CUS0             ;
            MOV     @HL,A

            MOV     L,#0DH
            SETB    P2.(L)              ;CUS3 is the complement of CUS1
            IN      A,P0                ;
            MOV     L,#CUS3             ;
            MOV     @HL,A               ;
            NOTI    A                   ;
            DECS    A                   ;
            MOV     L,#CUS1             ;
            MOVZ    @HL,A               ;

            MOV     L,#6                ;high p2.6
            SETB    P2.(L)

            MOV     L,#1                ;the indicator LED of a key input
            CLRB    P2.(L)

;;;product data code ------------------------------------------------
            MOV     H,#0
            MOV     L,#O_INP0           ;DAT0 ← O_INP0
            MOV     A,@HL
            MOV     H,#4
            MOV     L,#DAT0
            MOVZ    @HL,A

            ADDS    A,#0FH              ;A ← #0fh
            CPNE    @HL,A               ;does input key exist in port0 ?
            JP      DAT_P0

DAT_P1      MOV     L,#DAT1             ;input key exists in port 1
            MOV     @HL+,#04H           ;DAT1 ← DAT1 + #4
            MOV     L,#DAT1_0
            MOV     @HL+,#02H           ;DAT1_0 ← DAT1_0 + #2
```

```
            MOV     H,#0                ;DAT0 ← O_INP1
            MOV     L,#O_INP1           ;
            MOV     A,@HL               ;
            MOV     H,#4                ;
            MOV     L,#DAT0             ;
            MOVZ    @HL,A               ;
            JPL     R_SHIFT             ;
DAT_P0      MOV     L,#DAT1             ;clear DAT1 & DAT1_0
            MOV     @HL+,#0
            MOV     L,#DAT1_0
            MOV     @HL+,#0
            MOV     L,#DAT0
            MOV     H,#4                ;delay time
            MOV     H,#4                ;
            MOV     H,#4                ;
            MOV     H,#4                ;
            MOV     H,#4                ;
            JPL     R_SHIFT
;
;
;
;
;*********************************
            ORG     0400H
            JPL     RESET
;*********************************
R_SHIFT     MOV     A,@HL               ;DAT0 shifts three times to the left
            ADDS    A,@HL               ;
            MOV     @HL,A               ;
            ADDS    A,@HL               ;
            MOV     @HL,A               ;
            ADDS    A,@HL               ;
            JP      S_CARRY
            JP      N_CARRY

S_CARRY     MOV     L,#DAT1             ;if carry occurs, increase DAT1 & DAT1_0
            XCH     @HL,A               ;
            INCS    A                   ;
            XCH     @HL,A               ;

            MOV     L,#DAT1_0           ;
            XCH     @HL,A               ;
            INCS    A                   ;
            XCH     @HL,A               ;

            JP      A_OUTP
N_CARRY     MOV     H,#0                ;if carry doesn't occur, delay time
            MOV     H,#0                ;
            MOV     H,#0                ;
            MOV     H,#0                ;
            MOV     H,#0                ;
            MOV     H,#0                ;
            MOV     H,#0                ;
            MOV     H,#0                ;
```

```
A_OUTP  MOV     H,#0
        MOV     L,#O_OUTP       ;DAT0 ← DAT0 + O_OUTP
        ADDS    A,@HL           ;
        MOV     H,#4            ;
        MOV     L,#DAT0         ;
        MOV     @HL,A           ;

        NOTI    A
        DECS    A               ;DAT2 ← complement of DAT0
        MOV     L,#DAT2
        MOVZ    @HL,A

        MOV     L,#DAT1
        MOV     A,@HL
        NOTI    A               ;DAT3 ← complement of DAT1
        DECS    A
        MOV     L,#DAT3
        MOVZ    @HL,A

        MOV     L,#DAT1_0
        MOV     A,@HL
        NOTI    A
        DECS    A
        MOV     L,#DAT3_0       ;DAT3_0 ← complement of DAT1_0
        MOV     @HL,A
        JPL     TX

;****************** The END of  KS51840 DATA & CUSTOM CODE GEN. **************
```

KS51840 SIGNAL TRANSMISSION

Description

This program is for signal transmissions in SAMSUNG standard format. If one key is pressed, two frames are transmitted consecutively. The repeat pulse is transmitted until key-off. The frame interval is 60 ms. Each frame consists of leader code, custom code, and data code:

– Leader code (high level for 4.5 ms and low level for 4.5 ms)
– 12-bit custom code
– 8-bit data code

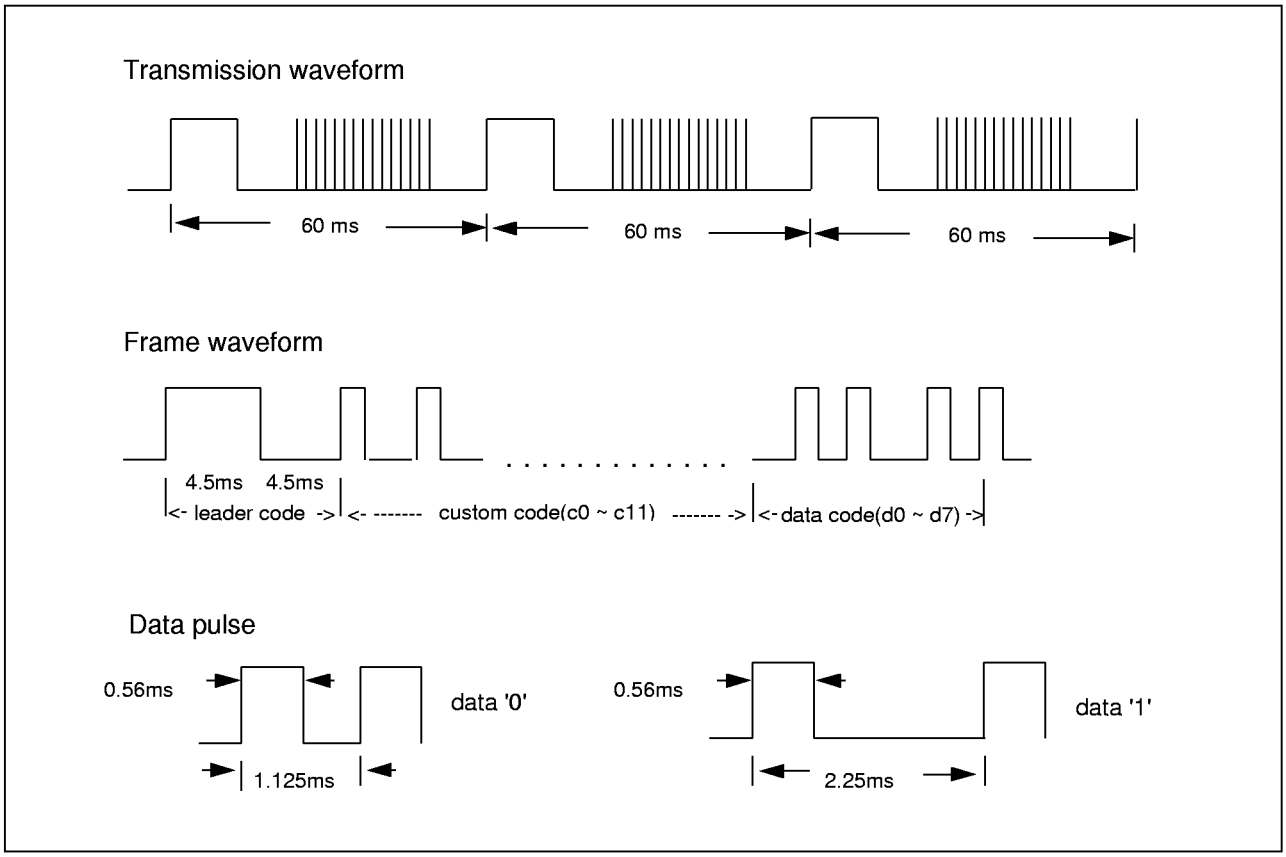

Figure 5– 7. Transmission Waveforms

RAM Assignment

This part is the same as for keyscan and code generation.

KS51840 Program Flowchart (This program is only apply to KS51840)

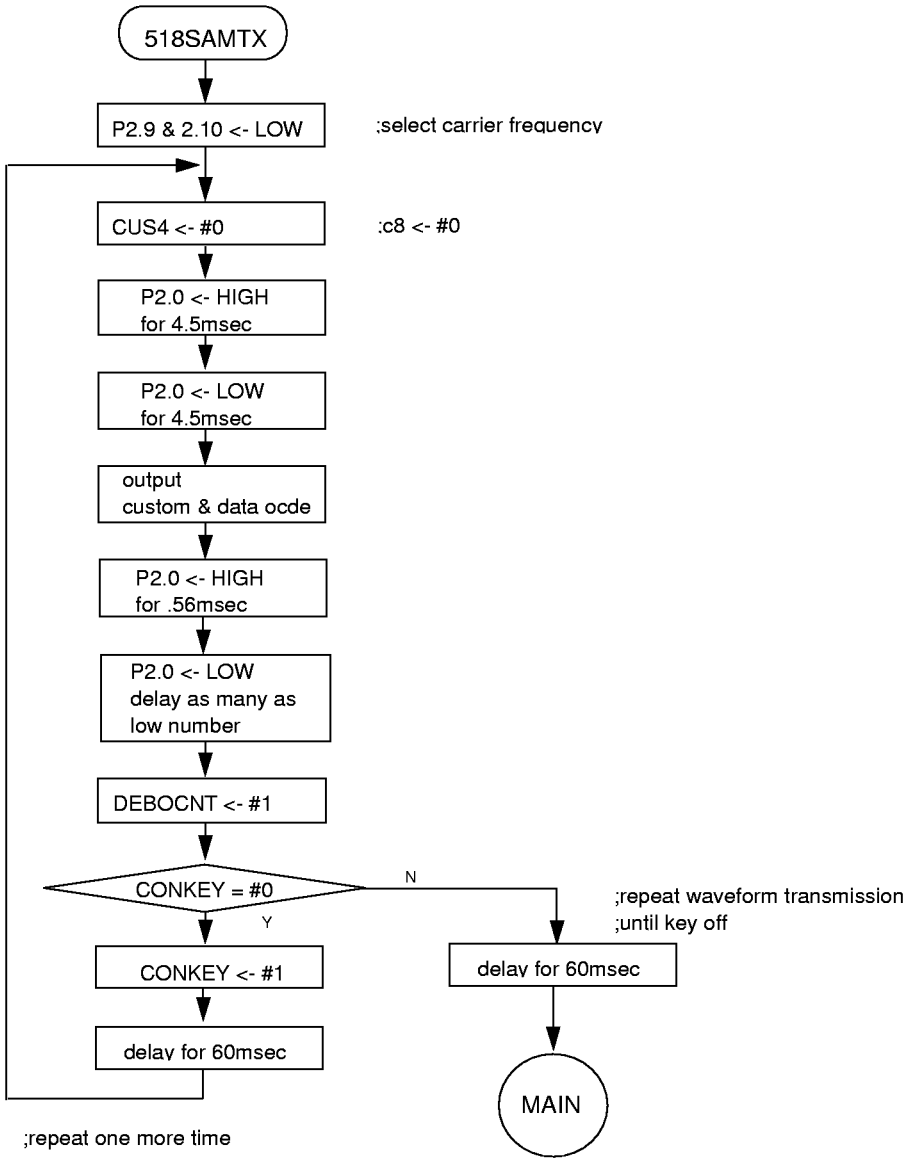

```
;*******************************
            ORG     0500H
            JPL     RESET
;*******************************
TX          MOV     L,#9                ;select carrier frequency
            CLRB    P2.(L)              ;37.9 kHz, 1/3 duty
            MOV     L,#0AH              ;clear p2.9 & p2.10
            CLRB    P2.(L)


SIGOUT      MOV     L,#CUS4             ;custom code (c8 - c11)←#0
            MOV     @HL+,#0             ;if device is KS51910, c8←#1


;;;output head pulse ------------------------------------------------
            MOV     L,#0                ;high for delay time 4.5msec
            SETB    P2.(L)
            CALLL   D4_5

            MOV     L,#0
            CLRB    P2.(L)              ;low for delay time 4.5msec
            CALLL   D4_5D

;;output custom code (c0 –c11) & data code (d0– d7) ---------------
            MOV     L,#CUS0             ;custom code (c0 - c3)
            CALLL   DATGEN
            MOV     L,#CUS1             ;custom code (c4 - c7)
            CALLL   DATGEN
            MOV     L,#CUS4             ;custom code (c8 -c11)
            CALLL   DATGEN
            MOV     L,#DAT0             ;data code (d0 - d3)
            CALLL   DATGEN
            MOV     L,#DAT1_0           ;data code (d4 - d7)
            CALLL   DATGEN
            MOV     L,#1
            DECS    L
            JP      .-1

            MOV     L,#0                ;EOB (end of bit)
            SETB    P2.(L)              ;high for .56 msec
            CALLL   D_560F
            MOV     L,#0
            CLRB    P2.(L)
            JPL     LOWCHEK
;
;
;
;
;
```

```
;*******************************
            ORG     0600H
            JPL     RESET
;*******************************
;;;check low code of custom code & data code  ----------------------
LOWCHEK MOV     L,#CUS0             ;custom code (c0 - c3)
            CALL    LCHEK
            MOV     L,#CUS1         ;custom code (c4 - c7)
            CALL    LCHEK
            MOV     L,#CUS4         ;custom code (c8 -c11)
            CALL    LCHEK
            MOV     L,#DAT0         ;data code (d0 - d3)
            CALL    LCHEK
            MOV     L,#DAT1_0       ;the maximum value of upper bit is #3
            MOV     A,L             ;data code (d4 - d7)
            CALL    LCHEK_1         ;check from the second bit
;== notice ==========================================================
;If value of DAT1_0 is greater than #3, programmer must change instruction
;CALL LCHEK_1 to other instruction  such as  CALL LCHEK_2  or CALL
; LCHEK.  And  you must check the frame interval (= 60msec)
;============================================================
;;;re-setting debounce count to #1 ----------------------------------
SETDBT  MOV     H,#0
            MOV     L,#DEBOCNT      ;DEBOCNT← #1
            MOV     @HL+,#1

;--------------------------------------------------------------------
;;;If conkey flag isn't '0', transmit repeat pulse
;;;otherwise, after setting, transmit again (two frames)
;--------------------------------------------------------------------
CONCHEKMOV      H,#0
            MOV     L,#CONKEY       ;CONKEY == #0 ?
            CPNZ    @HL             ;if CONKEY is #0, CONKEY←#1
            JP      LJ_MAIN         ;transmit frame again

            MOV     @HL+,#1
            CALLL   D4_5D           ;time is 60 msec  per frame
            CALLL   D2_25
            CALLL   D1_125
            MOV     L,#0CH
            MOV     H,#4
            MOV     H,#4
            DECS    L
            JP      .-3
            JPL     SIGOUT

;;;output repeat pulse ---------------------------------------------
LJ_MAIN CALLL   D1_125
            JPL     MAIN
```

```
;;output delay time as many as low numbers -------------------------
LCHEK    MOV     A,L
         CPBT    @HL.3           ;if @hl.3 is low, call d2_25d.
         JP      LCHEK_2
         CALLL   D2_25D

LCHEK_2  MOV     L,A
         CPBT    @HL.2           ;if @hl.2 is low, call d2_25d.
         JP      LCHEK_1
         CALLL   D2_25D

LCHEK_1  MOV     L,A
         CPBT    @HL.1           ;if @hl.1 is low, call d2_25d.
         JP      LCHEK_0
         CALLL   D2_25D

LCHEK_0  MOV     L,A
         CPBT    @HL.0           ;if @hl.0 is low, call d2_25d.
         JP      LCHEK_R
         CALLL   D2_25D
LCHEK_R  RET
;
;
;
;
;
;*******************************
         ORG     0700H
         JPL     RESET
;*******************************
;;custom code & data code generation --------------------------------
DATGEN   MOV     A,L
         CALL    D_560           ;high for .56 msec
         CPBT    @HL.0           ;if @hl.0 is high, low for 2.25msec.
         CALL    D2_25           ;otherwise, low for 1.125msec.
         CALL    D1_125

         CALL    D_560           ;high for .56 msec
         CPBT    @HL.1           ;if @hl.1 is high, low for 2.25msec.
         CALL    D2_25           ;otherwise, low for 1.125msec.
         CALL    D1_125

         CALL    D_560           ;high for .56 msec
         CPBT    @HL.2           ;if @hl.2 is high, low for 2.25msec.
         CALL    D2_25           ;otherwise, low for 1.125msec.
         CALL    D1_125

         CALL    D_560           ;high for .56 msec
         CPBT    @HL.3           ;if @hl.3 is high, low for 2.25msec.
         CALL    D2_25           ;otherwise, low for 1.125msec..
         CALL    D1_125D
         RET
```

```
;;;delay time subroutine by programming ----------------------------
D_560     MOV     L,#0
          SETB    P2.(L)
;
          MOV     L,#0CH
          MOV     H,#4
          DECS    L
          JP      .-2
          MOV     H,#4
;
          MOV     L,#0
          CLRB    P2.(L)
          MOV     L,A
          RET

D4_5D     MOV     L,#02H          ;delay time 4.5msec
           JP     .+2
D4_5      MOV     L,#06H
          DECS    L
          JP      .-1

          MOV     L,#05H
          CLR     A
          ADDS    A,#0BH
          MOV     H,#4
D_A       DECS    A
          JP       .-2
          DECS    L
          JP       .-6

D2_25D    MOV     L,#0EH
          JP      .+2
D2_25     MOV     L,#0FH
          MOV     H,#4
          DECS    L
          JP      .-2

D1_125    MOV     L,#0AH
          JP      .+6
D1_125D   MOV     L,#08H
          JP      .+4
D_560F    MOV     L,#0BH          ;delay time .56msec (for EOB)
          MOV     H,#4
          MOV     H,#4
          DECS    L
          JP       .-2
          RET
;
;
          org     0800h
          jpl     reset
          org     0900h
          jpl     reset
          org     0a00h
          jpl     reset
```

```
            org     0b00h
            jpl     reset
            org     0c00h
            jpl     reset
            org     0d00h
            jpl     reset
            org     0e00h
            jpl     reset
;
;*************** The END of KS51840 SAMSUNG FORMAT TX. *********************
```

20-DIP-300A-SG

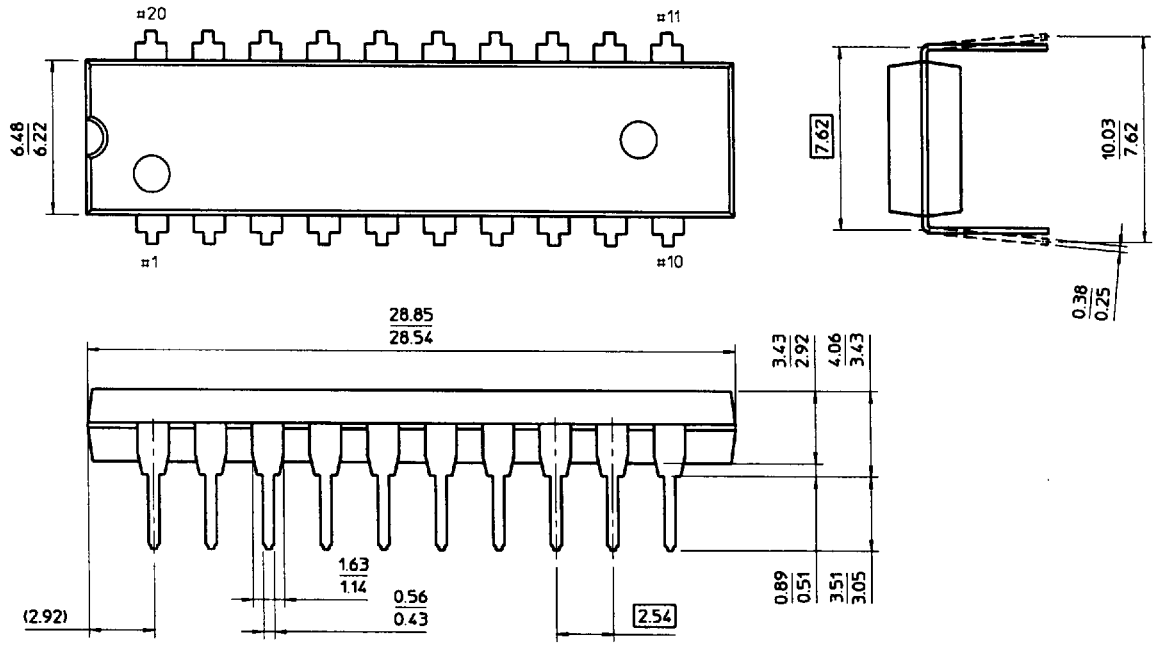

20-DIP-300B-SG

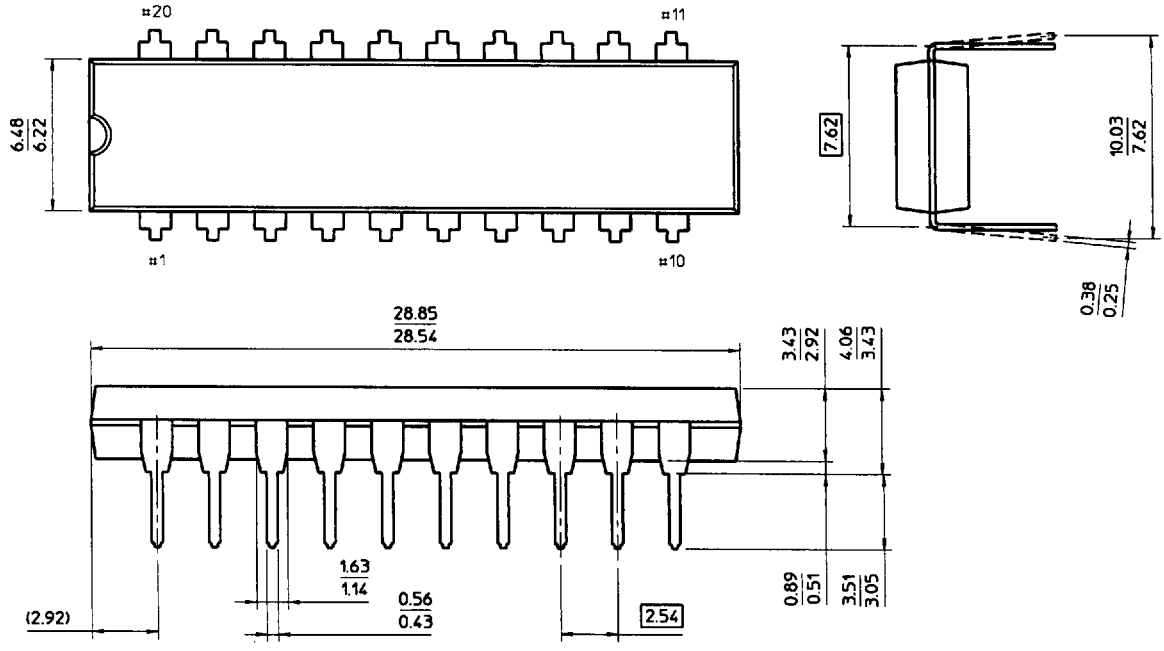

20-SOP-300

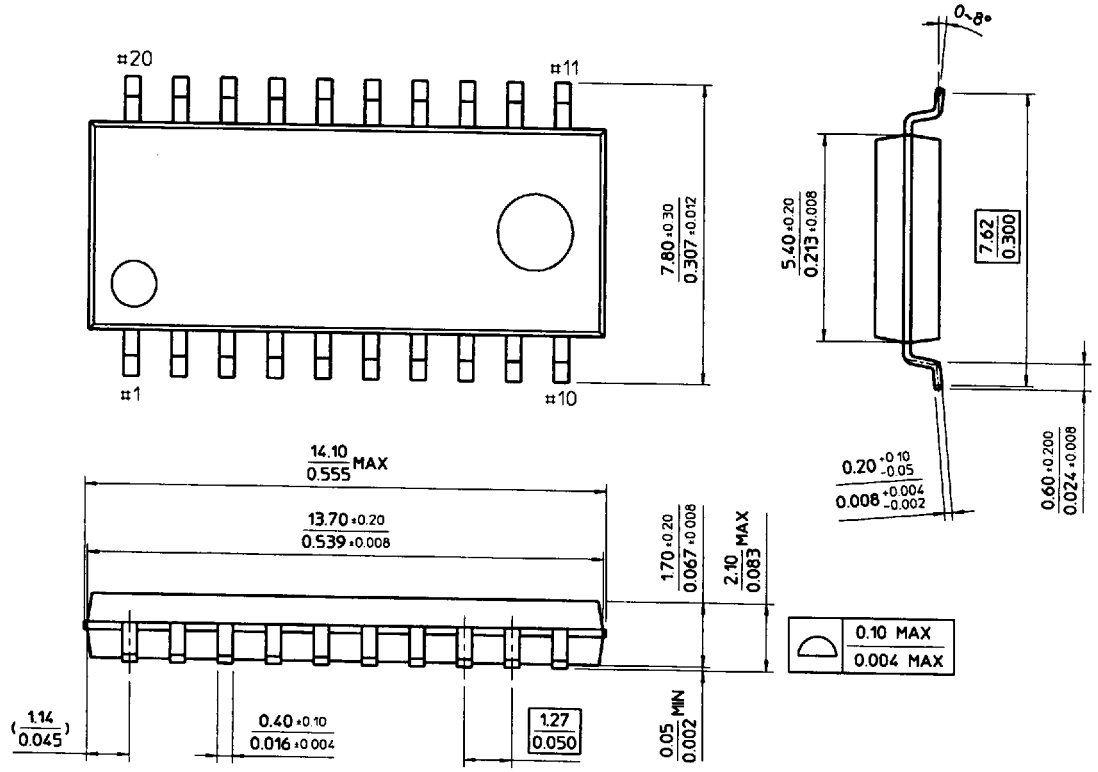

20-SOP-375