

**LA5677M****Dual Switching Regulator Control IC****Overview**

The LA5677M supports single-input control of the outputs of two converters of arbitrary types, including step up, step down and inverting. Since the LA5677M supports low voltage (3.6 to 18 V) and high frequency (1 to 500 kHz) operation, it is ideal for use in power supplies in battery powered portable equipment.

Features

- Operates at low voltages (3.6 to 18 V)
- Can be used with high frequency oscillators (1 to 500 kHz)
- Built-in low input malfunction prevention circuit
- Built-in timer-latch short circuit protection circuit

Specifications**Maximum Ratings at Ta = 25°C**

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CC} max		20	V
Error amplifier input voltage	V_I		20	V
Collector output voltage	V_O		20	V
Collector output current	I_O		21	mA
Allowable power dissipation	P_d max		330	mW
Operating temperature	T_{opr}		-20 to +85	°C
Storage temperature	T_{stg}		-40 to +125	°C

Operating Conditions at Ta = 25°C


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Recommended supply voltage	V_{CC}		3.6		18	V
Error amplifier input voltage	V_I		1.05		1.45	V
Collector output voltage	V_O		-0.3		+18	V
Collector output current	I_O				20	mA
Feedback pin current	I_{FT}				45	μA
Feedback resistance	R_{NF}		100			kΩ
Timing capacitance	C_T		150		15000	pF
Timing resistance	R_T		5.1		100	kΩ
Oscillator frequency	f_{OSC}		1		500	kHz

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.


Package Dimensions

unit: mm

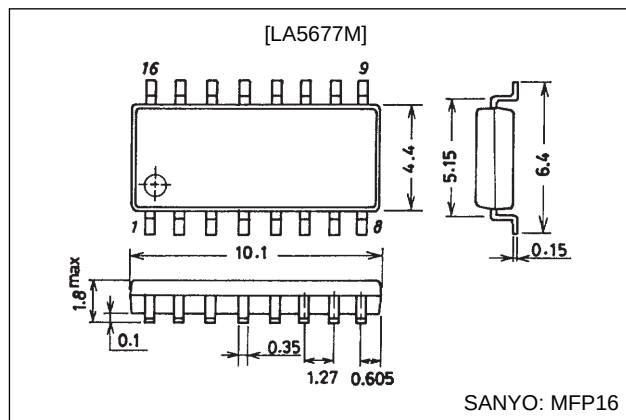3035A-MFP16**SANYO Electric Co.,Ltd. Semiconductor Bussiness Headquarters**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

O3098HA (OT)/92793TS A8-8023 No. 3660-1/7

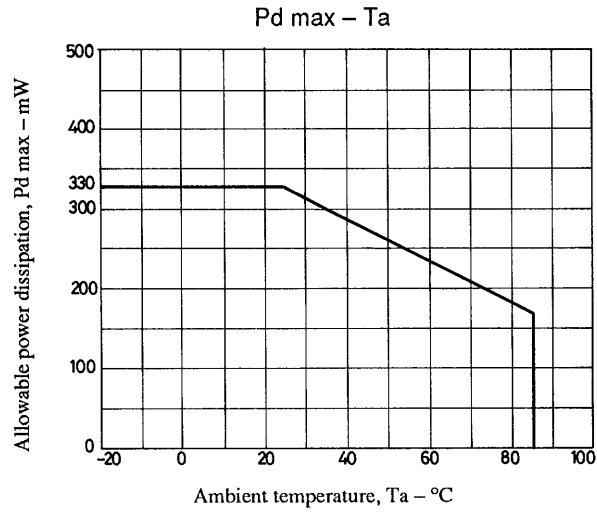

Parameter		Symbol	Conditions	Ratings			Unit
				min	typ	max	
Reference voltage block	Output voltage	V _{ref}	I _{OR} = 1 mA	2.40	2.50	2.60	V
	Line regulation	V _{line}	V _{CC} = 3.6 to 18 V		2	10	mV
	Load regulation	V _{load}	I _{OR} = 0.1 to 1 mA		1	7.5	mV
	Output voltage temperature variation				±0.2		%
	Short circuit output current	I _{OSC}	V _{ref} = 0 V	3	10	30	mA
Low input malfunction prevention block	High level threshold voltage	V _{TH}	I _{OR} = 0.1 mA		2.70		V
	Low level threshold voltage	V _{TL}	I _{OR} = 0.1 mA		2.58		V
	Hysteresis	V _{hys}	I _{OR} = 0.1 mA	80	120		mV
	Reset voltage	V _r	I _{OR} = 0.1 mA	1.5	1.9		V
Protection circuit block	Input threshold voltage	V _{tpc}		1.02	1.16	1.30	V
	Input standby voltage	V _{stby}	No pull-up		0.78		V
	Input latch voltage	V _l	No pull-up		0.74		V
	Input source current	I _{bpc}	When VS.C.P is 1.0 V	12	18	27	μA
	Comparator threshold voltage	V _{tc}	Pins 5, 12		1.2		V
Oscillator block	Oscillator frequency	f _{osc}	C _t = 330 pF, R _t = 10 kΩ		200		kHz
	f _{osc} standard deviation	Δf _A	All values agree		10		%
	Frequency variation 1 (V _{CC})	Δf _V	V _{CC} = 3.6 to 18 V		1		%
	Frequency variation 2 (Ta)	Δf _T			±0.4		%
Idle period adjustment circuit block	Input bias current	I _{bd}				1	μA
	Latch mode source current	I _{dt}			230		μA
	Latch input voltage	V _{dt}	I _{odt} = 40 μA	2.3			V
	Input threshold voltage	V _{t0}	With a duty cycle of 0%		2.05	2.25	V
		V _{t100}	f _{osc} = 10 kHz, With a duty cycle of 100%	1.20	1.45		V

Continued on next page.

LA5677M


Continued from preceding page.

Parameter		Symbol	Conditions	Ratings			Unit
				min	typ	max	
Error amplifier block	Input offset voltage	V_{IO}	With V (pins 5, 12) = 1.25 V	−6		+6	mV
	Input offset current	I_{IO}	With V (pins 5, 12) = 1.25 V	−100		+100	nA
	Input bias current	I_B	With V (pins 5, 12) = 1.25 V		160	500	nA
	Common mode input voltage range	V_{ICR}	$V_{CC} = 3.6$ to 18 V	1.05		1.45	V
	Open loop gain	A_V	$R_{NF} = 200 \text{ k}\Omega$		80		dB
	Unity gain bandwidth	G_B			1.5		MHz
	Common mode rejection ratio	CMRR			80		dB
	Maximum output voltage amplitude (1)	$V_O + m$		$V_{ref} - 0.1$			V
	Maximum output voltage amplitude (2)	$V_O - m$				1.0	V
	Output sink current (pins 5, 12)	$I_O + m$	$V_{ID} = -0.1 \text{ V}$, $V_O = 1.25 \text{ V}$		1.6		mA
	Output source current (pins 5, 12)	$I_O - m$	$V_{ID} = 0.1 \text{ V}$, $V_O = 1.25 \text{ V}$		−70		μA
Output block	Output leakage current	I_{leak}	$V_O = 18 \text{ V}$			10	μA
	Output saturation voltage	V_{sat}	$I_O = 10 \text{ mA}$		1.0	2	V
	Short circuit output current	I_{OS}	$V_O = 6 \text{ V}$		60		mA
PWM comparator block	Input threshold voltage	V_{t0}	With a duty cycle of 0%		2.05	2.25	V
		V_{t100}	$f_{osc} = 10 \text{ kHz}$, With a duty cycle of 100%	1.20	1.45		V
	Input sink current (pins 5, 12)		With V (pins 5, 12) = 1.25 V		1.6		mA
	Input source current (pins 5, 12)		With V (pins 5, 12) = 1.25 V		−70		μA
Whole device	Standby current	I_{CC1}	Output off state		1.6	2.2	mA
	Average supply current	I_{CC2}	$R_T = 10 \text{ k}\Omega$		1.9	2.6	mA

Pin Functions

No.	Pin	Function	No.	Pin	Function
1	C_T	Triangle wave oscillator capacitor connection	9	V_{CC}	Power supply input
2	R_T	Triangle wave oscillator resistor connection	10	OUT2	Output 2
3	OP1+	Error amplifier 1 + input	11	DEAD TIME2	Dead time 2 control
4	OP1−	Error amplifier 1 − input	12	OP2 _{OUT}	Error amplifier 2 output
5	OP1 _{OUT}	Error amplifier 1 output	13	OP2−	Error amplifier 2 − input
6	DEAD TIME1	Dead time 1 control	14	OP2+	Error amplifier 2 + input
7	OUT1	Output 1	15	S. C. P	Short circuit protection circuit connection
8	GND	Ground connection	16	V_{ref}	Reference voltage (2.5 V)

Equivalent Circuit Block Diagram

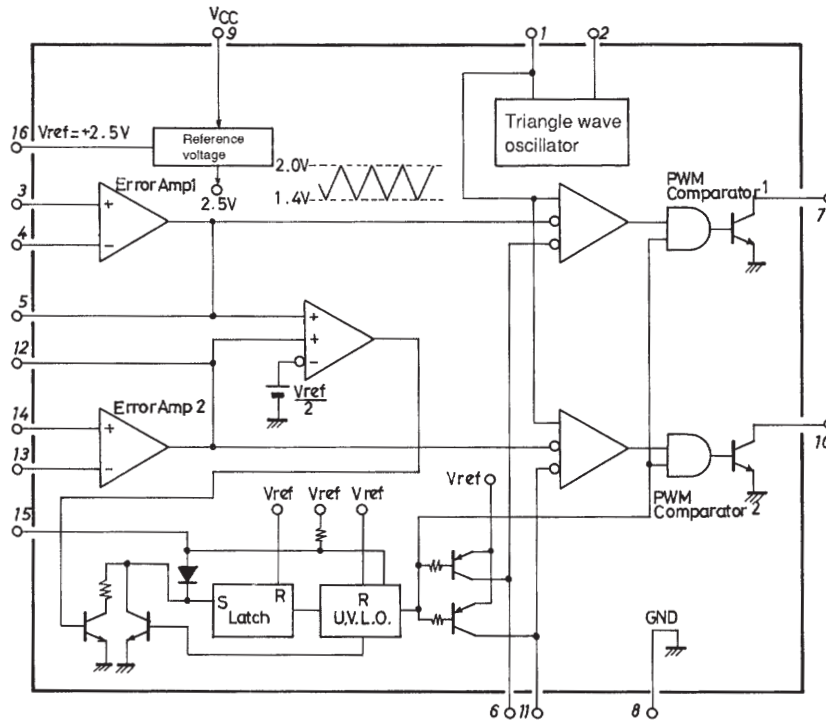

Operation Overview

1. Reference Voltage Block

The reference voltage block uses a 2.5 V reference voltage. This voltage is made available to external circuits from pin 16, and at the same time is used as the reference power supply by internal circuits.

2. Low Input Malfunction Prevention Circuit Block

The low input malfunction prevention circuit prevents incorrect operation when the power supply is brought up or during brief voltage drops. After power is applied and the reference voltage reaches V_{be} , the output transistors are held off until the power supply voltage becomes 2.72 V (typical). The dead time control pin voltage is held at the high level (V_{ref}) and the short circuit protection pin is held low (the initial state). Since this circuit has a hysteresis of 120 mV (typical) chattering due to power supply ripple can be prevented to a certain extent.

3. Timer-Latch Short Circuit Protection Circuit

During output overload, the timer-latch short circuit protection circuit's short circuit protection comparator turns off Q86 when the error amplifier inputs a low level signal (a voltage less than $V_{ref}/2$) to one or both of the short circuit protection comparator's two non-inverting inputs. At this time the pin 15 voltage increases from about 0.75 V (steady state) towards V_{ref} as the external capacitor is charged from V_{ref} through resistor R41 (80 k Ω). When the capacitor is charged to about 1.2 V, the protection latch is set, the output transistors are turned off, and the idle time becomes 100%. This also turns on Q97 which resets the protection enable state. The latch circuit reset voltage is under 1.9 V (typical).

$$V_{PE1} = V_{ref} \{1 - \exp(-t_1/R_{41} \cdot C_{PT})\}$$

$$V_{PE2} = V_{ref} \{1 - \exp(-t_2/R_{41} \cdot C_{PT})\}$$

$$0.75 = 2.5 \{1 - \exp(-t_1/80 \text{ k} \cdot C_{PT})\}$$

$$1.20 = 2.5 \{1 - \exp(-t_2/80 \text{ k} \cdot C_{PT})\}$$

$$t_1 = 28.56 \text{ k} \cdot C_{PT}$$

$$t_2 = 52.31 \text{ k} \cdot C_{PT}$$

$$t_{PT} = t_2 - t_1 = 23.75 \text{ k} \cdot C_{PT}$$

$$C_{PT} = 42.1 \times t_{PT} [\mu\text{F}]$$



The triangle wave oscillator generates an essentially symmetric triangle wave using a timing capacitor and resistor attached to the C_T pin (pin 1) and the R_T pin (pin 2), respectively. The voltage amplitude is between 1.4 and 2.0 V with pin 2 stabilized at 1 V. The oscillator frequency is determined by the external capacitor and resistor.

The idle period adjustment circuit consists of PWM comparators 1 and 2, each of which has one non-inverting and two inverting inputs. The output pulse width (on time) is controlled according to the input voltage. Pins 6 and 11 are dead time control pins, and are used to limit the maximum value of the pulse width. A pin voltage of 2.05 V (Typical) or over results in the output being off for the whole period, and a pin voltage of 1.45 V (Typical) or lower results in the output being on for the whole period.


6. Error Amplifier Block

Error amplifiers 1 and 2 are amplifiers for detecting the output voltages, i.e., the LA5677M application system output voltages. Since the common mode input voltage range is 1.05 to 1.45 V, we recommend setting their input voltages to $V_{ref}/2$. Pins 5 and 12 are the output pins, and the gain is set and the frequency characteristics adjusted with a resistor and a capacitor connected between the outputs and the non-inverting inputs of each amplifier. The outputs are also connected to the short circuit protection circuit detection circuit.

7. Output Block

The outputs are single end open collector outputs with an NPN Darlington pair structure.

Sample Application Circuit: +5 V, 1 A step-down converter and -5 V, 0.5 A polarity inverting converter using a 12 V input

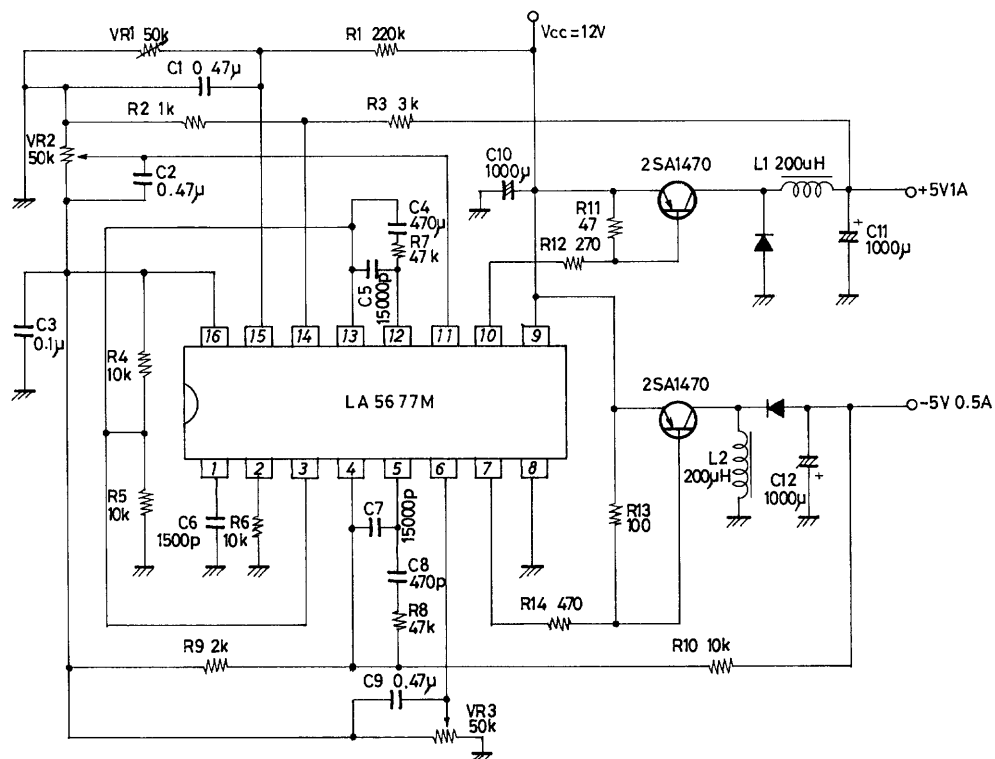

Unit (resistance: Ω , capacitance: F)

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of December, 1998. Specifications and information herein are subject to change without notice.