

SSI 32F8001/8002

Low-Power Programmable Electronic Filter

FUNCTIONAL DESCRIPTION

The SSI 32F8001/8002 is a high performance programmable electronic filter. It features a 7-pole 0.05° equiripple linear phase filter with matched normal and differentiated outputs.

CUTOFF FREQUENCY PROGRAMMING

The SSI 32F8001 programmable electronic filter can be set to a filter cutoff frequency from 9 to 27 MHz with no boost. The SSI 32F8002 can set the cutoff frequency from 6 to 18 MHz with no boost.

Cutoff frequency programming can be established using either a current source fed into pin IFP whose output current is proportional to the SSI 32F8001/8002 output reference voltage VPTAT, or by means of an external resistor tied from the output voltage reference pin VPTAT to pin VFP. The former method is optimized using the SSI 32D4661 Time Base Generator, since the current source into pin IFP is available at the DAC F output of the SSI 32D4661. Furthermore, the voltage reference input is supplied to pin VR3 of the SSI 32D4661 by the reference voltage from the VPTAT pin of the SSI 32F8001/8002. This reference voltage is internally generated by a band-gap circuit in conjunction with a temperature varying reference to create a voltage which is proportional to absolute temperature.

The VPTAT voltage will compensate for internal temperature variation of the f_c and boost circuits.

The cutoff frequency, determined by the -3 dB point relative to a very low frequency value (< 10 kHz), is related to the current IVFP injected into pin IFP by the following formulas.

f_c (ideal, in MHz)

$$32F8001 = 45.0 \cdot IFP = 45.0 \cdot IVFP \cdot 1.8/VPTAT$$

$$32F8002 = 30.0 \cdot IFP = 30.0 \cdot IVFP \cdot 1.8/VPTAT$$

where IFP and IVFP are in mA, $0.2 < IFP < 0.6$ mA, VPTAT is in volts, and $T_a = 25^\circ\text{C}$.

If a current source is used to inject current into pin IFP, pin VFP should be left open.

If the SSI 32F8001/8002 cutoff frequency is set using voltage VPTAT to bias up a resistor tied to pin VFP, the cutoff frequency is related to the resistor value by the following formulas.

f_c (ideal, in MHz)

$$32F8001 = 45.0 \cdot IFP = 45.0 \cdot 1.8/(3 \cdot R_x)$$

$$32F8002 = 30.0 \cdot IFP = 30.0 \cdot 1.8/(3 \cdot R_x)$$

R_x in $k\Omega$

If pin VFP is used to program cutoff frequency, pin IFP should be left open.

MAGNITUDE EQUALIZATION PROGRAMMING

The magnitude equalization, measured in dB, is the amount of high frequency peaking at the cutoff frequency relative to the original -3 dB point. For example, when 12 dB boost is applied, the magnitude response peaks up 9 dB above the DC gain.

The amplitude of the input signal at frequencies near the cutoff frequency can be increased using this feature. Applying an external voltage to pin VBP which is proportional to reference output voltage VPTAT (provided by the VPTAT pin) will set the amount of boost. A fixed amount of boost can be set by an external resistor divider network connected from pin VBP to pins VPTAT and GND. No boost is applied if pin FBST, frequency boost enable, is at a low logic level.

The amount of boost FB at the cutoff frequency F_c is related to the voltage VBP by the formula

$$FB \text{ (ideal, in dB)} = 20 \log_{10}[3.73(VBP/VPTAT)+1],$$

where $0 < VBP < VPTAT$.

POWER ON / OFF

The SSI 32F8001/8002 supports a power down mode for minimal idle mode power dissipation. When PWRON is pulled up to logic 1, the device is in normal operation mode. When PWRON is pulled down to logic 0, or left open, the device is in the power down mode.

SSI 32F8001/8002

Low-Power Programmable Electronic Filter

PIN DESCRIPTION

NAME	TYPE	DESCRIPTION
VIN+, VIN-	I	Differential Signal Inputs. The input signals must be AC coupled to these pins.
VO_NORM+, VO_NORM-	O	Differential Normal Outputs. The output signals must be AC coupled.
VO_DIFF+, VO_DIFF-	O	Differential Differentiated Outputs. For minimum time skew, these outputs should be AC coupled.
IFP	I	Frequency Program Input. The filter cutoff frequency f_c , is set by an external current IFP, injected into this pin. IFP must be proportional to voltage VPTAT. This current can be set with an external current generator such as a DAC. VFP should be left open when using this pin.
VFP	I	Frequency Program Input. The filter cutoff frequency can be set by programming a current through a resistor from VPTAT to this pin. IFP should be left open when using this pin.
VBP	I	Frequency Boost Program Input. The high frequency boost is set by an external voltage applied to this pin. VBP must be proportional to voltage VPTAT. A fixed amount of boost can be set by an external resistor divider network connected from VBP to VPTAT and GND. No boost is applied if the FBST pin is grounded, or at logic low.
FBST	I	Frequency Boost. A high logic level or open enables the frequency boost circuitry. A low input disables this function.
PWRON	I	Power On. A high logic level enables the chip. A low level or open pin puts the chip in a low power state.
VPTAT	O	PTAT Reference Voltage. This pin outputs a reference voltage which is proportional to absolute temperature (PTAT). VBP, VFP or IFP must be referenced to this pin for proper operation.
VCC	O	+5 Volt Supply.
GND	I	Ground

ELECTRICAL SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS

Operation above maximum ratings may damage the device.

PARAMETER	RATINGS
Storage Temperature	-65°C to +150°C
Junction Operating Temperature, Tj	+130°C
Supply Voltage, VCC	-0.5V to 7V
Voltage Applied to Inputs	-0.5V to VCC

SSI 32F8001/8002

Low-Power Programmable Electronic Filter

ELECTRICAL SPECIFICATIONS (continued)

RECOMMENDED OPERATING CONDITIONS

PARAMETER		RATINGS
Supply voltage	VCC	4.50V < VCC < 5.50V
Ambient Temperature	Ta	0°C < Ta < 70°C

ELECTRICAL CHARACTERISTICS

Unless otherwise specified recommended operating conditions apply.

Power Supply Characteristics

PARAMETER	CONDITIONS	MIN	NOM	MAX	UNIT
Power Supply Current	ICC PWRON ≤ 0.8V		0.1	0.5	mA
Power Supply Current	ICC PWRON ≥ 2V		46	60	mA
Power Dissipation	PD PWRON ≥ 2V, VCC = 5V		230	300	mW
	PWRON ≥ 2V, VCC = 5.5V		275	330	mW
	PWRON ≤ 0.8V		0.5	2.5	mW

DC Characteristics

High Level Input Voltage	VIH	TTL input	2		V
Low Level Input Voltage	VIL			0.8	V
High Level Input Current	I _{IH}	VIH = 2.7V		20	μA
Low Level Input Current	I _{IL}	VIL = 0.4V	-1.5		mA

Filter Characteristics

Filter Cutoff Frequency *(f -3 dB)	*fc	32F8001 $f_c = \frac{45 \text{ MHz}}{\text{mA}} (\text{IVFP})$ IVFP = 0.2 to 0.6 mA, Ta = 25 °C	9		27	MHz
		32F8002 $f_c = \frac{30 \text{ MHz}}{\text{mA}} (\text{IVFP})$ IVFP = 0.2 to 0.6 mA, Ta = 25 °C	6		18	MHz
Filter fc Accuracy	FCA	fc = max.	-12		+12	%
VO_NORM Diff Gain	AO	F = 0.67 fc, FB = 0 dB	0.8		1.2	V/V
VO_DIFF Diff Gain	AD	F = 0.67 fc, FB = 0 dB	0.8 AO		1.2 AO	V/V
Frequency Boost at fc	FB	VBP = VPTAT fc = max.	12	13.5	15	dB
		fc = min.	11.5	13	14.5	dB
Frequency Boost Accuracy	FBA	VBP/VPTAT = 1.0 fc = max.	-1.5		+1.5	dB

SSI 32F8001/8002

Low-Power Programmable Electronic Filter

FILTER CHARACTERISTICS (continued)

PARAMETER	CONDITIONS	MIN	NOM	MAX	UNIT	
Group Delay Variation Without Boost	TGDO $f_c = \max., \frac{VBP}{VPTAT} = 0$	8001	-500	+500	ps	
		$F = 0.2 f_c \text{ to } f_c$ 8002	-750	+750	ps	
	$f_c = \min., \frac{VBP}{VPTAT} = 0$	8001	-1.5	+1.5	ns	
		$F = 0.2 f_c \text{ to } f_c$ 8002	-2.25	+2.25	ns	
Group Delay Variation Without Boost (continued)	TGDO $F = 0.2 f_c \text{ to } f_c$ $\frac{VBP}{VPTAT} = 0$		-2	2	%	
		$F = f_c \text{ to } 1.75 f_c$ $\frac{VBP}{VPTAT} = 0$	-4	+4	%	
Group Delay Variation with Boost	TGDB $f_c = \max, VBP = VPTAT$		-500	+500	ps	
		$F = 0.2 f_c \text{ to } f_c$	-750	+750	ps	
	$f_c = \min., VBP = VPTAT$		-1.5	+1.5	ns	
		$F = 0.2 \text{ to } f_c$	-2.25	+2.25	ns	
	$F = 0.2 f_c \text{ to } f_c, VBP = VPTAT$	-2.5	+2.5	%		
$F = f_c \text{ to } 1.75 f_c, VBP = VPTAT$	-4	+4	%			
Filter Input Dynamic Range	VIF THD = 1% max, $F = 0.67 f_c, VBP = 0V$ (1000 pF across Rx)		1		Vp-p	
		THD = 1.7% max, $F = 0.67 f_c, VBP = 0V$, Normal output (1000 pF across Rx)	1.5		Vp-p	
Filter Input Dynamic Range	VIF THD = 3.5% max, $F = 0.67 f_c, VBP = 0V$, Differentiated output (1000 pF across Rx)	1.5			Vp-p	
Filter Output Dynamic Range	VOF THD = 1% max, $F = 0.67 f_c$ $R_{LOAD} \geq 1k\Omega$ (1000 pF across Rx)	1			Vp-p	
Filter Diff Input Resistance	RIN	3	4.3		k Ω	
Filter Input Capacitance	CIN			3	pF	
Output Noise Voltage Differentiated Output	EOUT BW = 100 MHz, $R_s = 50\Omega$	8001		3.5	5.4	mVRms
		$f_c = \max, VBP = 0V$ 8002		3.3	5.2	mVRms
Output Noise Voltage Normal Output	EOUT BW = 100 MHz, $R_s = 50\Omega$	8001		2.3	3.45	mVRms
		$f_c = \max, VBP = 0V$ 8002		2.1	3.15	mVRms
Output Noise Voltage Differentiated Output	EOUT BW = 100 MHz, $R_s = 50\Omega$	8001		7.7	10.75	mVRms
		$f_c = \max, VBP = VPTAT$ 8002		4.8	7	mVRms
Output Noise Voltage Normal Output	EOUT BW = 100 MHz, $R_s = 50\Omega$	8001		3.8	4.75	mVRms
		$f_c = \max, VBP = VPTAT$ 8002		2.6	3.3	mVRms

SSI 32F8001/8002

Low-Power Programmable Electronic Filter

ELECTRICAL SPECIFICATIONS (continued)

FILTER CONTROL CHARACTERISTICS

PARAMETER	CONDITIONS	MIN	NOM	MAX	UNIT
Filter Output Sink Current I_{O-}		1			mA
Filter Output Source Current I_{O+}		2			mA
Filter Output Resistance R_O (Single ended)	$I_{O+} = 1.0 \text{ mA}$			60	Ω
Reference Voltage V_{PTAT}	$T_j = 25^\circ\text{C}$		1.8		V
PTAT Voltage Input V_{FP}			$2/3 V_{PTAT}$		V
Programming Current Range	$T_a = 25^\circ\text{C}$	0.2		0.6	mA
Programming Voltage Range		0		V_{PTAT}	V
Voltage at pin IFP V_{IFP}	$I_{VFP} = 0 \text{ mA}$		$2/3 V_{PTAT}$		V
Power Up Time	$f_c = 9 \text{ MHz}$			1.5	μs
	$f_c = 27 \text{ MHz}$			1	μs
Power Down Time				1	μs

SSI 32F8001/8002 Low-Power Programmable Electronic Filter

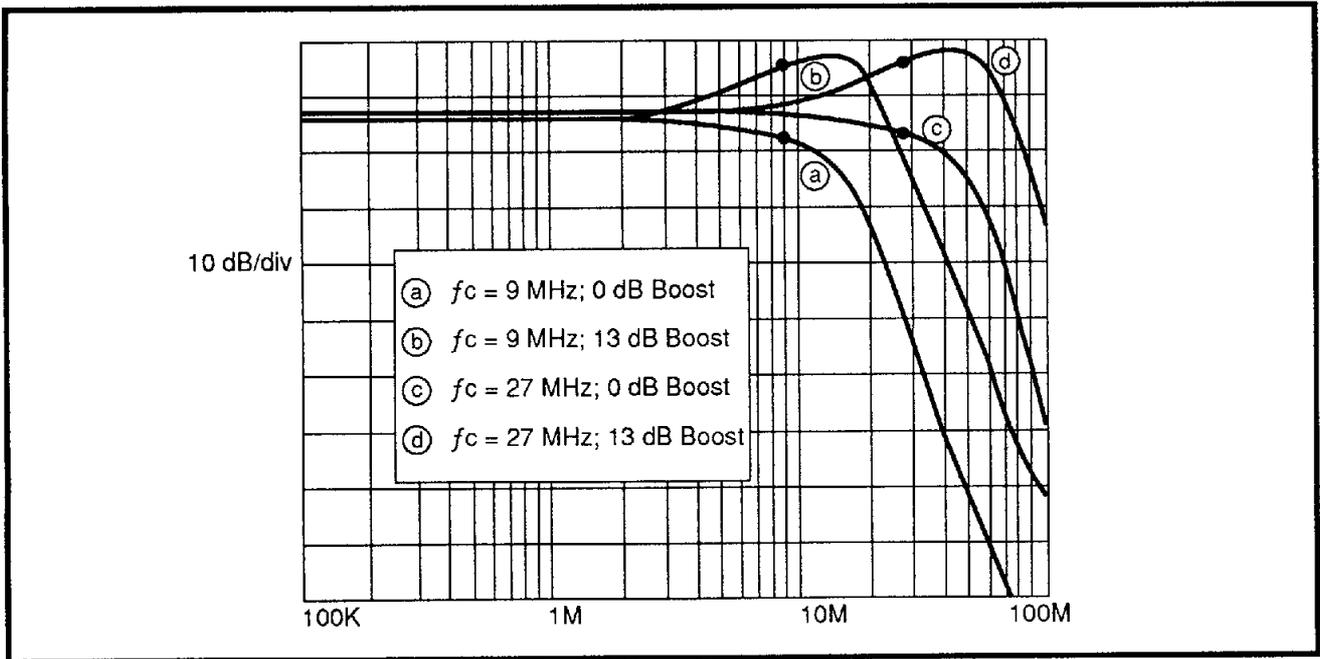


FIGURE 1: 32F8001 Normal Low Pass Response

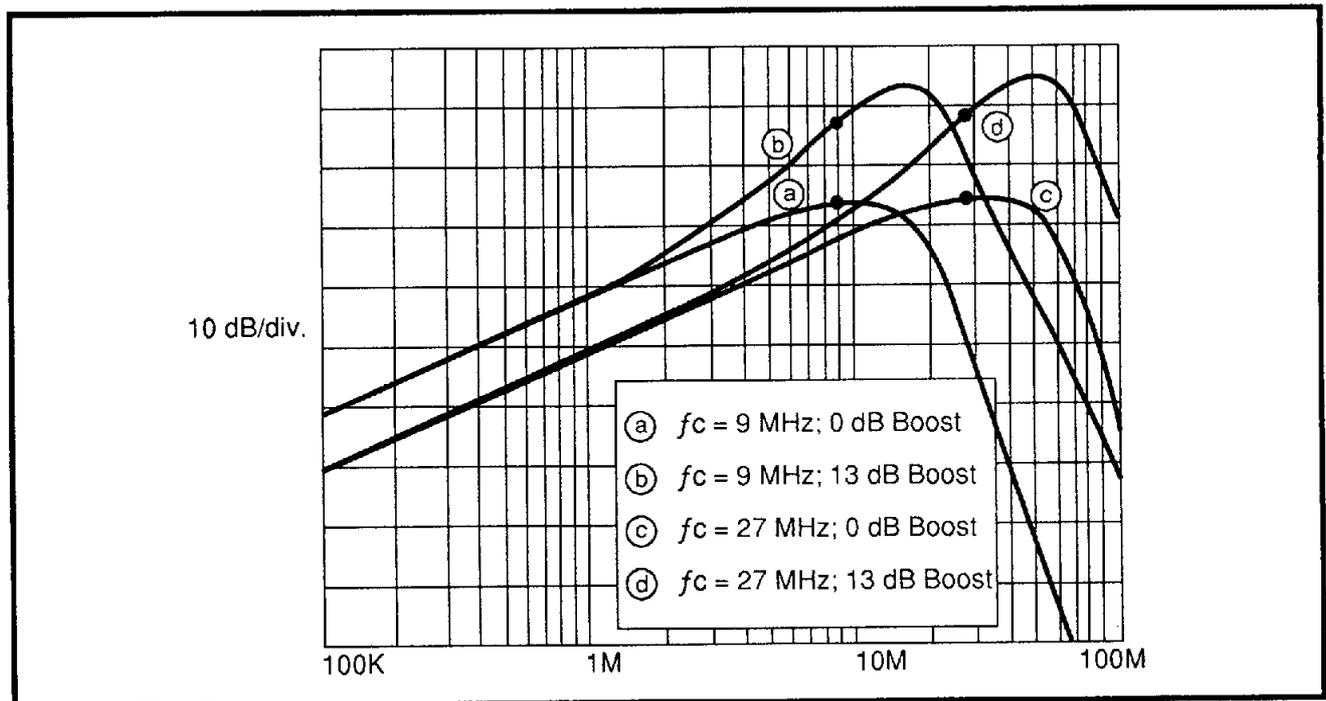


FIGURE 2: 32F8001 Differentiated Low Pass Response

SSI 32F8001/8002
Low-Power Programmable
Electronic Filter


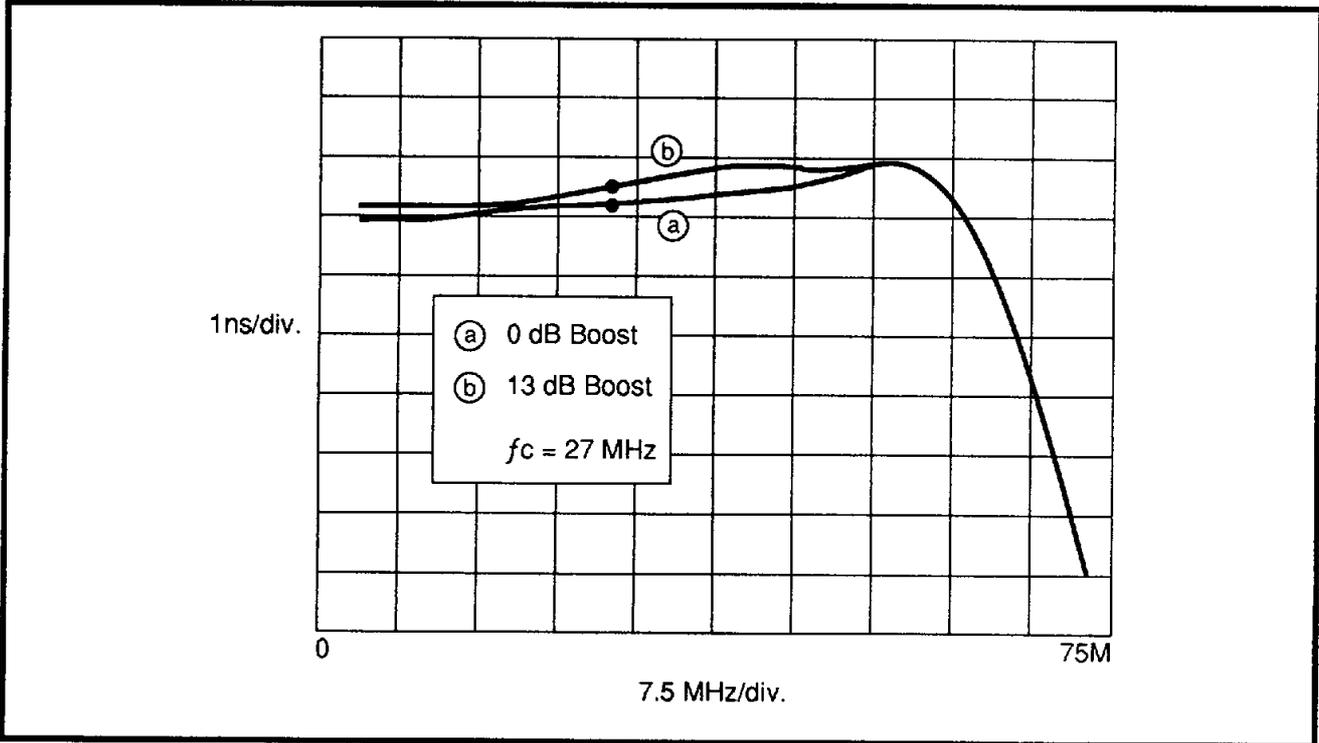


FIGURE 3: 32F8001 Group Delay Response with $f_c = 27$ MHz

SSI 32F8001/8002 Low-Power Programmable Electronic Filter

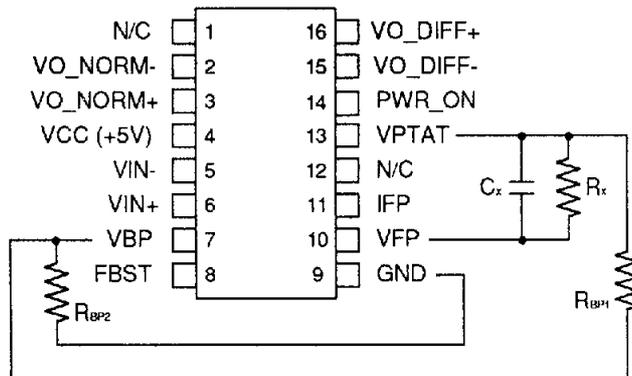

$$VPTAT = 1.8V \text{ (25°C)}$$

$$VVFP = 2/3 \text{ (VPTAT)}$$

IVFP range: 0.2 mA to 0.6 mA @25°C

(9 to 27 MHz no boost 32F8001)

(6 to 18 MHz no boost 32F8002)

Fixed frequency programming is accomplished as shown in the drawing above.

In this case IVFP (programming current) is equivalent to $\frac{VPTAT}{3} \cdot \frac{1}{R_x}$

i.e., $f_c = 27 \text{ MHz}$ then

$$IVFP = 0.6 \text{ mA @25°C} \quad R_x = 1 \text{ k}\Omega$$

Fixed boost programming is also accomplished as shown above. In this case VVBP is set by a voltage divider, where VVBP is a fraction of VPTAT.

i.e., boost = 9 dB then,

$$VBP/VPTAT = 0.488 \quad 9 \text{ dB} = 20 \log [3.73 (0.488) + 1]$$

$$\frac{R_{BP2}}{R_{BP1}} = \frac{1}{\left(\frac{VPTAT}{VBP} - 1\right)} = 0.953$$

$C_x = 1000 \text{ pF}$ - C_x is needed for lower THD at lower f_c .

FIGURE 4: 32F8001/8002 Applications Setup

SSI 32F8001/8002

Low-Power Programmable Electronic Filter

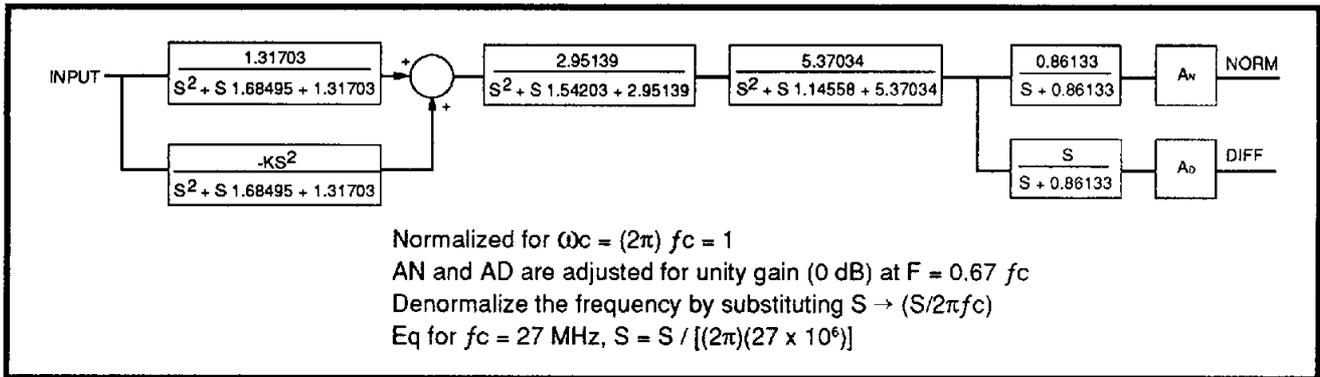


FIGURE 5: 32F8001/8002 Normalized Block Diagram

TABLE 1: 32F8001/8002 Frequency Boost Calculations, $K = 1.31703$ (10 BOOST (dB)/20 - 1)

Assuming 13 dB boost for VBP = VPTAT	Boost	K	$\frac{VBP}{VPTAT}$	Boost	K	$\frac{VBP}{VPTAT}$	
	$\frac{VBP}{VPTAT} = \frac{(10^{(FB/20)}) - 1}{3.73}$	1 dB	0.16	0.033	6 dB	1.31	0.267
2 dB		0.34	0.069	7 dB	1.63	0.332	
3 dB		0.54	0.110	8 dB	1.99	0.405	
4 dB		0.77	0.157	9 dB	2.40	0.488	
5 dB		1.03	0.209	10 dB	2.85	0.580	
				11 dB	3.36	0.683	
				12 dB	3.43	0.799	
				13 dB	4.57	0.929	
or, $\text{boost in dB} = 20 \log \left[3.37 \left(\frac{VBP}{VPTAT} \right) + 1 \right]$		$\frac{VBP}{VPTAT}$	Boost	$\frac{VBP}{VPTAT}$	Boost		
		0.1	2.753 dB	0.6	10.206 dB		
		0.2	4.841 dB	0.7	11.153 dB		
		0.3	6.523 dB	0.8	12.006 dB		
		0.4	7.391 dB	0.9	12.784 dB		
	0.5	9.142 dB	1.0	13.5 dB			

SSI 32F8001/8002

Low-Power Programmable Electronic Filter

TABLE 2: Calculations

Typical change in f -3 dB point with boost


Boost (dB)	Gain@ f_c (dB)	Gain@ peak (dB)	f_{peak}/f_c	f -3dB/ f_c
0	-3	0.00	no peak	1.00
1	-2	0.00	no peak	1.21
2	-1	0.00	no peak	1.51
3	0	0.15	0.70	1.80
4	1	0.99	1.05	2.04
5	2	2.15	1.23	2.20
6	3	3.41	1.33	2.33
7	4	4.68	1.38	2.43
8	5	5.94	1.43	2.51
9	6	7.18	1.46	2.59
10	7	8.40	1.48	2.66
11	8	9.59	1.51	2.73
12	9	10.77	1.51	2.80
13	10	11.92	1.53	2.87
14	11	13.06	1.53	2.93

Notes: 1. f_c is the original programmed cutoff frequency with no boost
 2. f -3 dB is the new -3 dB value with boost implemented
 3. f_{peak} is the frequency where the amplitude reaches its maximum value with boost implemented
 i.e., $f_c = 9$ MHz when boost = 0 dB
 if boost is programmed to 5 dB then f -3 dB = 19.8 MHz
 $f_{peak} = 11.07$ MHz

SSI 32F8001/8002

Low-Power Programmable Electronic Filter

PACKAGE PIN DESIGNATIONS (Top View)

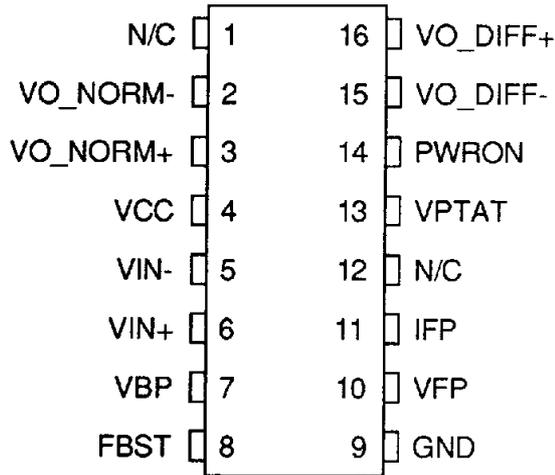

16-Lead SON, SOL

THERMAL CHARACTERISTICS: θ_{ja}

16-Lead SON (150 mil)	105°C/W
16-Lead SOL (300 mil)	100°C/W

CAUTION: Use handling procedures necessary for a static sensitive component.

ORDERING INFORMATION

PART DESCRIPTION	ORDER NO.	PKG. MARK
SSI 32F8001		
16-Lead SOL	32F8001-CL	32F8001-CL
16-Lead SON	32F8001-CN	32F8001-CN
SSI 32F8002		
16-Lead SOL	32F8002-CL	32F8002-CL
16-Lead SON	32F8002-CN	32F8002-CN

No responsibility is assumed by Silicon Systems for use of this product nor for any infringements of patents and trademarks or other rights of third parties resulting from its use. No license is granted under any patents, patent rights or trademarks of Silicon Systems. Silicon Systems reserves the right to make changes in specifications at any time without notice. Accordingly, the reader is cautioned to verify that the data sheet is current before placing orders.

Silicon Systems, Inc., 14351 Myford Road, Tustin, CA 92680-7022 (714) 573-6000, FAX (714) 573-6914