



June 2009

# FPF2310/12/13/13L

## Dual-Output Adjustable Current Limit Switch

### Features

- 1.8 to 5.5V Input Voltage Range
- Typical  $R_{ON} = 75m\Omega$  at  $I_N = 5.5V$
- 400~600mA Adjustable Current Limit
- 10% Current Limit Accuracy from Typical
- Slew Rate Controlled
- ESD Protected, Above 4000V HBM
- Independent Thermal Shutdown
- UVLO
- Output Discharge
- RoHS Compliant

### Applications

- Smart Phones
- Enterprise Equipment
- Peripheral USB Ports and Accessories



### Description

The FPF2310/12/13/13L are dual-channel load switches of IntelliMAX™ family. The FPF2310/12/13/13L consist of dual, independent, current-limited, and slew rate controlled, P-channel MOSFET power switches. Slew rated turn-on prevent inrush current from glitching supply rails. The input voltage range operates from 1.8V to 5.5V to fulfill today's USB device supply requirements. Switch control is accomplished by a logic input (ON) capable of interfacing directly with low-voltage control signal.

For the FPF2312, if the constant current condition persists after 10ms, these parts shut down the switch. The FPF2310 has an auto-restart feature that turns the switch on again after 150ms if the ON pin is still active. FPF2313/13L remains in the constant-current mode until the switch current falls below the current limit. For the FPF2310 through FPF2313/13L, the minimum current limit is 400mA-600mA with 10% accuracy (+25°C) for each switch to comply with USB applications in portable devices.

FPF2310M/12/13/13L series is available in a space-saving, 8-Lead, 3X3mm MLP.

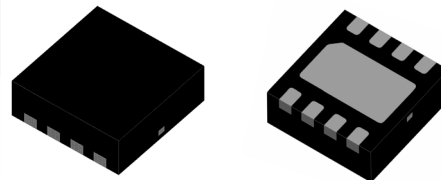


Figure 1. 8 Lead MLP (3x3mm)

### Ordering Information

| Part Number | Minimum Current Limit | Current Limit Blanking Time | Eco Status | Auto Restart | ON Pin Activity | Mode             | Package                               |
|-------------|-----------------------|-----------------------------|------------|--------------|-----------------|------------------|---------------------------------------|
| FPF2310MPX  | 400-600mA             | 10ms                        | Green      | 150ms        | Active HIGH     | Restart          | 8-Lead Molded Lead-less Package (MLP) |
| FPF2312MPX  | 400-600mA             | 10ms                        | Green      | N/A          | Active HIGH     | Latch Off        | 8-Lead Molded Lead-less Package (MLP) |
| FPF2313MPX  | 400-600mA             | 0ms                         | Green      | N/A          | Active HIGH     | Constant Current | 8-Lead Molded Lead-less Package (MLP) |
| FPF2313LMPX | 400-600mA             | 0ms                         | Green      | N/A          | Active LOW      | Constant Current | 8-Lead Molded Lead-less Package (MLP) |



For Fairchild's definition of Eco Status, please visit: [http://www.fairchildsemi.com/company/green/rohs\\_green.html](http://www.fairchildsemi.com/company/green/rohs_green.html).

## Application Circuit

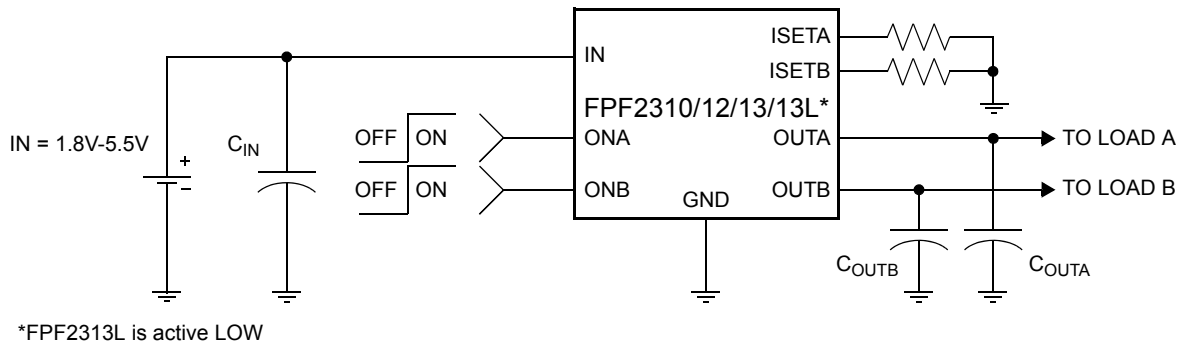


Figure 2. Typical Application

## Functional Block Diagram

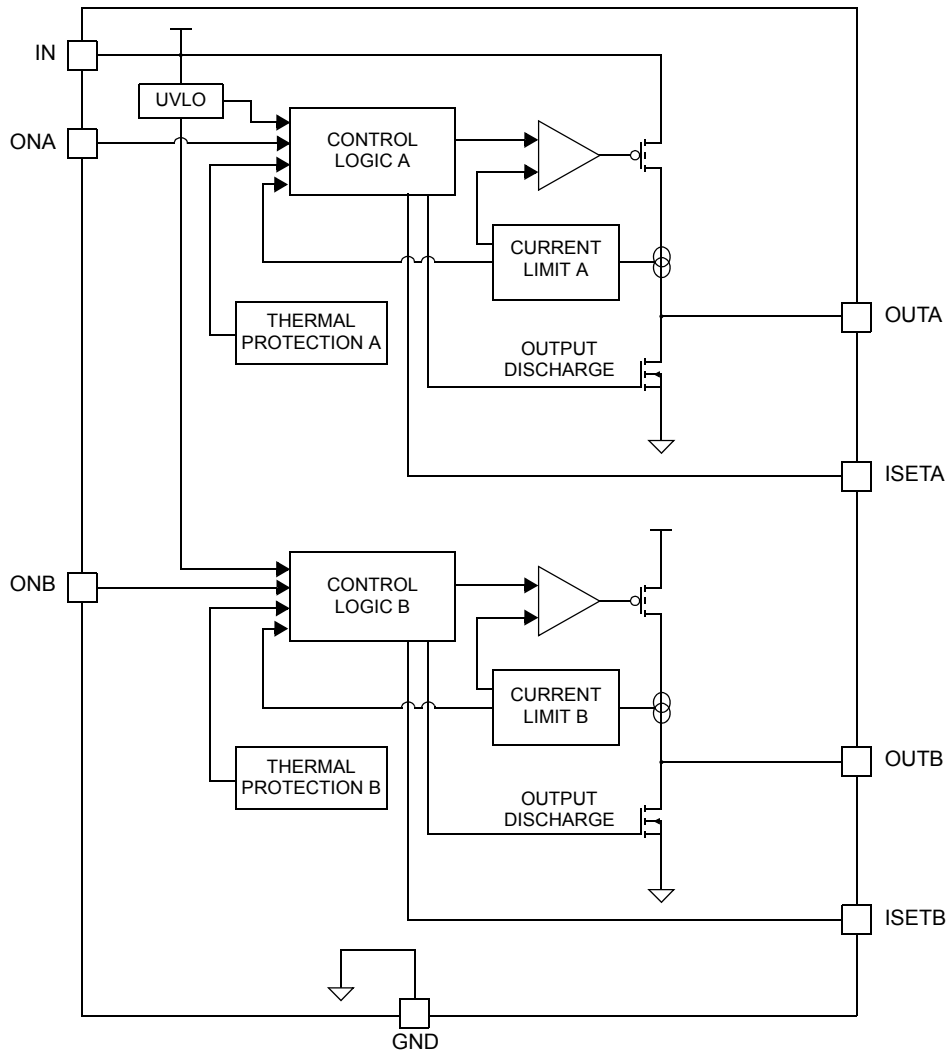


Figure 3. Block Diagram

## Pin Configuration

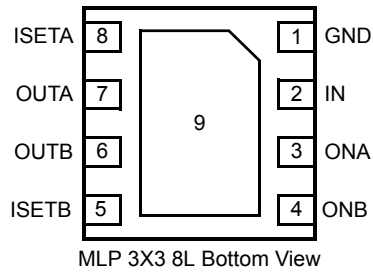


Figure 4. 8-Lead MLP 3x3mm (Bottom View)

## Pin Description

| Pin | Name        | Function                                                                                                          |
|-----|-------------|-------------------------------------------------------------------------------------------------------------------|
| 1   | GND         | Ground                                                                                                            |
| 2   | IN          | Supply Input: Input to the power switch and the supply voltage for the IC.                                        |
| 3   | ONA         | ON / OFF control input of power switch A.                                                                         |
| 4   | ONB         | ON / OFF control input of power switch B.                                                                         |
| 5   | ISETB       | Current limit set input for power switch B: A resistor from ISET to ground sets the current limit for the switch. |
| 6   | OUTB        | Switch Output: output of the power switch B.                                                                      |
| 7   | OUTA        | Switch Output: output of the power switch A.                                                                      |
| 8   | ISETA       | Current limit set input for power switch A: A resistor from ISET to ground sets the current limit for the switch. |
| 9   | Thermal Pad | IC substrate, which can be connected to GND for better thermal performance. Do not connect to other pins.         |

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol        | Parameter                               | Min.                              | Max.                | Unit |
|---------------|-----------------------------------------|-----------------------------------|---------------------|------|
|               | IN, OUTA, OUTB, ON to GND               | -0.3                              | 6.0                 | V    |
| $P_D$         | Power Dissipation                       |                                   | 0.6 <sup>(1.)</sup> | W    |
|               |                                         |                                   | 2.2 <sup>(2.)</sup> |      |
| $T_{STG}$     | Storage Temperature                     | -65                               | +150                | °C   |
| $\theta_{JA}$ | Thermal Resistance, Junction-to-Ambient |                                   | 216 <sup>(1.)</sup> | °C/W |
|               |                                         |                                   | 57 <sup>(2.)</sup>  |      |
| ESD           | Electrostatic Discharge Protection      | Human Body Model, JESD22-A114     |                     | V    |
|               |                                         | Charged Device Model, JESD22-C101 |                     | V    |

### Notes:

1. Soldered thermal pad on a two-layer PCB without vias based on JEDEC STD 51-3.
2. Soldered thermal pad on a four-layer PCB without vias connected with GND plane based on JEDEC STD51-5, 7.

## Recommended Operating Range

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

| Symbol | Parameter                     | Min. | Max. | Unit |
|--------|-------------------------------|------|------|------|
| IN     | Supply Input                  | 1.8  | 5.5  | V    |
| $T_A$  | Ambient Operating Temperature | -40  | +85  | °C   |

## Electrical Characteristics

IN = 1.8 to 5.5V, T<sub>A</sub> = -40 to +85°C unless otherwise noted. Typical values are at IN = 3.3V and T<sub>A</sub> = 25°C.

| Symbol                 | Parameter                         | Conditions                                                                                                      | Min. | Typ. | Max. | Units |
|------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------|------|------|------|-------|
| <b>Basic Operation</b> |                                   |                                                                                                                 |      |      |      |       |
| V <sub>IN</sub>        | Operating Voltage                 |                                                                                                                 | 1.8  |      | 5.5  | V     |
| I <sub>Q</sub>         | Quiescent Current                 | IN = 5.5V, I <sub>OUT</sub> = 0mA,<br>V <sub>ON</sub> = 5.5V (FPF2310/2/3), V <sub>ON</sub> = 0V (FPF2313L)     |      | 52.5 | 94.5 | μA    |
| I <sub>SD</sub>        | IN Shutdown Current               | IN = 5.5V, OUTA = OUTB = Short to GND,<br>V <sub>ON</sub> = 0V (FPF2310/2/3), V <sub>ON</sub> = 5.5V (FPF2313L) |      |      | 1    | μA    |
| R <sub>ON</sub>        | On Resistance                     | IN = 5.5V, I <sub>OUT</sub> = 200mA, T <sub>A</sub> = 25°C                                                      |      | 75   | 140  | mΩ    |
|                        |                                   | IN = 5.5V, I <sub>OUT</sub> = 200mA, T <sub>A</sub> = -40°C to +85°C                                            |      | 90   |      |       |
| R <sub>PD</sub>        | Output Pull-Down Resistance       | IN = 3.3V, T <sub>A</sub> = 25°C<br>V <sub>ON</sub> = 0V (FPF2310/2/3), V <sub>ON</sub> = 3.3V (FPF2313L)       |      | 70   |      | Ω     |
| V <sub>IH</sub>        | ON Input Logic High Voltage (ON)  | IN = 1.8V                                                                                                       | 0.8  |      |      | V     |
|                        |                                   | IN = 5.5V                                                                                                       | 1.4  |      |      |       |
| V <sub>IL</sub>        | ON Input Logic Low Voltage        | IN = 1.8V                                                                                                       |      |      | 0.5  | V     |
|                        |                                   | IN = 5.5V                                                                                                       |      |      | 0.9  |       |
| I <sub>ON</sub>        | ON Input Leakage                  | V <sub>ON</sub> = IN or GND                                                                                     | -1   |      | 1    | μA    |
| <b>Protections</b>     |                                   |                                                                                                                 |      |      |      |       |
| I <sub>LIM</sub>       | Current Limit                     | IN = 3.3V, OUTA = OUTB = 3V,<br>R <sub>SET</sub> = 690Ω, T <sub>A</sub> = 25°C                                  | 450  | 500  | 550  | mA    |
| TSD                    | Thermal Shutdown                  | Shutdown Threshold                                                                                              |      | 140  |      | °C    |
|                        |                                   | Return from Shutdown                                                                                            |      | 130  |      |       |
|                        |                                   | Hysteresis                                                                                                      |      | 10   |      |       |
| V <sub>UVLO</sub>      | Under-Voltage Shutdown            | IN Increasing                                                                                                   | 1.55 | 1.65 | 1.75 | V     |
| V <sub>UVLO_HYS</sub>  | Under-Voltage Shutdown Hysteresis |                                                                                                                 |      | 50   |      | mV    |
| <b>Dynamic</b>         |                                   |                                                                                                                 |      |      |      |       |
| t <sub>ON</sub>        | Turn-On Time                      | R <sub>L</sub> = 500Ω, C <sub>L</sub> = 0.1μF                                                                   |      | 111  |      | μs    |
| t <sub>OFF</sub>       | Turn-Off Time                     | R <sub>L</sub> = 500Ω                                                                                           |      | 5    |      | μs    |
| t <sub>R</sub>         | OUTA, OUTB Rise Time              | R <sub>L</sub> = 500Ω, C <sub>L</sub> = 0.1μF                                                                   |      | 13   |      | μs    |
| t <sub>F</sub>         | OUTA, OUTB Fall Time              | R <sub>L</sub> = 500Ω                                                                                           |      | 2    |      | μs    |
| t <sub>BLANK</sub>     | Over-Current Blanking Time        | FPF2310, FPF2312                                                                                                | 5    | 10   | 20   | ms    |
| t <sub>RSTRT</sub>     | Auto-Restart Time                 | FPF2310                                                                                                         | 75   | 150  | 300  | ms    |
| t <sub>CLR</sub>       | Current Limit Response Time       | IN = 3.3V, Moderate Over-Current Condition                                                                      |      | 20   |      | μs    |

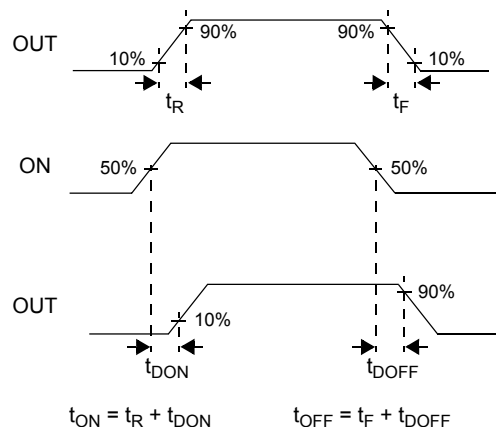


Figure 5. Timing Diagram

## Typical Characteristics

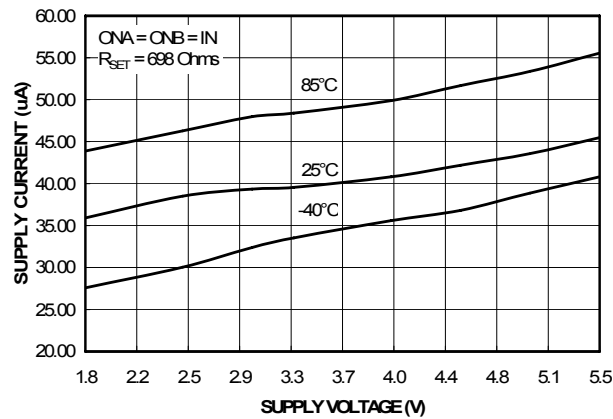


Figure 6. Quiescent Current vs. Supply Voltage

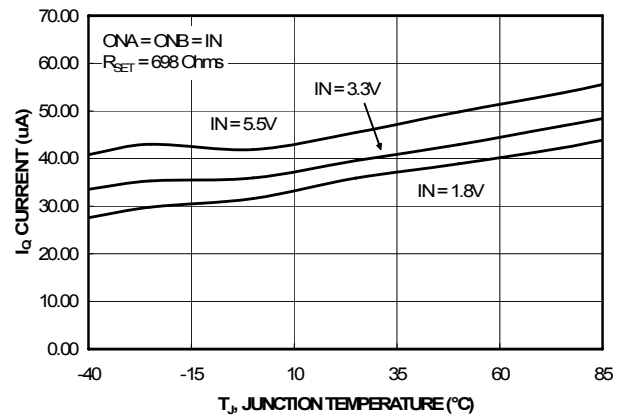


Figure 7. Quiescent Current vs. Temperature

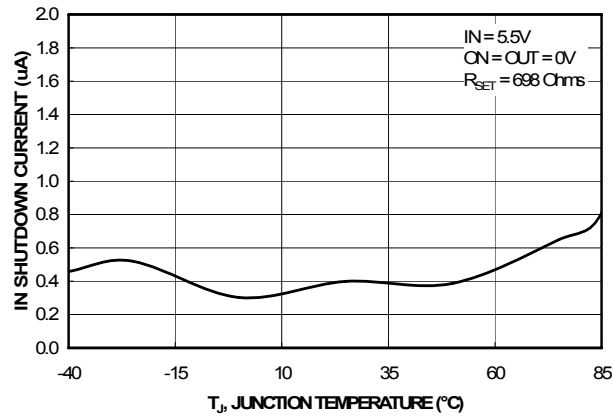
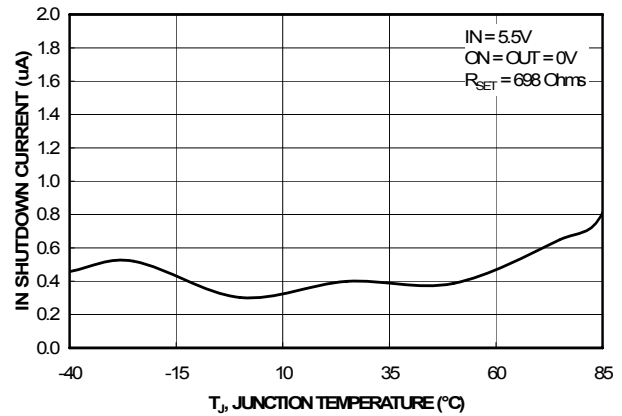
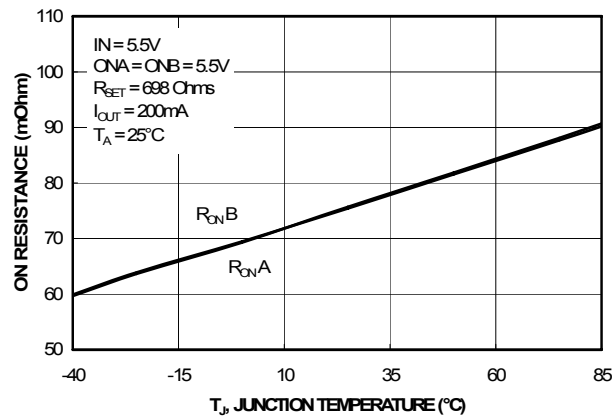
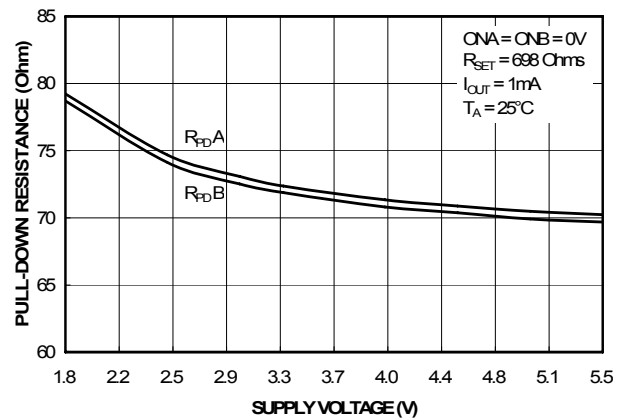


Figure 8. IN Shutdown Current vs. Temperature

Figure 9.  $R_{ON}$  vs. Supply VoltageFigure 10.  $R_{ON}$  vs. TemperatureFigure 11.  $R_{PD}$  vs. Supply Voltage

## Typical Characteristics

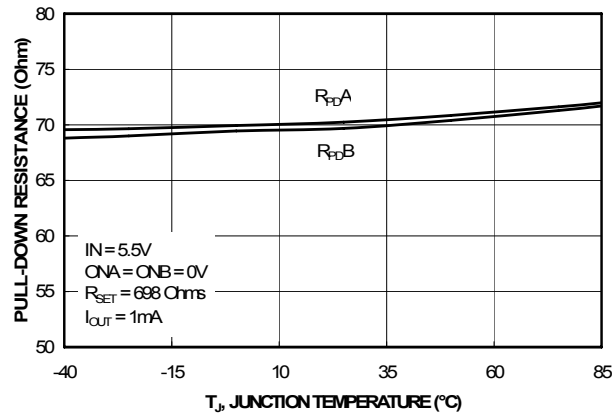
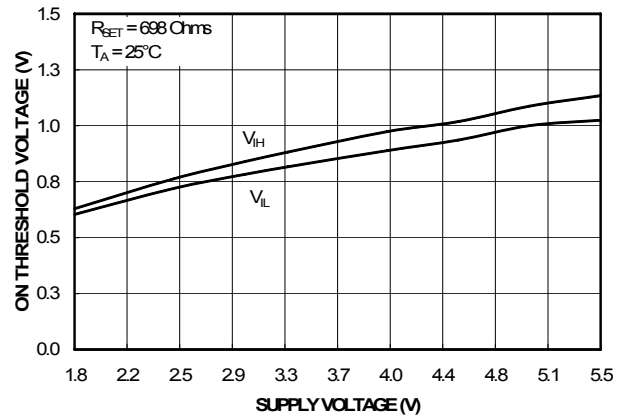
Figure 12.  $R_{PD}$  vs. Temperature

Figure 13. ON Threshold Voltage vs. Supply Voltage

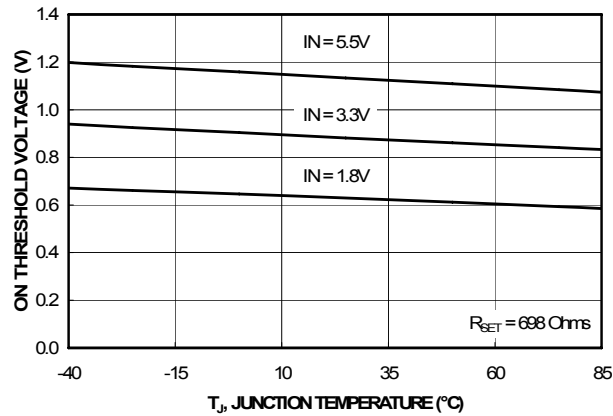


Figure 14. ON High Voltage vs. Temperature

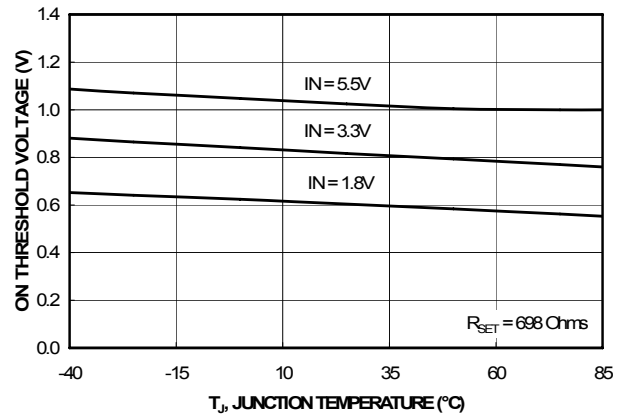


Figure 15. ON Low Voltage vs. Temperature

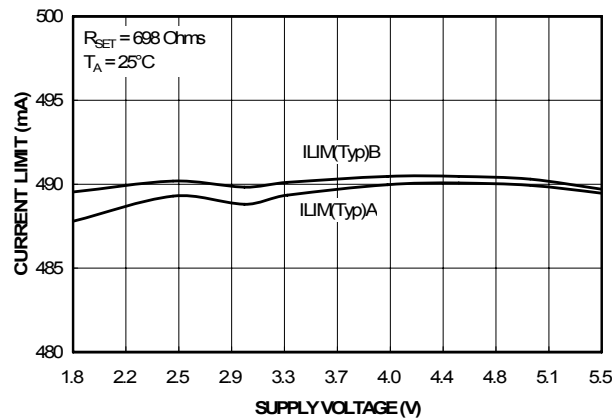


Figure 16. Current Limit vs. Supply Voltage

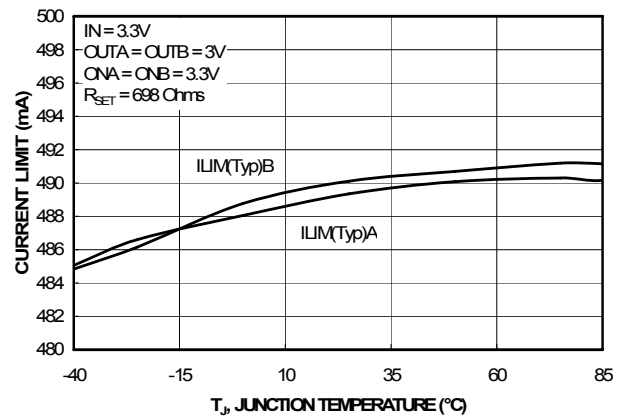
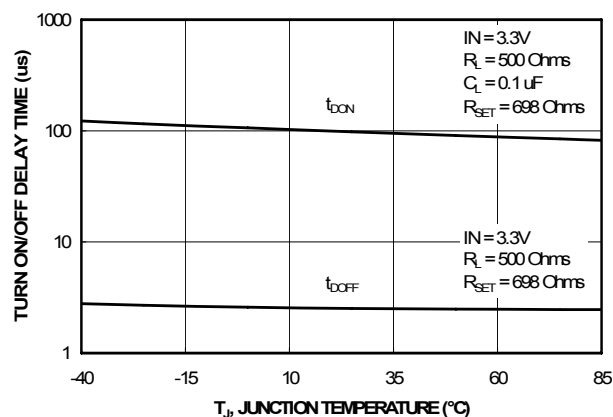
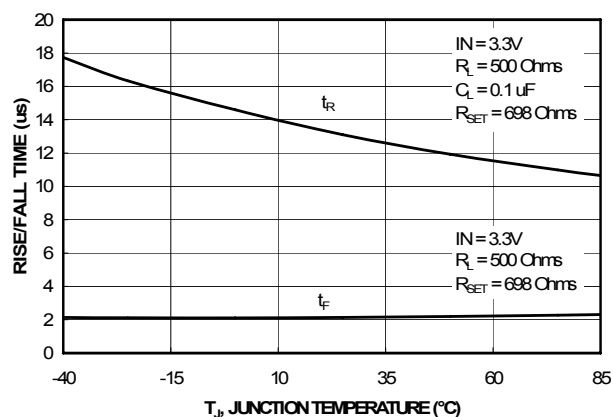
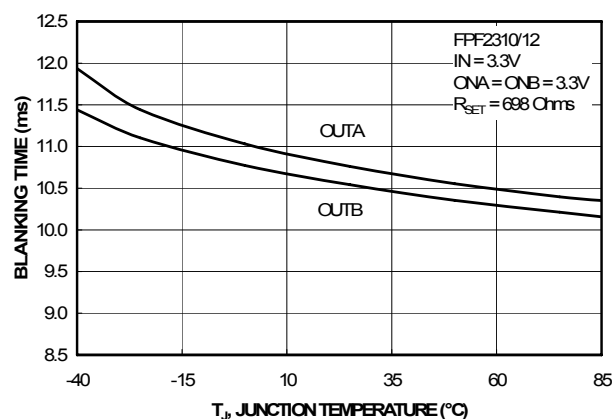
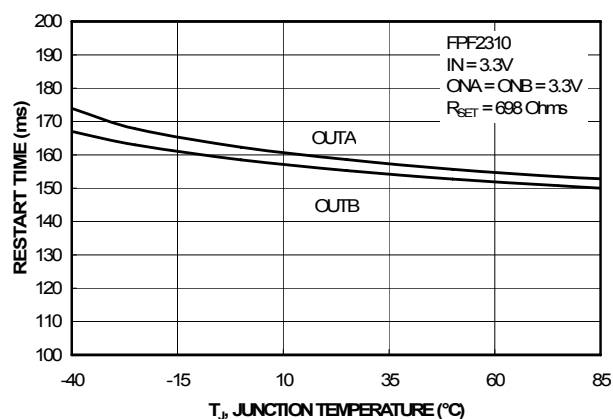
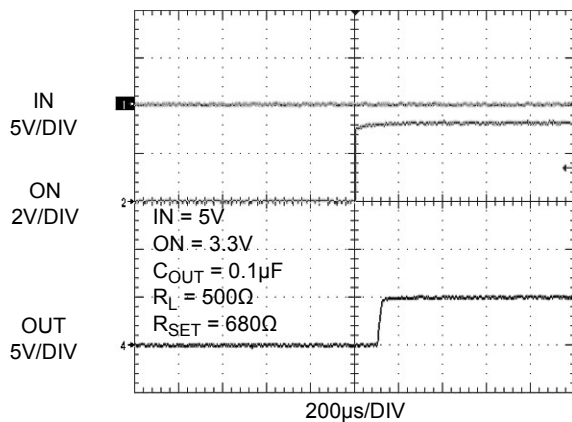
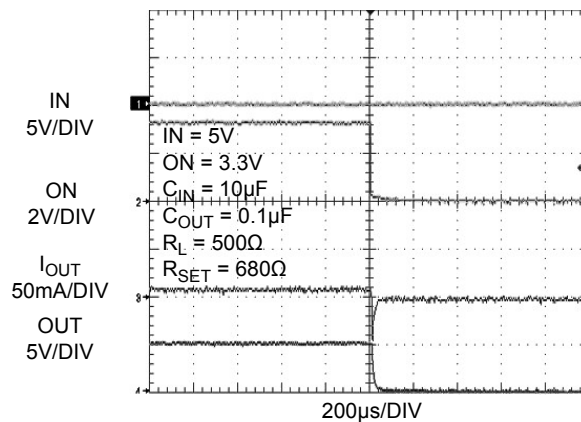


Figure 17. Current Limit vs. Temperature

## Typical Characteristics

Figure 18.  $t_{ON}$  /  $t_{OFF}$  vs. TemperatureFigure 19.  $t_{RISE}$  /  $t_{FALL}$  vs. TemperatureFigure 20.  $t_{BLANK}$  vs. TemperatureFigure 21.  $t_{RSTRT}$  vs. TemperatureFigure 22.  $t_{ON}$  ResponseFigure 23.  $t_{OFF}$  Response

## Typical Characteristics

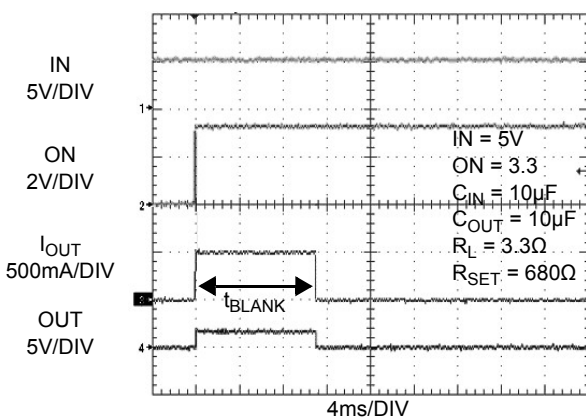


Figure 24.  $t_{BLANK}$  Response (FPF2310/12)

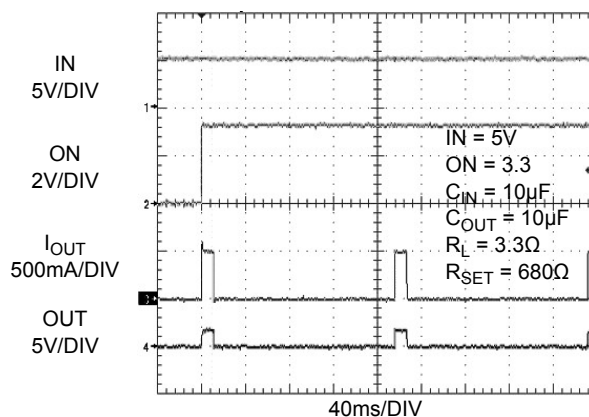


Figure 25.  $t_{RSTRT}$  Response (FPF2310)

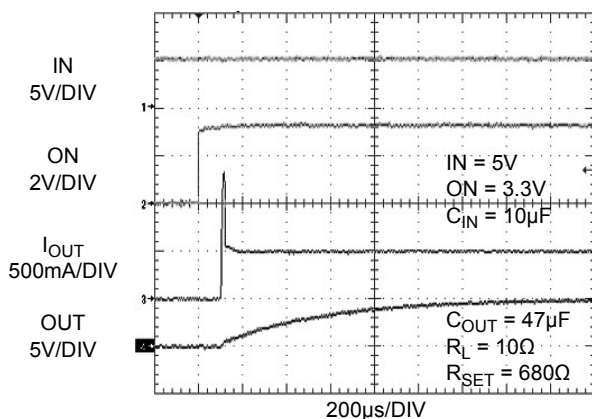


Figure 26. Current Limit Response with 47μF

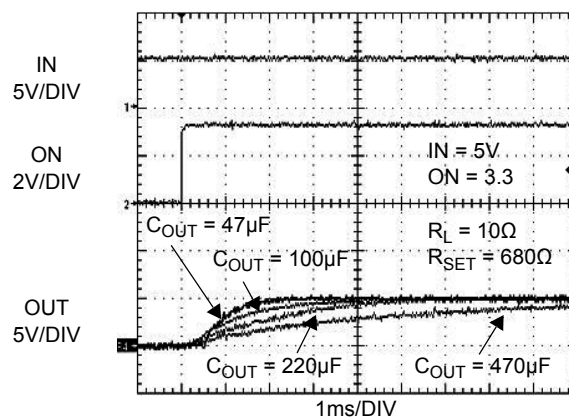


Figure 27. Output Voltage Rise Time with Various Load Capacitor

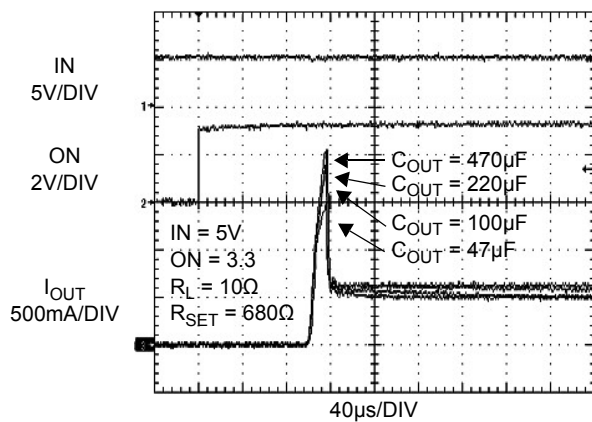


Figure 28. Output Current Inrush at Startup with Various Load Capacitors



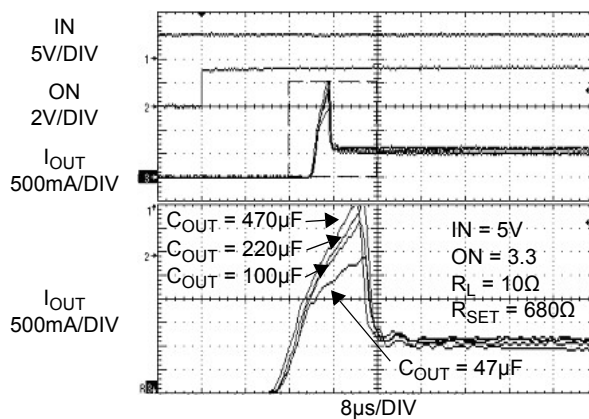


Figure 29. Output Current Inrush at Startup with Various Load Capacitors


## Typical Characteristics

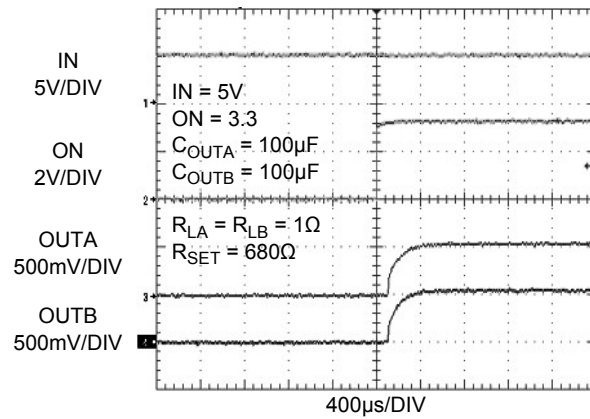

**Figure 30. Current Limit Response Time Both Channels are in OC**

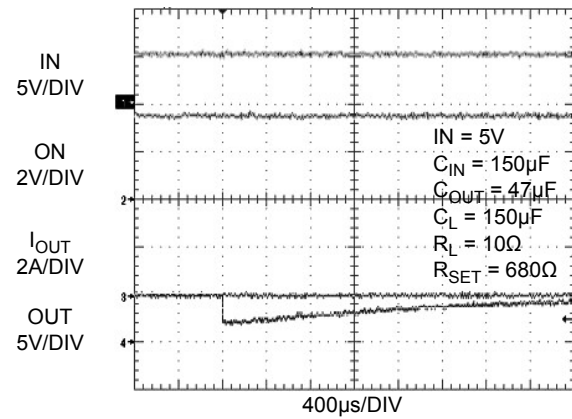

**Figure 31. Inrush Response During Capacitive Load Hot Plug-In Event**

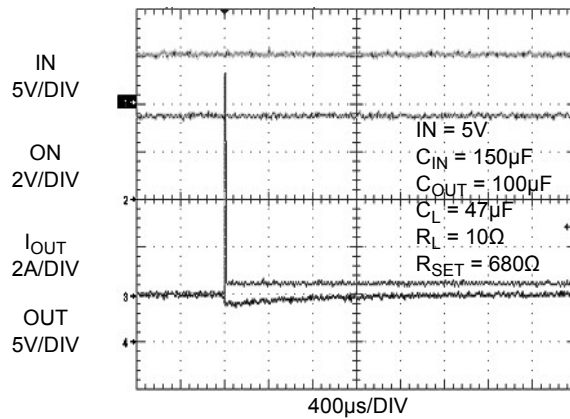

**Figure 32. Inrush Response During Capacitive and Resistive Load Hot Plug-In Event**

www.DataSheet4U.com

## Description of Operation

The FPF2310/2/3/3L are dual-output current-limit switches designed to meet notebook computers, peripheral USB ports, and point-of-load (POL) application power requirements. Dual-output current can be used where two USB ports are powered by hosts or self-powered hubs. The FPF231X family offers control and protection while providing optimum operation current for a safe design practice. The core of each switch is a typical 75mΩ (IN = 5.5V) P-channel MOSFET and a controller capable of functioning over an input operating range of 1.8 to 5.5V. The FPF231X family offers current limiting, UVLO (under-voltage lockout), and thermal shutdown protection per each switch. In the event of an over-current condition, the load switch limits the load to current limit value. The current limit value for each switch can be adjusted through the ISET pins. 400mA-600mA is adjustable for the FPF2310 through FPF2313. The minimum current limit is 400mA-600mA with 10% accuracy at +25°C with minimum variation over temperature.

### On/Off Control


The ON pin is active HIGH for FPF2310/2/3 and controls the state of the switch. Pulling the ON pin continuous to HIGH holds the switch in the ON state. The switch moves into the OFF state when the ON pin is pulled LOW or if a fault is encountered. FPF2313L is active LOW and performs in reverse order. For all versions, an under-voltage on input voltage or a junction temperature in excess of 140°C overrides the ON control to turn off the switch. In addition, excessive currents cause the switch to turn off in the FPF2310 and FPF2312 after 10ms blanking time. The FPF2310 has an auto-restart feature that automatically turns the switch ON again after 150ms. For the FPF2312, the ON pin must be toggled to turn on the switch again. The FPF2313 and FPF2313L do not turn off in response to an over-current condition, but remain operating in a constant-current mode as long as ON is enabled and the thermal shutdown or UVLO is not activated. The ON pin does not have a pull-down or pull-up resistor and should not be left floating.

### Current Limiting

The current limit ensures that the current through the switch doesn't exceed a maximum value, while not limiting at less than a minimum value. FPF231X family has dual-output load switches in one package. The current limit of each switch is adjustable through the an external resistor connected to the ISET pin. The current limit range is from 400mA to 600mA with 10% current limit tolerance.

The FPF2310 and FPF2312 have a blanking time of 10ms ( $t_{BLANK(Typ)} = 10ms$ ) during which the switch acts as a constant current source.


If the over-current condition persists beyond the blanking time, the FPF2310 latches off and shuts the switch off. If the ON pin is kept active, an auto-restart feature releases the switch and turns the switch on again after a 150ms auto-restart time ( $t_{RSTRT}$ ). If the over-current condition persists beyond the blanking time, the FPF2312 has a latch-off feature that shuts the switch off. The switch is kept off until the ON pin is toggled. The FPF2313/3L have no current-limit blanking period, so remain in a constant-current state until the ON pin of the affected switch is deactivated or the thermal shutdown turns off the switch.

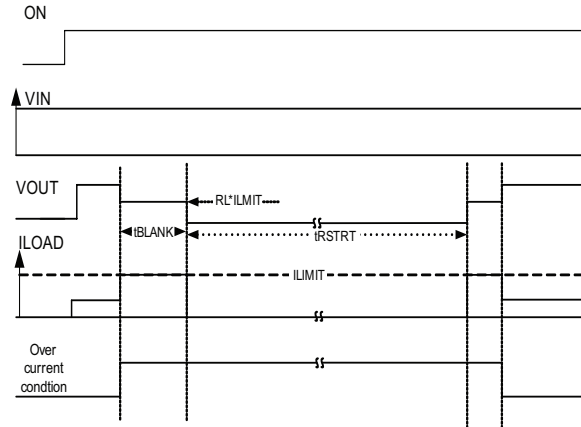

**Figure 33. FPF2310 Performance While Entering into an Over-Current Condition.**

#### Note:

3. An over-current condition signal loads the output with a heavy load current larger than  $I_{LIM}$  value.

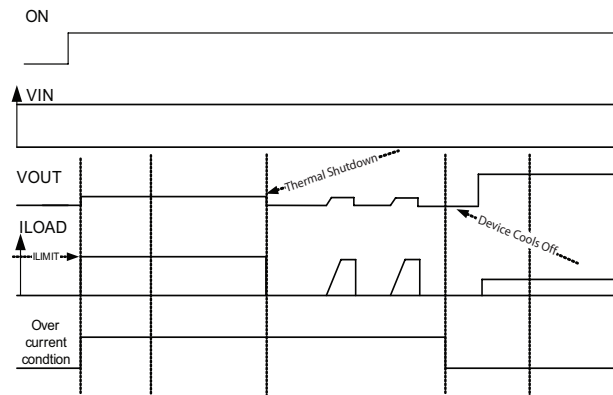


**Figure 34. FPF2313 Performance While Entering into an Over-Current Condition**

#### Note:

4. An over-current condition signal loads the output with a heavy load current larger than  $I_{LIM}$  value.

Table 1:  $R_{SET}$  Selection Guide

| $R_{SET}$<br>[ $\Omega$ ] | Minimum<br>Current<br>Limit<br>[mA] | Typical-<br>Current<br>Limit<br>[mA] | Maximum<br>Current<br>Limit [mA] | Tolerance<br>(%) |
|---------------------------|-------------------------------------|--------------------------------------|----------------------------------|------------------|
| 511                       | 607                                 | 674                                  | 742                              | 10               |
| 536                       | 578                                 | 643                                  | 707                              | 10               |
| 562                       | 552                                 | 613                                  | 674                              | 10               |
| 590                       | 526                                 | 584                                  | 642                              | 10               |
| 620                       | 500                                 | 556                                  | 611                              | 10               |
| 649                       | 478                                 | 531                                  | 584                              | 10               |
| 681                       | 455                                 | 506                                  | 556                              | 10               |
| 732                       | 424                                 | 471                                  | 518                              | 10               |
| 775                       | 400                                 | 445                                  | 489                              | 10               |

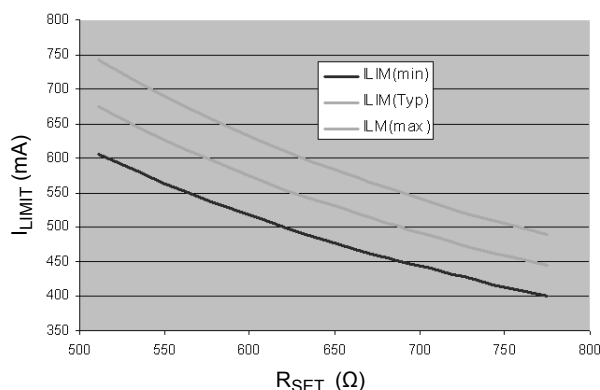Figure 35.  $I_{LIMIT}$  vs  $R_{SET}$ **Under-Voltage Lockout (UVLO)**

The under-voltage lockout feature turns off the switch if the input voltage drops below the under-voltage lockout threshold. With the ON pin active (ON pin is pulled LOW), the input voltage rising above the under-voltage lockout threshold causes a controlled turn-on of the switch and limits current overshoot. The device detects the UVLO condition when input voltage goes below UVLO voltage, but remains above 1.3V (typical).

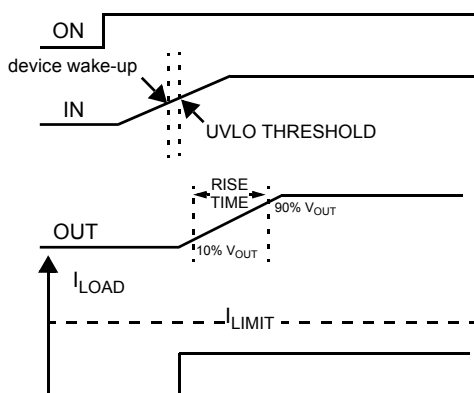


Figure 36. Under-Voltage Lockout (UVLO)

**Output Discharge Resistor**

The FPF2310/2/3 and FPF2313L family contains an 70 $\Omega$  on-chip output pull-down resistor for quick output discharge when the switch is turned off. This features become more attractive when an application requires a large output capacitor to be discharged when switch turns off. However, the OUT pin should not be connected directly to the battery source due to the discharge mechanism of the load switch.

**Thermal Shutdown**

The thermal shutdown protects the device from internally or externally generated excessive temperatures. Each switch has an individual thermal shutdown protection function and operates independently as adjacent switch temperature increases above 140°C. If one switch is in normal operation and shutdown protection of second switch is activated, the first channel continues to operate if the affected channel's heat stays confined. The over-temperature in one channel can shut down both switches due to rapidly generated excessive load currents resulting in very high power dissipation. Generally, a thermally improved board layout can provide heat sinking and allow heat to stay confined and not affect the second switch operation.

During an over-temperature condition, the affected switch is turned off. If the temperature of the die drops below the threshold temperature, the switch automatically turns on again. To avoid unwanted thermal oscillations, a 10°C (typical) thermal hysteresis is implemented between thermal shutdown entry and exit temperatures.

If output of both switches are connected together and an excessive load current activates thermal protection of both, the controller can shutdown the switches after both outputs go LOW and turn on both channels again. This provides a simultaneous switch turn on. Thermal protection is for device protection and should not be used as regular application operation.

## Application Information

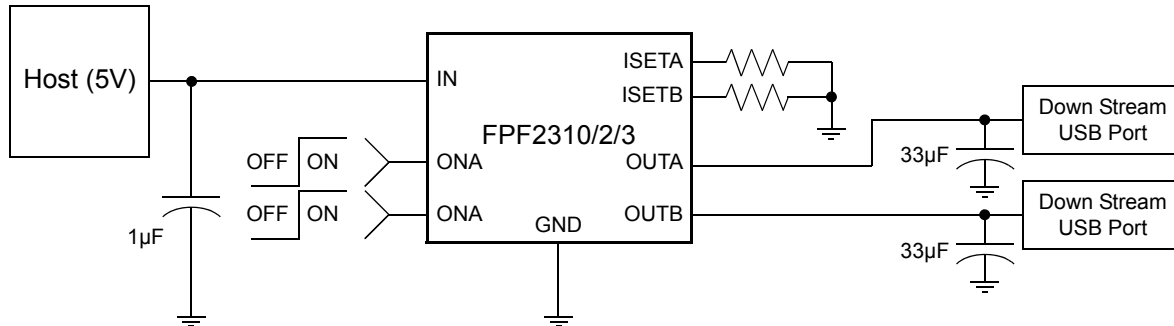


Figure 37. Typical Application

### Input Capacitor

To limit the voltage drop on the input supply caused by transient inrush currents when the switch is turned on into discharged load capacitors or a short-circuit, an input capacitor,  $C_{IN}$ , is recommended between IN and GND. The FPF2310/2/3/3L features a fast current limit response time of 20µs. An inrush current (also known as surge current) could occur during the current limit response time while the switch is responding to an over-current condition caused by large output capacitors. A 10µF ceramic capacitor,  $C_{IN}$ , is required to provide charges for the inrush current and prevent input voltage drop at the turn on. Higher values of  $C_{IN}$  to further reduce the voltage drop.

### Output Capacitor

A 0.1µF to 1µF capacitor,  $C_{OUT}$ , should be placed between the OUT and GND pins. This capacitor prevents parasitic board inductances from forcing output voltage below GND when the switch turns off. This capacitor should have a low dissipation factor. An X7R MLCC (Multilayer Ceramic Chip) capacitors is recommended.

For the FPF2310 and FPF2312, the total output capacitance needs to be kept below a maximum value,  $C_{OUT(MAX)}$ , to prevent the part from registering an over-current condition beyond the blanking time and shutdown. The maximum output capacitance for a given input voltage can be determined from the following:

$$C_{OUT(MAX)} = \frac{I_{LIM(MIN)} \times t_{BLANK(MIN)}}{V_{IN}} \quad (2)$$

For example, in a 5V application and  $I_{LIM(MIN)} = 500mA$  using  $R_{SET} = 620\Omega$ ,  $C_{OUT(MAX)}$  can be determined as:

$$\begin{aligned} C_{OUT(MAX)}(IN = 5V) &= \frac{0.5A \times 5ms}{5} \quad (3) \\ &= 500\mu F \end{aligned}$$

### Power Dissipation

During normal operation as a switch, the power dissipation of device is small and has little effect on the operating temperature of the part. The maximum power dissipation for both switches, while the switch is in normal operation, occurs just before both channels enter into current limit. This may be calculated using:

$$P_{D\_MAX(NormalOperation)} = 2 \times (I_{LIM(MIN)})^2 \times R_{ON(MAX)} \quad (4)$$

For example, for a 5V application maximum normal operation power loss while both switches delivering output current up to 500mA ( $I_{LIM(MIN)} = 500mA$ ) can be calculated as:

$$\begin{aligned} P_{D\_MAX(NormalOperation)}(IN = 5V) &= 2 \times (0.5)^2 \times 0.14 \quad (5) \\ &= 70mW \end{aligned}$$

The maximum junction temperature should be limited to 125°C under normal operation. Junction temperature can be calculated using:

$$T_J = P_D \times R_{\theta JA} + T_A \quad (6)$$

where:

$T_J$  is junction temperature;  
 $P_D$  is power dissipation across the switch  
 $R_{\theta JA}$  is thermal resistance, junction-to-ambient; and  $T_A$  is ambient temperature

For example,  $T_{J(MAX)}(Normal\ operation)$  for an MLP 3x3mm package with  $T_A = 25^\circ C$  while both switches are delivering up to 1.1A, is calculated as:

$$\begin{aligned} T_{J(MAX)}(NormalOperation) &= P_{D\_MAX(Normal\ Operation)}(IN = 5V) \times 216 + 25 \quad (7) \\ &= 40.12^\circ C \end{aligned}$$

If the part goes into current limit, the maximum power dissipation occurs when the output of switch is shorted to ground. For the FPF2310, the power dissipation scales with the auto-restart time,  $t_{RSTRT}$ , and the over-current blanking time,  $t_{BLANK}$ . In this case, the maximum power dissipated for the FPF2310 is:

$$P_{D\_MAX(CurrentLimit)} = 2 \times \frac{t_{BLANK}}{t_{BLANK} + t_{RSTRT}} \times I_{N(MAX)} \times I_{LIM(MAX)} \quad (8)$$

Which results in:

$$P_{D\_MAX(CurrentLimit)} = 2 \times \frac{10}{10 + 150} \times 5.5 \times 0.74 = 508\text{mW} \quad (9)$$

Note that this is below the maximum package power dissipation and the thermal shutdown feature protection provides additional safety to protect the part from damage due to excessive heating. The junction temperature is only able to increase to the thermal shutdown threshold. Once this temperature has been reached, toggling ON has no effect until the junction temperature drops below the thermal shutdown exit temperature. For the FPF2313 and FPF2313L, a short on the both outputs causes both switches to operate in a constant-current state and dissipating a worst-case power of:

$$P_{MAX} = I_{N(MAX)} \times I_{LIM(MAX)} = 2 \times 5.5 \times 0.74 = 8.14\text{W} \quad (10)$$

As both FPF2313/3L outputs are connected to GND.

This power dissipation is significant and activates both thermal shutdown blocks. The part cycles in and out of thermal shutdown as long as the ON pin is activated (pulled LOW) and the output short is present.

## PCB Layout Recommendations

For the best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effects that parasitic trace inductances may have on normal and short-circuit operation. Using wide traces for IN, OUTs, and GND pins helps minimize parasitic electrical effects along with minimizing the case-to-ambient thermal impedance.


### Improving Thermal Performance of the FPF231X Family of Devices

Improper layout could result in higher junction temperature and triggering the thermal shutdown protection feature. This concern applies particularly to the FPF2313 and FPF2313L, where both channels operate in constant-current mode in the overload conditions and; during fault condition, the outputs are shorted, resulting to large voltage drop across switches. In this case, power dissipation of the switch ( $P_D = (V_{IN} - V_{OUT}) \times I_{LIM(MAX)}$ ) could exceed the maximum absolute power dissipation of part.

The following techniques improve the thermal performance of this family of devices. These techniques are listed in order of the significance of impact.


1. Thermal performance of the load switch can be improved by connecting the DAP (Die Attach Pad) of MLP 3x3mm package to the GND plane of the PCB.
2. Embedding two exposed through-hole vias into the DAP (pin 9) provides a path for heat to transfer to the back GND plane of the PCB. A drill size of round, 15 mils (0.4mm) with 1-

ounce copper plating is recommended to create appropriate solder reflow. A smaller size hole prevents the solder from penetrating into the via, resulting in device lift-up. Similarly, a larger via-hole consumes excessive solder and may result in voiding the DAP.

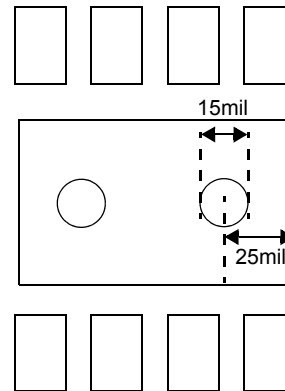

**Figure 38. Two Through-Hole Open Vias Embedded in DAP**

3. The IN, OUTs, and GND pins dissipate most of the heat generated during a high-load current condition. The layout suggested in Figure 39 illustrates a proper layout for devices in MLP 3x3mm packages. IN, OUTs, and GND pins are connected to adequate copper so that heat may be transferred as efficiently as possible out of the device. The low-power FLAGB and ON pins' traces may be laid-out diagonally from the device to maximize the area available to the ground pad. Placing the input and output capacitors as close to the device as possible also contributes to heat dissipation, particularly during high load currents.

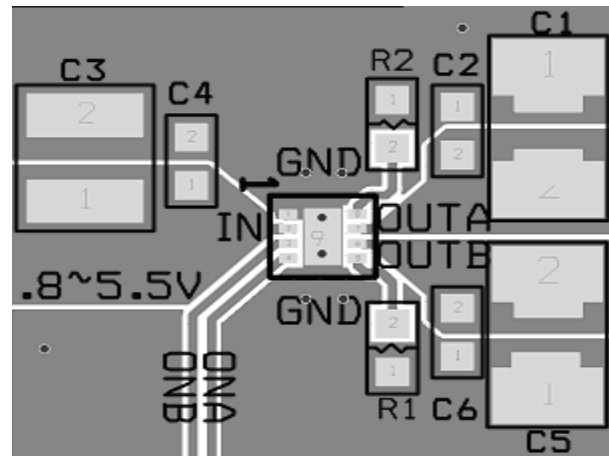

**Figure 39. Proper Layout of Output and Ground Copper Area**

## FPF231X Evaluation Board

FPF231X evaluation board has components and circuitry to demonstrate FPF2310/2/3/3L load switches functions and features accommodating both MLP 3x3mm packages. The state of the each channel can be configured using J1 and J2 jumpers. In addition, both channels can be controlled by ONA and ONB test pins. Thermal performance of the board is improved using techniques recommended in the layout recommendations section. R3 and R4 resistors are used on the board to sink a light load current when switches are activated.

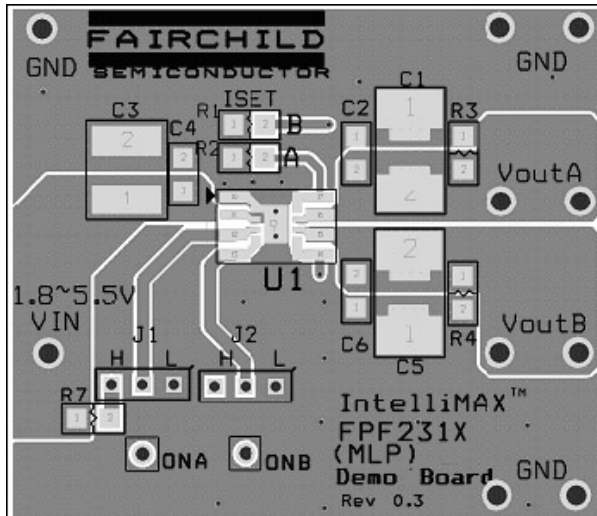


Figure 40. Top, SST, and AST Layers  
(MLP 3x3mm Package)

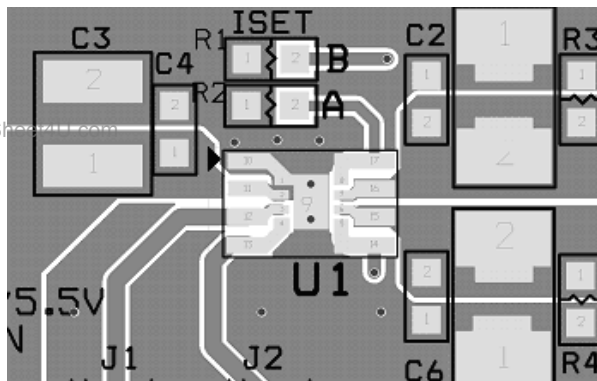


Figure 41. Zoom In to Top Layer


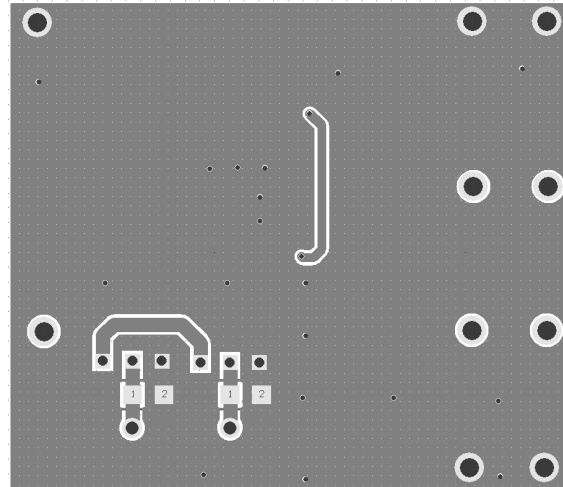


Figure 42. Bottom and ASB Layers

## Related Resources

[\*FPF2310/12/13/13L Evaluation Board User Guide: Power Switch for USB Applications\*](#)

## Dimensional Outline and Pad Layout

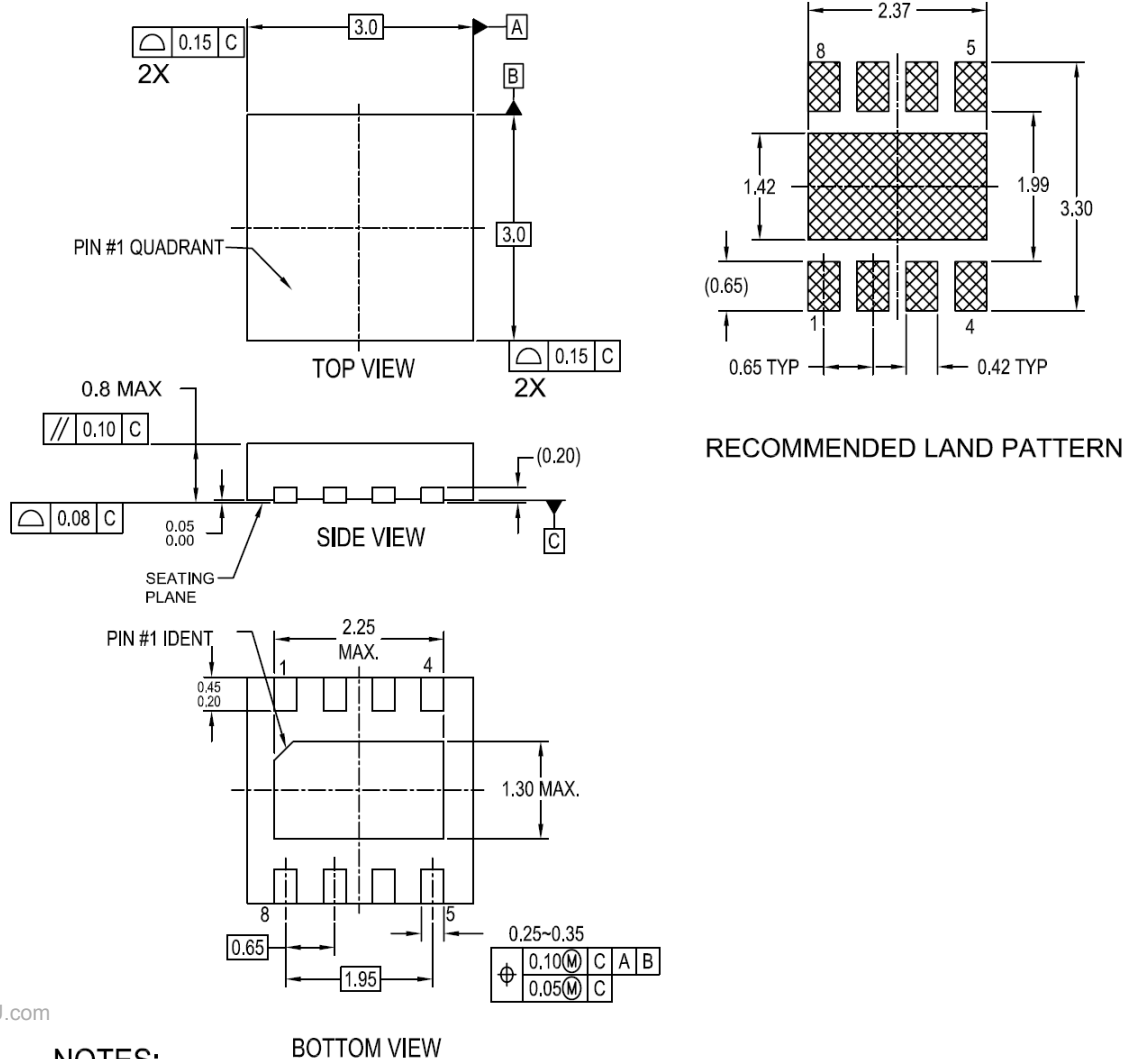

### NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-229, VARIATION VEEC, DATED 11/2001
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994
- D. FILENAME: MKT-MLP08Drev2

**Figure 43. 8-Lead Molded Leadless Package (MLP)**

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

|                                                                                      |                                                                                     |                                                                                      |                                                                                       |
|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Auto-SPM™                                                                            | F-PFS™                                                                              | PowerTrench®                                                                         | The Power Franchise®                                                                  |
| Build it Now™                                                                        | FRFET®                                                                              | PowerXS™                                                                             | the power™                                                                            |
| CorePLUS™                                                                            | Global Power ResourceSM                                                             | Programmable Active Droop™                                                           | franchise™                                                                            |
| CorePOWER™                                                                           | Green FPS™                                                                          | QFET®                                                                                | TinyBoost™                                                                            |
| CROSSVOLT™                                                                           | Green FPS™ e-Series™                                                                | QS™                                                                                  | TinyBuck™                                                                             |
| CTL™                                                                                 | Gmax™                                                                               | Quiet Series™                                                                        | TinyLogic®                                                                            |
| Current Transfer Logic™                                                              | GTO™                                                                                | RapidConfigure™                                                                      | TINYOPTO™                                                                             |
| EcoSPARK®                                                                            | IntelliMAX™                                                                         |  ™  | TinyPower™                                                                            |
| EfficientMax™                                                                        | ISOPPLANAR™                                                                         | Saving our world, 1mW/W/kW at a time™                                                | TinyPWM™                                                                              |
| EZSWITCH™*                                                                           | MegaBuck™                                                                           | SmartMax™                                                                            | TinyWire™                                                                             |
|  ™* | MICROCOUPLER™                                                                       | SMART START™                                                                         | TriFault Detect™                                                                      |
|  ®  | MicroFET™                                                                           | SPM®                                                                                 | TRUECURRENT™*                                                                         |
| Fairchild®                                                                           | MicroPak™                                                                           | STEALTH™                                                                             | μSerDes™                                                                              |
| Fairchild Semiconductor®                                                             | MillerDrive™                                                                        | SuperFET™                                                                            |  ™ |
| FACT Quiet Series™                                                                   | MotionMax™                                                                          | SuperSOT™_3                                                                          | UHC®                                                                                  |
| FACT®                                                                                | Motion-SPM™                                                                         | SuperSOT™_6                                                                          | Ultra FRFET™                                                                          |
| FAST®                                                                                | OPTOLOGIC®                                                                          | SuperSOT™_8                                                                          | UniFET™                                                                               |
| FastvCore™                                                                           | OPTOPLANAR®                                                                         | SupreMOS™                                                                            | VCX™                                                                                  |
| FETBench™                                                                            |  ® | SyncFET™                                                                             | VisualMax™                                                                            |
| FlashWriter®*                                                                        | PDP SPM™                                                                            | Sync-Lock™                                                                           | XS™                                                                                   |
| FPS™                                                                                 | Power-SPM™                                                                          |  ®* |                                                                                       |

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. I40