

# S510065

## CATV OUT-OF-BAND TUNER



### FEATURES

- 3.3V SINGLE SUPPLY OPERATION
- LOW POWER CONSUMPTION (400 mW)
- Low DISTORTION: -55dBc@1VPP
- 82 dB TOTAL CONVERSION GAIN
- 55 dB TOTAL GAIN CONTROL RANGE
- LOW LO-RF LEAKAGE


### DESCRIPTION

The S510065-55Z is a downconverter designed to be used as an Out-of-Band Tuner for use in CATV set-top box and Digital Cable Ready TV applications. The S510065-55Z consists of an input AGC amplifier, mixer, and a video/AGC amplifier. This device offers optimum performance with low power consumption and low distortion. There are two Package Options QFN 28 and TSSOP 20. The product is RoHS Compliant

### APPLICATIONS

- Cable Set-Top Boxes • Digital Cable Ready TV Sets.

### FUNCTIONAL DIAGRAM

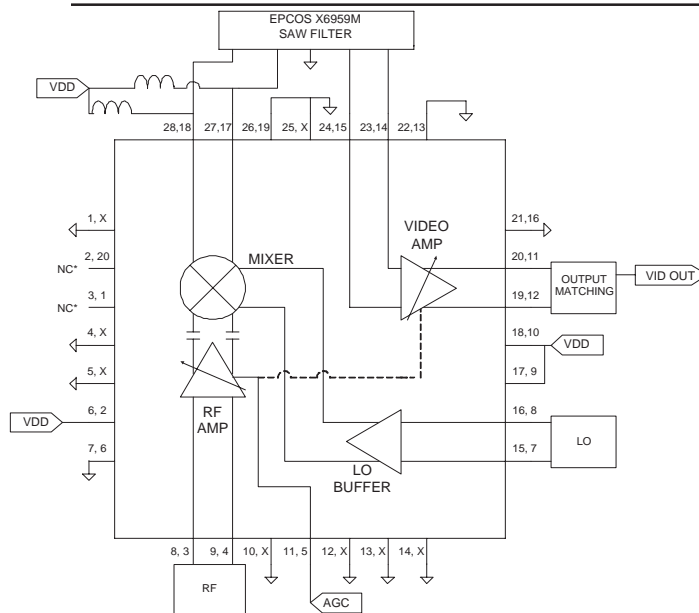

### ELECTRICAL CHARACTERISTICS (TA = 25°C, VDD = 3.3 V, unless otherwise specified)

SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
<b>RF Performance</b>					
RFIN	RF Input Frequency Range, High Side L.O.	MHz	50		150
LOIN	LO Input Frequency Range, High Side L.O.	MHz	80		220
CGMAX	Maximum Conversion Gain*	dB		82	
VAGC	AGC Voltage	V	0		3
AGC	AGC Dynamic Range VAGC = 0 to 3 V	dB	50	55	
IM3	Third Order Intermodulation, 1 VPP Differential Output, 1K ohm load	dBc	50	55	
IFOUT	IF Output Level, Differential Output, 1K ohm load	VPP		1	2
NF	Noise Figure, VAGC = 3 V	dB		13	15
GINPUT	RF Amp/Mixer Conversion Gain, VAGC = 3 V	dB		41	
GVIDEO	Video Amplifier Gain, VAGC = 3 V	dB		55	
LO-RF LEAKAGE	LO leakage at the RF port	dBm		-95	-85
<b>DC Performance</b>					
VDD	Supply Voltage	V	3.2	3.3	3.4
IDD	Supply Current	mA		117	135

\* Includes saw filter loss.

### ABSOLUTE MAXIMUM RATINGS

(Tc = 25°C unless otherwise noted)



SYMBOLS	PARAMETERS	UNITS	RATINGS
VDD (GND)	Supply Voltage (GND)	V	-0.3 to +3.6
TOP	Operating Temperature	°C	-40 to +85
TSTG	Storage Temperature	°C	-65 to +150
	Junction Temperature	°C	+150
	Thermal Resistance (Ø ja)	°C/W	34

Note:

1. Operation in excess of any one of these parameters may result in permanent damage.

Performance tests and ratings for Sirenza Microdevices' products were performed internally by Sirenza and measured using specific computer systems and/or components and reflect the approximate performance of the products as measured by those tests. Any difference in circuit implementation, test software, or test equipment may affect actual performance. The information provided herein is believed to be reliable at press time and Sirenza Microdevices assumes no responsibility for the use of this information. All such use shall be entirely at the user's own risk. Prices and specifications for Sirenza Microdevices' products are subject to change without notice. Buyers should consult Sirenza Microdevices' standard terms and conditions of sale for Sirenza's limited warranty with regard to its products. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Sirenza Microdevices does not authorize or warrant any product for use in life-support devices and/or systems.

## PIN ASSIGNMENTS





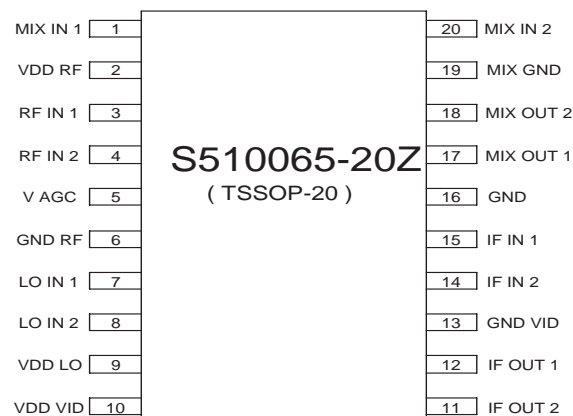
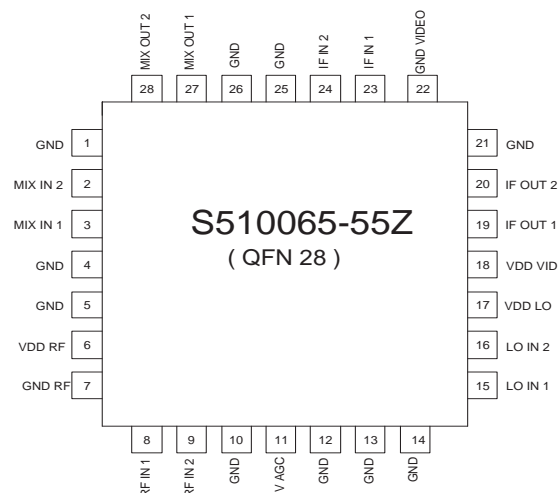


## PIN FUNCTIONS



TSSOP QFN-28

PIN NO.	PIN NO.	PIN NAME	DESCRIPTION
16 19	1, 4, 5, 10, 12, 13, 14, 21, 25, 26	GND	Ground pins. Connect to the ground plane with shortest possible length to minimize inductance.
20	2	MIX IN2	No connection.
1	3	MIX IN1	No connection.
2	6	VDD RF	RF AMP Supply, +3.3 V.
6	7	GND RF	RF AMP Ground. See GND.
3	8	RF IN1	RF AMP Positive Input. Input impedance, 1K ohms single ended. SEE APPLICATION PAGE 5.
4	9	RF IN2	RF AMP Negative Input. SEE APPLICATION PAGE 5.
5	11	AGC	Automatic Gain Control, Min Gain @ AGC = 0 V, Max Gain @ AGC = 3.0 V.
7	15	LO IN1	LO Buffer Positive Input.
8	16	LO IN2	LO Buffer Negative Input.
9	17	VDD LO	LO Buffer Supply, +3.3 V.
10	18	VDD VID	VIDEO AMP Input Stage Supply, +3.3 V.
12	19	IF OUT1	VIDEO AMP Negative Output. This pin and IFOUT2 form a 1K ohm output impedance. Open Drain See Application Page 5
11	20	IF OUT2	VIDEO AMP Positive Output. See IFOUT1.
13	22	GND VID	VIDEO AMP Ground. See GND.
15	23	IF IN1	VIDEO AMP Negative Input.
14	24	IF IN2	VIDEO AMP Positive Input.
17	27	MIX OUT1	MIXER Positive Output. Open Drain .See Application Page 5
18	28	MIX OUT2	MIXER Negative Output. Open Drain. See Application Page 5 .

## TYPICAL PERFORMANCE CURVES

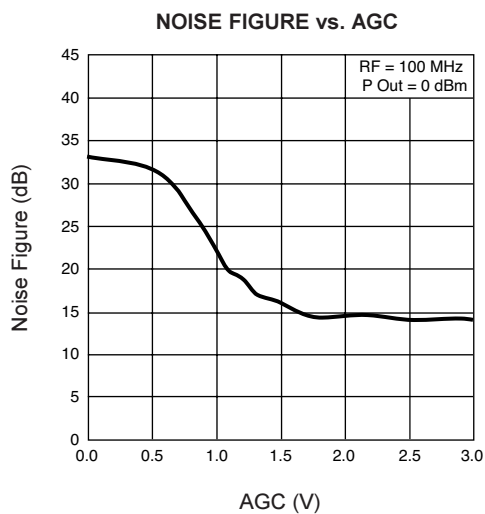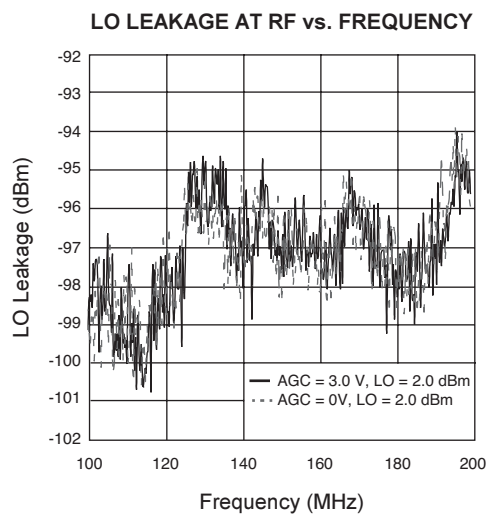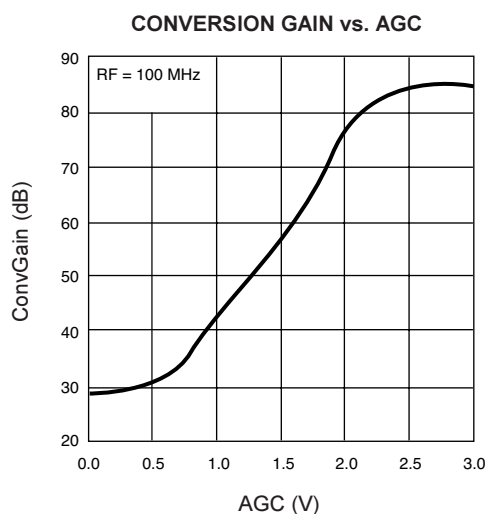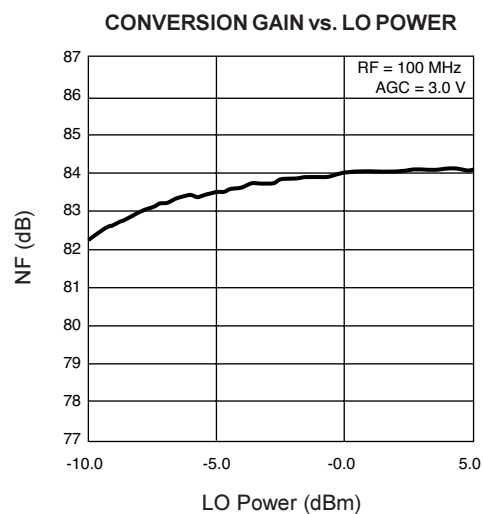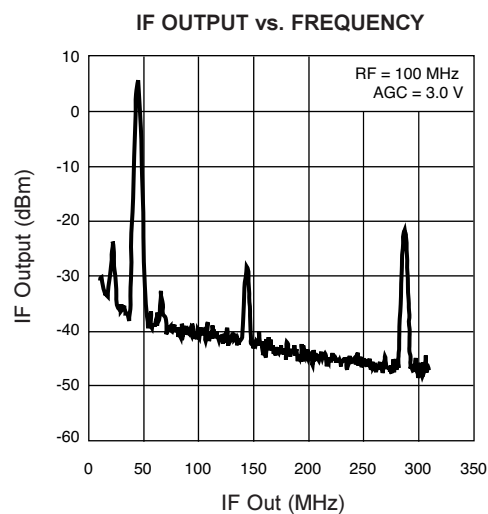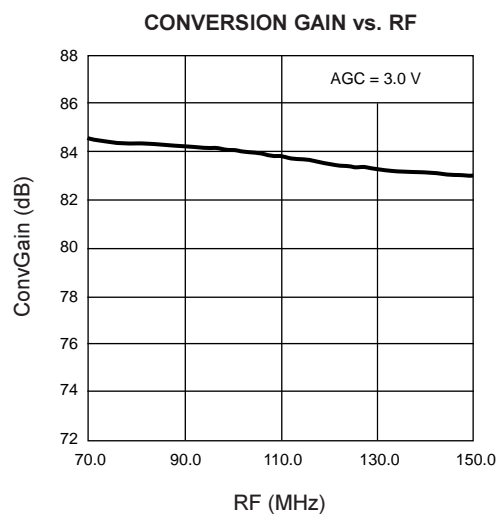


TYPICAL PERFORMANCE CURVES (CON'T)

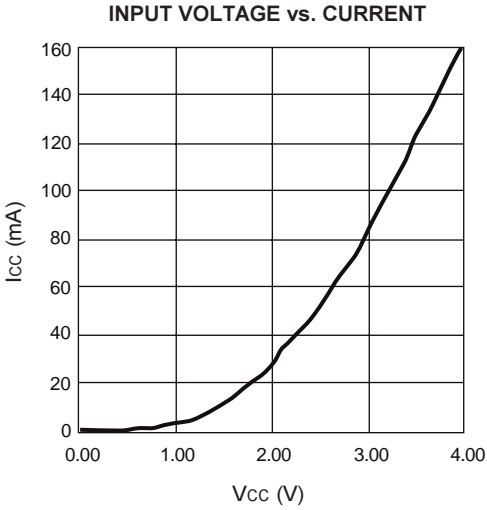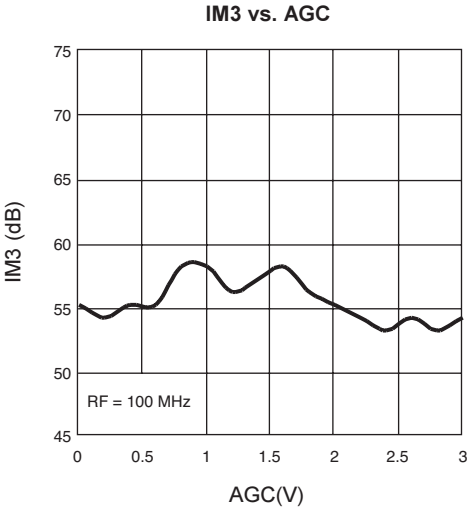



## PACKAGE INFORMATION QFN-28 (Units in mm)

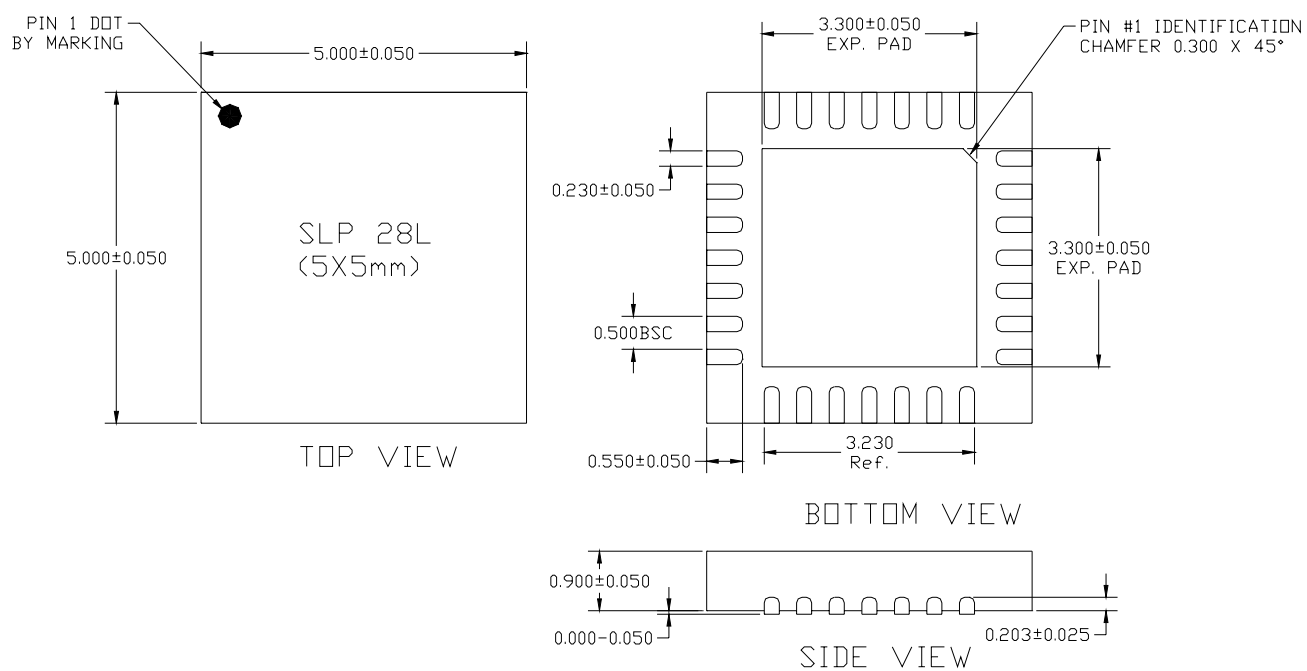

1. Dimensions and tolerances conform to ASME Y14.5-1994.
2. All dimensions are in millimeters. All angles are in degrees.
3. The exposed thermal pad is also an electrical ground.

## LAND PATTERN FOR TERMINALS AND THERMAL/GROUND PAD

