




### PHASE NOISE (1 Hz BW, typical)

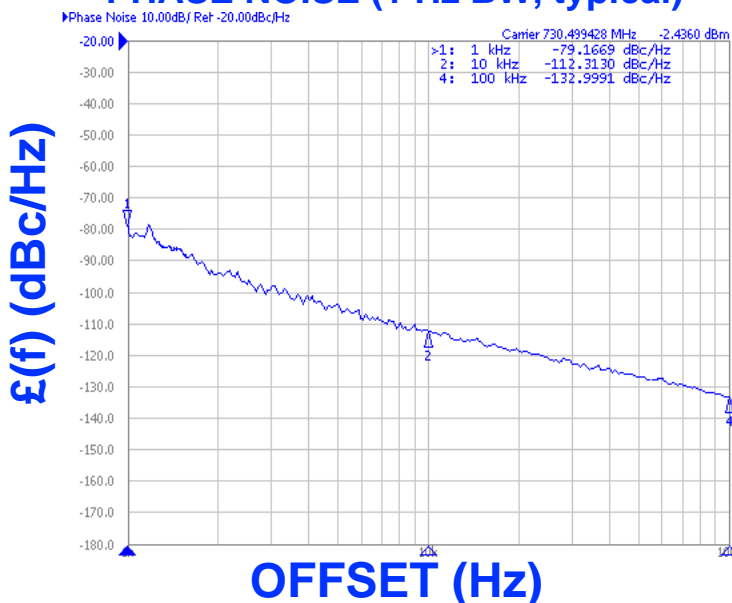

#### FEATURES

- Frequency Range: 713 - 748 MHz
- Tuning Voltage: 1-4 Vdc
- MINI-14S-L - Style Package

#### APPLICATIONS

- VSAT Modems
- Basestation
- Digital Radios

#### PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Oscillation Frequency Range	713 - 748	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-112	dBc/Hz
Harmonic Suppression (2nd, typ.)	-14	dBc
Tuning Voltage	1-4	Vdc
Tuning Sensitivity (avg.)	32	MHz/V
Power Output	5.5±3	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	100	pF
Pushing	<1	MHz/V
Pulling ( 12dB Return Loss, Any Phase)	<1	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-14S-L	

#### POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	22	mA


All specifications are typical unless otherwise noted and subject to change without notice.

#### APPLICATION NOTES


- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

#### NOTES:

TUNING CURVE, typ.

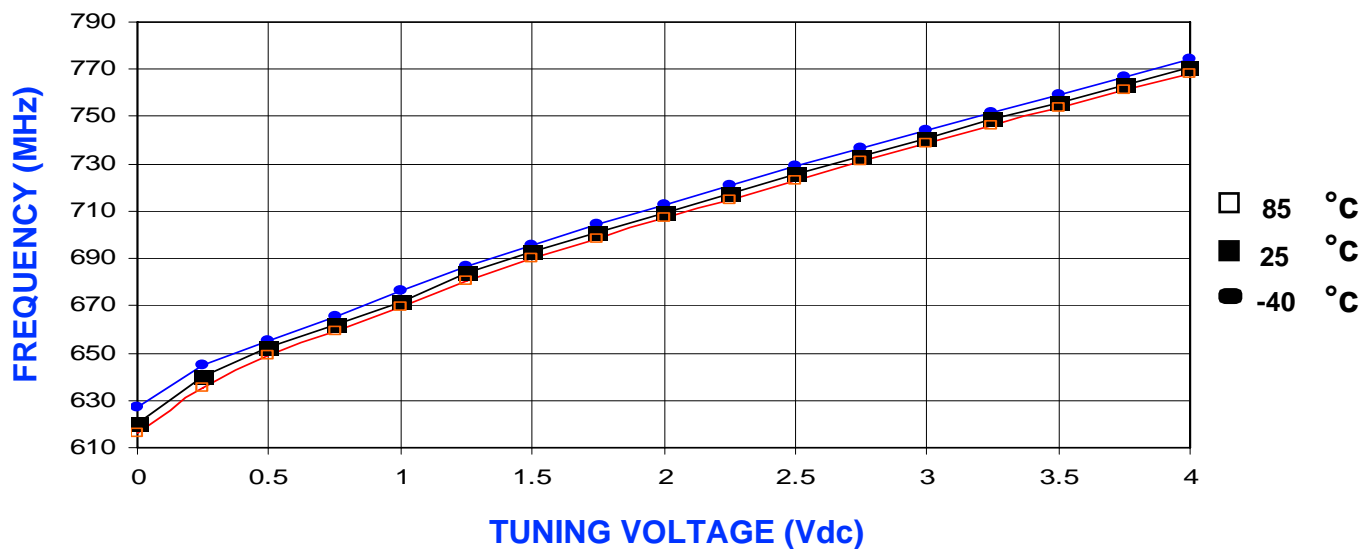

POWER CURVE, typ.

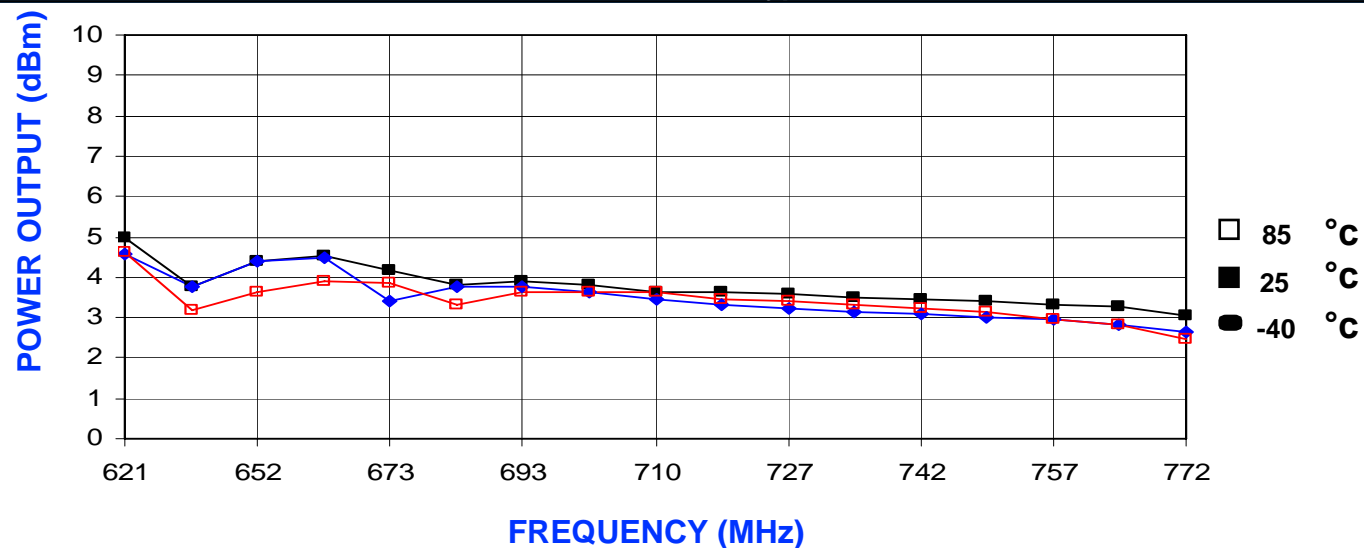

PHYSICAL DIMENSIONS

