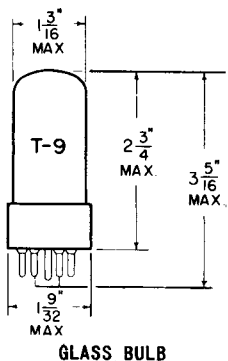


## TUNG-SOL

BEAM PENTODE [www.DataSheet4U.com](http://www.DataSheet4U.com)


COATED UNIPOTENTIAL CATHODE

HEATER

25 VOLTS 0.3 AMP.

AC OR DC

ANY MOUNTING POSITION

**BOTTOM VIEW**INTERMEDIATE SHELL  
7 PIN OCTAL

7AC

THE 25L6GT IS DESIGNED FOR SERVICE IN THE OUTPUT STAGE OF AC/DC RECEIVERS. IT DELIVERS A HIGH POWER OUTPUT WITH HIGH POWER SENSITIVITY FROM LOW SUPPLY VOLTAGES.

**RATINGS**



INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM



HEATER VOLTAGE	25	VOLTS
MAXIMUM PLATE VOLTAGE	200	VOLTS
MAXIMUM GRID #2 VOLTAGE	125	VOLTS
MAXIMUM PLATE DISSIPATION	10	WATTS
MAXIMUM GRID #2 DISSIPATION	1.25	WATTS
MAXIMUM GRID #1 CIRCUIT RESISTANCE (FIXED BIAS)	0.1	MEGOHM
MAXIMUM GRID #1 CIRCUIT RESISTANCE (SELF BIAS)	0.5	MEGOHM
MAXIMUM HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE DC AND PEAK	200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE DC	100	VOLTS
DC AND PEAK	200	VOLTS

**TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS**CLASS  $A_1$  AMPLIFIER

HEATER VOLTAGE	25	25	VOLTS
HEATER CURRENT	0.3	0.3 ←	AMP.
PLATE VOLTAGE	110	200	VOLTS
GRID #2 VOLTAGE	110	125	VOLTS
GRID #1 VOLTAGE	-7.5	0	VOLTS
CATHODE BIAS RESISTOR	0	180	OHMS
PEAK AF GRID #1 VOLTAGE	7.5	8.5	VOLTS
PLATE RESISTANCE (APPROX.)	13 000	28 000	OHMS
TRANSCONDUCTANCE	8 000	8 000	μMHOS
ZERO-SIGNAL PLATE CURRENT	49	46	MA.
MAXIMUM-SIGNAL PLATE CURRENT	50	47	MA.
ZERO-SIGNAL GRID #2 CURRENT	4	2.2	MA.
MAXIMUM-SIGNAL GRID #2 CURRENT	10	8.5	MA.
LOAD RESISTANCE	2 000	4 000	OHMS
TOTAL HARMONIC DISTORTION (APPROX.)	10	10	PERCENT
POWER OUTPUT	2.1	3.8	WATTS

# 25L6GT

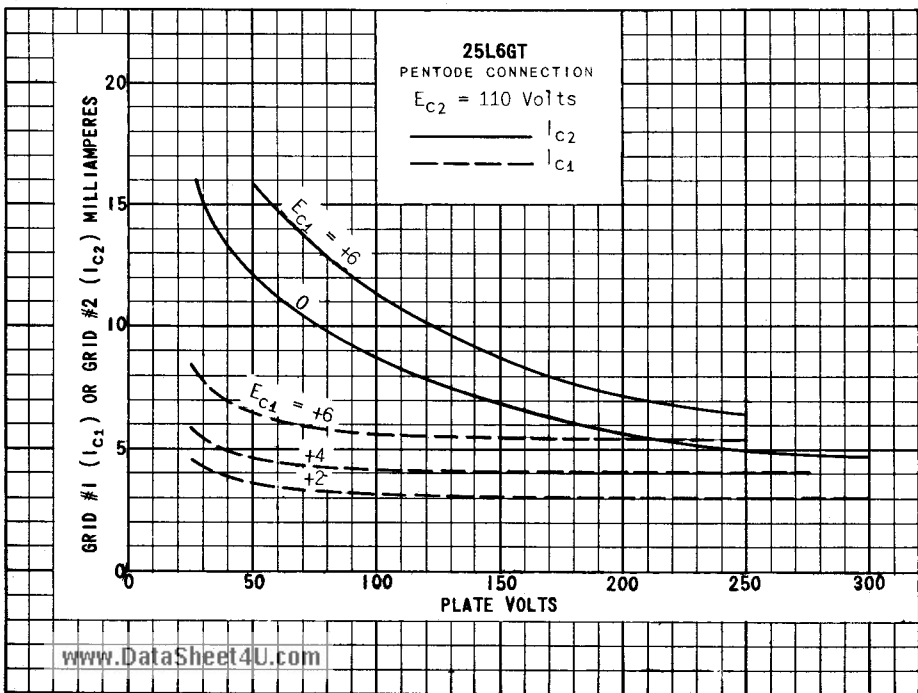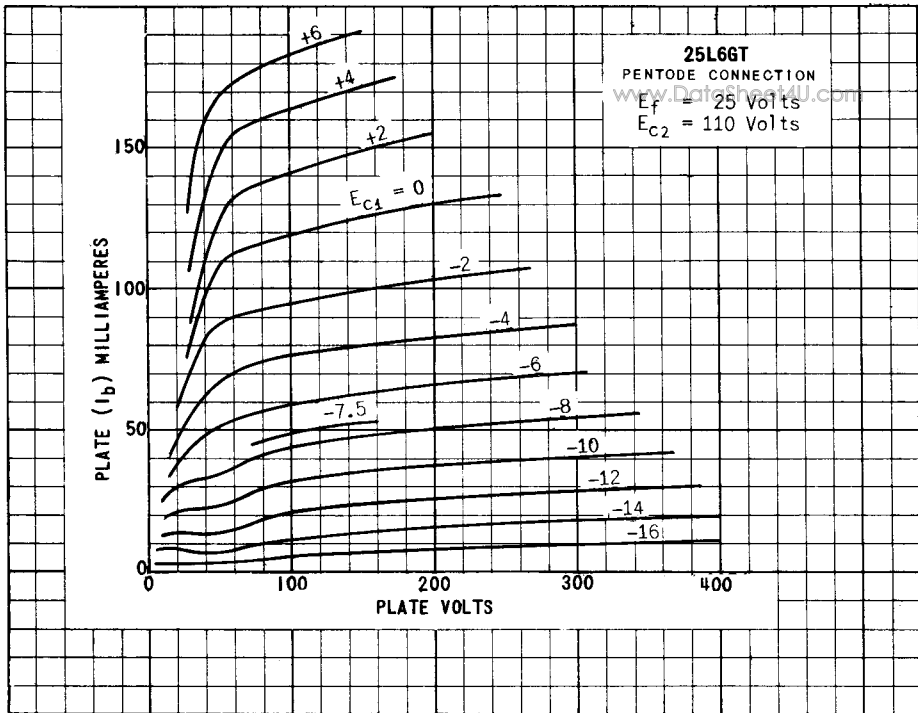

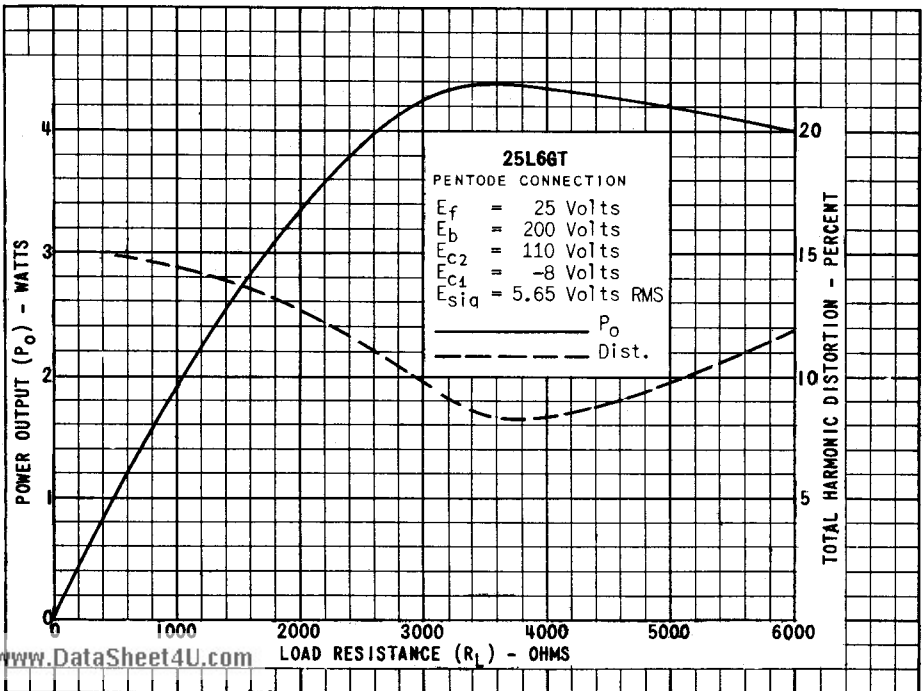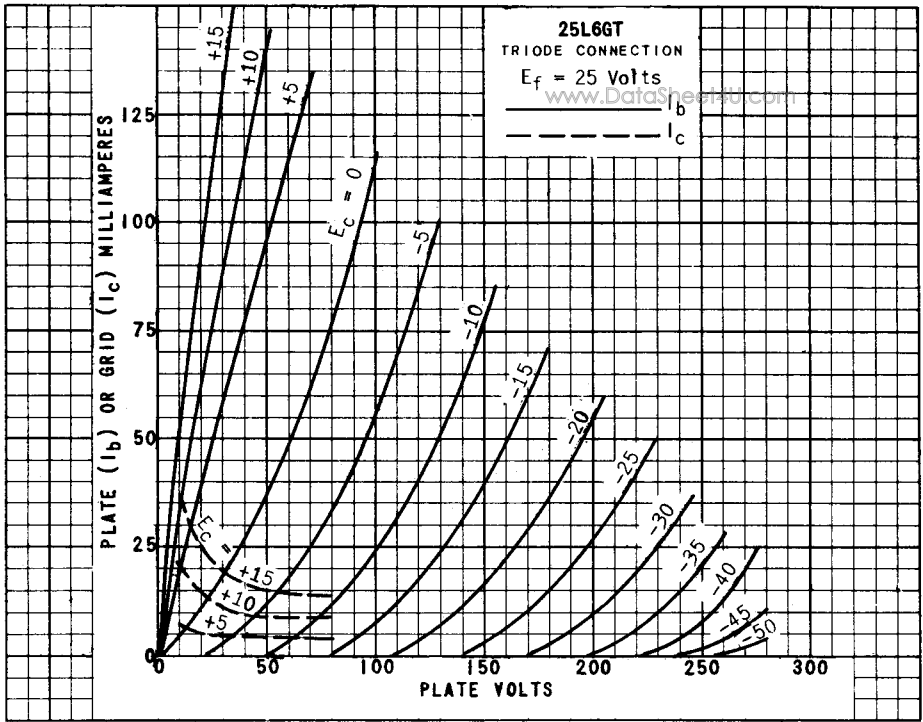

PRINTED IN U. S. A.