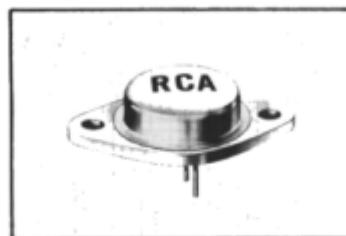


**Power Transistors**

**2N1487 2N1488  
2N1489 2N1490**

RCA-2N1487-2N1490 are diffused-junction power transistors of the silicon n-p-n type. These transistors are intended for a wide variety of applications in industrial and military equipment. They are particularly useful in power-switching circuits such as in dc-to-dc converters, inverters, choppers, solenoid and relay controls; in oscillator, regulator, and pulse-amplifier circuits; and as class-A and class-B push-pull audio and servo amplifiers.

These transistors feature high power-dissipation ratings, high beta at high current, and excellent high temperature performance.

**High-Power Types**

JEDEC TO-3

- Maximum dissipation rating of 75 watts at a mounting flange temperature of 25°C
- 2N1489 and 2N1490 have a maximum saturation resistance of 0.67 ohm

*Maximum Ratings, Absolute-Maximum Values:*

	2N1487	2N1488		
	2N1489	2N1490		
COLLECTOR-TO-BASE VOLTAGE . . . . .	60	100	max.	volts
COLLECTOR-TO-EMITTER VOLTAGE:				
With base open (sustaining voltage) . . . . .	40	55	max.	volts
With emitter-to-base reverse biased ( $V_{EB} = 1.5$ volts) . . . . .	60	100	max.	volts
EMITTER-TO-BASE VOLTAGE . . . . .	10	10	max.	volts
COLLECTOR CURRENT . . . . .	6	6	max.	amp
EMITTER CURRENT . . . . .	-8	-8	max.	amp
BASE CURRENT . . . . .	3	3	max.	amp
TRANSISTOR DISSIPATION: (See Rating Chart Fig. 1):				
At mounting-flange temperature of 25°C . . . . .	75	75	max.	watts
At mounting-flange temperature of 100°C . . . . .	43	43	max.	watts
TEMPERATURE RANGE:				
Operating and Storage . . . . .	-65 to +200		°C	



## ELECTRICAL CHARACTERISTICS

Mounting-flange temperature =  $25^{\circ}\text{C}$  unless otherwise specified.

Characteristic	Symbol	TEST CONDITIONS				LIMITS								Units
		DC Collec- tor Voltage (volts)	DC Emitter Voltage (volts)	DC Collec- tor Current (ma)	DC Base Current (ma)	Type 2N1487		Type 2N1488		Type 2N1489		Type 2N1490		
		$V_{CB}$	$V_{CE}$	$V_{EB}$	$I_C$	$I_B$	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Collector-Cutoff Current: With $I_E = 0$ and at mounting flange temperature of; $25^{\circ}\text{C}$ $150^{\circ}\text{C}$	$I_{CBO}$							25	25	25	25	25	25	$\mu\text{a}$
		30	30				1000	1000	1000	1000	1000	1000		
Emitter-Cutoff Current	$I_{EBO}$			10	0		25	25	25	25	25	25	$\mu\text{a}$	
Collector-To-Emitter Voltage: (Emitter-to-base reverse bias) (Base open sustaining voltage)	$V_{CEX}$		1.5	0.5		60	100	60	100	60	100	60	100	volts
	$V_{CEO}$ (sus)			100	0	40	55	40	55	40	55	40	55	volts
DC Current Transfer Ratio	$h_{FE}$	4		1.5amps		15	45	15	45	25	75	25	75	
DC Collector-To-Emitter Saturation Resistance	$r_{CE}(\text{sat})$			1.5amps	300		2		2		0.67		0.67	ohms
				1.5amps	100									ohm
Base-To-Emitter Voltage	$V_{BE}$	4		1.5amps			3.5	3.5	3.5	3.5	2.5	2.5	2.5	volts
Thermal Resistance: Junction-to-mounting flange	$R_{\theta JC}$						2.33	2.33	2.33	2.33	2.33	2.33	2.33	$^{\circ}\text{C}/\text{w}$

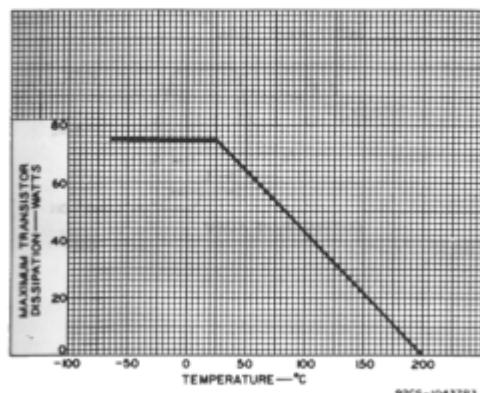


Fig. 1 - Rating Chart for Types 2N1487, 2N1488, 2N1489, and 2N1490.

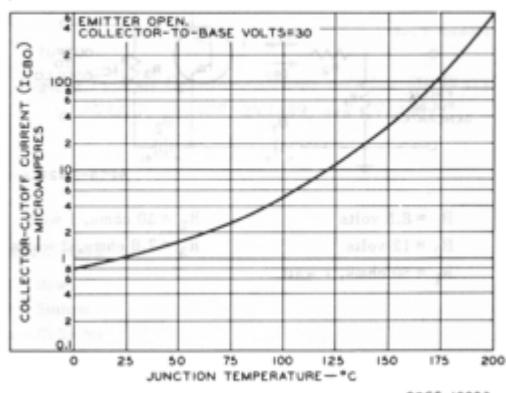


Fig. 2 - Typical Operation Characteristics for Types 2N1487, 2N1488, 2N1489, and 2N1490.




Typical Operation of the 2N1487, 2N1488, 2N1489, and 2N1490 in the Power-Switching Circuit of Fig. 3:

DC Supply Voltage ( $B_2$ ) . . . . .	12	volts
DC Base Bias Voltage ( $B_1$ ) . . . . .	-8.5	volts
Generator Resistance . . . . .	50	ohms
"On" DC Collector Current . . . . .	1.5	amp
"Turn-On" Base Current ( $I_{B1}$ ) . . . . .	300	ma
"Turn-Off" Base Current ( $I_{B2}$ ) . . . . .	-150	ma
Switching Time:		
Delay Time ( $t_d$ ) . . . . .	0.2	$\mu$ sec
Rise Time ( $t_r$ ) . . . . .	1.0	$\mu$ sec
Storage Time ( $t_s$ ) . . . . .	1.0	$\mu$ sec
Fall Time ( $t_f$ ) . . . . .	1.2	$\mu$ sec

Typical Characteristics of the 2N1487, 2N1488, 2N1489, and 2N1490 at a Mounting-Flange Temperature of 25°C:

Collector-to-base capacitance: $C_{ob}$ ( $V_{CB} = 40$ volts) . . . . .	200	$\mu\mu f$
Thermal Time Constant, $\tau_1$ . . . . .	12	msec
Alpha-Cutoff Frequency $f_{ab}$ ( $V_{CB} = 12$ volts, $I_c = 100$ ma)	1	Mc

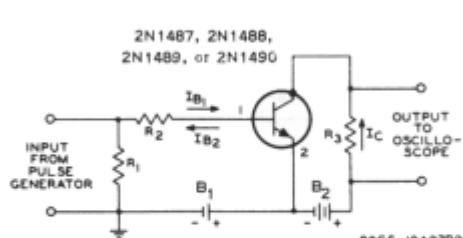

$B_1 = 8.5$  volts

$B_2 = 12$  volts

$R_1 = 50$  ohms, 1 watt

$R_2 = 30$  ohms, 1 watt

$R_3 = 7.8$  ohms, 2 watts

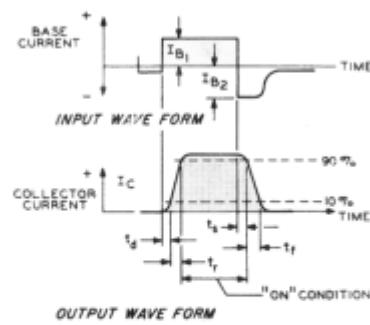


Fig. 3 - Typical Power-Switching Circuit.



File No. 139

2N1487-2N1490

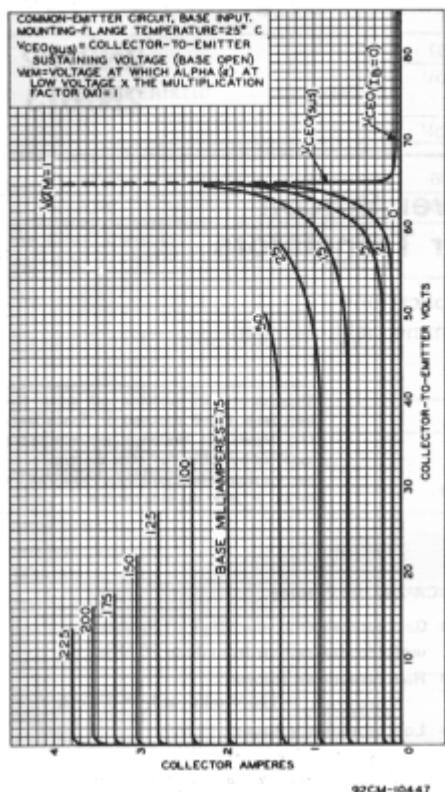


Fig. 4 - Typical Collector Characteristics for Types 2N1487, 2N1488, 2N1489, and 2N1490.

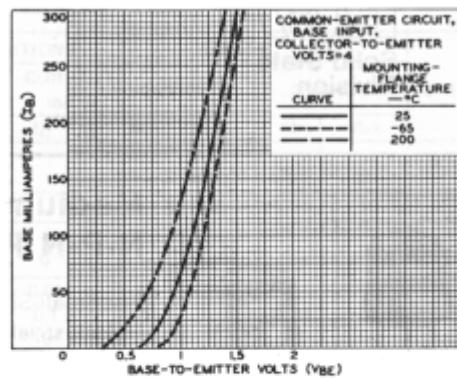


Fig. 5 - Typical Input Characteristics for Types 2N1487, 2N1488, 2N1489, and 2N1490.

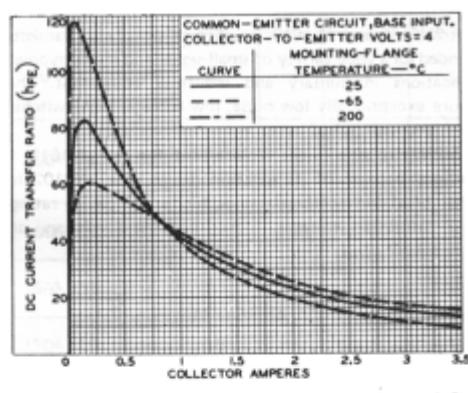


Fig. 6 - Typical Operation Characteristics for Types 2N1487, 2N1488, 2N1489, and 2N1490.

#### TERMINAL CONNECTIONS

- Pin 1 — Base
- Pin 2 — Emitter
- Case — Collector
- Mounting Flange — Collector

