

Features

- Available in JAN, JANTX, JANTXV per MIL-PRF-19500/369
- TO-66 Package
- Designed for General Purpose Switching and Amplifier Applications



Electrical Characteristics ($T_A = +25^\circ\text{C}$ unless otherwise noted)

Parameter	Test Conditions	Symbol	Units	Min.	Max.
Collector - Emitter Breakdown Voltage	$I_C = 100 \text{ mA dc}$ $I_C = 100 \text{ mA dc}, R_{BE} = 100 \Omega$ $V_{BE} = -1.5 \text{ V dc}, I_C = 100 \text{ mA dc}$	$V_{(BR)CEO}$ $V_{(BR)CER}$ $V_{(BR)CEX}$	V dc	140 150 160	—
Collector - Emitter Cutoff Current	$V_{BE} = -1.5 \text{ V dc}, V_{CE} = 140 \text{ V dc}$	I_{CEX1}	$\mu\text{A dc}$	—	20
Emitter - Base Cutoff Current	$V_{EB} = 7.0 \text{ V dc}$	I_{EBO}	mA dc	—	1
Forward Current Transfer Ratio	$V_{CE} = 4.0 \text{ V dc}, I_C = 50 \text{ mA dc}$ $V_{CE} = 4.0 \text{ V dc}, I_C = 0.5 \text{ A dc}$ $V_{CE} = 4.0 \text{ V dc}, I_C = 1.0 \text{ A dc}$	h_{FE}	-	50 25 10	— 100 —
Collector - Emitter Saturation Voltage	$I_C = 0.5 \text{ A dc}, I_B = 50 \text{ mA dc}$	$V_{CE(SAT)}$	V dc	—	1
Emitter - Base Voltage (non-saturated)	$I_C = 0.5 \text{ A dc}, V_{CE} = 4.0 \text{ V dc}$	V_{BE}	V dc	—	1.7
Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio	$V_{CE} = 4.0 \text{ Vdc}, I_C = 0.5 \text{ A dc}, f = 100 \text{ kHz}$	$ h_{fe} $		4	40
Open Circuit Output Capacitance	$V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1 \text{ MHz}$	C_{obo}	pF	—	300
Small-Signal Short-Circuit Forward-Current Transfer Ratio	$V_{CE} = 4 \text{ V dc}, I_C = 0.5 \text{ A dc}, f = 1.0 \text{ kHz}$	h_{fe}	—	15	100
Collector - Emitter Cutoff Current	$T_A = +150^\circ\text{C}$ $V_{BE} = -1.5 \text{ V dc}, V_{CE} = 140 \text{ V dc}$	I_{CEX2}	mA dc	—	5
Forward Current Transfer Ratio	$T_A = -65^\circ\text{C}$ $V_{CE} = 4 \text{ V dc}, I_C = 0.5 \text{ A dc}$	h_{FE4}	-	15	

Absolute Maximum Ratings ($T_C = +25^\circ\text{C}$ unless otherwise noted)

Ratings	Symbol	Value
Collector - Emitter Voltage	V_{CEO}	140 V dc
Collector - Emitter Voltage	V_{CER}	150 V dc
Collector - Base Voltage	V_{CBO}	160 V dc
Emitter - Base Voltage	V_{EBO}	7.0 V dc
Base Current	I_B	2.0 A dc
Collector Current	I_C	3.0 A dc
Total Power Dissipation @ $T_A = +25^\circ\text{C}$ ¹	P_T	3.0 W
Total Power Dissipation @ $T_C = +25^\circ\text{C}$ ¹	P_T	25 W
Operating & Storage Temperature Range	T_J, T_{STG}	-65°C to $+200^\circ\text{C}$

Thermal Characteristics

Characteristics	Symbol	Max. Value
Thermal Resistance, Junction to Case ²	$R_{\theta JC}$	3°C/W
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	58.5°C/W

- For derating see figures 2 and 3 of MIL-PRF-19500/369.
- For thermal impedance see figure 4 of MIL-PRF-19500/369.

Switching Characteristics						
Turn-On Time	$V_{CC} = 30 \text{ Vdc}, I_C = 0.5 \text{ A dc}, I_B = 50 \text{ mA dc}$	t_{on}	μs	—	8	
Turn-Off Time	$V_{CC} = 30 \text{ Vdc}, I_C = 0.5 \text{ A dc}, I_{B1} = -I_{B2} = 50 \text{ mA dc}$	t_{off}	μs	—	15	
Safe Operating Area						
DC Tests:	$T_C = +25^\circ\text{C}, 1 \text{ Cycle}, t = 1.0 \text{ s}$					
Test 1:	$I_C = 3 \text{ A dc}, V_{CE} = 8.33 \text{ V dc}$					
Test 2:	$I_C = 833 \text{ mA dc}, V_{CE} = 30 \text{ V dc},$					
Test 3:	$I_C = 178.5 \text{ mA dc}, V_{CE} = 140 \text{ V dc}$					

2N3441

NPN Silicon Power Transistor

Rev. V2

Outline Drawing (TO-66)

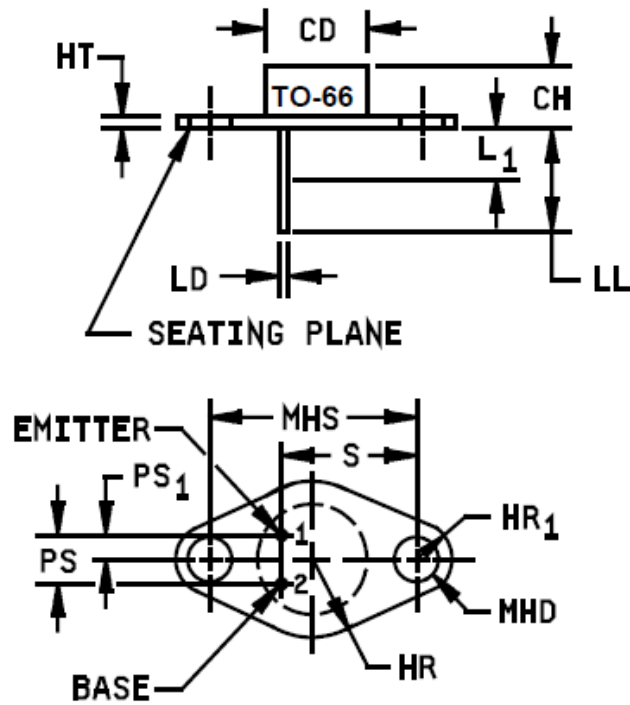


FIGURE 1. Physical dimensions (similar to TO-66).

Outline Drawing (TO-66)

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.470	.500	11.94	12.70	
CH	.250	.340	6.35	8.64	
HR		.350		8.89	
HR ₁	.115	.145	2.92	3.68	
HT	.050	.075	1.27	1.91	
LD	.028	.034	0.71	0.86	4, 6
LL	.360	.500	9.14	12.70	
L ₁		.050		1.27	6
MHD	.142	.152	3.61	3.86	4
MHS	.958	.962	24.33	24.43	
PS	.190	.210	4.83	5.33	3
PS ₁	.093	.107	2.36	2.72	3
S	.570	.590	14.48	14.99	

NOTES:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. These dimensions should be measured at points .050 inch (1.27 mm) +.005 inch (0.13 mm) - 0 inch below seating plane. When gauge is not used, measurement will be made at the seating plane.
4. Two places.
5. The seating plane of the header shall be flat within .001 inch (0.03 mm) concave to .004 inch (0.10 mm) convex inside a .930 inch (23.62 mm) diameter circle on the center of the header and flat within .001 inch (0.03 mm) concave to .006 inch (0.15 mm) convex overall.
6. Lead diameter shall not exceed twice LD within L₁.
7. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.
8. Pin 1 is the emitter and pin 2 is the base. The collector shall be electrically connected to the case.

FIGURE 1. Physical dimensions - Continued.

VPT COMPONENTS. ALL RIGHTS RESERVED.

Information in this document is provided in connection with VPT Components products. These materials are provided by VPT Components as a service to its customers and may be used for informational purposes only. Except as provided in VPT Components Terms and Conditions of Sale for such products or in any separate agreement related to this document, VPT Components assumes no liability whatsoever. VPT Components assumes no responsibility for errors or omissions in these materials. VPT Components may make changes to specifications and product descriptions at any time, without notice. VPT Components makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF VPT COMPONENTS PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. VPT COMPONENTS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. VPT COMPONENTS SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

VPT Components products are not intended for use in medical, lifesaving or life sustaining applications. VPT Components customers using or selling VPT Components products for use in such applications do so at their own risk and agree to fully indemnify VPT Components for any damages resulting from such improper use or sale.