NPN Darlington Silicon Power Transistor

2N6056

ON Semiconductor Preferred Device

. . . designed for general–purpose amplifier and low frequency switching applications.

- High DC Current Gain —
  h_{FE} = 3000 (Typ) @ I_C = 4.0 Adc
- Collector–Emitter Sustaining Voltage — @ 100 mA
  $V_{CEO(sus)}$ = 80 Vdc (Min)
- Low Collector–Emitter Saturation Voltage —
  $V_{CE(sat)}$ = 2.0 Vdc (Max) @ I_C = 4.0 Adc
  = 3.0 Vdc (Max) @ I_C = 8.0 Adc
- Monolithic Construction with Built–In Base–Emitter Shunt Resistors

DARLINGTON
8 AMPERE
SILICON
POWER TRANSISTOR
80 VOLTS
100 WATTS



CASE 1–07
TO–204AA
(TO–3)

MAXIMUM RATINGS (1)

Rating	Symbol	Max	Unit
Collector–Emitter Voltage	V_{CEO}	80	Vdc
Collector–Base Voltage	V_{CB}	80	Vdc
Emitter–Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous Peak	I_C	8.0 16	Adc
Base Current	I_B	120	mAdc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	100 0.571	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.75	°C/W

(1) Indicates JEDEC Registered Data

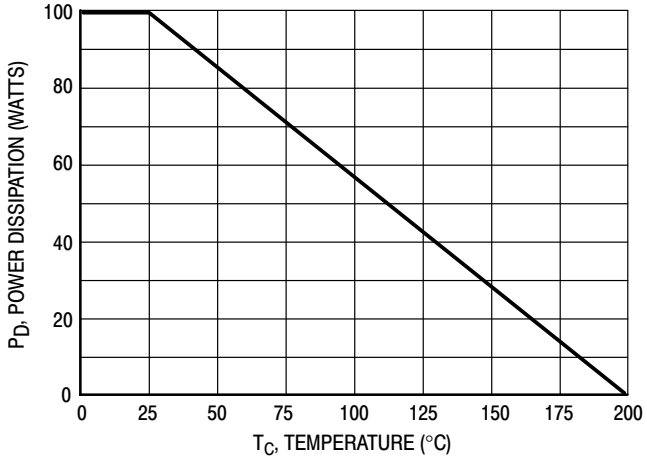

Figure 1. Power Derating

Preferred devices are ON Semiconductor recommended choices for future use and best overall value.

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector–Emitter Sustaining Voltage (2) (I_C = 100 mAdc, I_B = 0)	$V_{CEO(sus)}$	80	—	Vdc
Collector Cutoff Current (V_{CE} = 40 Vdc, I_B = 0)	I_{CEO}	—	0.5	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	I_{CEX}	— —	0.5 5.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	—	2.0	mAdc
ON CHARACTERISTICS (2)				
DC Current Gain (I_C = 4.0 Adc, V_{CE} = 3.0 Vdc) (I_C = 8.0 Adc, V_{CE} = 3.0 Vdc)	h_{FE}	750 100	18000 —	—
Collector–Emitter Saturation Voltage (I_C = 4.0 Adc, I_B = 16 mAdc) (I_C = 8.0 Adc, I_B = 80 mAdc)	$V_{CE(sat)}$	— —	2.0 3.0	Vdc
Base–Emitter Saturation Voltage (I_C = 8.0 Adc, I_B = 80 mAdc)	$V_{BE(sat)}$	—	4.0	Vdc
Base–Emitter On Voltage (I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)	$V_{BE(on)}$	—	2.8	Vdc
DYNAMIC CHARACTERISTICS				
Magnitude of Common Emitter Small–Signal Short Circuit Current Transfer Ratio (I_C = 3.0 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)	$\|h_{fe}\|$	4.0	—	—
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	C_{ob}	—	200	pF
Small–Signal Current Gain (I_C = 3.0 Adc, V_{CE} = 3.0 Vdc, f = 1.0 kHz)	h_{fe}	300	—	—

*Indicates JEDEC Registered Data.

(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%

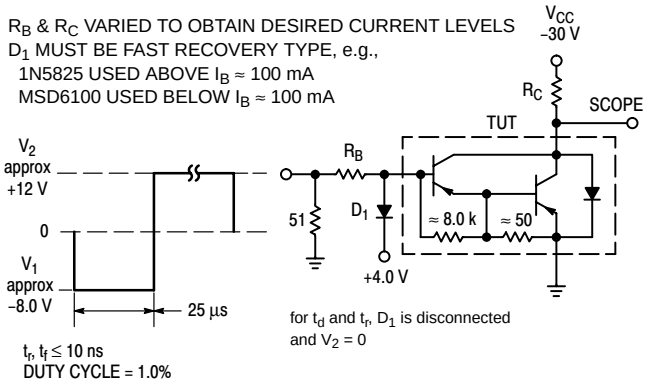

For NPN test circuit reverse diode, polarities and input pulses.

Figure 2. Switching Times Test Circuit

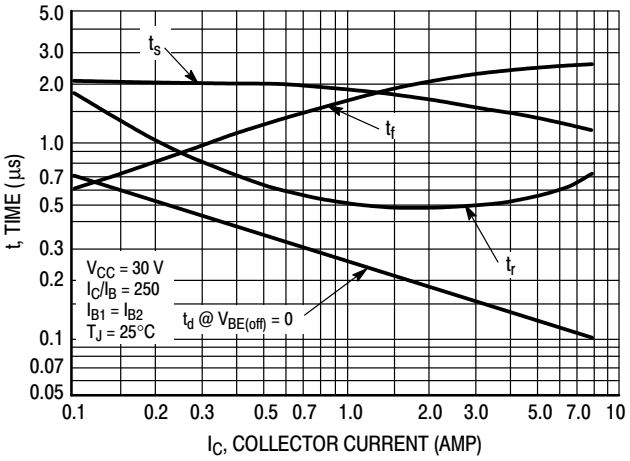

Figure 3. Switching Times

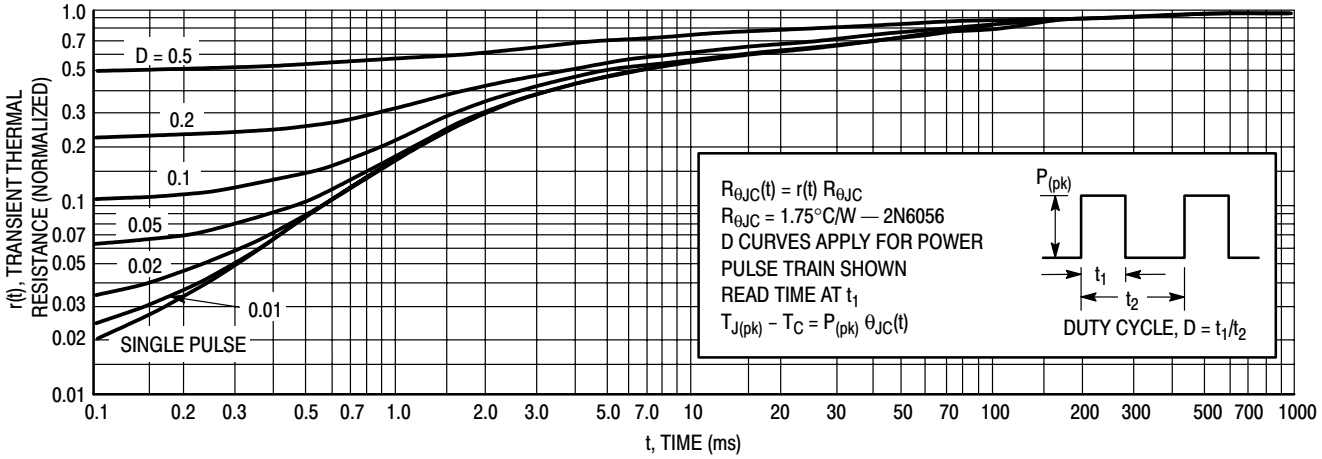

Figure 4. Thermal Response

ACTIVE−REGION SAFE OPERATING AREA

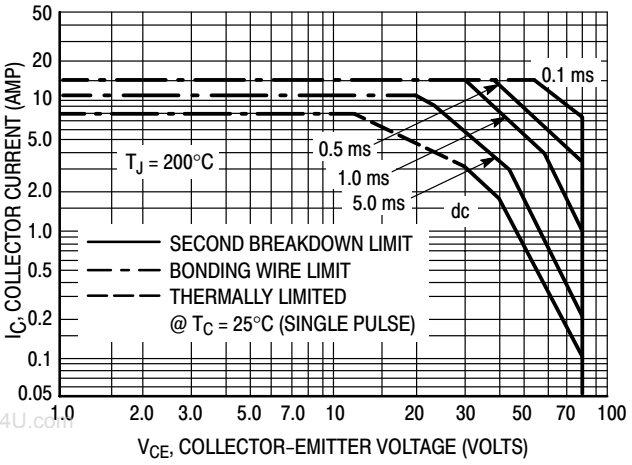

Figure 5. Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 200°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

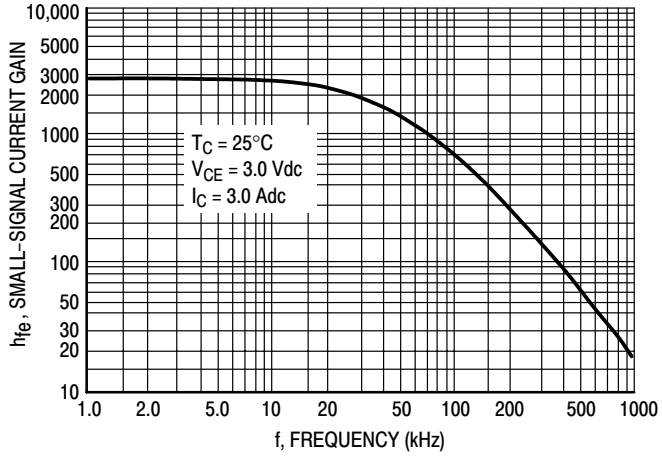

Figure 6. Small−Signal Current Gain

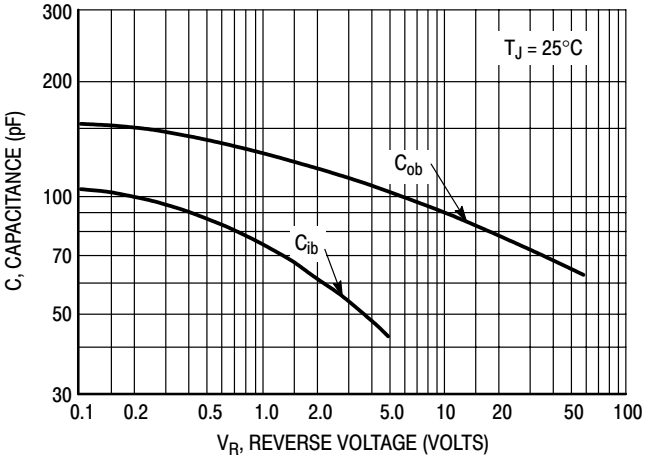

Figure 7. Capacitance

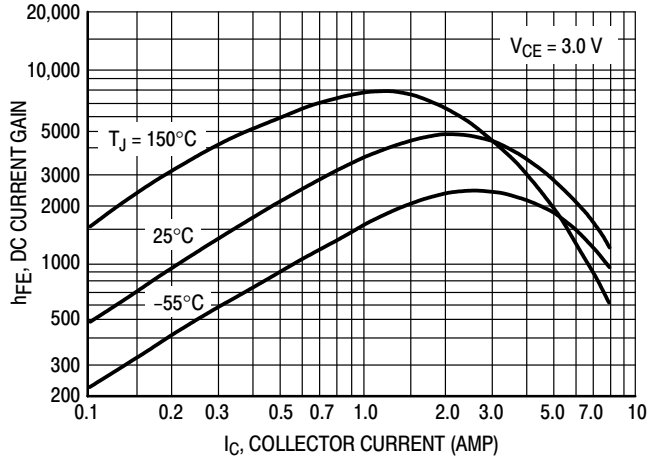

Figure 8. DC Current Gain

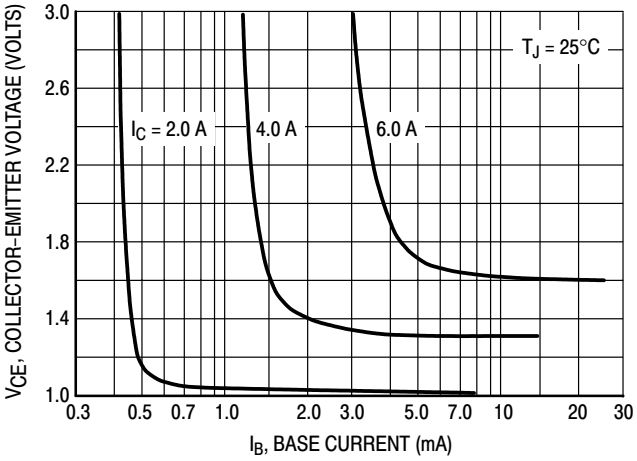

Figure 9. Collector Saturation Region

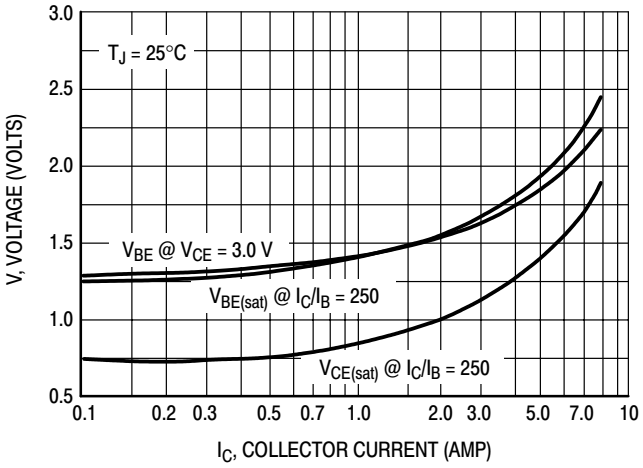

Figure 10. “On” Voltage

PACKAGE DIMENSIONS

CASE 1–07
TO–204AA (TO–3)
ISSUE Z

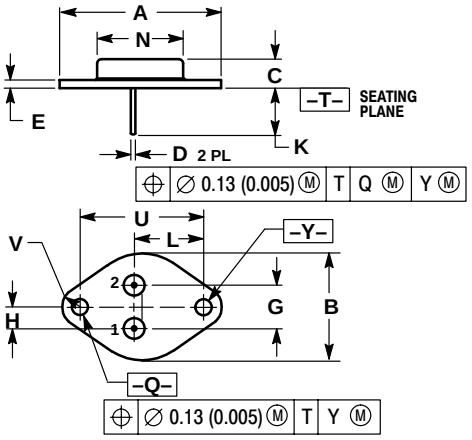

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO–204AA OUTLINE SHALL APPLY.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	1.550 REF		39.37 REF	
B	---	1.050	---	26.67
C	0.250	0.335	6.35	8.51
D	0.038	0.043	0.97	1.09
E	0.055	0.070	1.40	1.77
G	0.430 BSC		10.92 BSC	
H	0.215 BSC		5.46 BSC	
K	0.440	0.480	11.18	12.19
L	0.665 BSC		16.89 BSC	
N	---	0.830	---	21.08
Q	0.151	0.165	3.84	4.19
U	1.187 BSC		30.15 BSC	
V	0.131	0.188	3.33	4.77

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

Notes

PUBLICATION ORDERING INFORMATION

NORTH AMERICA Literature Fulfillment:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada
Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada
Email: ONlit@hibbertco.com
Fax Response Line: 303–675–2167 or 800–344–3810 Toll Free USA/Canada

N. American Technical Support: 800–282–9855 Toll Free USA/Canada

EUROPE: LDC for ON Semiconductor – European Support
German Phone: (+1) 303–308–7140 (Mon–Fri 2:30pm to 7:00pm CET)
Email: ONlit–german@hibbertco.com
French Phone: (+1) 303–308–7141 (Mon–Fri 2:00pm to 7:00pm CET)
Email: ONlit–french@hibbertco.com
English Phone: (+1) 303–308–7142 (Mon–Fri 12:00pm to 5:00pm GMT)
Email: ONlit@hibbertco.com

EUROPEAN TOLL–FREE ACCESS*: 00–800–4422–3781
*Available from Germany, France, Italy, UK, Ireland

CENTRAL/SOUTH AMERICA:
Spanish Phone: 303–308–7143 (Mon–Fri 8:00am to 5:00pm MST)
Email: ONlit–spanish@hibbertco.com
Toll–Free from Mexico: Dial 01–800–288–2872 for Access – then Dial 866–297–9322

ASIA/PACIFIC: LDC for ON Semiconductor – Asia Support
Phone: 1–303–675–2121 (Tue–Fri 9:00am to 1:00pm, Hong Kong Time)
Toll Free from Hong Kong & Singapore:
001–800–4422–3781
Email: ONlit–asia@hibbertco.com

JAPAN: ON Semiconductor, Japan Customer Focus Center
4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan 141–0031
Phone: 81–3–5740–2700
Email: r14525@onsemi.com

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local Sales Representative.