

2SA1034, 2SA1035

Silicon PNP epitaxial planer type

For low-frequency and low-noise amplification

Complementary to 2SC2405 and 2SC2406

Features

- Low noise voltage NV.
- High forward current transfer ratio h_{FE} .
- Mini type package, allowing downsizing of the equipment and automatic insertion through the tape packing and the magazine packing.

Absolute Maximum Ratings (Ta=25°C)

| Parameter | Symbol | Ratings | Unit |
|------------------------------|-----------|------------|------|
| Collector to base voltage | 2SA1034 | -35 | V |
| | 2SA1035 | -55 | |
| Collector to emitter voltage | 2SA1034 | -35 | V |
| | 2SA1035 | -55 | |
| Emitter to base voltage | V_{EBO} | -5 | V |
| Peak collector current | I_{CP} | -100 | mA |
| Collector current | I_C | -50 | mA |
| Collector power dissipation | P_C | 200 | mW |
| Junction temperature | T_j | 150 | °C |
| Storage temperature | T_{stg} | -55 ~ +150 | °C |


Electrical Characteristics (Ta=25°C)

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|---|---------------|--|-----|------|------|------|
| Collector cutoff current | I_{CBO} | $V_{CB} = -10V, I_E = 0$ | | | -100 | nA |
| | I_{CEO} | $V_{CE} = -10V, I_B = 0$ | | | -1 | μA |
| Collector to base voltage | V_{CBO} | $I_C = -10\mu A, I_E = 0$ | -35 | | | V |
| | | | -55 | | | |
| Collector to emitter voltage | V_{CEO} | $I_C = -2mA, I_B = 0$ | -35 | | | V |
| | | | -55 | | | |
| Emitter to base voltage | V_{EBO} | $I_E = -10\mu A, I_C = 0$ | -5 | | | V |
| Forward current transfer ratio | h_{FE}^{*1} | $V_{CE} = -5V, I_C = -2mA$ | 180 | | 700 | |
| Collector to emitter saturation voltage | $V_{CE(sat)}$ | $I_C = -100mA, I_B = -10mA^{*2}$ | | -0.7 | -0.6 | V |
| Base to emitter voltage | V_{BE} | $V_{CE} = -1V, I_C = -100mA^{*2}$ | | 200 | -1.0 | V |
| Transition frequency | f_T | $V_{CB} = -5V, I_E = 2mA, f = 200MHz$ | | | | MHz |
| Noise voltage | NV | $V_{CE} = -10V, I_C = -1mA, G_v = 80dB$ $R_g = 100k\Omega, \text{Function} = \text{FLAT}$ | | | 150 | mV |

* h_{FE1} Rank classification


*2 Pulse measurement

| Rank | R | S | T |
|----------|-----------|-----------|-----------|
| h_{FE} | 180 ~ 360 | 260 ~ 520 | 360 ~ 700 |
| Marking | 2SA1034 | FR | FS |
| Symbol | 2SA1035 | HR | HT |

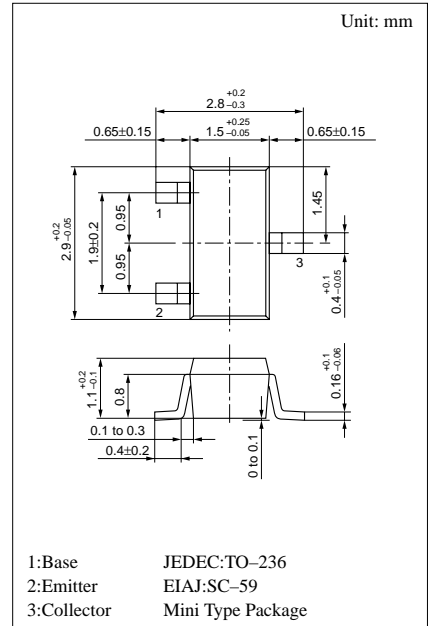


Marking symbol : F(2SA1034)
H(2SA1035)


$P_C - T_a$

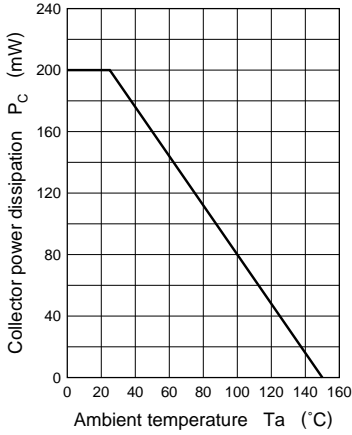


$I_C - V_{CE}$

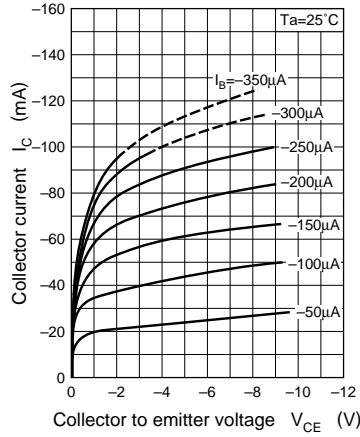


$I_C - I_B$

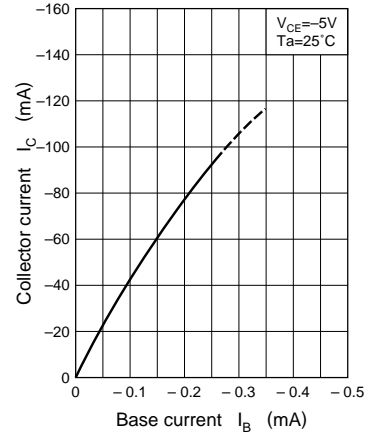


$I_B - V_{BE}$

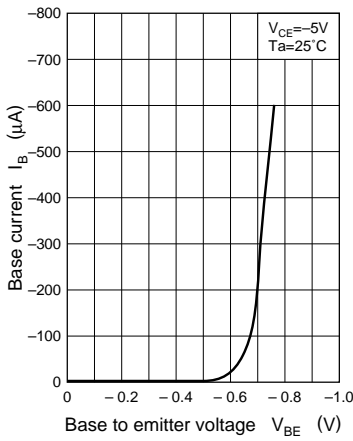


$I_C - V_{BE}$

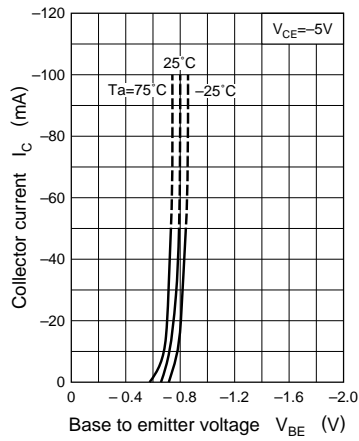


$V_{CE(sat)} - I_C$

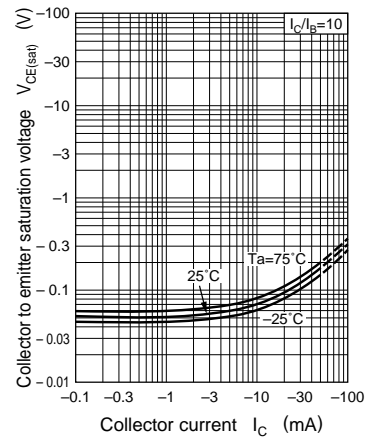

$h_{FE} - I_C$

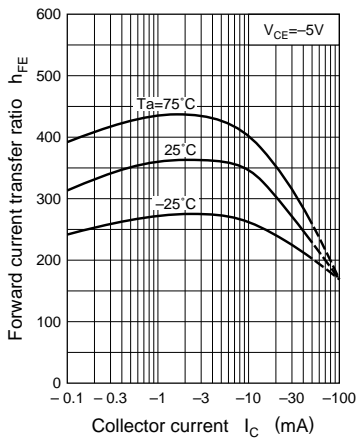

$f_T - I_E$

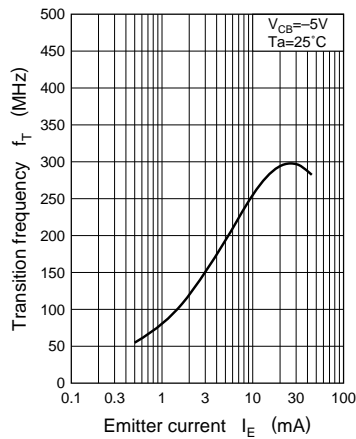

$C_{ob} - V_{CB}$

