


SFT102 0.5 AMP HIGH VOLTAGE NPN TRANSISTOR 450 VOLTS	SSDI 14830 VALLEY VIEW LA MIRADA, CA. 90638 (213) 921-9660 TWX 910-583-4807 FAX 213-921-2396
---	--

CASE STYLE TO-59
 ALL TERMINALS ISOLATED FROM CASE

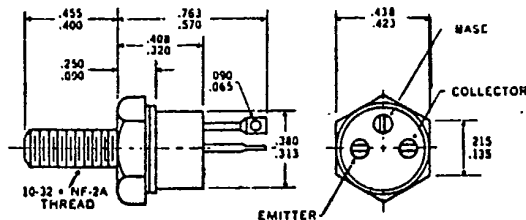

FEATURES

- ▶ BVCEO 350 VOLTS MIN.
- ▶ HIGH GAIN FROM 1mA TO 200mA
- ▶ VERY LOW LEAKAGE
- ▶ CHIP TO CASE CAPACITANCE LESS THAN 5pf
- ▶ 200 °C OPERATING TEMPERATURE
- ▶ GOLD EUTECTIC DIE ATTACH
- ▶ IDEAL FOR HIGH VOLTAGE VIDEO AMPLIFIERS
- ▶ FAST SWITCHING, $t_{on} = 500ns$ MAX.

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Collector-Emitter Voltage	VCEO	350	Volts
Collector-Base Voltage	VCBO	450	Volts
Emitter-Base Voltage	VEBO	7.0	Volts
Collector Current	IC	0.5	Amps
Base Current	IB	0.1	Amps
Total Device Dissipation @ Tc = 25 °C	PD	25	Watts
Derate Above 25 °C		166	mW/ °C
Operating and Storage Temperature	TJ, Tstg	-65 to +200	°C

THERMAL CHARACTERISTICS

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Thermal Resistance, Junction to Case	RθJC	6.0	°C/W

ELECTRICAL CHARACTERISTICS



Characteristics	Symbol	Min	Max	Unit
Collector-Emitter Breakdown Voltage* (IC = 10mA _{dc})	BVCEO	350		Volts
Collector-Base Breakdown Voltage (IC = 10μA _{dc})	VCBO	450		Volts

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min	Max	Unit
Emitter-Base Breakdown Voltage (IE = 10uAdc)	BVEBO	7		Vdc
Collector Cutoff Current (VCE = 300Vdc)	ICEO		10	uAdc
Collector Cutoff Current (VCB = 400Vdc)	ICBO		1	uAdc
Emitter Cutoff Current (VEB = 6Vdc)	IEBO		500	nAdc
DC Current Gain* (IC = 100uAdc, VCE = 10Vdc) (IC = 10mAdc, VCE = 10Vdc) (IC = 300mAdc, VCE = 10Vdc)	hFE	50 70 30		
Collector-Emitter Saturation Voltage* (IC = 100mAdc, IB = 10mAdc) (IC = 300mAdc, IB = 30mAdc)	VCE (SAT)		0.4 1.5	Vdc
Base-Emitter Saturation Voltage* (IC = 100mAdc, IB = 10mAdc) (IC = 300mAdc, IB = 30mAdc)	VBE (SAT)		0.8 1.0	Vdc
Current Gain Bandwidth Product (IC = 10mAdc, VCE = 10Vdc, f = 10MHz)	fT	25		MHz
Output Capacitance (VCB = 10Vdc, IE = 0Adc, f = 1MHz)	Cob		20	pf
Input Capacitance (VBE = 0.5Vdc, IC = 0Adc, f = 1MHz)	Cib		150	pf
Turn On Time	ton		500	ns
Turn Off Time				
			2.5	us

*Pulse Test: Pulse Width = 300us, Duty Cycle = 2%

TYPICAL OPERATING CURVES

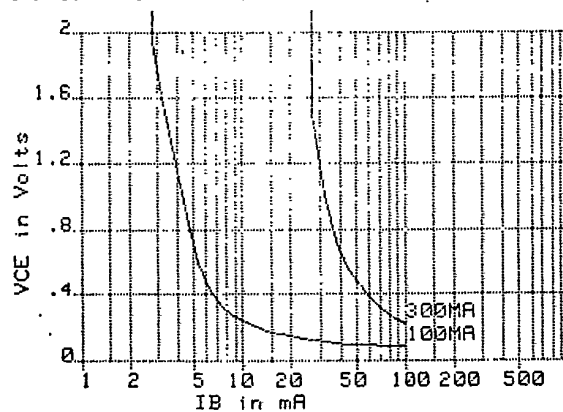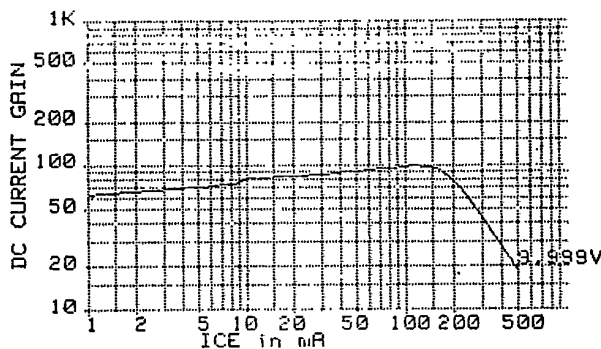

SSDI

SOLID STATE DEVICES, INC.


P.O. Box 577, La Mirada, California 90637

Telephone (213) 921-9660 ♦ TWX 910-583-4807 ♦ FAX 213-921-2396

<h2 style="margin: 0;">2N5013 THRU 2N5015</h2> <h3 style="margin: 0;">500 mA</h3> <h1 style="margin: 0;">HIGH VOLTAGE NPN TRANSISTOR</h1> <h2 style="margin: 0;">800—1000 VOLTS</h2>	
<p style="font-size: small; margin: 0;">14830 Valley View Avenue La Mirada, California 90638 (213) 921-9660 TWX 910-583-4807 FAX 213-921-2396</p>	

**CASE STYLE W
JEDEC TO-5**

FEATURES

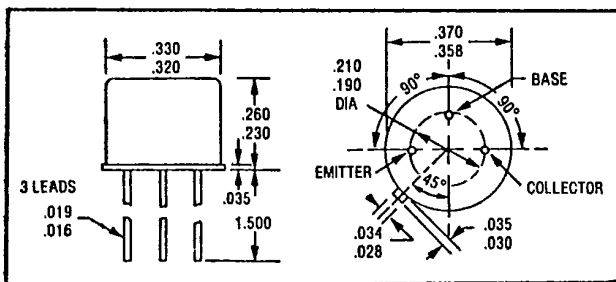

- BV_{CER} AND BV_{CBO} TO 1000 VOLTS
- LOW SATURATION VOLTAGE
- LOW LEAKAGE AT HIGH TEMPERATURE
- 200°C OPERATING, GOLD EUTECTIC DIE ATTACH
- 2N5010 THRU 2N5012 ALSO AVAILABLE

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector - Emitter Voltage, R _{BE} = 1K Ohms	2N5013 2N5014 2N5015	800	Volts
Collector - Base Voltage		900	
		1000	
Emitter - Base Voltage	V _{EB0}	5	Volts
Collector Current	I _C	500	m Amps
Base Current	I _B	50	m Amps
Total Device Dissipation @ TC = 100°C	P _D	2	Watts
Derate above 100 °C		20	mW/°C
Operating and Storage Temperature	T _J , T _{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Value	Unit
Thermal Resistance, Junction to Case	R _{θJC}	50	°C/W

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min.	Max.	Unit
Collector - Emitter Breakdown Voltage* (I _C = 200 μA dc, R _{BE} = 1 K ohms)	BV _{CER} *	800		Vdc
		900		
		1000		
Collector - Base Breakdown Voltage (I _C = 200 μA dc)	BV _{CBO}	800		Vdc
		900		
		1000		
Emitter - Base Breakdown Voltage (I _E = 50 μA dc)	BV _{EBO}	5		Vdc


ELECTRICAL CHARACTERISTICS

Characteristics		Symbol	Min.	Max.	Unit
Collector Cutoff Current	(V _{CB} = 650 Vdc) (V _{CB} = 700 Vdc) (V _{CB} = 750 Vdc)	2N5013 2N5014 2N5015		12**	uAdc
Collector Cutoff Current	(V _{CB} = 650 Vdc, TA=100°C) (V _{CB} = 700 Vdc, TA=100°C) (V _{CB} = 750 Vdc, TA=100°C)	2N5013 2N5014 2N5015		100**	uAdc
DC Current Gain*	(I _C = 5 mAdc, V _{CE} = 10 Vdc) (I _C = 20 mAdc, V _{CE} = 10 Vdc)		25 30	180	
Collector - Emitter Saturation Voltage*	(I _C = 20 mAdc, I _B = 5 mAdc)	2N5013 2N5014 2N5015		1.6 1.6 1.8	Vdc
Base - Emitter Saturation Voltage*	(I _C = 20 mAdc, I _B = 5 mAdc)			1.0	Vdc
Current - Gain - Bandwidth Product	(I _C = 20 mAdc, V _{CE} = 10 Vdc, f = 1 MHz)	f _T	25		MHz
Output Capacitance	(V _{CB} = 10 Vdc, I _E = 0, f = 5 MHz)	C _{ob}		25	pf
Delay Time	(V _{CC} = 125 Vdc, I _C = 100 mAdc, I _{B1} = I _{B2} = 10 mAdc)	t _d		200	ns
Rise Time		t _r		1200	ns
Storage Time		t _s		3.0	us
Fall Time		t _f		800	ns

*Pulse Test: Pulse width = 300 us, DutyCycle = 2%


**Typically 1 uA

TYPICAL OPERATING CURVES

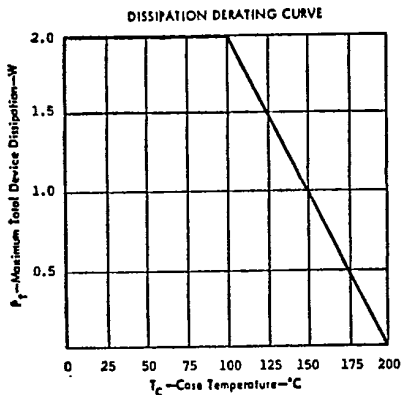

FORWARD BIAS DC SAFE OPERATION AREA (S.O.A. CURVE)

CURVES APPLY BELOW RATED V_{CEO} T_C = 25°C

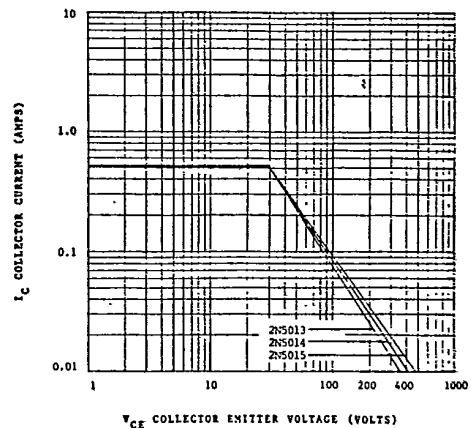


2N5095 AND 2N5097

1 AMP

HIGH VOLTAGE NPN TRANSISTOR


500-600 VOLTS



14830 Valley View Avenue
 La Mirada, California 90638
 (213) 921-9660
 TWX 910-583-4807
 FAX 213-921-2396

**CASE STYLE W
JEDEC TO-5**

FEATURES

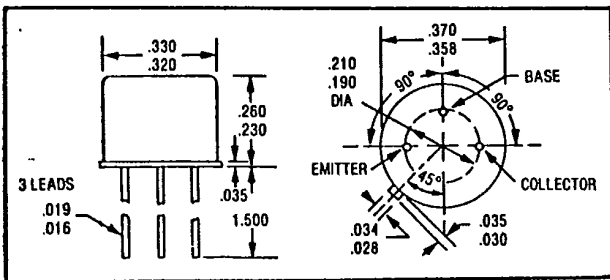

- BV_{CEO} TO 450 VOLTS
- LOW SATURATION VOLTAGE
- VERY LOW LEAKAGE
- 200°C OPERATING, GOLD EUTECTIC DIE ATTACH
- DESIGNED FOR COMPLEMENTARY USE WITH 2N5094 AND 2N5096
- 2N5092 ALSO AVAILABLE

MAXIMUM RATINGS

Rating	Symbol	2N5095	2N5097	Unit
Collector - Emitter Voltage	V _{CEO}	400	450	Volts
R _{BE} = 1 K Ohms	V _{CER}	500	600	Volts
Collector - Base Voltage	V _{CBO}	500	600	Volts
Emitter - Base Voltage	V _{EBO}	6.0		Volts
Collector Current	I _C	1.0		Amps
Base Current	I _B	0.5		Amps
Total Device Dissipation @ TC = 100°C	P _D	2		Watts
Derate above 100 °C		20		mW/°C
Operating and Storage Temperature	T _J , T _{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Value	Unit
Thermal Resistance, Junction to Case	R _{θJC}	50	°C/W

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min.	Max.	Unit
Collector - Emitter Breakdown Voltage* (I _C = 50 mA dc)	BV _{CEO} *	400 450		Vdc
(I _C = 100 uA dc, R _{BE} = 1K Ohms)	BV _{CER} *	500 600		Vdc
Collector - Base Breakdown Voltage (I _C = 100 uA dc)	BV _{CBO}	500 600		Vdc
Emitter - Base Breakdown Voltage (I _E = 20 uA dc)	BV _{EBO}	6		Vdc

ELECTRICAL CHARACTERISTICS


Characteristics	Symbol	Min.	Max.	Unit
Collector Cutoff Current 2N5095 VCB = 400 Vdc 2N5097 VCB = 500 Vdc	I_{CBO}		500	nAdc
Emitter Cutoff Current ($V_{EB} = 4$ Vdc)	I_{EBO}		250	nAdc
DC Current Gain* ($I_C = 1$ mAdc, $V_{CE} = 10$ Vdc) ($I_C = 25$ mAdc, $V_{CE} = 5$ Vdc) ($I_C = 100$ mAdc, $V_{CE} = 5$ Vdc)	h_{FE}	25 50 15	250 300 250	
Collector - Emitter Saturation Voltage* ($I_C = 25$ mAdc, $I_B = 2.5$ mAdc)	$V_{CE(SAT)}$		0.5	Vdc
Base - Emitter Voltage* ($I_C = 25$ mAdc, $V_{CE} = 5$ Vdc)	$V_{BE(ON)}$ *		1.0	Vdc
Current - Gain - Bandwith Product ($I_C = 50$ mAdc, $V_{CE} = 10$ Vdc, $f = 20$ MHz)	f_T	25		MHz
Output Capacitance ($V_{CB} = 15$ Vdc, $I_E = 0$, $f = 2$ MHz)	C_{ob}		15	pf

SWITCHING TIMES

Delay Time	$V_{CC} = 125$ Vdc $I_C = 100$ mAdc, $I_{B1} = I_{B2} = 10$ mAdc	t_d		200	ns
Rise Time		t_r		1200	ns
Storage Time		t_s		3.0	us
Fall Time		t_f		800	ns

*Pulse Test: Pulse width = 300 us, DutyCycle = 2%

TYPICAL OPERATING CURVES

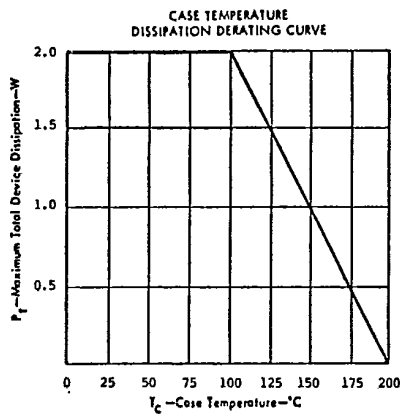

FORWARD BIAS DC SAFE OPERATION AREA (S.O.A. CURVE)
CURVES APPLY BELOW RATED V_{CEO} $T_C = 25^\circ C$

