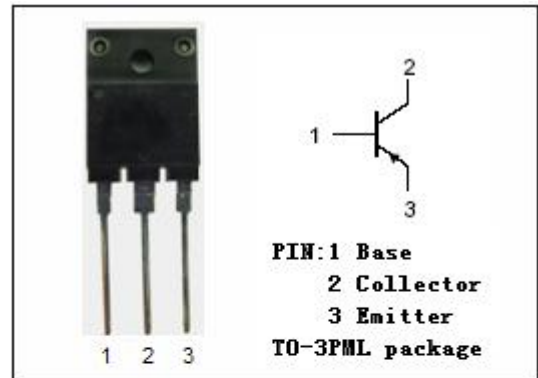


isc Silicon PNP Power Transistor
2SB1361
DESCRIPTION


- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = -150V(\text{Min})$
- Wide Area of Safe Operation
- Complement to Type 2SD2052
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Designed for high power amplifications.


ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

| SYMBOL | PARAMETER | VALUE | UNIT |
|-----------|---|---------|------------------|
| V_{CBO} | Collector-Base Voltage | -150 | V |
| V_{CEO} | Collector-Emitter Voltage | -150 | V |
| V_{EBO} | Emitter-Base Voltage | -5 | V |
| I_C | Collector Current-Continuous | -9 | A |
| I_{CP} | Collector Current-Pulse | -15 | A |
| P_C | Collector Power Dissipation @ $T_C=25^\circ\text{C}$ | 100 | W |
| | Collector Power Dissipation @ $T_a=25^\circ\text{C}$ | 3 | |
| T_J | Junction Temperature | 150 | $^\circ\text{C}$ |
| T_{stg} | Storage Temperature Range | -55~150 | $^\circ\text{C}$ |

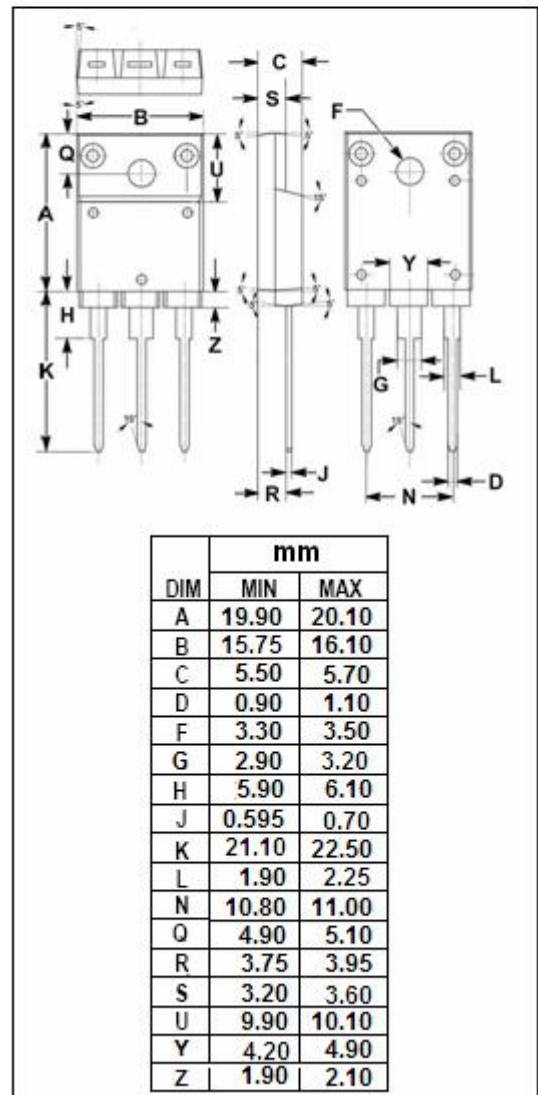

isc Silicon PNP Power Transistor
2SB1361
ELECTRICAL CHARACTERISTICS
 $T_C=25^{\circ}\text{C}$ unless otherwise specified

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP. | MAX | UNIT |
|---------------|--------------------------------------|-----------------------------|-----|------|------|---------|
| $V_{CE(sat)}$ | Collector-Emitter Saturation Voltage | $I_C = -7A; I_B = -0.7A$ | | | -2.0 | V |
| $V_{BE(on)}$ | Base -Emitter On Voltage | $I_C = -7A; V_{CE} = -5V$ | | | -1.8 | V |
| I_{CBO} | Collector Cutoff Current | $V_{CB} = -150V; I_E = 0$ | | | -50 | μA |
| I_{EBO} | Emitter Cutoff Current | $V_{EB} = -3V; I_C = 0$ | | | -50 | μA |
| h_{FE-1} | DC Current Gain | $I_C = -20mA; V_{CE} = -5V$ | 20 | | | |
| h_{FE-2} | DC Current Gain | $I_C = -1A; V_{CE} = -5V$ | 60 | | 200 | |
| h_{FE-3} | DC Current Gain | $I_C = -7A; V_{CE} = -5V$ | 20 | | | |

◆ h_{FE-2} Classifications

| Q | S | P |
|--------|--------|---------|
| 60-120 | 80-160 | 100-200 |

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.