

Silicon PNP Power Transistors

2SB649 2SB649A

DESCRIPTION


- With TO-126 package
- Complement to type 2SD669/669A
- High breakdown voltage V_{CEO} : -120/-160V
- High current -1.5A
- Low saturation voltage, excellent h_{FE} linearity

APPLICATIONS

- For low-frequency power amplifier applications

PINNING

PIN	DESCRIPTION
1	Emitter
2	Collector; connected to mounting base
3	Base

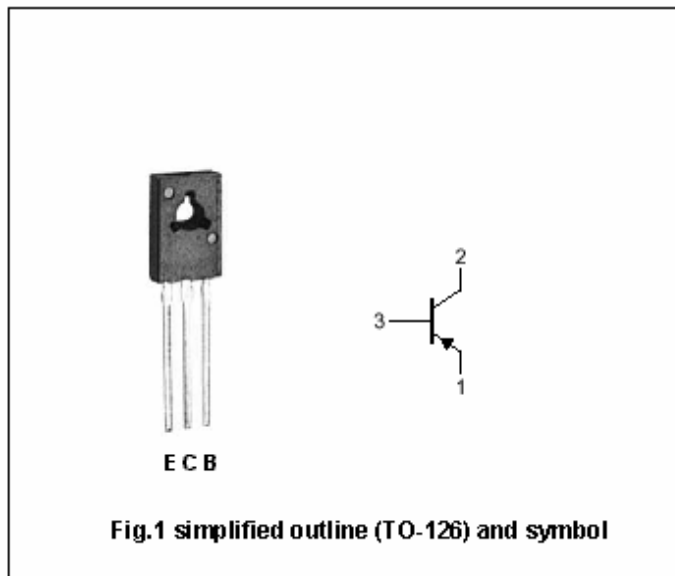

Absolute maximum ratings(Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	2SB649	-180	V
		2SB649A	-180	
V_{CEO}	Collector-emitter voltage	2SB649	-120	V
		2SB649A	-160	
V_{EBO}	Emitter-base voltage	Open collector	-5	V
I_C	Collector current (DC)		-1.5	A
I_{CM}	Collector current-Peak		-3	A
P_D	Total power dissipation	$T_a=25^\circ C$	1	W
		$T_c=25^\circ C$	20	
T_j	Junction temperature		150	°C
T_{stg}	Storage temperature		-55~150	°C

Silicon PNP Power Transistors

2SB649 2SB649A

CHARACTERISTICS

T_j=25 °C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	2SB649	I _C =-10mA; R _{BE} =∞	-120		V
		2SB649A		-160		
V _{(BR)CBO}	Collector-base breakdown voltage	2SB649	I _C =-1mA; I _E =0	-180		V
		2SB649A		-180		
V _{(BR)EBO}	Emitter-base breakdown voltage	I _E =-1mA; I _C =0	-5			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =-0.5A; I _B =-50mA			-1.0	V
V _{BE}	Base-emitter voltage	I _C =-150mA; V _{CE} =5V			-1.5	V
I _{CBO}	Collector cut-off current	V _{CB} =-160V; I _E =0			-10	μA
h _{FE-1}	DC current gain	2SB649	I _C =-150mA; V _{CE} =-5V	60		320
		2SB649A		60		200
h _{FE-2}	DC current gain	I _C =-0.5A; V _{CE} =-5V	30			
f _T	Transition frequency	I _C =-150mA; V _{CE} =-5V		140		MHz
C _{OB}	Collector output capacitance	f=1MHz; V _{CB} =-10V		27		pF


◆ h_{FE} Classifications

h _{FE-1}	B	C	D
2SB649	60-120	100-200	160-320
2SB649A	60-120	100-200	

Silicon PNP Power Transistors

2SB649 2SB649A

PACKAGE OUTLINE

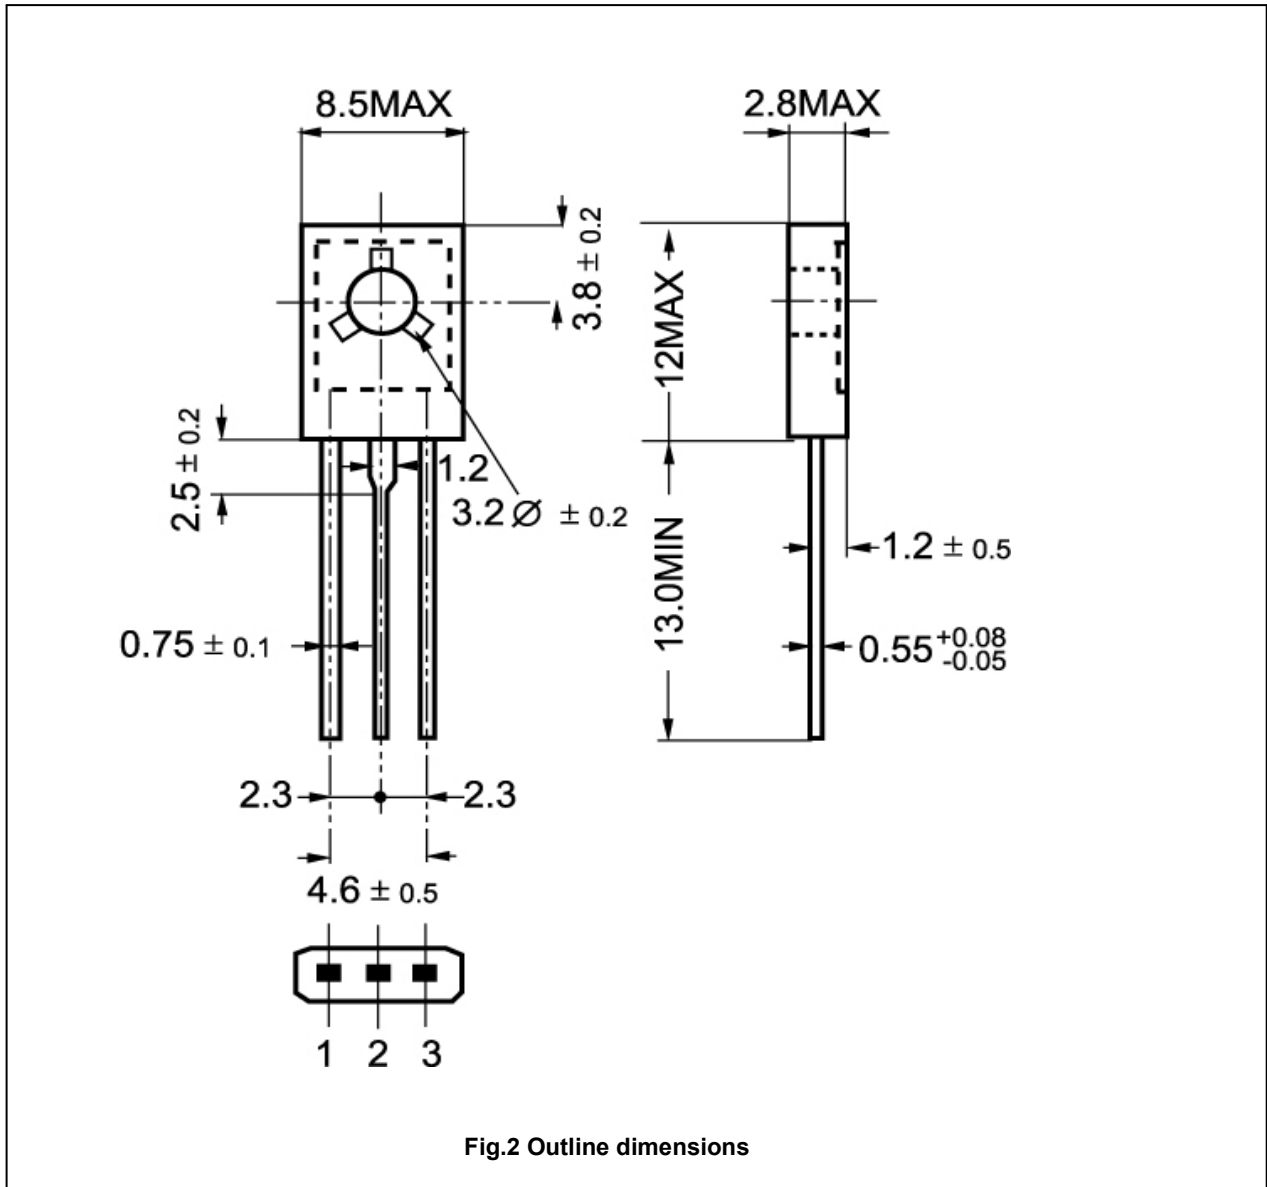

Silicon PNP Power Transistors

2SB649 2SB649A

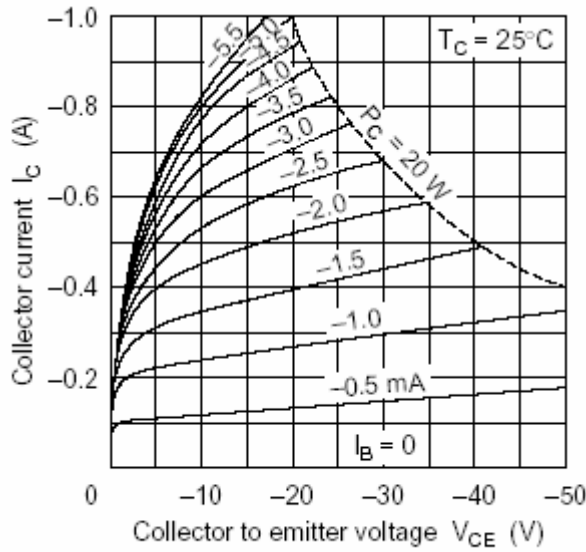


Fig.3 Static Characteristic

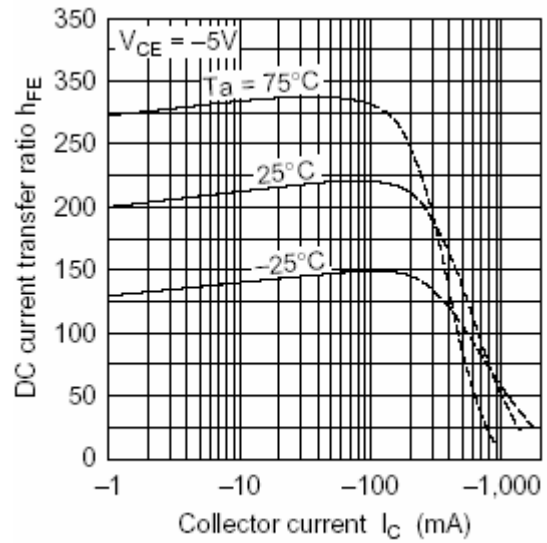


Fig.4 DC current Gain

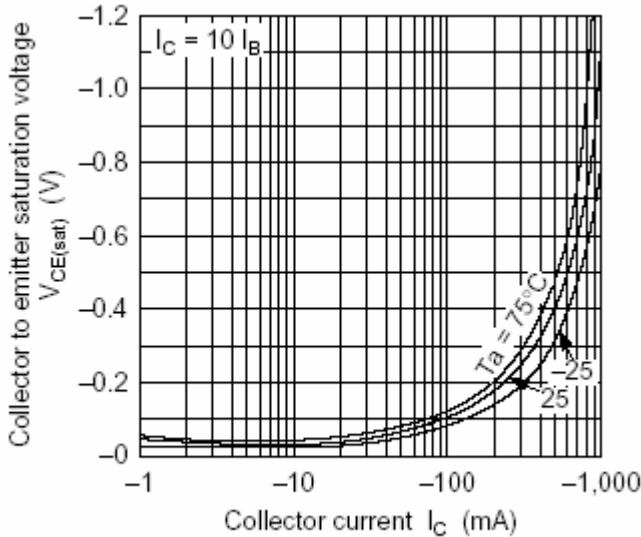


Fig.5 Collector-Emitter Saturation Voltage

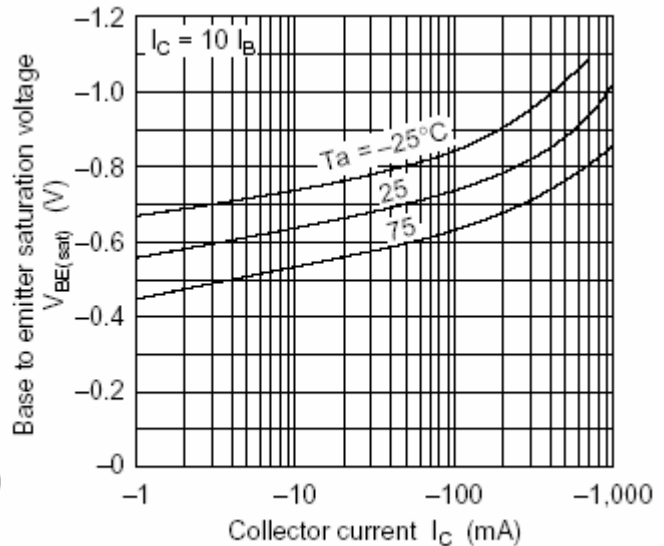


Fig.6 Base-Emitter Saturation Voltage

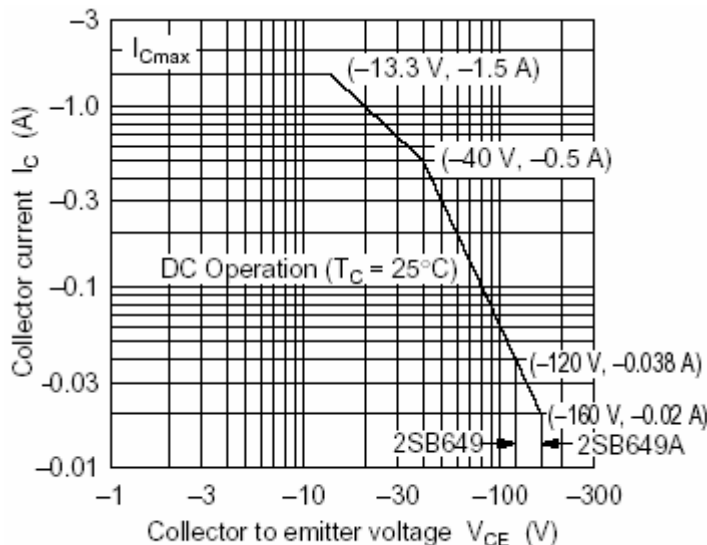


Fig.7 Safe Operating Area