


HIGH CURRENT SWITCHING APPLICATIONS.  
POWER AMPLIFIER APPLICATIONS.

INDUSTRIAL APPLICATIONS  
Unit in mm

FEATURES:

- High Collector Current :  $I_C=7A$
- Low Saturation Voltage  
:  $V_{CE(sat)}=0.4V(\text{Max.})$  (at  $I_C=4A$ )
- High Collector Power Dissipation  
:  $P_C=40W$  (at  $T_c=25^\circ C$ )
- Complementary to 2SB993

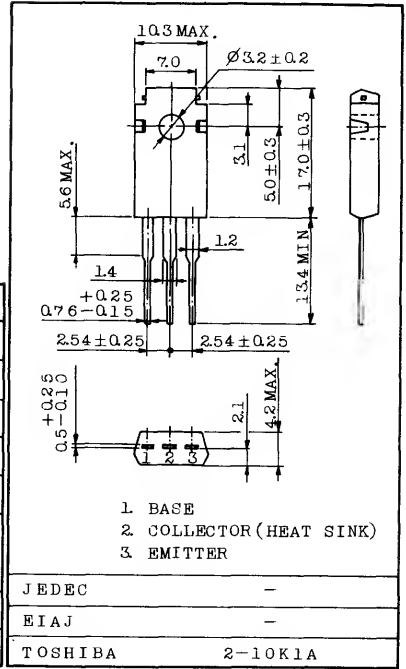

MAXIMUM RATINGS ( $T_a=25^\circ C$ )

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		$V_{CBO}$	70	V
Collector-Emitter Voltage		$V_{CEO}$	50	V
Emitter-Base Voltage		$V_{EBO}$	5	V
Collector Current		$I_C$	7	A
Base Current		$I_B$	1	A
Collector Power Dissipation	$T_a=25^\circ C$	PC	1.5	W
	$T_c=25^\circ C$		40	
Junction Temperature		$T_j$	150	$^\circ C$
Storage Temperature Range		$T_{stg}$	-55 ~ 150	$^\circ C$

ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ )

Weight : 2.0g

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		$I_{CBO}$	$V_{CB}=70V, I_E=0$	-	-	30	$\mu A$
Emitter Cut-off Current		$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	50	$\mu A$
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=50mA, I_B=0$	50	-	-	V
DC Current Gain		$h_{FE(1)}$ (Note)	$V_{CE}=1V, I_C=1A$	70	-	240	
		$h_{FE(2)}$	$V_{CE}=1V, I_C=4A$	30	-	-	
Saturation Voltage	Collector-Emitter	$V_{CE(sat)}$	$I_C=4A, I_B=0.4A$	-	0.2	0.4	V
	Base-Emitter	$V_{BE(sat)}$	$I_C=4A, I_B=0.4A$	-	0.9	1.2	
Transition Frequency		$f_T$	$V_{CE}=4V, I_C=1A$	-	10	-	MHz
Collector Output Capacitance		$C_{ob}$	$V_{CB}=10V, I_E=0, f=1MHz$	-	250	-	pF
Switching Time	Turn-on Time	$t_{on}$		-	0.2	-	$\mu s$
	Storage Time	$t_{stg}$		-	2.5	-	
	Fall Time	$t_f$		-	0.5	-	

Note :  $h_{FE(1)}$  Classification 0 : 70 ~ 140, Y : 120 ~ 240

