

isc Silicon NPN Power Transistor
2SD812
DESCRIPTION



- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = 80V(\text{Min})$
- Good Linearity of h_{FE}
- Wide Area of Safe Operation
- Complement to Type 2SB747
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- High power amplifier applications.
- Suitable for 15~20W home stereo output amplifier and voltage regulator.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	80	V
V_{CEO}	Collector-Emitter Voltage	80	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	5	A
I_{CP}	Peak Collector Current	8	A
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	40	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

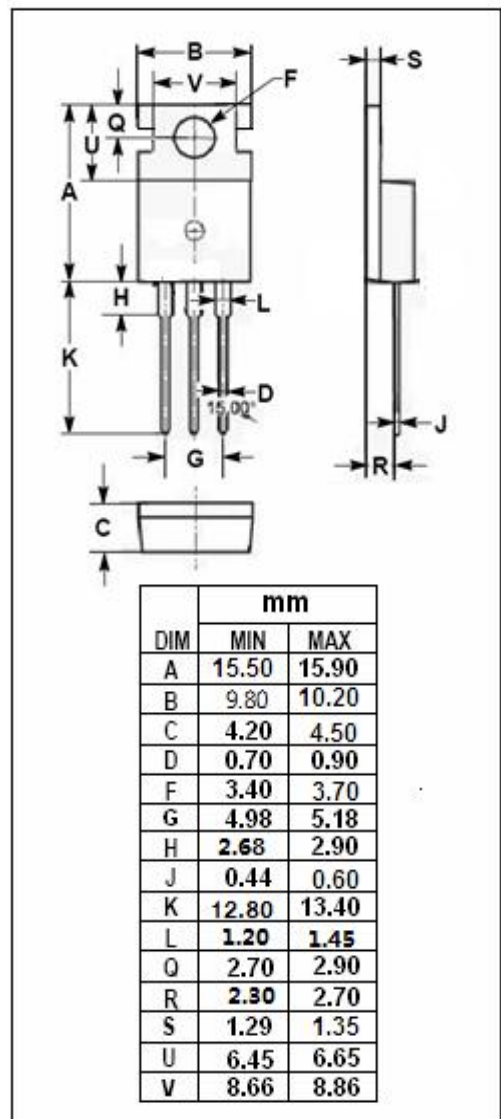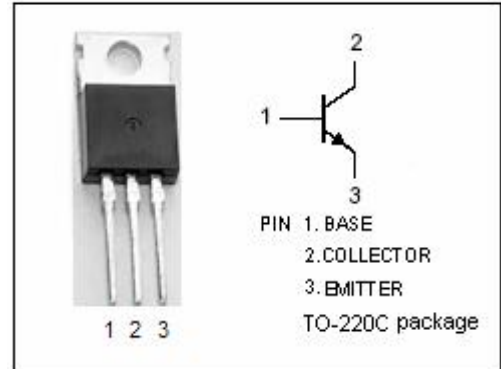

isc Silicon NPN Power Transistor**2SD812****ELECTRICAL CHARACTERISTICS** $T_c=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C= 3A; I_B= 0.3A$			2.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C= 3A; V_{CE}= 5V$			1.8	V
I_{CBO}	Collector Cutoff Current	$V_{CB}= 80V; I_E= 0$			50	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}= 3V; I_C= 0$			50	μA
h_{FE-1}	DC Current Gain	$I_C= 20mA; V_{CE}= 5V$	20			
h_{FE-2}	DC Current Gain	$I_C= 1A; V_{CE}= 5V$	40		200	
h_{FE-3}	DC Current Gain	$I_C= 3A; V_{CE}= 5V$	20			
C_{OB}	Collector Output Capacitance	$I_E= 0; V_{CB}= 10V; f= 1MHz$		90		pF
f_T	Current-Gain—Bandwidth Product	$I_C= 0.5A; V_{CE}= 5V$		15		MHz

◆ **h_{FE-2} Classifications**

R	Q	P
40-80	60-120	100-200

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.