

TOSHIBA Field Effect Transistor Silicon N Channel Junction Type

2SK3857TK

For ECM

- Application for Ultra-compact ECM


Absolute Maximum Ratings (Ta=25°C)

Characteristic	Symbol	Rating	Unit
Gate-Drain voltage	V_{GDO}	-20	V
Gate Current	I_G	10	mA
Drain power dissipation (Ta = 25°C)	P_D	100	mW
Junction Temperature	T_j	125	°C
Storage temperature range	T_{stg}	-55~125	°C

IDSS CLASSIFICATION


A-Rank	140~240 μ A
B-Rank	210~350 μ A

Unit: mm

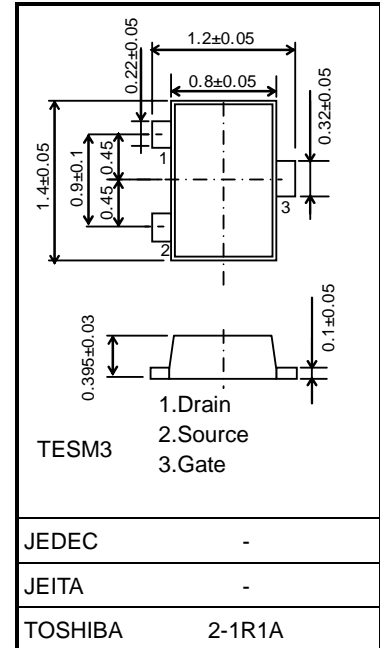


Weight: 2.2mg (typ.)

Marking

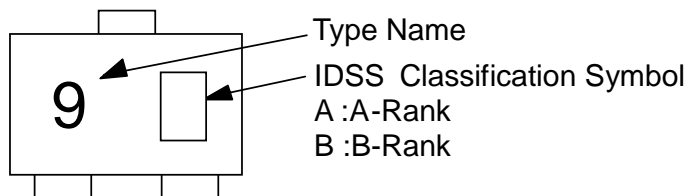

Equivalent Circuit

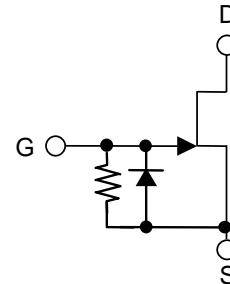


Electrical Characteristics (Ta=25°C)


Characteristic	Symbol	Test Condition	Min	Typ.	Max	Unit
Drain Current	I_{DSS}	$V_{DS} = 2V, V_{GS} = 0$	140	—	350	μA
Drain Current	I_D	$V_{DD} = 2V, R_L = 2.2k\Omega, C_g = 5pF$	—	—	370	μA
Gate-Source Cut-off Voltage	$V_{GS(OFF)}$	$V_{DS} = 2V, I_D = 1\mu A$	-0.1	—	-1.0	V
Forward transfer admittance	$ Y_{fs} $	$V_{DS} = 2V, V_{GS} = 0V$	0.9	1.3	—	mS
Gate-Drain Voltage	$V_{(BR)GDO}$	$I_G = -10\mu A$	-20	—	—	V
Input capacitance	C_{iss}	$V_{DS} = 2V, V_{GS} = 0, f = 1MHz$	—	3.5	—	pF
Voltage Gain	Gv	$V_{DD} = 2V, R_L = 2.2k\Omega, C_g = 5pF, f = 1kHz, v_{in} = 100mV$	-3.0	-0.5	—	dB
Delta Voltage Gain	$DGv(f)$	$V_{DD} = 2V, R_L = 2.2k\Omega, C_g = 5pF, f = 1kHz \text{ to } 100Hz, v_{in} = 100mV$	—	0	-1	dB
Delta Voltage Gain	$DGv(V)$	$V_{DD} = 2V \text{ to } 1.5V, R_L = 2.2k\Omega, C_g = 5pF, f = 1kHz, v_{in} = 100mV$	—	-0.8	-2	dB
Noise Voltage	VN	$V_{DD} = 2V, R_L = 1k\Omega, C_g = 10pF, Gv = 80dB, A\text{-Curve Filter}$	—	25	55	mV
Total Harmonic Distortion	THD	$V_{DD} = 2V, R_L = 2.2k\Omega, C_g = 5pF, f = 1kHz, v_{in} = 50mV$	—	0.7	—	%
Time Output Stability	tos	$V_{DD} = 2V, R_L = 2.2k\Omega, C_g = 5pF$	—	100	200	ms







Time Output Stability Test Method







a) TEST CIRCUIT

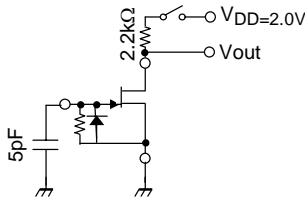

b) TEST SIGNAL

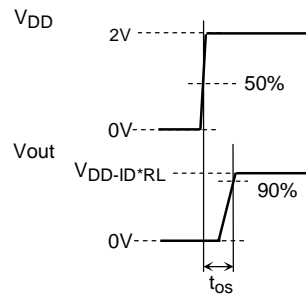

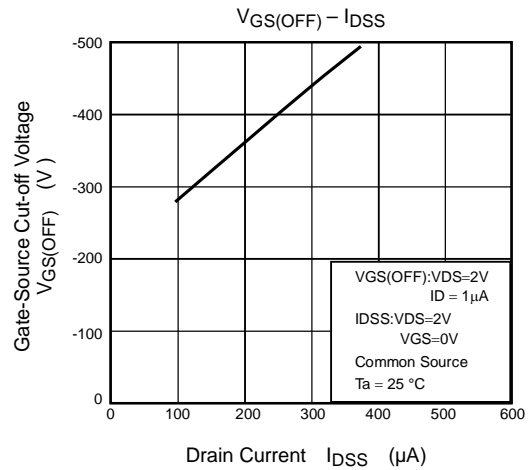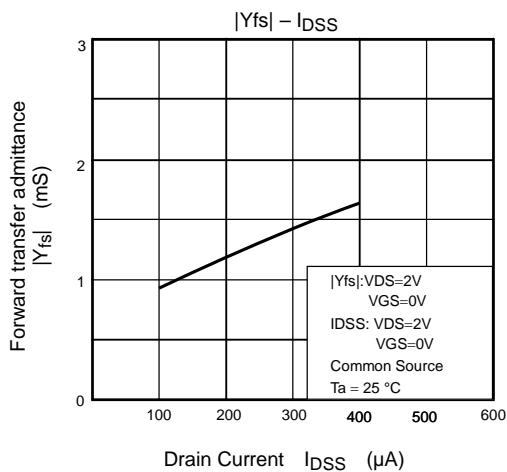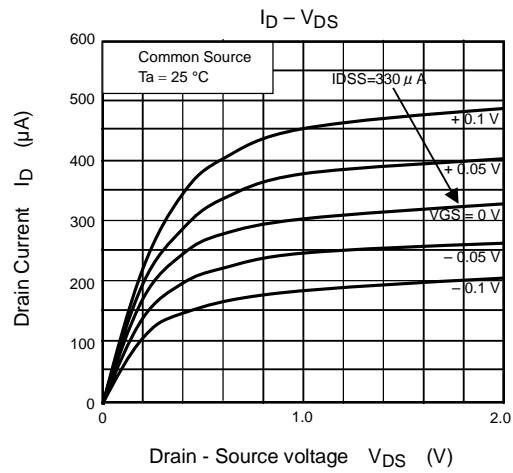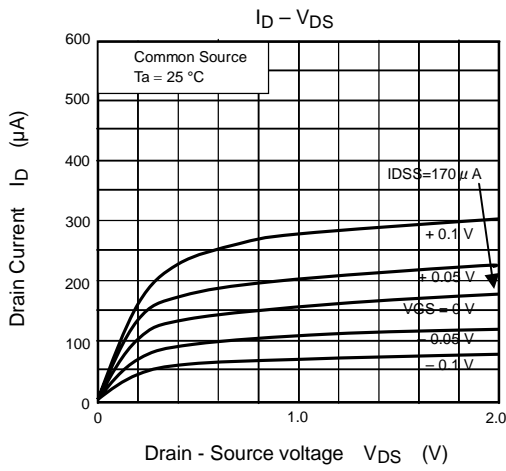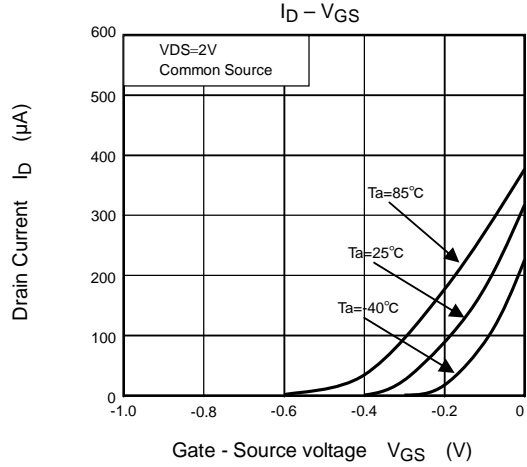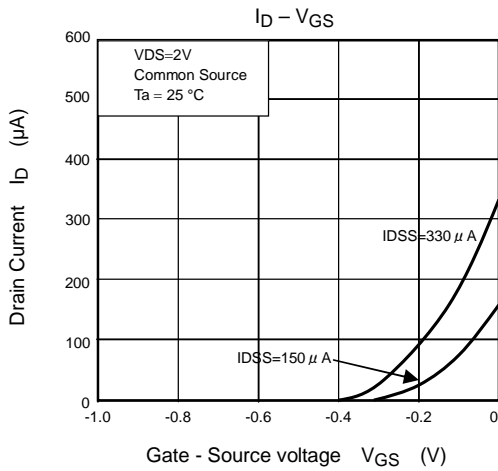

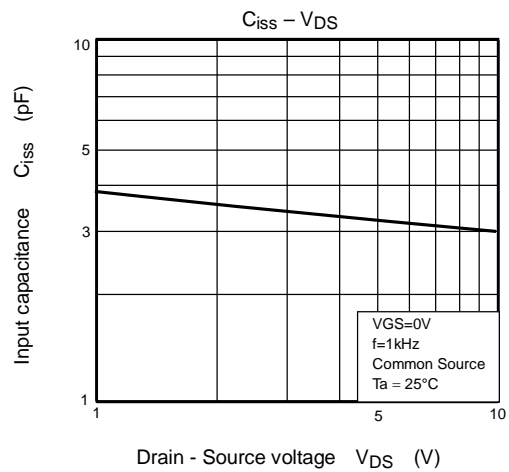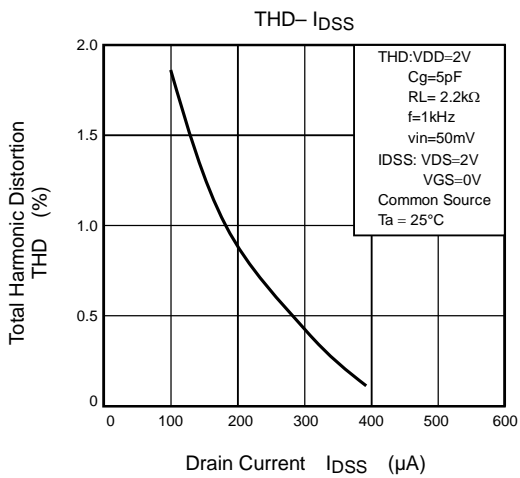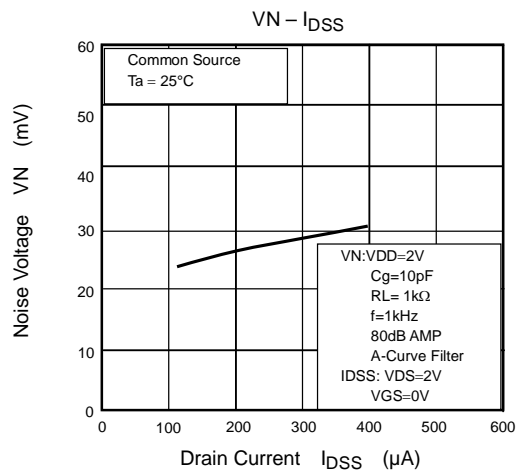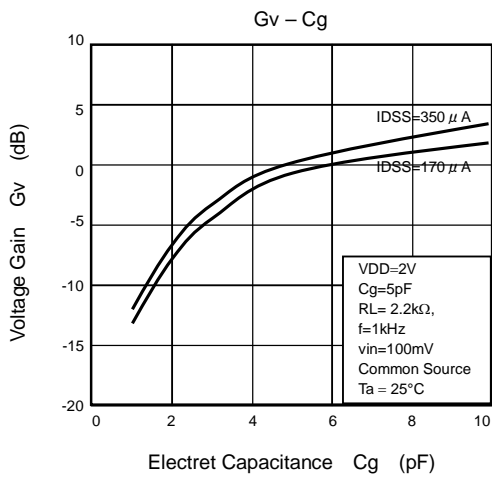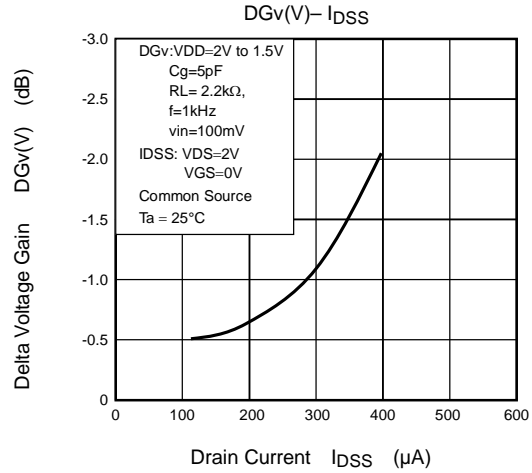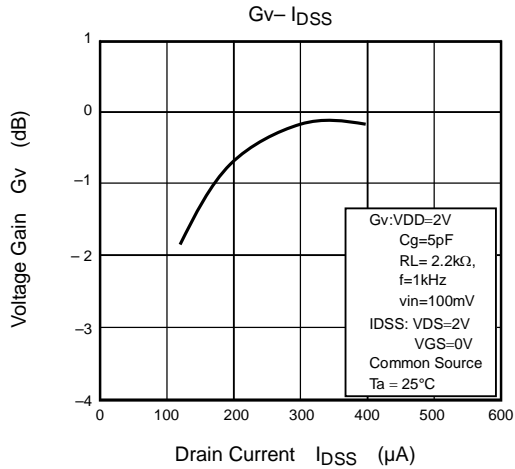

RESTRICTIONS ON PRODUCT USE

060116EAA

- The information contained herein is subject to change without notice. 021023_D
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc. 021023_A
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk. 021023_B
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations. 060106_Q
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others. 021023_C