


TOSHIBA Photocoupler GaAs IRed & Photo-Transistor

4N35(Short), 4N36(Short), 4N37(Short)

- AC Line / Digital Logic Isolator.
- Digital Logic / Digital Logic Isolator.
- Telephone Line Receiver.
- High Frequency Power Supply Feedback Control.
- Relay Contact Monitor.


The TOSHIBA 4N35 (short) through 4N37 (short) consists of a gallium arsenide infrared emitting diode coupled with a silicon phototransistor in a dual in-line package.

- Switching speeds: 3μs (typ.)
- DC current transfer ratio: 100% (min.)
- Isolation resistance: 10¹¹Ω (min.)
- Isolation voltage: 2500Vrms (min.)
- UL recognized: UL1577, file no. E67349

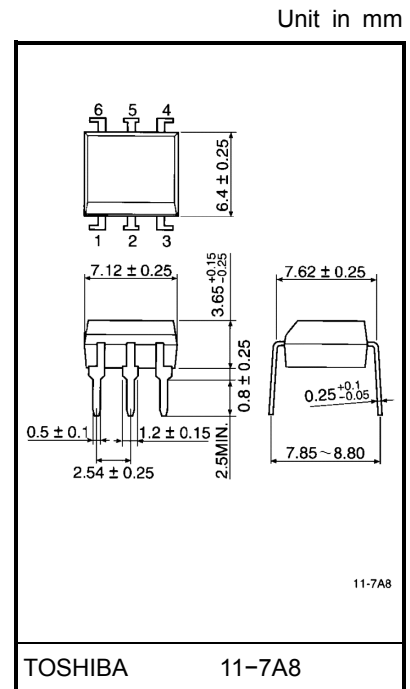

Weight: 0.4 g

Pin Configurations(top view)

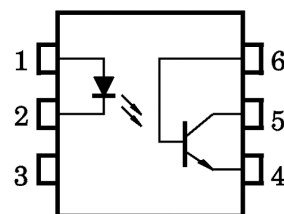

- 1 : ANODE
- 2 : CATHODE
- 3 : N.C.
- 4 : EMITTER
- 5 : COLLECTOR
- 6 : BASE

Maximum Ratings (Ta = 25°C)

Characteristic		Symbol	Rating	Unit					
LED	Forward current (continuous)	I_F	60	mA					
	Forward current derating	$\Delta I_F / ^\circ\text{C}$	0.8 (*)	mA / °C					
	Peak forward current (Note 1)	I_{PF}	3	A					
	Power dissipation	P_D	100	mW					
	Power dissipation derating	$\Delta P_D / ^\circ\text{C}$	1.33 (*)	mW / °C					
	Reverse voltage	V_R	6	V					
Detector	Collector-emitter voltage	BV_{CEO}	30	V					
	Collector-base voltage	BV_{CBO}	70	V					
	Emitter-collector voltage	BV_{ECO}	7	V					
	Collector current (continuous)	I_C	100	mA					
	Power dissipation	P_C	300	mW					
	Power dissipation derating	$\Delta P_C / ^\circ\text{C}$	4.0 (*)	mW / °C					
Coupled	Storage temperature	T_{stg}	-55~150	°C					
	Operating temperature	T_{opr}	-55~100	°C					
	Lead soldering temperature (at 10 s)	T_{sol}	260	°C					
	Total package power dissipation	P_T	300	mW					
	Total package power dissipation derating	$\Delta P_T / ^\circ\text{C}$	3.3 (*)	mW / °C					
		BV_S	2500	Vrms					
	Input to output isolation voltage (AC, 1 minute)	<table border="1"> <tr> <td>4N35</td> <td rowspan="3">$BV_S (**)$</td> <td>2500 / 3550</td> <td rowspan="3">Vrms / Vpk</td> </tr> <tr> <td>4N36</td> <td>1750 / 2500</td> </tr> <tr> <td>4N37</td> <td>1050 / 1500</td> </tr> </table>	4N35	$BV_S (**)$	2500 / 3550	Vrms / Vpk	4N36	1750 / 2500	4N37
4N35	$BV_S (**)$	2500 / 3550	Vrms / Vpk						
4N36		1750 / 2500							
4N37		1050 / 1500							







(Note 1) Pulse width 1μs, 300pps






(*) Above 25°C ambient.





(**) JEDEC registered maximum BV_S , however, TOSHIBA specifies a maximum BV_S of 2500V_{rms}, 1 minute.

Electrical Characteristics (Ta = 25°C)

Characteristic		Symbol	Test Condition	Min.	Typ.	Max.	Unit	
LED	Forward voltage	V_F	$I_F = 10 \text{ mA}$	0.8	1.15	1.5	V	
			$I_F = 10 \text{ mA}, T_a = -55^\circ\text{C}$	0.9	—	1.7		
			$I_F = 10 \text{ mA}, T_a = 100^\circ\text{C}$	0.7	—	1.4		
	Reverse current	I_R	$V_R = 6 \text{ V}$	—	—	10	μA	
	Capacitance	C_D	$V = 0, f = 1 \text{ MHz}$	—	30	100	pF	
Detector	DC forward current gain	h_{FE}	$V_{CE} = 5 \text{ V}, I_C = 500 \mu\text{A}$	—	200	—	—	
	Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 10 \text{ mA}$	30	—	—	V	
	Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100 \mu\text{A}$	70	—	—	V	
	Emitter-collector breakdown voltage	$V_{(BR)ECO}$	$I_E = 100 \mu\text{A}$	7	—	—	V	
	Collector dark current	I_{CEO}	$V_{CE} = 10 \text{ V}$	—	1	50	nA	
	Collector dark current	I_{CEO}	$V_{CE} = 30 \text{ V}, T_a = 100^\circ\text{C}$	—	—	500	μA	
	Collector-emitter capacitance	C_{CE}	$V = 0, f = 1 \text{ MHz}$	—	10	—	pF	
Coupled	Current transfer ratio	I_C / I_F	$I_F = 10 \text{ mA}, V_{CE} = 10 \text{ V}$	100	—	—	%	
			$I_F = 10 \text{ mA}, V_{CE} = 10 \text{ V}, T_a = -55^\circ\text{C}$	40	—	—		
			$I_F = 10 \text{ mA}, V_{CE} = 10 \text{ V}, T_a = 100^\circ\text{C}$	40	—	—		
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F = 10 \text{ mA}, I_C = 0.5 \text{ mA}$	—	0.1	0.3	V	
	Capacitance input to output	C_S	$V_S = 0, f = 1 \text{ MHz}$	—	0.8	2.5	pF	
	Isolation resistance	R_S	$V_S = 500 \text{ V}, R.H. \leq 60 \%$	10^{11}	—	—	Ω	
	Input to output isolation current (pulse width = 8ms)	4N35 4N36 4N37	I_{IO}	$V_{IO} = 3550 \text{ Vpk}$	—	—	100	μA
				$V_{IO} = 2500 \text{ Vpk}$	—	—	100	
				$V_{IO} = 1500 \text{ Vpk}$	—	—	100	
Turn-on time	t_{ON}	$V_{CC} = 10 \text{ V}, I_C = 2 \text{ mA}, R_L = 100\Omega$	—	3	10	μs		
Turn-off time	t_{OFF}		—	3	10			

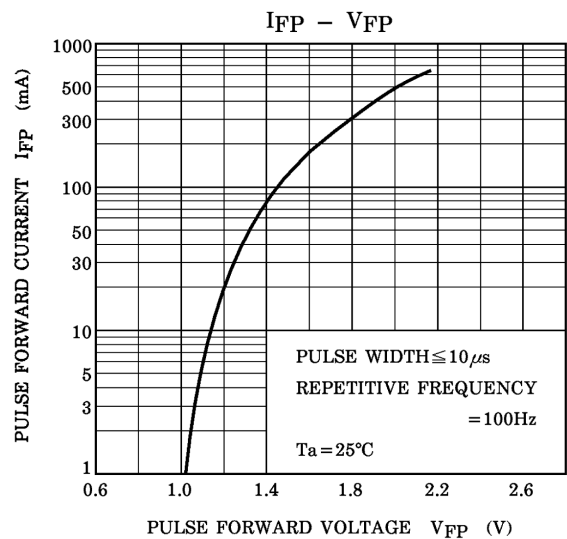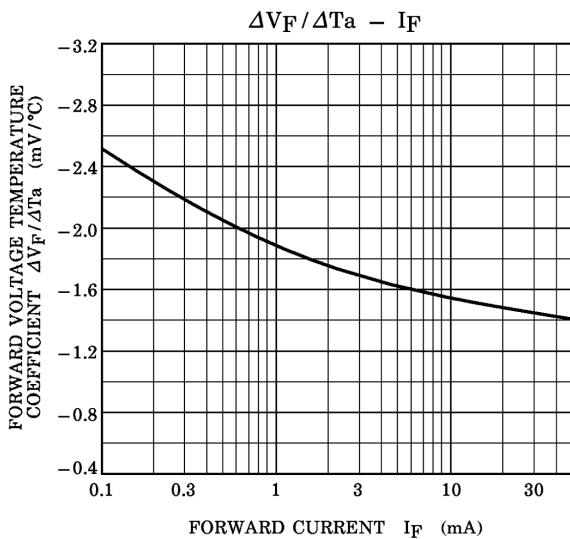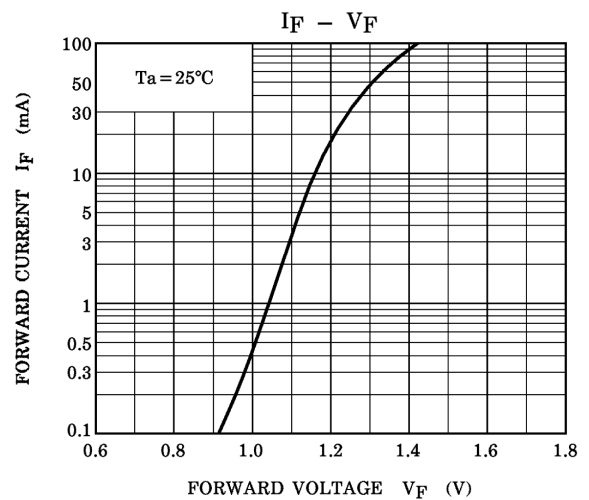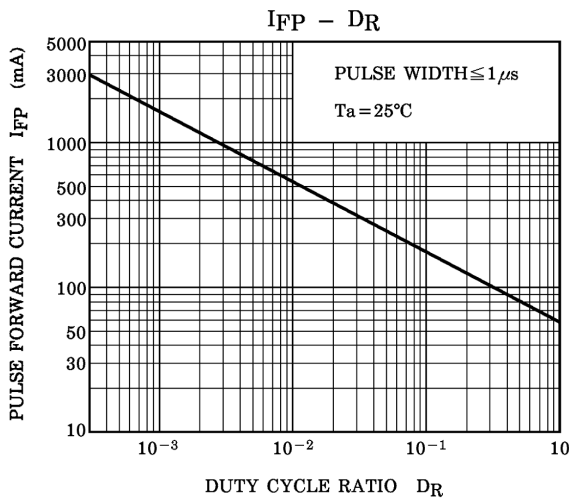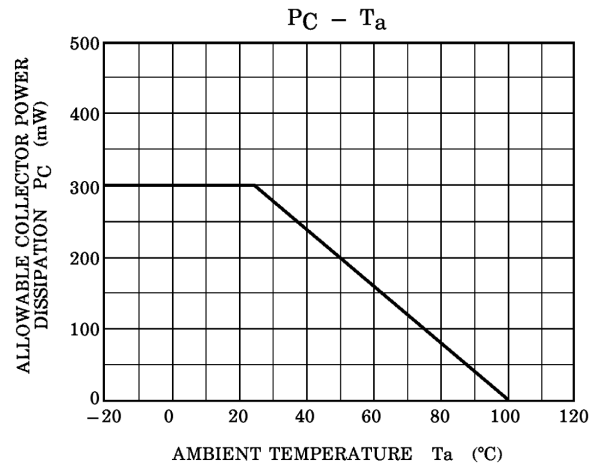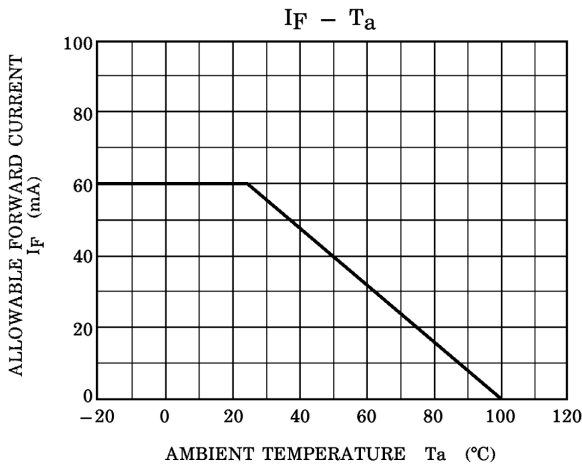

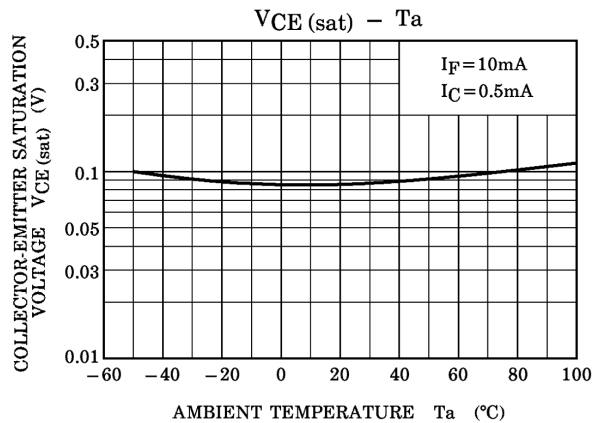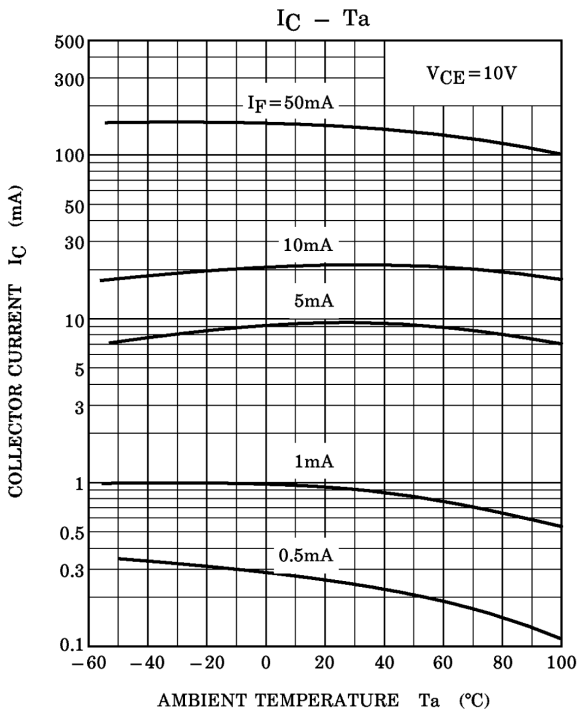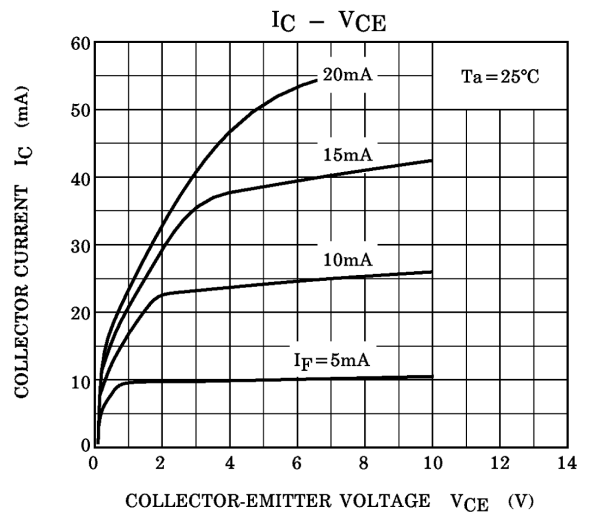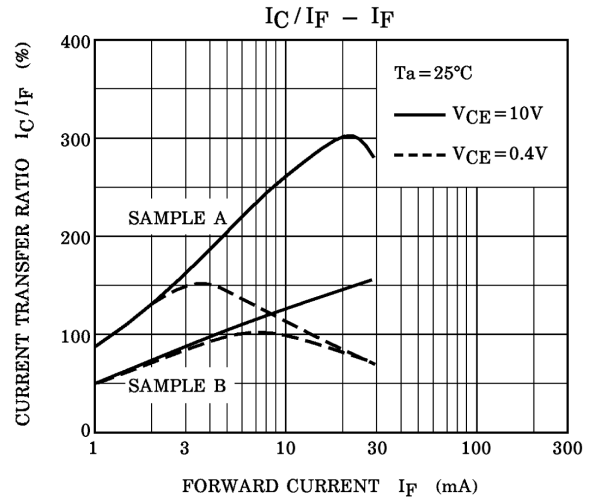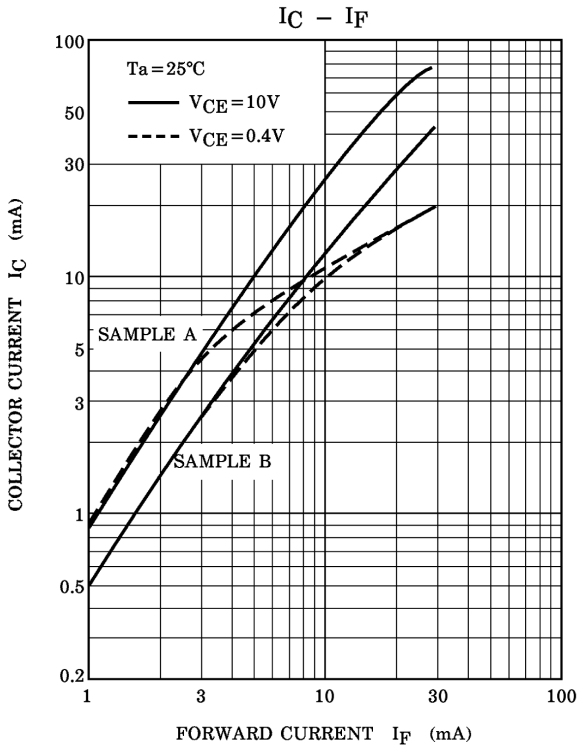

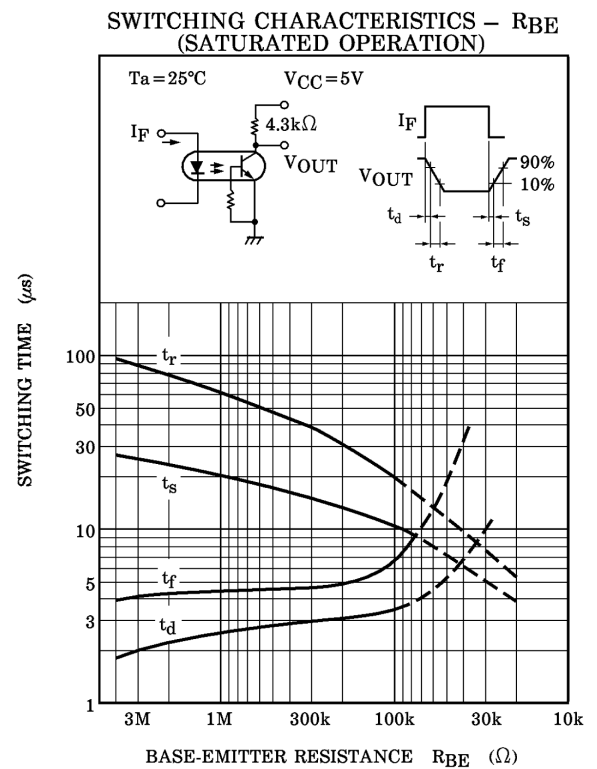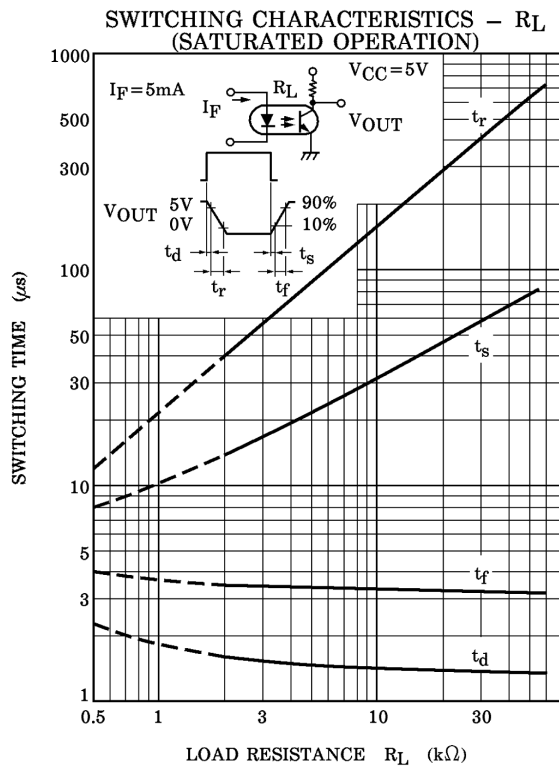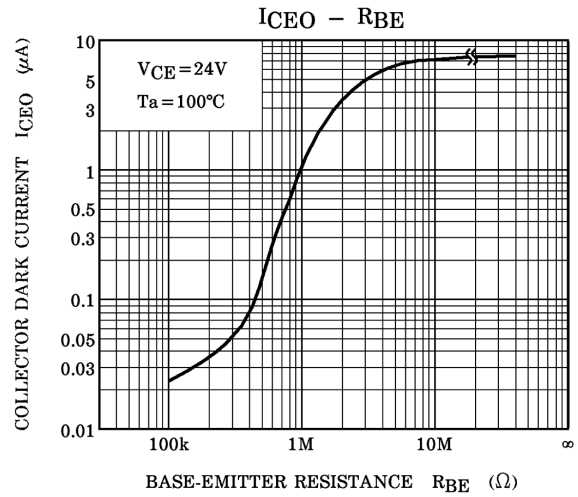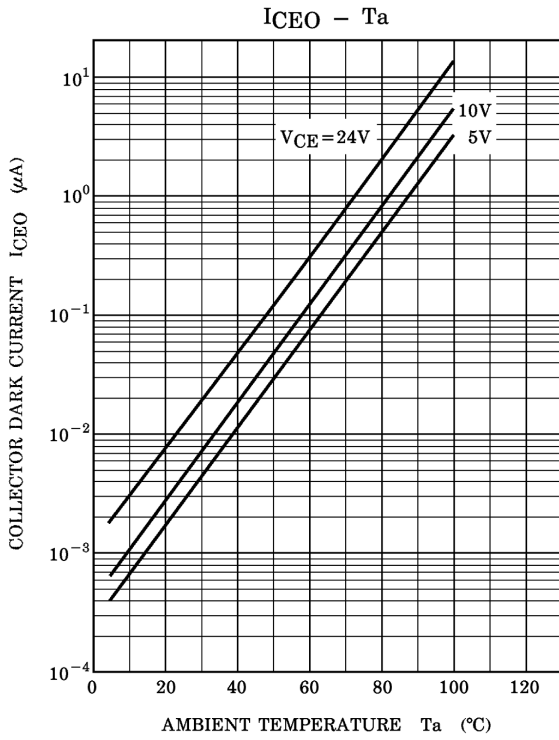

RESTRICTIONS ON PRODUCT USE

000707EBC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.