

Silicon NPN Power Transistors

2N6326 2N6327 2N6328

DESCRIPTION


- With TO-3 package
- Low collector saturation voltage
- High DC current gain

APPLICATIONS

- Designed for audio amplifier and switching circuits applications

PINNING

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

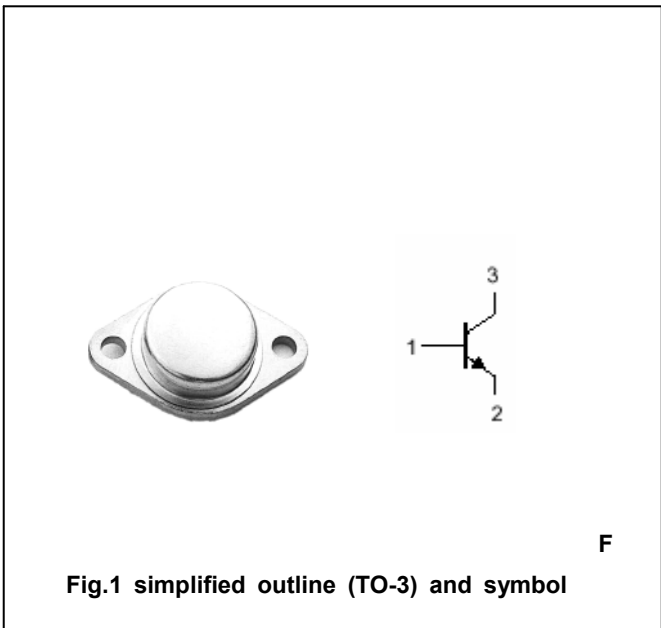

Absolute maximum ratings(Ta=□)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	2N6326	60	V
		2N6327	80	
		2N6328	100	
V _{CEO}	Collector-emitter voltage	2N6326	60	V
		2N6327	80	
		2N6328	100	
V _{EBO}	Emitter-base voltage	Open collector	5	V
I _C	Collector current		30	A
I _B	Base current		7.5	A
P _D	Total power dissipation	T _C =25□	200	W
T _j	Junction temperature		200	□
T _{stg}	Storage temperature		-65~200	□

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
R _{th j-c}	Thermal resistance junction to case	0.875	□/W

Silicon NPN Power Transistors

2N6326 2N6327 2N6328

CHARACTERISTICS

T_j=25 °C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-emitter sustaining voltage	2N6326	I _C =0.2 A ; I _B =0			V
		2N6327				
		2N6328				
V _{CEsat}	Collector-emitter saturation voltage	I _C =15A; I _B =1.5A			1.2	V
V _{BEsat}	Base-emitter saturation voltage	I _C =15A; I _B =1.5A			1.5	V
V _{BE}	Base-emitter on voltage	I _C =8A ; V _{CE} =4V			1.5	V
I _{CBO}	Collector cut-off current	2N6326				mA
		2N6327				
		2N6328				
I _{EBO}	Emitter cut-off current	V _{EB} =4V; I _C =0			1.0	mA
h _{FE-1}	DC current gain	I _C =8A ; V _{CE} =4V	25			
h _{FE-2}	DC current gain	I _C =30A ; V _{CE} =4V	6		30	
f _T	Transition frequency	I _C =1A ; V _{CE} =10V;f=1.0MHz	3			MHz

Silicon NPN Power Transistors

2N6326 2N6327 2N6328

PACKAGE OUTLINE



Fig.2 outline dimensions (unindicated tolerance:±0.1mm)