

isc N-Channel MOSFET Transistor

60NF06

FEATURES

- Drain Current $-I_D=60A @ T_C=25^\circ C$
- Drain Source Voltage-
: $V_{DSS}= 60V(\text{Min})$
- Static Drain-Source On-Resistance
: $R_{DS(on)} = 0.016 \Omega (\text{Max})$
- Fast Switching

DESCRIPTION

Suitable as primary switch in advanced high-efficiency isolated DC-DC converters for Telecom and Computer application. It is also intended for any application with low gate charge drive requirements .

APPLICATIONS



- High-efficiency DC-DC converters
- UPS and motor control
- Automotive

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	60	V
V_{GS}	Gate-Source Voltage-Continuous	± 20	V
I_D	Drain Current-Continuous	60	A
I_{DM}	Drain Current-Single Pluse ($t_p \leq 10 \mu s$)	240	A
P_D	Total Dissipation @ $T_C=25^\circ C$	110	W
T_J	Max. Operating Junction Temperature	175	$^\circ C$
T_{stg}	Storage Temperature	-65~175	$^\circ C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	1.36	$^\circ C/W$
$R_{th j-a}$	Thermal Resistance, Junction to Ambient	62.5	$^\circ C/W$

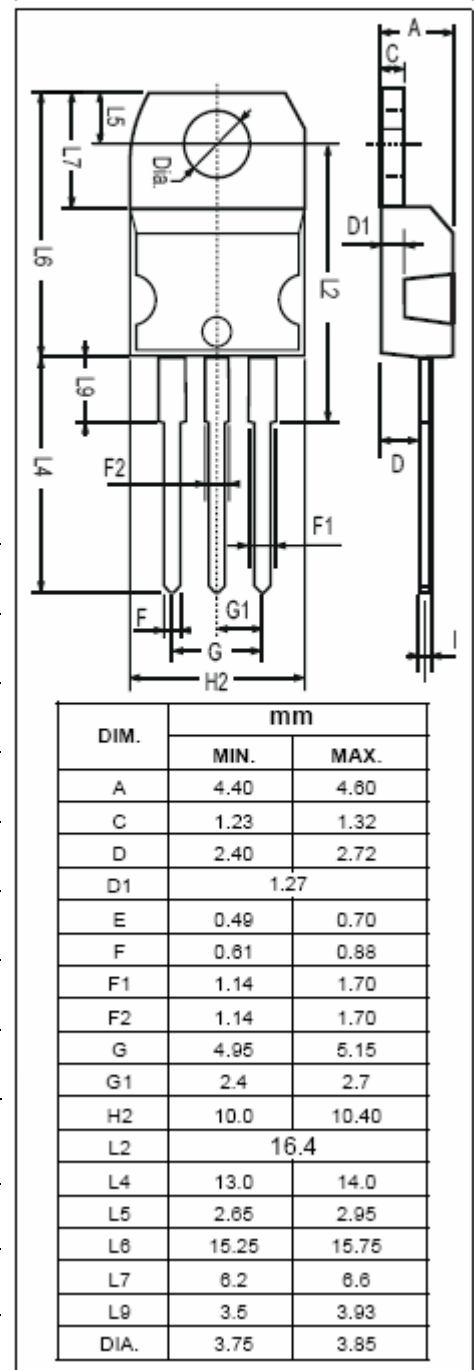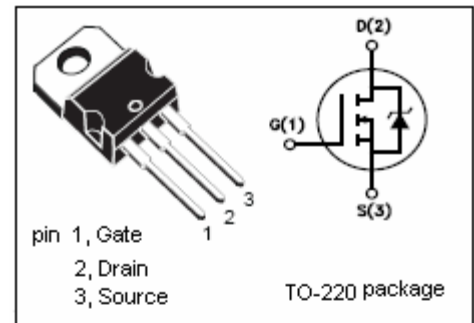

isc N-Channel MOSFET Transistor**60NF06****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}= 0; I_D= 0.25\text{mA}$	60		V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}= V_{GS}; I_D= 0.25\text{mA}$	2	4	V
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS}= 10\text{V}; I_D= 30\text{A}$		0.016	Ω
I_{GSS}	Gate-Body Leakage Current	$V_{GS}= \pm 20\text{V}; V_{DS}= 0$		± 100	nA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}= 60\text{V}; V_{GS}=0$ $V_{DS}= 60\text{V}; V_{GS}=0; T_J= 125^{\circ}\text{C}$		1 10	μA
V_{SD}	Forward On-Voltage	$I_S= 60\text{A}; V_{GS}=0$		1.3	V