

# 6AL11

## Beam Power Tube— Sharp-Cutoff Pentode

For Combined FM Detector and Audio-Frequency  
Output Amplifier Applications in TV Receivers

### DUODECAR TYPE

#### Electrical:

Heater Characteristics and Ratings:

Voltage (AC or DC) . . . . .	6.3 ± 0.6	volts
Current at heater volts = 6.3 . . . . .	0.9	amp
Peak heater-cathode voltage (Each unit):		
Heater negative with respect to cathode . . . . .	200 max.	volts
Heater positive with respect to cathode . . . . .	200 <sup>a</sup> max.	volts

Direct Interelectrode Capacitances (Approx.):<sup>b</sup>

#### Beam Power Unit:

Grid No.1 to plate . . . . .	0.26	pf
Input: G <sub>1B</sub> to (K <sub>B</sub> +G <sub>3B</sub> , G <sub>2B</sub> , IS, H) . . . . .	11	pf
Output: P <sub>B</sub> to (K <sub>B</sub> +G <sub>3B</sub> , G <sub>2B</sub> , IS, H) . . . . .	12	pf


#### Pentode Unit:

G <sub>1P</sub> to P <sub>P</sub> . . . . .	0.034	pf
G <sub>3P</sub> to P <sub>P</sub> . . . . .	3.2	pf
G <sub>1P</sub> to (K <sub>P</sub> , G <sub>2P</sub> , G <sub>3P</sub> , IS, H) . . . . .	6.5	pf
G <sub>3P</sub> to (K <sub>P</sub> , G <sub>1P</sub> , G <sub>2P</sub> , P <sub>P</sub> , IS, H) . . . . .	7.5	pf
G <sub>1P</sub> to G <sub>3P</sub> . . . . .	0.24	pf
P <sub>B</sub> to P <sub>P</sub> . . . . .	0.12	pf

#### Mechanical:

Operating Position . . . . .	Any
Type of Cathodes . . . . .	Coated Unipotential
Maximum Overall Length . . . . .	2.625" ←
Seated Length . . . . .	2.000" to 2.250" ←
Diameter . . . . .	1.062" to 1.188"
Dimensional Outline (JEDEC 9-59) . . . . .	See <i>General Section</i>
Bulb . . . . .	T9
Base . . . . .	Small-Button Duodecar 12-Pin (JEDEC No. E12-70)
Basing Designation for BOTTOM VIEW . . . . .	12BU

- Pin 1 - Heater
- Pin 2 - Pentode Cathode
- Pin 3 - Pentode Grid No.1
- Pin 4 - Pentode Grid No.3
- Pin 5 - Internal Shield
- Pin 6 - Pentode Plate
- Pin 7 - Pentode Grid No.2
- Pin 8 - Beam Power Grid No.1
- Pin 9 - Beam Power Cathode,  
Beam Power Grid No.3
- Pin 10 - Beam Power Grid No.2
- Pin 11 - Beam Power Plate
- Pin 12 - Heater



<sup>a</sup> The dc component must not exceed 100 volts.  
<sup>b</sup> without external shield.

← Indicates a change.



# 6AL11

## Characteristics, Class A<sub>1</sub> Amplifier (Pentode Unit):

Plate Supply Voltage. . . . .	150	volts
Grid-No.3 . . . . .	<i>Connected to cathode at socket</i>	
Grid-No.2 Supply Voltage. . . . .	100	volts
Grid-No.1 . . . . .	<i>Connected to negative end of cathode resistor</i>	
Cathode Resistor. . . . .	560	ohms
Plate Resistance (Approx.). . . . .	0.15	megohm
Transconductance, Grid No.1 to Plate. . . . .	1000	μmhos
Transconductance, Grid No.3 to Plate. . . . .	400	μmhos
Plate Current . . . . .	1.3	ma
Grid-No.2 Current . . . . .	2.1	ma
Grid-No.1 Voltage (Approx.) for plate μa = 30 . . . . .	-4.5	volts
Grid-No.3 Voltage (Approx.) for plate μa = 50 . . . . .	-4.5	volts

### PENTODE UNIT — FM SOUND DETECTOR

#### Maximum Ratings, Design-Maximum Values:

Plate Voltage . . . . .	330 max.	volts
Grid-No.3 (Suppressor-Grid) Voltage . . . . .	28 max.	volts
Grid-No.2 (Screen-Grid) Supply Voltage. . . . .	330 max.	volts
Grid-No.2 Voltage . . . . .	<i>See Grid-No.2 Input Rating Chart at front of Receiving Tube Section</i>	

#### Grid-No.1 (Control-Grid) Voltage:

Positive-bias value . . . . .	0 max.	volts
Plate Dissipation . . . . .	1.7 max.	watts
Grid-No.2 Input:		

For grid-No.2 voltages up to 165 volts. . . . . 1.1 max. watts

For grid-No.2 voltages between

165 and 330 volts . . . . . *See Grid-No.2 Input Rating Chart at front of Receiving Tube Section*

### BEAM POWER UNIT — AMPLIFIER — Class A<sub>1</sub>

#### Maximum Ratings, Design-Maximum Values:

Plate Voltage . . . . .	275 max.	volts
Grid-No.2 (Screen-Grid) Voltage . . . . .	275 max.	volts
Plate Dissipation . . . . .	10 max.	watts
Grid-No.2 Input . . . . .	2 max.	watts

#### Typical Operation and Characteristics:

Plate Voltage . . . . .	250	volts
Grid-No.2 Voltage . . . . .	250	volts
Grid-No.1 (Control-Grid) Voltage. . . . .	-8	volts
Peak AF Grid-No.1 Voltage . . . . .	8	volts
Zero-Signal Plate Current . . . . .	35	ma
Max.-Signal Plate Current . . . . .	39	ma
Zero-Signal Grid-No.2 Current . . . . .	2.5	ma
Max.-Signal Grid-No.2 Current . . . . .	7	ma
Plate Resistance (Approx.). . . . .	0.1	megohm
Transconductance. . . . .	6500	μmhos
Load Resistance . . . . .	5000	ohms
Total Harmonic Distortion . . . . .	10	per cent
Max.-Signal Power Output. . . . .	4.2	watts

#### Maximum Circuit Values:

##### Grid-No.1-Circuit Resistance:


For fixed-bias operation. . . . . 0.25 max. megohm

For cathode-bias operation. . . . . 0.5 max. megohm



# 6AL11

## AVERAGE CHARACTERISTICS Beam Power Unit

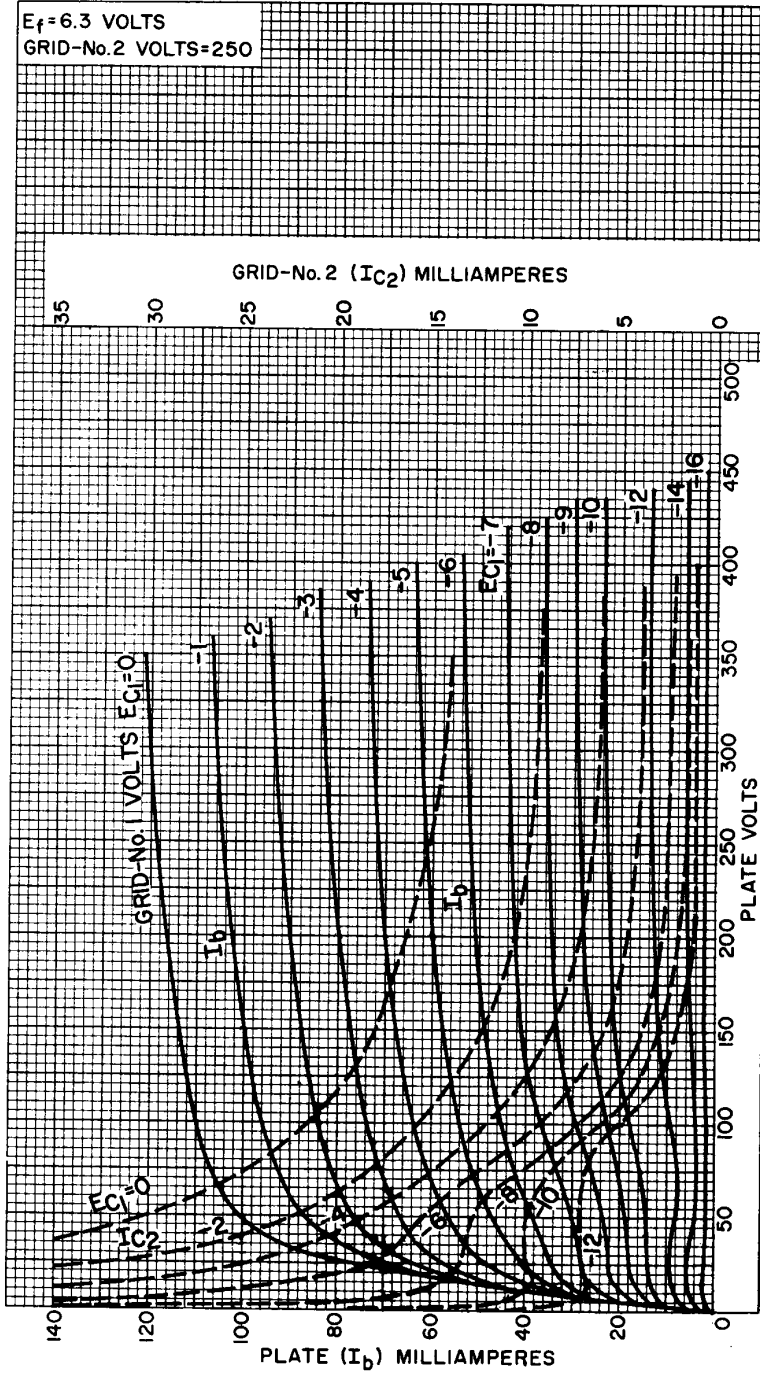


RADIO CORPORATION OF AMERICA  
Electronic Components and Devices  
Harrison, N. J.

DATA 2  
8-64


# 6AL11

## OPERATION CHARACTERISTICS Beam Power Unit

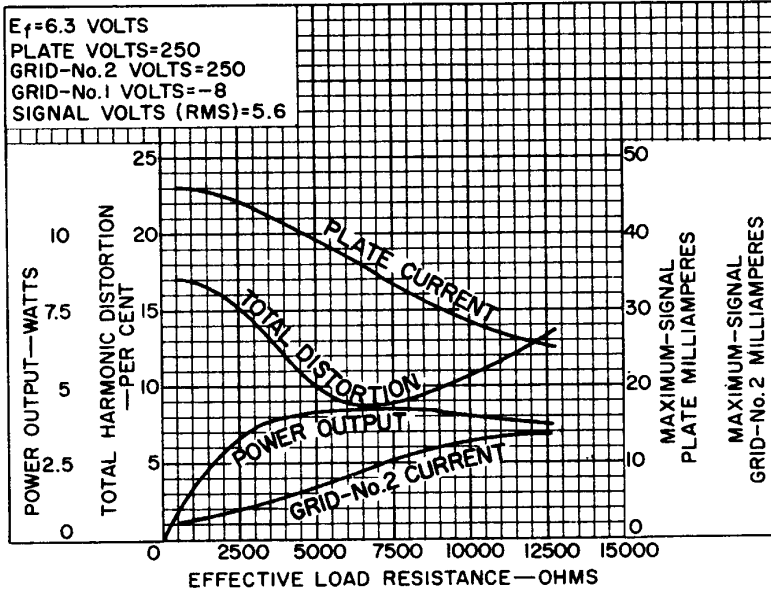

92CS-12663

## AVERAGE CHARACTERISTICS Pentode Unit

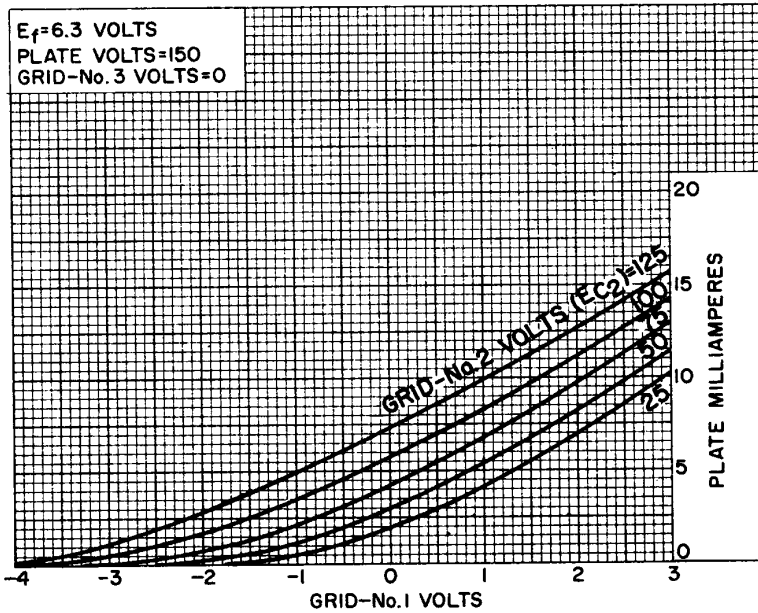


92CS-12670



# 6AL11

## AVERAGE PLATE CHARACTERISTICS Pentode Unit

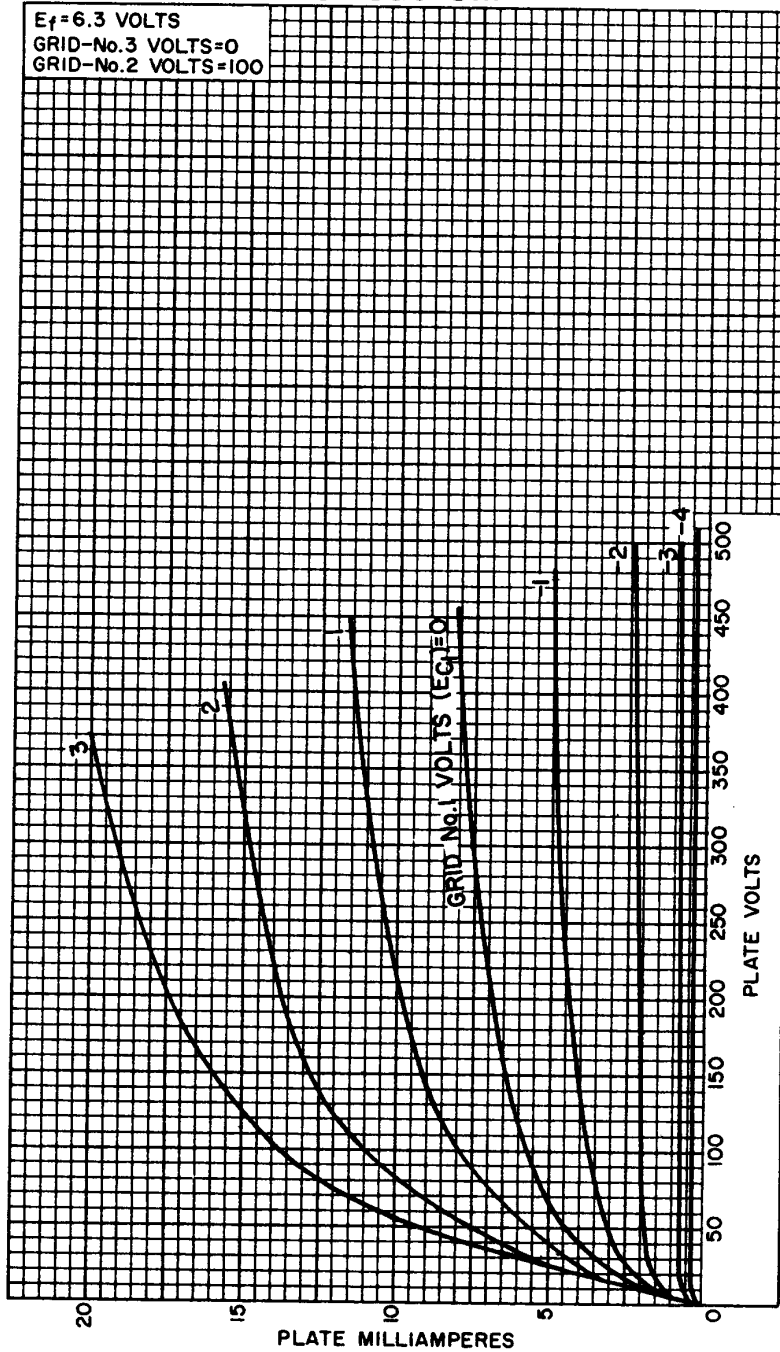

92CM-12671




RADIO CORPORATION OF AMERICA  
Electronic Components and Devices  
Harrison, N. J.

DATA 3  
8-64

# 6AL11

## AVERAGE PLATE CHARACTERISTICS Pentode Unit

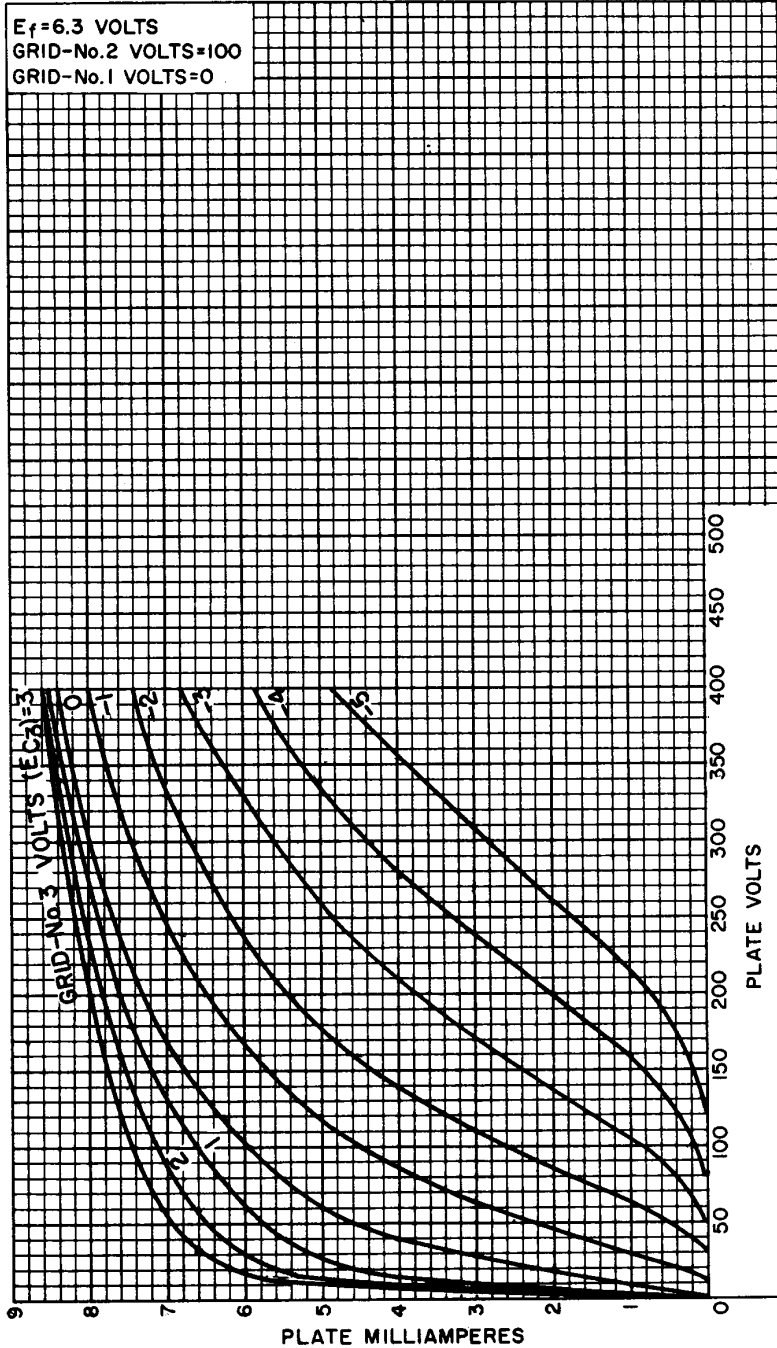

92CM-12672

RADIO CORPORATION OF AMERICA  
Electronic Components and Devices  
Harrison, N. J.

