

Silicon PNP Power Transistors

2N6436 2N6437 2N6438

DESCRIPTION

- With TO-3 package
- High DC current gain
- Fast switching times
- Low collector saturation voltage
- Complement to type 2N6338~2N6341

APPLICATIONS

- For use in industrial-military power amplifier and switching circuit applications

PINNING(see Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

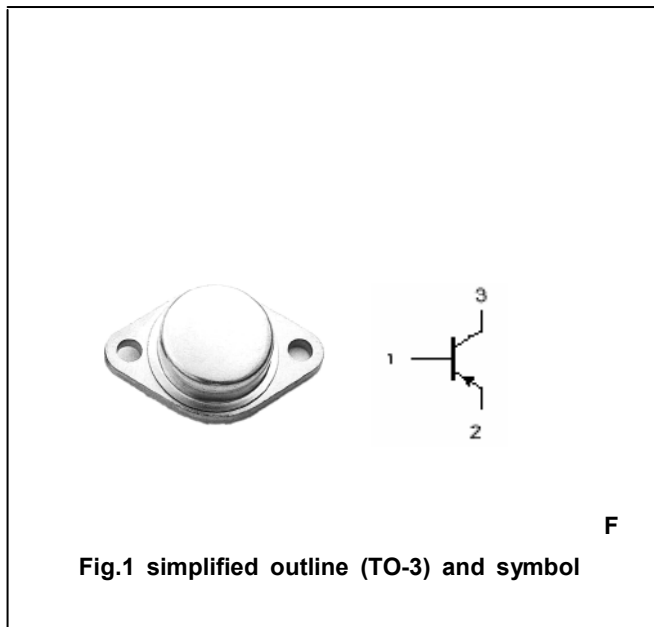


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings(Ta=□)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	2N6436	-100	V
		2N6437	-120	
		2N6438	-140	
V _{CEO}	Collector-emitter voltage	2N6436	-80	V
		2N6437	-100	
		2N6438	-120	
V _{EBO}	Emitter-base voltage	Open collector	-6	V
I _C	Collector current		-25	A
I _{CM}	Collector current-peak		-50	A
I _{BC}	Base current		-10	A
P _D	Total power dissipation	T _C =25□	200	W
T _j	Junction temperature		200	□
T _{stg}	Storage temperature		-65~200	□

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
R _{th j-c}	Thermal resistance junction to case	0.875	□/W

Silicon PNP Power Transistors

2N6436 2N6437 2N6438

CHARACTERISTICS

T_j=25 °C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(SUS)CEO}	Collector-emitter sustaining voltage	2N6436	-80			V
		2N6437	-100			
		2N6438	-120			
V _{CEsat-1}	Collector-emitter saturation voltage	I _C =-10A; I _B =-1.0A			-1.0	V
V _{CEsat-2}	Collector-emitter saturation voltage	I _C =-25A; I _B =-2.5A			-1.8	V
V _{BE sat-1}	Base-emitter saturation voltage	I _C =-10A; I _B =-1.0A			-1.8	V
V _{BE sat-2}	Base-emitter saturation voltage	I _C =-25A; I _B =-2.5A			-2.5	V
I _{CEX}	Collector cut-off current	V _{CE} =Rated V _{CEO} ; V _{EB} =-1.5V T _C =150 °C			-10 -1.0	μA mA
I _{CBO}	Collector cut-off current	V _{CB} =Rated V _{CB} ; I _E =0			-10	μA
I _{CEO}	Collector cut-off current	2N6436				μA
		2N6437				
		2N6438				
I _{EBO}	Emitter cut-off current	V _{EB} =-6V; I _C =0			-100	μA
h _{FE-1}	DC current gain	I _C =-0.5A; V _{CE} =-2V	30			
h _{FE-2}	DC current gain	I _C =-10A; V _{CE} =-2V	20		120	
h _{FE-3}	DC current gain	I _C =-25A; V _{CE} =-2V	12			
C _{OB}	Output capacitance	I _E =0; V _{CB} =-10V; f=1MHz			700	pF
f _T	Transition frequency	I _C =-1A; V _{CE} =-10V; f=10MHz	40			MHz

Silicon PNP Power Transistors

2N6436 2N6437 2N6438

PACKAGE OUTLINE



Fig.2 outline dimensions