

SINAMICS S120 drive system

Booksize format for Line and Motor Modules

Active Line Modules in booksize format

Overview



The self-commutated feed/feedback units (with IGBTs in infeed and regenerative feedback directions) generate a regulated DC link voltage. This means that the connected Motor Modules are decoupled from the line voltage. Line voltage fluctuations within the permissible supply tolerances have no effect on the motor voltage. Active Line Modules are designed for connection to grounded-neutral (TN, TT) and non-grounded (IT) supply systems.

The DC link is pre-charged via integrated precharging resistors.

In order to operate an Active Line Module, it is absolutely essential to use the appropriate Active Interface Module or matching line reactor.

Design

The Active Line Modules in booksize format feature the following interfaces as standard:

- 1 line connection via screw-type terminals
- 1 connection for the 24 V DC electronics power supply via the 24 V terminal adapter included in the scope of supply
- 1 DC link connection via integrated DC link busbars
- 3 DRIVE-CLiQ sockets
- 2 PE (protective earth) connections

The status of the Active Line Modules is indicated via two multi-color LEDs.

On the 100 mm (3.94 in) wide Active Line Module, the shield for the power supply cable can be connected to the integrated shield connection plate via a shield connection terminal or tube clip, e.g. Weidmüller type KLBÜ CO 4. The shield connection terminal must not be used for strain relief. Shield connection plates are available for the 150 mm (5.91 in), 200 mm (7.87 in) and 300 mm (11.81 in) wide modules.

The signal cable shield can be connected to the Line Module by means of a shield connection terminal, e.g. type KLBÜ 3-8 SC by Weidmüller.

Design (continued)

The scope of supply of the Active Line Modules includes:

- DRIVE-CLiQ cable for connection to the Control Unit for drive control on the immediate left
- DRIVE-CLiQ cable (length depends on module width) to connect Active Line Module to adjacent Motor Module
- 2 blanking plugs for sealing unused DRIVE-CLiQ sockets
- Jumper for connecting the 24 V DC busbar to the adjacent Motor Module
- 24 V terminal adapter
- Connector X21 for digital inputs
- Fan insert for the 80 kW (100 HP) and 120 kW (150 HP) Active Line Modules is supplied with the modules. The voltage for the fan insert is supplied by the Active Line Module.
- 1 set of warning signs in foreign languages

Integration

The Active Line Module communicates via DRIVE-CLiQ with the CU320 Control Unit, SINUMERIK 802D sl, SINUMERIK 840D sl with NCU 710.1/NCU 720.2/NCU 730.1/NCU 730.2 PN or with the Numeric Control Extensions NX10/NX15 and receives its control information from these sources.

SINAMICS S120 drive system

Booksized format for Line and Motor Modules

Active Line Modules in booksized format

Technical specifications

General technical specifications

Line connection voltage Up to 2000 m (6562 ft) above sea level	380 ... 480 V 3 AC ± 10% (-15% < 1 min)
Line frequency	47 ... 63 Hz
Power factor	
• Active mode	
- Fundamental power factor ($\cos \varphi_1$)	1.0 (factory setting), can be altered by input of a reactive current setpoint
- Total (λ)	1.0 (factory setting)
• Smart mode	
- Fundamental mode	> 0.96
- Total	0.65 ... 0.90
DC link voltage V_d	In Active Mode, the DC link voltage is regulated and can be adjusted as a voltage decoupled from the line voltage. In Smart Mode, the DC link voltage is regulated in proportion to the line voltage to the mean rectified line voltage value. Factory setting for DC link voltage: 380 ... 400 V 3 AC: 600 V (Active Mode) 400 ... 415 V 3 AC: 625 V (Active Mode) 416 ... 480 V 3 AC: 1.35 x line voltage (Smart Mode)
Electronics power supply	24 V DC -15%/+20%
Radio interference suppression	
• Active Line Module 16 kW (18 HP) and 36 kW (40 HP)	
- Standard (Active Line Module + line reactor)	no radio interference suppression
- with line filter package	Class A1 to EN 55011 and Category C2 to EN 61800-3
• Active Line Module 55 kW (60 HP), 80 kW (100 HP) and 120 kW (150 HP)	
- Standard (Active Line Module + Active Interface Module)	Category C3 to EN 61800-3 up to 350 m (1148 ft) total cable length
- with Basic Line Filter	Class A1 to EN 55011 and Category C2 to EN 61800-3 up to 350 m (1148 ft) total cable length Category C3 to EN 61800-3 from 350 m to 1000 m (1148 ft to 3281 ft) total cable length

General technical specifications (continued)

Type of cooling	Internal air cooling, power units with increased air cooling provided by integrated fan Built-on fan (with 80 kW (100 HP) and 120 kW (150 HP) Active Line Modules).
Permissible ambient or coolant temperature (air) in operation for line-side components, Line Modules and Motor Modules	0 ... 40 °C (32 ... 104 °F) without derating, > 40 ... 55 °C (104 ... 131 °F), see derating characteristics
Installation altitude	Up to 1000 m (3281 ft) above sea level without derating, > 1000 ... 4000 m (3281 ... 13124 ft) above sea level, see derating characteristics
Conformity	CE (low-voltage and EMC directives)
Approvals	cULus (File No.: E192450)

SINAMICS S120 drive system

Booksize format for Line and Motor Modules

Active Line Modules in booksize format

Technical specifications (continued)

Line voltage 380 ... 480 V 3 AC

Order No.

• Internal air cooling	6SL3130-7TE21-6AA3	6SL3130-7TE23-6AA3	6SL3130-7TE25-5AA3	6SL3130-7TE28-0AA3	6SL3130-7TE31-2AA3
• External air cooling	6SL3131-7TE21-6AA3	6SL3131-7TE23-6AA3	6SL3131-7TE25-5AA3	6SL3131-7TE28-0AA3	6SL3131-7TE31-2AA3

Product name

Active Line Modules in booksize format

Feed/feedback power

• Rated power P_{rated} - with 380 V 3 AC - with 460 V 3 AC ⁴⁾	kW (HP)	16 (18)	36 (40)	55 (60)	80 (100)	120 (150)
• for S6 duty (40%) P_{S6}	kW	21	47	71	106	158
• P_{max}	kW	35	70	91	131	175
• P_{max} , maximum	kW	27	60	92	134	200

DC link current

• at 600 V DC	V	35	79	121	176	244
• for S6 duty (40%)	A	59	117	152	218	292

Input current

• Rated current at 380 V 3 AC	A	26	58	88	128	192
• for S6 duty (40%)	A	35	79	121	176	244
• Maximum	A	59	117	152	195	292

Current requirement

24 V DC electronics power supply, max.	A	1.1	1.5	1.9	2.0	2.5
--	---	-----	-----	-----	-----	-----

Current capacity

• of 24 V DC busbars	A	20	20	20	20	20
• DC link busbars	A	100	200	200	200	200

DC link capacitance

• Smart Line Module	μF	710	1410	1880	2820	3995
• Drive group, max.	μF	20000	20000	20000	20000	20000

Efficiency η

0.98	0.98	0.98	0.98	0.98	0.98
------	------	------	------	------	------

Power loss¹⁾

• with internal air cooling	kW	0.26	0.63	0.90	1.35	2.20
• with external air cooling int./ext.	kW	0.06/0.2	0.135/0.495	0.2/0.7	0.305/1.045	0.49/1.71

Cooling air requirement

m^3/s (ft^3/s)	0.016 (0.565)	0.031 (1.095)	0.044 (1.554)	0.144 (5.085)	0.144 (5.085)
----------------------	---------------	---------------	---------------	---------------	---------------

Sound pressure level

dB (A)	< 60	< 65	< 60	< 75	< 75
--------	------	------	------	------	------

Line connection

U1, V1, W1	Screw-type terminals (X1)	M6 screw studs for ring terminal ends (X1)	M8 screw studs for ring terminal ends (X1)	M8 screw studs for ring terminal ends (X1)	M8 screw studs for ring terminal ends (X1)
------------	---------------------------	--	--	--	--

• Conductor cross-section	mm ²	2.5 ... 10	2.5 ... 50	2.5 ... 95, 2 x 35	2.5 ... 120, 2 x 50
---------------------------	-----------------	------------	------------	--------------------	---------------------

Shield connection

Integrated into the connector	See Accessories	See Accessories	See Accessories	See Accessories
-------------------------------	-----------------	-----------------	-----------------	-----------------

PE connection

On housing with M5 screw	On housing with M6 screw	On housing with M6 screw	On housing with M8 screw	On housing with M8 screw
--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

Cable length, max.

(total of all motor cables and DC link)

• Shielded	m (ft)	350 ³⁾ (1150)	350 ³⁾ (1150)	1000 (3281)	1000 (3281)	1000 (3281)
• Unshielded	m (ft)	560 ³⁾ (1840)	560 ³⁾ (1840)	1500 (4922)	1500 (4922)	1500 (4922)

Degree of protection

IP20	IP20	IP20	IP20	IP20
------	------	------	------	------

Dimensions

• Width	mm (in)	100 (3.94)	150 (5.91)	200 (7.87)	300 (11.81)	300 (11.81)
• Height	mm (in)	380 (14.96)	380 (14.96)	380 (14.96)	380, (14.96) with fan ²⁾ : 629 (24.8)	380, (14.96) with fan ²⁾ : 629 (24.8)

• Depth

- with internal air cooling	mm (in)	270 (10.63)	270 (10.63)	270 (10.63)	270 (10.63)
- with external air cooling on/behind mounting surface	mm (in)	226/66.5 (8.9/2.6)	226/71 (8.9/2.8)	226/92 (8.9/3.6)	226/82 (8.9/3.2)

Weight

• with internal air cooling, approx.	kg (lb)	7 (15)	10.3 (23)	17 (38)	23 (51)
• with external air cooling, approx.	kg (lb)	8.8 (19)	13.8 (30)	18.5 (41)	27.7 (61)

• with external air cooling, approx.	kg (lb)	8.8 (19)	13.8 (30)	18.5 (41)	30.7 (68)
---	---------	----------	-----------	-----------	-----------

¹⁾ Power loss of Active Line Module at rated power without losses of 24 V DC electronics power supply.

²⁾ The fan is supplied with the Active Line Module and must be installed before the Active Line Module is commissioned.

³⁾ Max. cable lengths in conjunction with HFD line reactors, see derating characteristics.

⁴⁾ Nominal HP ratings are provided for ease of assigning components only. The Line Module power is dependent on the Motor Module loading and is to be dimensioned accordingly.

SINAMICS S120 drive system

Booksized format for Line and Motor Modules

Active Line Modules in booksized format

Selection and Ordering Data

Rated infeed power	Active Line Module in booksized format	
	Internal air cooling Order No.	External air cooling Order No.
Line voltage 380 ... 480 V 3 AC		
16 kW (18 HP)	6SL3130-7TE21-6AA3	6SL3131-7TE21-6AA3
36 kW (40 HP)	6SL3130-7TE23-6AA3	6SL3131-7TE23-6AA3
55 kW (60 HP)	6SL3130-7TE25-5AA3	6SL3131-7TE25-5AA3
80 kW (100 HP)	6SL3130-7TE28-0AA3	6SL3131-7TE28-0AA3
120 kW (150 HP)	6SL3130-7TE31-2AA3	6SL3131-7TE31-2AA3

Accessories

Designation	Order No.
Shield connection kit For Line Modules and Motor Modules in booksized format	
• 150 mm (5.91 in) wide for internal air cooling	6SL3162-1AF00-0AA1
• 150 mm (5.91 in) wide for external air cooling	6SL3162-1AF00-0BA0
• 200 mm (7.87 in) wide for internal air cooling	6SL3162-1AH01-0AA0
• 200 mm (7.87 in) wide for external air cooling	6SL3162-1AH01-0BA0
• 300 mm (11.81 in) wide for internal/external air cooling	6SL3162-1AH00-0AA0
DC link rectifier adapter For direct infeed of DC link voltage	
• Screw-type terminals 0.5 ... 10 mm ² for Line Modules and Motor Modules in booksized format with a width of 50 mm (1.97 in) or 100 mm (3.94 in)	6SL3162-2BD00-0AA0
• Screw-type terminals 35 ... 95 mm ² for Line Modules and Motor Modules in booksized format with a width of 150 mm, 200 mm and 300 mm (5.91 in, 7.87 in and 11.81 in)	6SL3162-2BM00-0AA0
DC link adapters (2 units) For multi-tier configuration Screw-type terminals 35 ... 95 mm ² For all Line Modules and Motor Modules in booksized format	6SL3162-2BM01-0AA0
24 V terminal adapter For all Line Modules and Motor Modules in booksized format	6SL3162-2AA00-0AA0
24 V jumper For connection of the 24 V busbars (for booksized format)	6SL3162-2AA01-0AA0
Warning signs in foreign languages This set of foreign language warning signs can be placed on top of the standard English or German signs. A set of signs is supplied with the units. One sign in each of the following languages is provided in each set: Chinese, Czech, Danish, Dutch, Finnish, French, Greek, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish and Turkish.	6SL3166-3AB00-0AA0


SINAMICS S120 drive system

Booksize format for Line and Motor Modules


Active Line Modules in booksize format

Characteristic curves


Overload capability

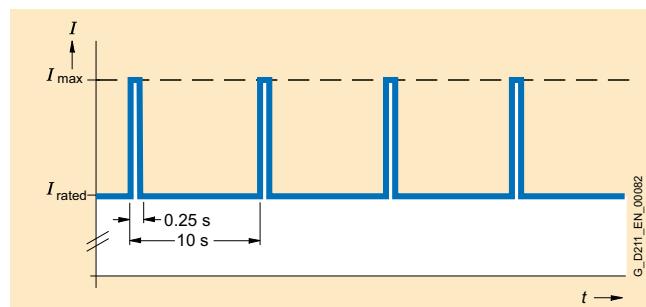


Derating characteristics

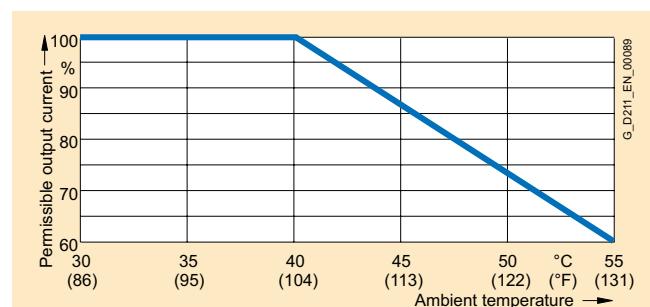



Duty cycle with previous load

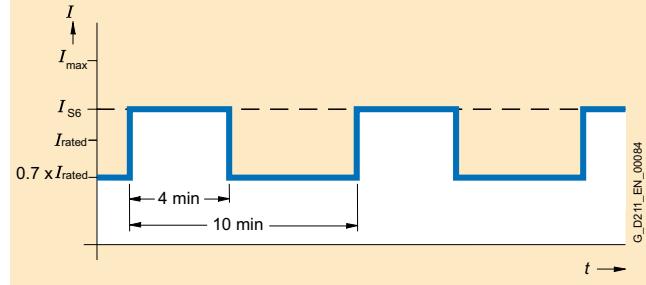


Output power dependent on ambient temperature

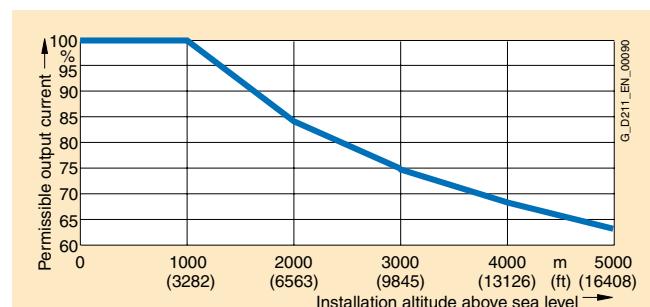

Output power dependent on installation altitude

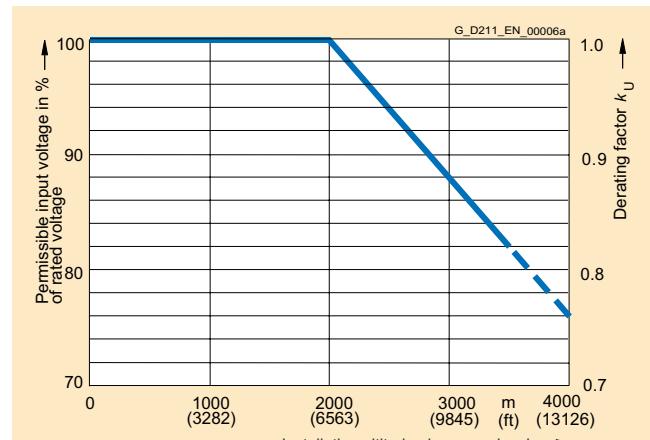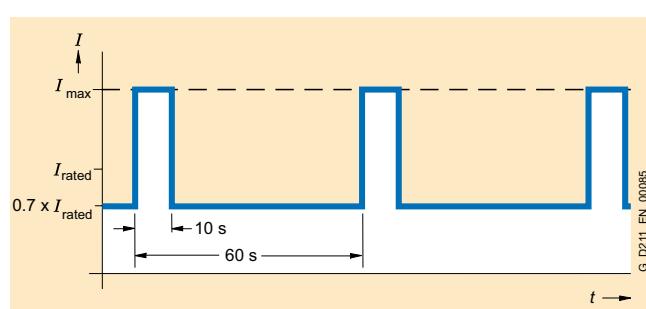

Voltage derating dependent on installation altitude

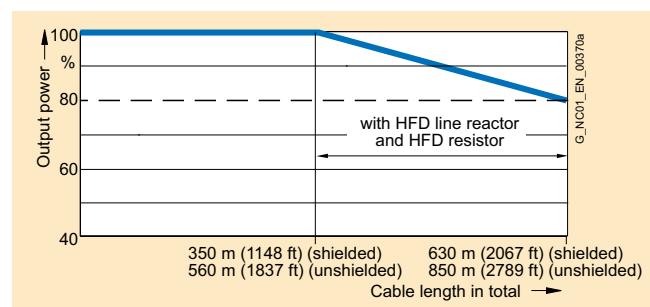

Output power with Active Line Module dependent on total cable length

SINAMICS S120 drive system

Booksized format for Line and Motor Modules

Active Line Modules in booksized format HF/HFD line reactors

Overview



Line reactors with HF properties are essential for operation of Active Line Modules. The use of other makes of line reactor can lead to malfunctions or irreparable damage to equipment.

The HFD line reactors must be used in combination with the HFD resistor (or alternatively the braking resistor Plus, see braking resistors for booksized format) when there are direct drives in the drive group, such as linear motors, torque motors, spindle motors as well as non-Siemens motors, or when resonant effects are to be expected. The risk of failures due to premature ageing of drive components can be reduced in this way.

Benefits

- Limitation of mains and HF harmonic effects
- Stores energy for boosting voltage for step-up converter mode at high frequency with Active Line Modules

Application

HF/HFD line reactors can be used for 400 V 3 AC -10% to 480 V 3 AC +10%; 50/60 Hz ±10%.

Selection and Ordering Data

Rated infeed power of the Active Line Module	Suitable for Active Line Module	HF line reactor
	Order No.	Order No.
Line voltage 380 ... 480 V 3 AC		
16 kW (18 HP)	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	6SN1111-0AA00-0BA1
36 kW (40 HP)	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3	6SN1111-0AA00-0CA1
55 kW (60 HP)	6SL3130-7TE25-5AA3 6SL3131-7TE25-5AA3	6SN1111-0AA00-0DA1
80 kW (100 HP)	6SL3130-7TE28-0AA3 6SL3131-7TE28-0AA3	6SN1111-0AA00-1EA0
120 kW (150 HP)	6SL3130-7TE31-2AA3 6SL3131-7TE31-2AA3	6SL3000-0DE31-2BA0

Technical specifications

Line voltage 380 ... 480 V 3 AC					
Order No.	6SN1111-0AA00-0BA1	6SN1111-0AA00-0CA1	6SN1111-0AA00-0DA1	6SN1111-0AA00-1EA0	6SL3000-0DE31-2BA0
Product name	HF line reactor				
Rated current	A	30	67	103	150
Power loss	kW	0.17	0.25	0.35	0.45
Line/load connection 1U1, 1V1, 1W1/ 1U2, 1V2, 1W2	Screw-type terminals 16 mm ²	Screw-type terminals 35 mm ²	Screw-type terminals 70 mm ²	M10 connection lugs	M10 connection lugs
PE connection	Screw-type terminals 16 mm ²	Screw-type terminals 35 mm ²	Screw-type terminals 70 mm ²	M10 connection lugs	M10 connection lugs
Degree of protection	IP20	IP20	IP20	IP00	IP00
Dimensions					
• Width	mm (in)	150 (5.91)	150 (5.91)	150 (5.91)	225 (8.86)
• Height	mm (in)	125 (4.92)	217 (8.54)	277 (10.91)	220 (8.66)
• Length	mm (in)	330 (12.99)	330 (12.99)	330 (12.99)	480 (18.90)
Weight, approx.	kg (lb)	13 (28.67)	20 (44.10)	27 (59.54)	35 (77.18)
Approvals	cURus (File No.: E257852)	cURus (File No.: E257852)	cURus (File No.: E257852)	cURus (File No.: E257852)	cURus (File No.: E257852)
Suitable for Active Line Module in booksized format	Type	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3	6SL3130-7TE25-5AA3 6SL3131-7TE25-5AA3	6SL3130-7TE28-0AA3 6SL3131-7TE28-0AA3
• Rated infeed power of the Active Line Module	kW (HP)	16 (18)	36 (40)	55 (60)	80 (100)
					120 (150)

SINAMICS S120 drive system

Booksize format for Line and Motor Modules

**Active Line Modules in booksize format
HF/HFD line reactors**

Technical specifications (continued)

Line voltage 380 ... 480 V 3 AC					
Order No.	6SL3000-0DE21-6AA0	6SL3000-0DE23-6AA0	6SL3000-0DE25-5AA0	6SL3000-0DE28-0AA0	6SL3000-0DE31-2AA0
Product name	HFD line reactor				
Rated current	A	30	67	103	150
Power loss	kW	0.17	0.25	0.35	0.45
Line/load connection 1U1, 1V1, 1W1/ 1U2, 1V2, 1W2	Screw-type terminals 16 mm ²	Screw-type terminals 35 mm ²	Screw-type terminals 70 mm ²	M10 connection lugs	M10 connection lugs
PE connection	Screw-type terminals 16 mm ²	Screw-type terminals 35 mm ²	Screw-type terminals 70 mm ²	M10 connection lugs	M10 connection lugs
Degree of protection	IP20	IP20	IP20	IP00	IP00
Dimensions					
• Width	mm (in)	150 (5.91)	150 (5.91)	150 (5.91)	200 (7.87)
• Height	mm (in)	125 (4.92)	235 (9.25)	290 (11.42)	210 (8.27)
• Length	mm (in)	330 (12.99)	330 (12.99)	330 (12.99)	380 (14.96)
Weight, approx.	kg (lb)	13 (29)	21 (46)	27 (60)	37 (82)
Suitable for Active Line Module in booksize format	Type	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3	6SL3130-7TE25-5AA3 6SL3131-7TE25-5AA3	6SL3130-7TE28-0AA3 6SL3131-7TE28-0AA3
• Rated infeed power of the Active Line Module	kW (HP)	16 (18)	36 (40)	55 (60)	80 (100)
					120 (150)

Selection and Ordering Data

Rated infeed power of the Active Line Module	Suitable for Active Line Module	HFD line reactor
	Order No.	Order No.
Line voltage 380 ... 480 V 3 AC		
16 kW (18 HP)	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	6SL3000-0DE21-6AA0
36 kW (40 HP)	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3	6SL3000-0DE23-6AA0
55 kW (60 HP)	6SL3130-7TE25-5AA3 6SL3131-7TE25-5AA3	6SL3000-0DE25-5AA0
80 kW (100 HP)	6SL3130-7TE28-0AA3 6SL3131-7TE28-0AA3	6SL3000-0DE28-0AA0
120 kW (150 HP)	6SL3130-7TE31-2AA3 6SL3131-7TE31-2AA3	6SL3000-0DE31-2AA0

HFD line reactor

For vibration damping, the HFD line reactor must be used in combination with the HFD resistor.

Technical specifications

Order No.	6SL3100-1BE21-3AA0
Product name	HFD resistor 15R 800 W for HFD line reactor only
Power	0.8 kW
Dimensions	
• Width	270 mm (10.6 in)
• Height	75 mm (2.95 in)
• Depth	555 mm (21.8 in)
Degree of protection to EN 60529 (IEC 60529)	IP51
Connecting cable Included in scope of supply	5 m (16.4 ft)

Selection and Ordering Data

Designation	Order No.
HFD resistor 15R 800 W	6SL3100-1BE21-3AA0
Suitable for all HFD line reactors	

SINAMICS S120 drive system

Booksized format for Line and Motor Modules

Active Line Modules in booksized format

Line filters

Overview



In plants which have strict EMC requirements, line filters work together with line reactors to restrict the conducted interference emanating from the power modules to the limit values of Class A1 as defined in EN 55011 and Category C2 as defined in EN 61800-3. Line filters are suited only for direct connection to TN (grounded) systems.

Optional line filter ranges that are coordinated with the power range are available for the SINAMICS S120 drive system:

- Wideband Line Filters
- Basic Line Filters

These line filters differ with regard to the frequency range in which they reduce the conducted emissions.

Note:

According to product standard IEC 61800-3 or EN 50370-1, radio interference suppression commensurate with the relevant operating conditions must be provided and is a legal requirement in the EU (EMC Directive). Line filters and line reactors are required for this purpose. The use of filters of other makes can lead to limit value violations, resonance, overvoltages and irreparable damage to motors or other equipment. The machine manufacturer must provide verification that the machinery to be operated with the drive products and the installed suppression elements, e.g. line filters, are CE/EMC-compliant before the machines are approved for delivery.

SINAMICS S120 drive system

Booksize format for Line and Motor Modules

**Active Line Modules in booksize format
Line filters – Wideband Line Filters/Adapter set**

Overview



The damping characteristics of Wideband Line Filters for 16 kW and 36 kW (18 HP and 40 HP) Active Line Modules not only conform with the requirements of EMC standards for the frequency range of 150 kHz to 30 MHz but also include low frequencies of 2 kHz and above. As a result, these line filters have an extended functional range, allowing a certain independence with respect to the machine installation location in cases where the line properties are generally unknown (e.g., line impedance).

Line filter packages are available for Active Line Modules in booksize format. These line filter packages that must be installed by the customer comprise a Wideband Line Filter and an HF/HFD commutating reactor.

Note:

Radio interference suppression is required in accordance with EMC standards (product standard IEC 61800-3, EN 61800-3; VDE 0160 T 100). In the EU, this is mandatory by law. The line filter packages consisting of commutating reactor and line filter are required for this purpose. The Wideband Line Filter with the commutating reactor forms a unit specially matched to the step-up converter principle of the Active Line Modules. Use of other filters can lead to exceeding of limit values, resonances, overvoltages and irreparable damage to motor or other equipment.

Technical specifications

Line voltage 380 ... 480 V 3 AC

Order No.	6SL3000-0FE21-6AA0 6SL3000-0FE23-6AA0 6SL3000-0FE25-5AA0 6SL3000-0FE28-0AA0 6SL3000-0FE31-2AA1				
Product name	Wideband Line Filter included in each line filter package				
Rated current	A	30	67	103	150
Power loss	kW	0.07	0.09	0.11	0.15
Line/load connection	L1, L2, L3/U, V, W	Screw-type terminals 10 mm ²	Screw-type terminals 50 mm ²	Screw-type terminals 50 mm ²	Screw-type terminals 95 mm ² M10 connection lugs
PE connection	On housing with M5 bolt	On housing with M8 bolt	On housing with M8 bolt	On housing with M8 bolt	On housing with M8 bolt
Degree of protection	IP20	IP20	IP20	IP20	IP00
Dimensions					
• Width	mm (in)	130 (5.12)	130 (5.12)	130 (5.12)	200 (7.87)
• Height	mm (in)	480 (18.9)	480 (18.9)	480 (18.9)	480 (18.9)
• Depth	mm (in)	150 (5.91)	245 (9.65)	260 (10.24)	260 (10.24)
Weight, approx.	kg (lb)	9 (20)	16 (35)	19 (42)	22 (49)
Approvals	cURus	cURus	cURus	cURus	cURus
Suitable for Active Line Module in booksize format	Type	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3	6SL3130-7TE25-5AA3 6SL3131-7TE25-5AA3	6SL3130-7TE28-0AA3 6SL3131-7TE28-0AA3
• Rated infeed power of the Active Line Module	kW (HP)	16 (18)	36 (40)	55 (60)	80 (100)
					120 (150)

SINAMICS S120 drive system

Booksized format for Line and Motor Modules

Active Line Modules in booksized format Line filters – Wideband Line Filters/Adapter set

Selection and Ordering Data

Line filters for Active Line Modules in booksized format should be ordered in combination with the appropriate line reactor as a line filter package. The order number for the line filter package includes the Wideband Line Filter and the line reactor.

Rated infeed power of the Active Line Module	Suitable for Active Line Module	HF line filter package
	Order No.	Wideband Line Filter and HF line reactor
Line voltage 380 ... 480 V 3 AC		
16 kW (18 HP)	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	6SL3000-0FE21-6AA0
36 kW (40 HP)	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3	6SL3000-0FE23-6AA0
55 kW (60 HP)	6SL3130-7TE25-5AA3 6SL3131-7TE25-5AA3	6SL3000-0FE25-5AA0
80 kW (100 HP)	6SL3130-7TE28-0AA3 6SL3131-7TE28-0AA3	6SL3000-0FE28-0AA0
120 kW (150 HP)	6SL3130-7TE31-2AA3 6SL3131-7TE31-2AA3	6SL3000-0FE31-2AA1

Rated infeed power of the Active Line Module	Suitable for Active Line Module	HFD line filter package
	Order No.	Wideband Line Filter and HFD line reactor
Line voltage 380 ... 480 V 3 AC		
16 kW (18 HP)	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	6SL3000-0FE21-6BA0
36 kW (40 HP)	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3	6SL3000-0FE23-6BA0
55 kW (60 HP)	6SL3130-7TE25-5AA3 6SL3131-7TE25-5AA3	6SL3000-0FE25-5BA0
80 kW (100 HP)	6SL3130-7TE28-0AA3 6SL3131-7TE28-0AA3	6SL3000-0FE28-0BA0
120 kW (150 HP)	6SL3130-7TE31-2AA3 6SL3131-7TE31-2AA3	6SL3000-0FE31-2BA0

Accessories



Line filter package assembled with an adapter set

The adapter sets for booksized format units are designed for very compact assembly. They enable line filters and line reactors to be installed compactly one above the other in the control cabinet.

Selection and Ordering Data

Active Line Module power output	Suitable for HF line filter package	Adapter set
	Order No.	Order No.
Line voltage 380 ... 480 V 3 AC		
16 kW (18 HP)	6SL3000-0FE21-6AA0	6SL3060-1FE21-6AA0
36 kW (40 HP)	6SL3000-0FE23-6AA0	6SN1162-0GA00-0CA0

SINAMICS S120 drive system

Booksize format for Line and Motor Modules

**Active Line Modules in booksize format
Basic Line Filters**

Overview



Basic Line Filters are designed for use on machines on which conducted interference emissions in the frequency range between 150 kHz and 30 MHz need to be damped in accordance with the requirements of CE EMC legislation.

The use of Basic Line Filters is subject to the following general conditions:

- The machine/system must only be used in industrial power systems
- No. of axes <12
- Total cable length <150 m (492 ft)
- The machine manufacturer (OEM) must have the CE conformity of the machine/system confirmed by an accredited EMC test laboratory (e.g. by EPCOS; e-mail: emv.labor@epcos.com).

Technical specifications

Line voltage 380 ... 480 V 3 AC			
Order No.	6SL3000-0BE21-6DA0	6SL3000-0BE23-6DA0	6SL3000-0BE25-5DA0
Product name	Basic Line Filter		
Rated current	A	36	65
Power loss	kW	0.006	0.010
Line/load connection L1, L2, L3/U, V, W • Conductor cross-section	mm ²	Screw-type terminals 10	Screw-type terminals 35
PE connection		On housing with M6 screw stud	On housing with M6 screw stud
Degree of protection		IP20	IP20
Dimensions			
• Width	mm (in)	50 (1.97)	75 (2.95)
• Height	mm (in)	420 (16.54)	420 (16.54)
• Depth	mm (in)	226 (8.9)	226 (8.9)
Weight, approx.	kg (lb)	5 (11)	6.5 (14)
Approvals		cURus (File No.: E70122)	cURus (File No.: E70122)
Suitable for Active Line Module in booksize format	Type	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3
• Rated infeed power of the Active Line Module	kW (HP)	16 (18)	36 (40)
			55 (60)

Selection and Ordering Data

Rated infeed power of the Active Line Module	Suitable for Active Line Module	Basic Line Filter
	Order No.	Order No.
Line voltage 380 ... 480 V 3 AC		
16 kW (18 HP)	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	6SL3000-0BE21-6DA0
36 kW (40 HP)	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3	6SL3000-0BE23-6DA0
55 kW (60 HP)	6SL3130-7TE25-5AA3 6SL3131-7TE25-5AA3	6SL3000-0BE25-5DA0

More information

You must follow the instructions in the Equipment Manual when using Basic Line Filters in conjunction with 16 kW to 55 kW (18 HP to 60 HP) Active Line Modules: SINAMICS S120 – Power units in booksize format.

SINAMICS S120 drive system

Booksized format for Line and Motor Modules

Active Line Modules in booksized format Recommended line-side components

Overview

Suitable line-side power components are assigned depending on the power rating of the Active Line Modules.

The tables below list recommended components.

Further information about the main contactors, switch disconnectors, fuses and circuit-breakers specified in the tables can be found in Catalogs LV 1, LV 1 T.

Assignment of line-side power components to Active Line Modules in booksized format

Rated infeed power	Assignment to Active Line Module	Main contactor	Output interface for main contactor	Main switch	Leading auxiliary circuit switch for main switch
		Type	Order No.	Order No.	Order No.

Line voltage 380 ... 480 V 3 AC

16 kW (18 HP)	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	3RT1035-...	3TX7004-1LB00	3LD2504-0TK51	3LD9200-5B
36 kW (40 HP)	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3	3RT1045-...	3TX7004-1LB00	3LD2704-0TK51	3LD9200-5B
55 kW (60 HP)	6SL3130-7TE25-5AA3 6SL3131-7TE25-5AA3	3RT1054-...	3TX7004-1LB00	3KA5330-1EE01	3KX3552-3EA01
80 kW (100 HP)	6SL3130-7TE28-0AA3 6SL3131-7TE28-0AA3	3RT1056-...	3TX7004-1LB00	3KA5330-1EE01	3KX3552-3EA01
120 kW (150 HP)	6SL3130-7TE31-2AA3 6SL3131-7TE31-2AA3	3RT1065-...	3TX7004-1LB00	3KA5730-1EE01	3KX3552-3EA01

Rated infeed power	Assignment to Active Line Module	Circuit-breaker	Fuse switch disconnector	Switch disconnector with fuse holders	Leading auxiliary switch for switch disconnector with fuse holders
		Type	Order No.	Order No.	Order No.

Line voltage 380 ... 480 V 3 AC

16 kW (18 HP)	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	3RV1031-4FA10	3NP4010-0CH01	3KL5030-1EB01	3KX3552-3EA01
36 kW (40 HP)	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3	3RV1041-4LA10	3NP4010-0CH01	3KL5230-1EB01	3KX3552-3EA01
55 kW (60 HP)	6SL3130-7TE25-5AA3 6SL3131-7TE25-5AA3	3VL2712-3DC33-0AA0	3NP4270-0CA01	3KL5530-1EB01	3KX3552-3EA01
80 kW (100 HP)	6SL3130-7TE28-0AA3 6SL3131-7TE28-0AA3	3VL2716-3DC33-0AA0	3NP4270-0CA01	3KL5530-1EB01	3KX3552-3EA01
120 kW (150 HP)	6SL3130-7TE31-2AA3 6SL3131-7TE31-2AA3	3VL3725-3DC36-0AA0	3NP5360-0CA00	3KL5730-1EB01	3KX3552-3EA01

Rated infeed power	Assignment to Active Line Module	NEOZED fuse (gL/gG)		DIAZED fuse (gL/gG)		LVHRC fuse (gL/gG)		UL/CSA fuse, Class J Available from: Ferraz Shawmut http://www.ferrazshawmut.com			
		Order No.	Rated current	Size	Order No.	Rated current	Size	Order No.	Rated current	Size	Reference No.

Line voltage 380 ... 480 V 3 AC

16 kW (18 HP)	6SL3130-7TE21-6AA3 6SL3131-7TE21-6AA3	5SE2335	35 A	D02	5SB411	35 A	DIII	3NA3814	35 A	000	AJT35	35 A	27 x 60
36 kW (40 HP)	6SL3130-7TE23-6AA3 6SL3131-7TE23-6AA3	-			5SC211	80 A	DIVH	3NA3824	80 A	000	AJT80	80 A	29 x 117
55 kW (60 HP)	6SL3130-7TE25-5AA3 6SL3131-7TE25-5AA3	-			-			3NA3132	125 A	1	AJT125	125 A	41 x 146
80 kW (100 HP)	6SL3130-7TE28-0AA3 6SL3131-7TE28-0AA3	-			-			3NA3136	160 A	1	AJT175	175 A	41 x 146
120 kW (150 HP)	6SL3130-7TE31-2AA3 6SL3131-7TE31-2AA3	-			-			3NA3144	250 A	1	AJT250	250 A	54 x 181