

# DATA SHEET

For a complete data sheet, please also download:

- The IC06 74HC/HCT/HCU/HCMOS Logic Family Specifications
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Information
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Outlines

## **74HC/HCT7731**

### **Quad 64-bit static shift register**

Product specification  
File under Integrated Circuits, IC06

September 1993

## Quad 64-bit static shift register

## 74HC/HCT7731

## FEATURES

- Frequency range DC to 100 MHz.
- Separate serial data inputs
- Cascadable
- Functionally compatible with HEF 4731
- Includes recycling mode
- Direct shift out
- Output capability: Standard
- I<sub>CC</sub> category: LSI.

## APPLICATIONS

- Data storage
- Delay line.

## GENERAL DESCRIPTION

The HC/HCT7731 are high-speed Si-gate CMOS devices. They are specified in compliance with JEDEC standard no. 7A.

The HC/HCT7731 are quad 64-bit static shift registers with a recycling mode. Each register has separate data inputs D<sub>a</sub> to D<sub>d</sub>, clock inputs CP<sub>a</sub> to CP<sub>d</sub> and data outputs Q<sub>a</sub> to Q<sub>d</sub>. Data shifts one place towards the output, each LOW to HIGH transition of the clock pulse. Each recycling mode input controls two registers REC<sub>ab</sub> for registers A and B and REC<sub>cd</sub> for registers C and D. When the REC input is HIGH, the device is in the recycling mode and data at the output is shifted back into the input of the register, so after 64 clock pulses the contents of a register is again in its original position. This enables the user to tap off data from any position. When the REC input is LOW external data can be shifted in.

## QUICK REFERENCE DATA

GND = 0 V; T<sub>amb</sub> = 25 °C; t<sub>r</sub> = t<sub>f</sub> = 6 ns.

| SYMBOL                             | PARAMETER  | CONDITIONS                                       | TYP. |     | UNIT |
|------------------------------------|--|--|------|-----|------|
|                                    |  |  | HC   | HCT |      |
| t <sub>PHL</sub> /t <sub>PLH</sub> | propagation delay<br>CP <sub>a-d</sub> to Q <sub>a-d</sub> | C <sub>L</sub> = 15 pF;<br>V <sub>CC</sub> = 5 V | 15   | 20  | ns   |
| f <sub>max</sub>                   | maximum clock<br>frequency                                 |  | 100  | 100 | MHz  |
| C <sub>I</sub>                     | input capacitance  |  | 3.5  | 3.5 | pF   |
| C <sub>PD</sub>                    | power dissipation<br>capacitance per register              | notes 1, 2<br>and 3                              | 58   | 61  | pF   |

## Notes

1. C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW):

$$P_D = (C_{PD} \times V_{CC}^2 \times f_i) + (C_L + V_{CC}^2 \times f_o) + (I_{pull-up} \times V_{CC})$$

where:

f<sub>i</sub> = input frequency in MHz.

f<sub>o</sub> = output frequency in MHz.

V<sub>CC</sub> = supply voltage in V.

C<sub>L</sub> = output load capacitance in pF.

I<sub>pull-up</sub> = pull-up currents in μA.

2. For HC the condition is V<sub>I</sub> = GND to V<sub>CC</sub>  
For HCT the condition is V<sub>I</sub> = GND to V<sub>CC</sub> – 1.5 V.
3. See also power dissipation information.

## ORDERING INFORMATION



| EXTENDED TYPE<br>NUMBER | PACKAGE |              |          |         |
|-------------------------|---------|--------------|----------|---------|
|                         | PINS    | PIN POSITION | MATERIAL | CODE    |
| 74HC/HCT7731N           | 16      | DIL          | plastic  | SOT38Z  |
| 74HC/HCT7731D           | 16      | SO16         | plastic  | SOT109A |

# Quad 64-bit static shift register

# 74HC/HCT7731


## PINNING

| SYMBOL                  | PIN          | DESCRIPTION           |
|-------------------------|--------------|-----------------------|
| $Q_a$ to $Q_d$          | 1, 7, 9, 15  | data outputs          |
| $CP_a$ to $CP_d$        | 2, 6, 10, 14 | clock inputs          |
| $D_a$ to $D_d$          | 3, 5, 11, 13 | data inputs           |
| $REC_{ab}$ , $REC_{cd}$ | 4, 12        | recycled enable input |
| GND                     | 8            | ground (0 V)          |
| $V_{CC}$                | 16           | positive supply       |

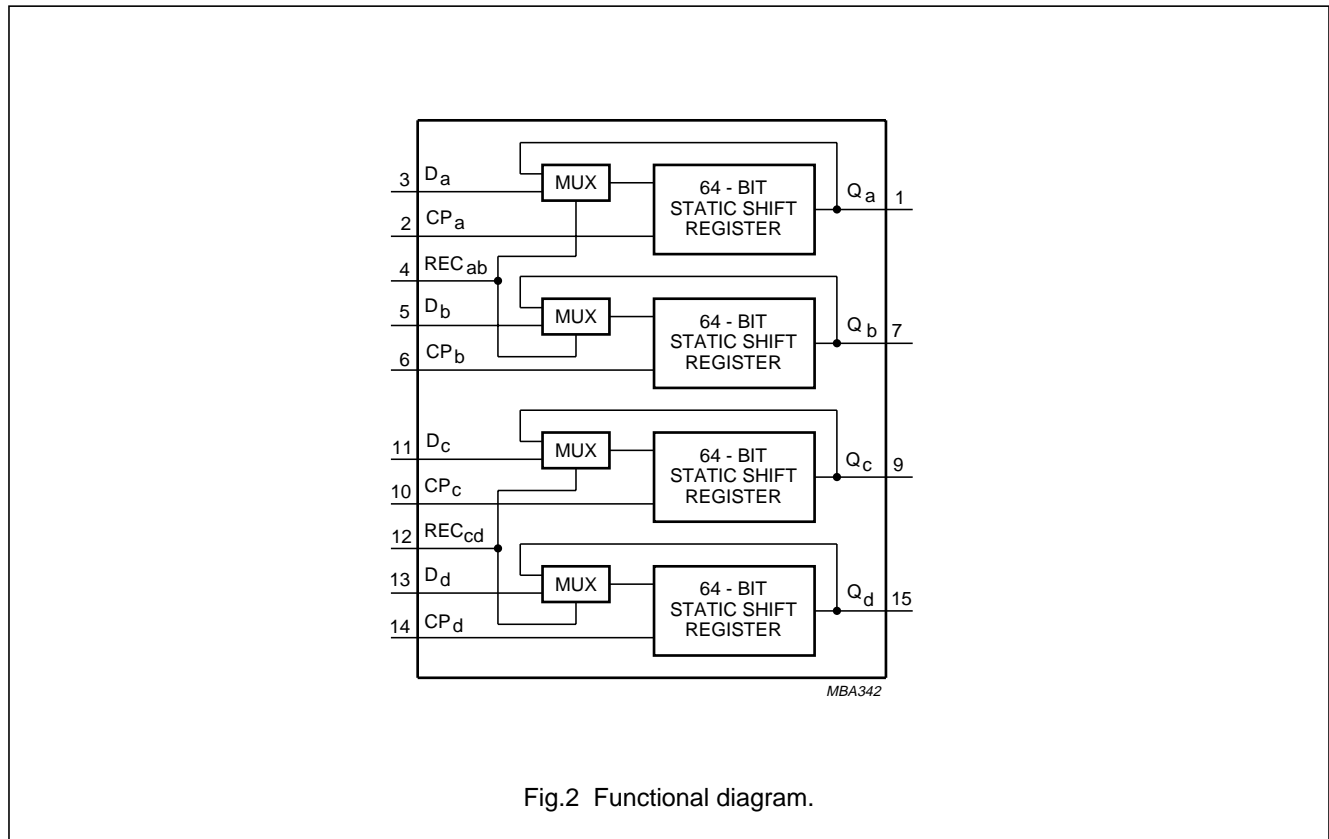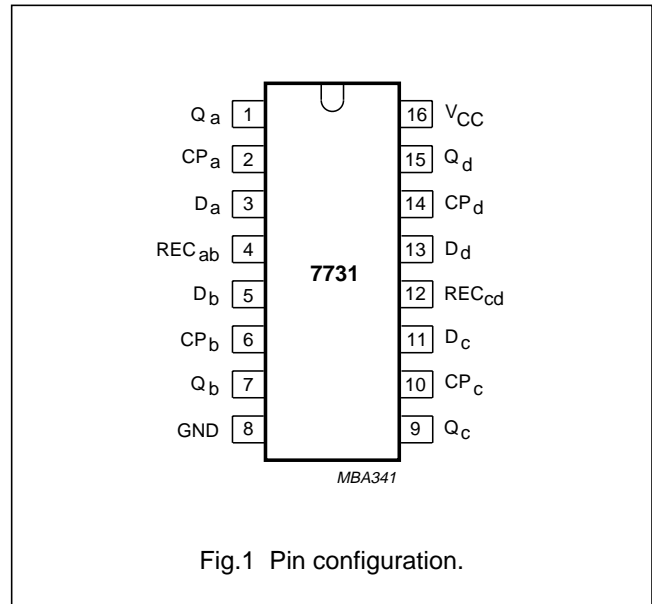

Quad 64-bit static shift register

74HC/HCT7731

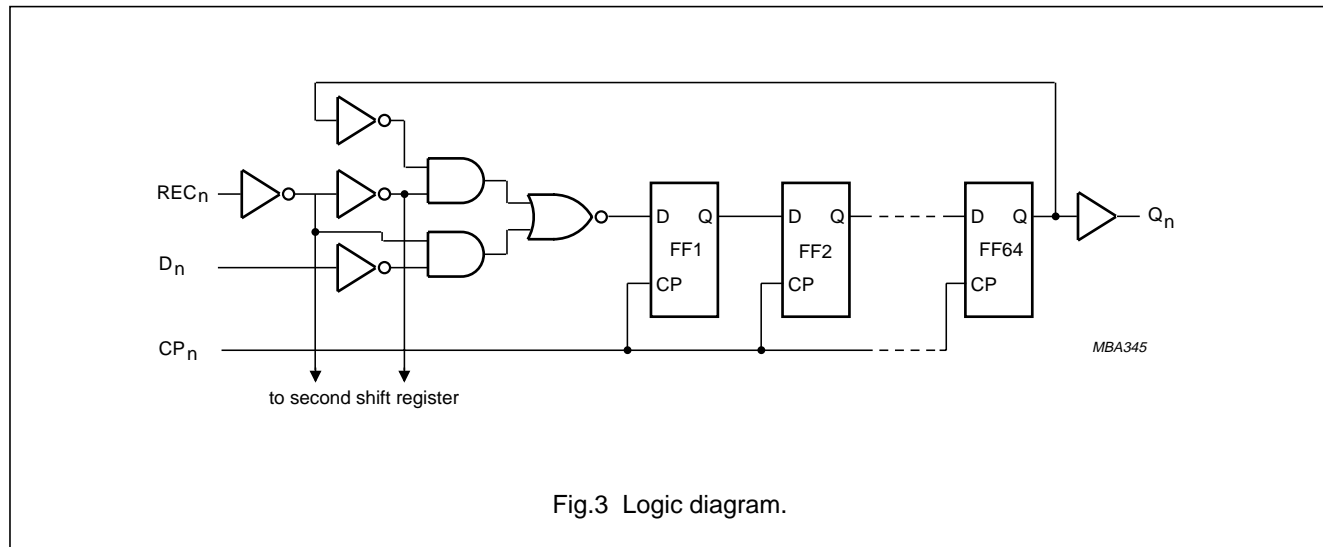

**FUNCTION TABLE**

| INPUT |    | OUTPUT  |
|-------|----|---------|
| REC   | CP | MODE    |
| L     | ↑  | shift   |
| H     | ↑  | recycle |

**Notes**

- L = LOW voltage level  
 H = HIGH voltage Level  
 ↑ = LOW-to-HIGH CP transition

## Quad 64-bit static shift register

## 74HC/HCT7731

**DC CHARACTERISTICS FOR 74HC**

For the DC characteristics see *"74HC/HCT/HCU/HCMOS Logic Family Specifications"*.

Output capability: standard

I<sub>CC</sub> category: LSI.

**AC CHARACTERISTICS FOR 74HC**

GND = 0 V; t<sub>r</sub> = t<sub>f</sub> = 6 ns; C<sub>L</sub> = 50 pF.

| SYMBOL                             | PARAMETER                                       | T <sub>amb</sub> (°C) |     |     |            |     |             |     | UNIT | TEST CONDITION         |                |
|------------------------------------|---|-----------------------|-----|-----|------------|-----|-------------|-----|------|------------------------|----------------|
|                                    |   | +25                   |     |     | -40 to +85 |     | -40 to +125 |     |      | V <sub>CC</sub><br>(V) | WAVEFORMS      |
|                                    |   | MIN                   | TYP | MAX | MIN        | MAX | MIN         | MAX |      |                        |                |
| t <sub>PHL</sub> /t <sub>PLH</sub> | propagation delay time CP to Q <sub>n</sub>     | –                     | 50  | 155 | –          | 190 | –           | 230 | ns   | 2.0                    | Fig.4          |
|                                    |   | –                     | 18  | 31  | –          | 38  | –           | 46  | ns   | 4.5                    |                |
|                                    |   | –                     | 15  | 26  | –          | 32  | –           | 39  | ns   | 6.0                    |                |
| t <sub>THL</sub> /t <sub>TLH</sub> | output transition time                          | –                     | 19  | 75  | –          | 90  | –           | 110 | ns   | 2.0                    | Fig.4          |
|                                    |   | –                     | 7   | 15  | –          | 18  | –           | 22  | ns   | 4.5                    |                |
|                                    |   | –                     | 6   | 13  | –          | 15  | –           | 19  | ns   | 6.0                    |                |
| t <sub>W</sub>                     | clock pulse width HIGH or LOW                   | 80                    | 19  | –   | 100        | –   | 120         | –   | ns   | 2.0                    | Fig.4          |
|                                    |   | 16                    | 7   | –   | 20         | –   | 24          | –   | ns   | 4.5                    |                |
|                                    |   | 14                    | 6   | –   | 17         | –   | 20          | –   | ns   | 6.0                    |                |
| t <sub>su</sub>                    | set-up time D <sub>n</sub> to CP <sub>n</sub>   | 60                    | 8   | –   | 75         | –   | 90          | –   | ns   | 2.0                    | Fig.4          |
|                                    |   | 12                    | 3   | –   | 15         | –   | 18          | –   | ns   | 4.5                    |                |
|                                    |   | 10                    | 3   | –   | 13         | –   | 15          | –   | ns   | 6.0                    |                |
| t <sub>su</sub>                    | set-up time REC <sub>n</sub> to CP <sub>n</sub> | 75                    | 22  | –   | 90         | –   | 110         | –   | ns   | 2.0                    | Fig.5          |
|                                    |   | 15                    | 8   | –   | 18         | –   | 22          | –   | ns   | 4.5                    |                |
|                                    |   | 13                    | 7   | –   | 15         | –   | 19          | –   | ns   | 6.0                    |                |
| t <sub>h</sub>                     | hold time D <sub>n</sub> to CP <sub>n</sub>     | 25                    | –3  | –   | 30         | –   | 35          | –   | ns   | 2.0                    | Fig.4          |
|                                    |   | 5                     | –1  | –   | 6          | –   | 7           | –   | ns   | 4.5                    |                |
|                                    |   | 4                     | –1  | –   | 5          | –   | 6           | –   | ns   | 6.0                    |                |
| t <sub>h</sub>                     | hold time REC <sub>n</sub> to CP <sub>n</sub>   | 10                    | –8  | –   | 10         | –   | 15          | –   | ns   | 2.0                    | Fig.5          |
|                                    |   | 2                     | –3  | –   | 2          | –   | 3           | –   | ns   | 4.5                    |                |
|                                    |   | 2                     | –3  | –   | 2          | –   | 3           | –   | ns   | 6.0                    |                |
| f <sub>max</sub>                   | maximum clock pulse frequency                   | 6                     | 26  | –   | 4.8        | –   | 4           | –   | MHz  | 2.0                    | Fig.4 (note 1) |
|                                    |   | 30                    | 78  | –   | 24         | –   | 20          | –   | MHz  | 4.5                    |                |
|                                    |   | 35                    | 93  | –   | 28         | –   | 23          | –   | MHz  | 6.0                    |                |

**Note**

1. The maximum power dissipation has to be observed. See power dissipation information.

## Quad 64-bit static shift register

## 74HC/HCT7731

## UNIT LOAD COEFFICIENT

| INPUT            | UNIT LOAD COEFFICIENT |
|------------------|-----------------------|
| CP <sub>n</sub>  | 0.7                   |
| REC <sub>n</sub> | 0.4                   |
| D <sub>n</sub>   | 0.5                   |

## Notes

- The RS input has CMOS input switching levels.
- The value of additional quiescent supply current ( $\Delta I_{CC}$ ) for a unit load of 1 is given in the family specifications. To determine  $\Delta I_{CC}$  per input, multiply this value by the unit load coefficient shown in Table 1.

## AC CHARACTERISTICS FOR 74HCT



GND = 0 V;  $t_r = t_f = 6$  ns;  $C_L = 50$  pF.

| SYMBOL                             | PARAMETER                                       | T <sub>amb</sub> (°C) |     |     |            |     |             |     | UNIT | TEST CONDITION      |                |
|------------------------------------|---|-----------------------|-----|-----|------------|-----|-------------|-----|------|---------------------|----------------|
|                                    |   | +25                   |     |     | -40 to +85 |     | -40 to +125 |     |      | V <sub>CC</sub> (V) | WAVEFORMS      |
|                                    |   | MIN                   | TYP | MAX | MIN        | MAX | MIN         | MAX |      |                     |                |
| t <sub>PHL</sub> /t <sub>PLH</sub> | propagation delay time<br>CP to Q <sub>n</sub>  | –                     | 24  | 42  | –          | 52  | –           | 63  | ns   | 4.5                 | Fig.4          |
| t <sub>THL</sub> /t <sub>TLH</sub> | output transmission time                        | –                     | 7   | 15  | –          | 18  | –           | 22  | ns   | 4.5                 | Fig.4          |
| t <sub>W</sub>                     | clock pulse width<br>HIGH or LOW                | 16                    | 7   | –   | 20         | –   | 24          | –   | ns   | 4.5                 | Fig.4          |
| t <sub>su</sub>                    | set-up time D <sub>n</sub> to CP <sub>n</sub>   | 12                    | 3   | –   | 15         | –   | 18          | –   | ns   | 4.5                 | Fig.4          |
| t <sub>su</sub>                    | set-up time REC <sub>n</sub> to CP <sub>n</sub> | 15                    | 6   | –   | 18         | –   | 22          | –   | ns   | 2                   | Fig.5          |
| t <sub>h</sub>                     | hold time D <sub>n</sub> to CP <sub>n</sub>     | 5                     | 0   | –   | 6          | –   | 7           | –   | ns   | 2                   | Fig.4          |
| t <sub>h</sub>                     | hold time REC <sub>n</sub> to CP <sub>n</sub>   | 2                     | –3  | –   | 2          | –   | 3           | –   | ns   | 4.5                 | Fig.5          |
| f <sub>max</sub>                   | maximum clock pulse<br>frequency                | 30                    | 80  | –   | 24         | –   | 20          | –   | MHz  | 4.5                 | Fig.4 (note 1) |

Quad 64-bit static shift register


74HC/HCT7731

AC WAVEFORMS

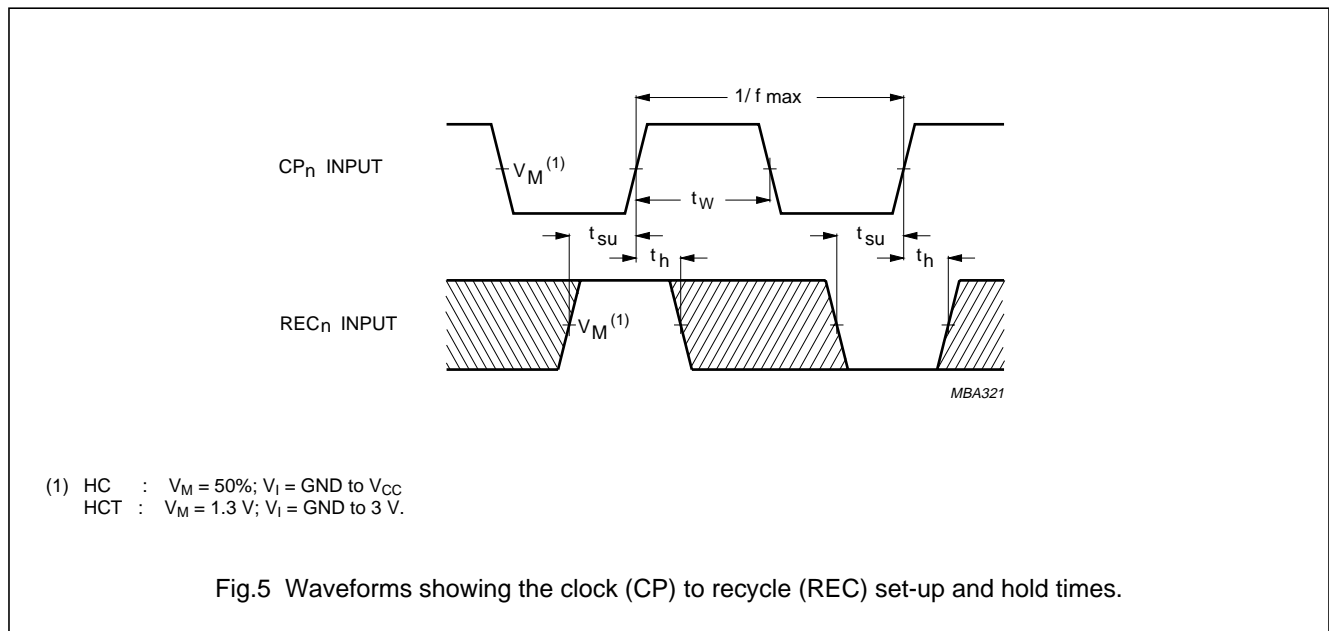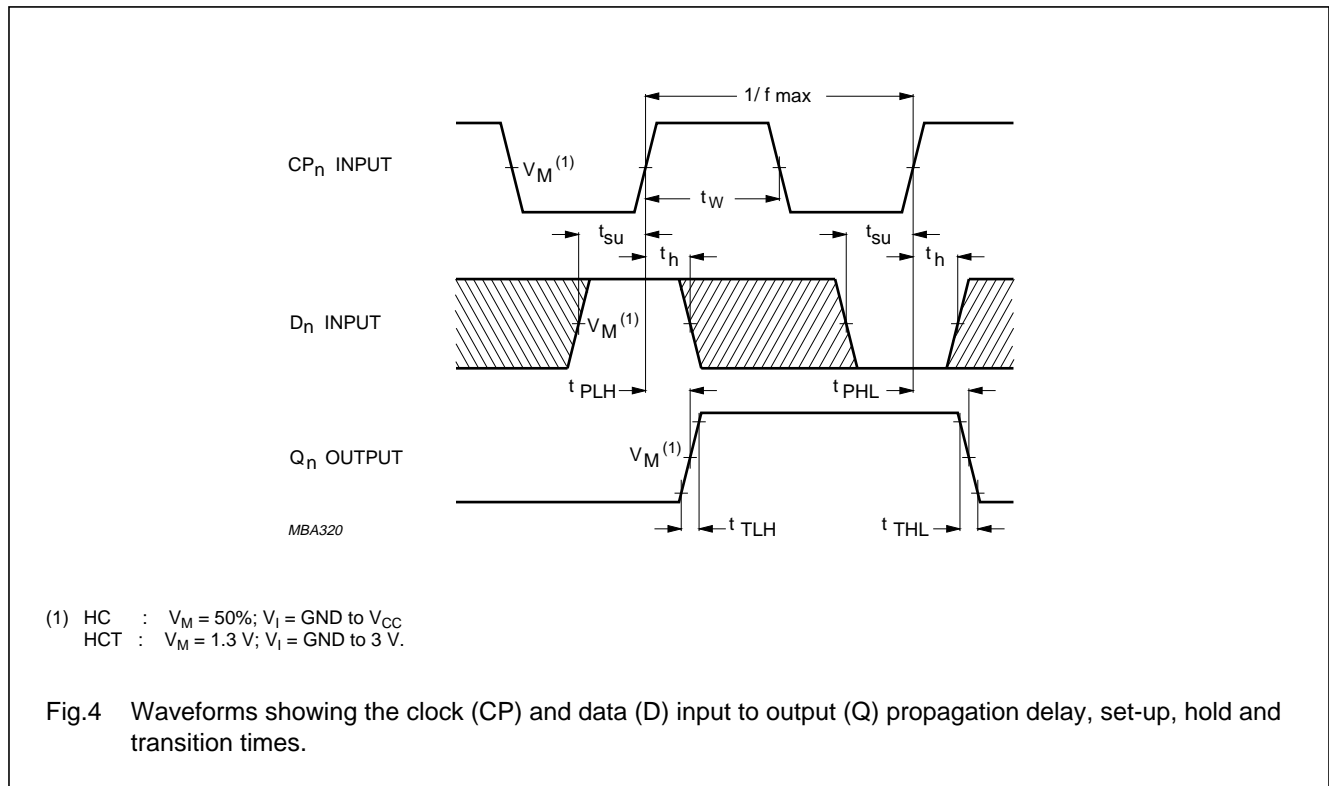

## Quad 64-bit static shift register

## 74HC/HCT7731

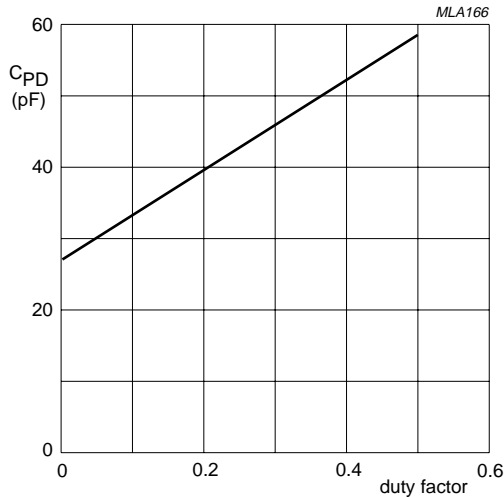Fig.6 C<sub>PD</sub> as a function of the duty factor.**POWER DISSIPATION INFORMATION**

The power dissipation per register operating at the same frequency is given by:

$$P_D = (C_{PD} \times V_{CC}^2 \times f_i) + (C_L + V_{CC}^2 \times f_o) + (I_{pull-up} \times V_{CC})$$

- $f_i$  = clock input frequency  
 $f_o$  = data output frequency  
 $C_L$  = output load capacitance in pF  
 $V_{CC}$  = power supply voltage in V.

As  $P_D$  also depends on the frequency at which the contents of the internal bits are changing, the value of  $C_{PD}$  is a function of the duty factor ( $d_f$ ) being the ratio between data and clock frequency, see Fig.6.

Example:

- $f_i$  = 12 MHz  
 $f_o$  = 3 MHz  
 $C_L$  = 25 pF  
 $V_{CC}$  = 5 V  
 $d_f$  =  $3/12 = 0.25$   
 $C_{PD}$  = 42.5 pF

$$P_D = (42.5 \times 5^2 \times 12) + (25 \times 5^2 \times 3) = 14625 \mu W$$

As the maximum allowable power dissipation in an SO package at  $T_{amb} = 125^\circ C$  is 60 mW, it is allowed to apply 4 registers at the same time under these conditions.

**PACKAGE OUTLINES**

See "74HC/HCT/HCU/HCMOS Logic Package Outlines".