

2N6604

JAN, JTX, JTXV AVAILABLE
CASE 303-01, STYLE 1

HIGH FREQUENCY TRANSISTOR

NPN SILICON



MAXIMUM RATINGS (T_A = 25°C Free Air Temperature)

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V _{CEO}	15	Vdc
Collector-Base Voltage	V _{CBO}	25	Vdc
Emitter-Base Voltage	V _{EBO}	3.0	Vdc
Collector Current — Continuous	I _C	50	mAdc
Total Device Dissipation @ T _C = 125°C Derate above 125°C	P _D	500 6.66	mW mW/°C
Storage Temperature	T _{stg}	-65 to +200	°C

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage (I _C = 1.0 mAdc, I _B = 0)	V _{(BR)CEO}	15	—	—	Vdc
Collector-Base Breakdown Voltage (I _C = 0.1 mAdc, I _E = 0)	V _{(BR)CBO}	25	—	—	Vdc
Emitter-Base Breakdown Voltage (I _E = 0.1 mAdc, I _C = 0)	V _{(BR)EBO}	3.0	—	—	Vdc
Collector Cutoff Current (V _{CB} = 15 Vdc, I _E = 0)	I _{CBO}	—	—	50	nAdc

ON CHARACTERISTICS

DC Current Gain (I _C = 30 mAdc, V _{CE} = 10 Vdc)	h _{FE}	30	—	200	—
---	-----------------	----	---	-----	---

SMALL SIGNAL CHARACTERISTICS

Collector-Base Capacitance(1) (V _{CB} = 10 Vdc, I _E = 0, 0.1 MHz ≤ f ≤ 1.0 MHz)	C _{cb}	0.30	—	0.80	pF
--	-----------------	------	---	------	----

FUNCTIONAL TEST

Common-Emitter Amplifier Power Gain (Figure 1) (V _{CE} = 10 Vdc, I _C = 30 mAdc, f = 1.0 GHz)	G _{pe}	15	—	21	dB
Spot Noise Figure (R _S = Optimum) (Figure 1) (V _{CE} = 10 Vdc, I _C = 5.0 mAdc, f = 1.0 GHz)	NF	1.5	—	3.0	dB
Power Gain at Optimum Noise Figure (Figure 1) (V _{CE} = 10 Vdc, I _C = 5.0 mAdc, f = 1.0 GHz)	G _{NF}	9.0	—	—	dB

TYPICAL 2 GHz PERFORMANCE

Maximum Available Gain (Figure 1)(2) (V _{CE} = 10 Vdc, I _C = 30 mAdc, f = 2.0 GHz)	MAG	—	10	—	dB
Noise Figure (R _S = Optimum) (Figure 1) (V _{CE} = 10 Vdc, I _C = 5.0 mAdc, f = 2.0 GHz)	NF	—	4.3	—	dB

(1) C_{cb} measurement employs a three-terminal capacitance bridge incorporating a guard circuit. The emitter terminal shall be connected to the guard terminal of the bridge.

(2) MAG is calculated from the S-Parameters using the equation $MAG = \frac{|S_{21}|^2}{(1 - |S_{11}|^2)(1 - |S_{22}|^2)}$

FIGURE 1 – BLOCK DIAGRAM FOR POWER GAIN AND NOISE FIGURE

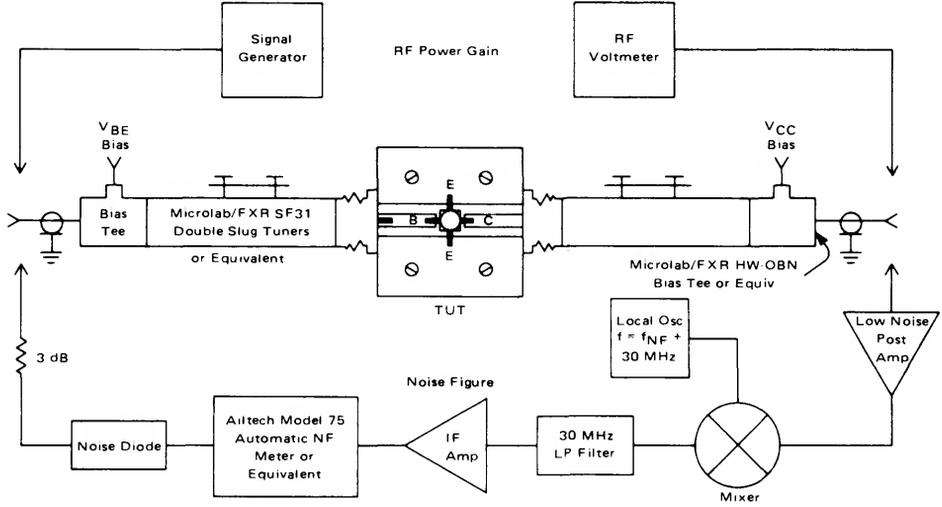


FIGURE 2 – POWER GAIN AND NOISE FIGURE versus FREQUENCY

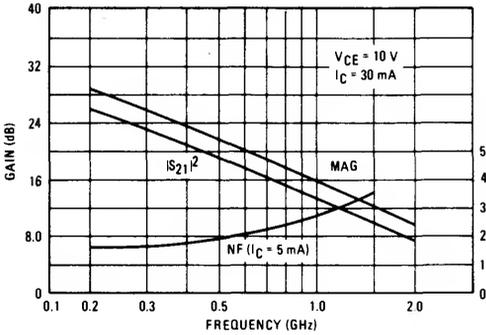


FIGURE 3 – OUTPUT CAPACITANCE versus VOLTAGE

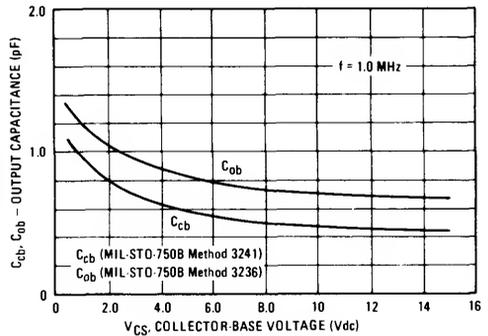


FIGURE 4 – CURRENT GAIN-BANDWIDTH PRODUCT versus COLLECTOR CURRENT

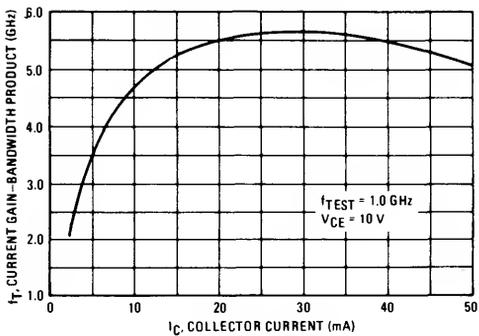


FIGURE 5 – POWER GAIN versus COLLECTOR CURRENT


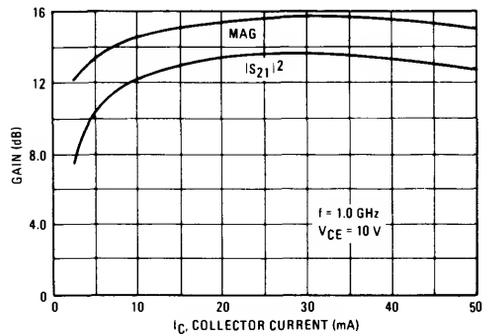


FIGURE 6 – NOISE FIGURE versus COLLECTOR CURRENT

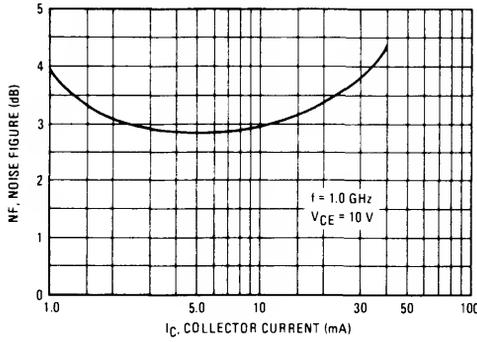

COMMON EMITTER SCATTERING PARAMETERS

FIGURE 7 – INPUT AND OUTPUT REFLECTION COEFFICIENTS versus FREQUENCY


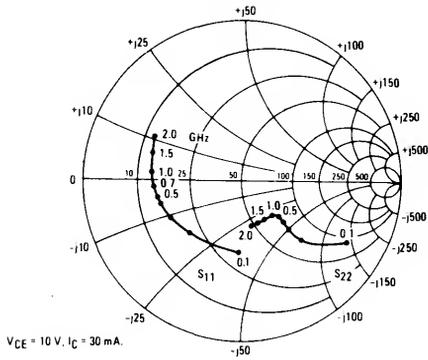


FIGURE 8 – FORWARD AND REVERSE TRANSMISSION COEFFICIENTS versus FREQUENCY

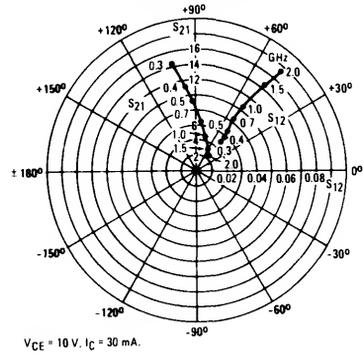

7

S - PARAMETERS

V _{CE} (Volts)	I _C (mA)	Frequency (MHz)	S11		S21		S12		S22	
			S11	∠φ	S21	∠φ	S12	∠φ	S22	∠φ
5.0	5	100	0.72	-40	12.37	153	0.028	67	0.91	-18
		200	0.65	-78	10.38	133	0.048	51	0.76	-32
		500	0.61	-137	5.75	100	0.067	34	0.50	-45
		1000	0.61	-168	3.13	78	0.082	31	0.41	-54
		2000	0.63	161	1.58	47	0.112	30	0.41	-80
	10	100	0.57	-60	19.54	146	0.024	63	0.85	-27
		200	0.55	-105	14.70	125	0.038	47	0.64	-43
		500	0.59	-155	7.12	95	0.051	39	0.37	-55
		1000	0.61	-178	3.77	76	0.069	40	0.29	-62
		2000	0.64	156	1.91	50	0.106	39	0.30	-86
	30	100	0.43	-111	30.58	135	0.016	57	0.72	-39
		200	0.53	-145	19.35	114	0.022	49	0.46	-57
		500	0.62	-173	8.42	91	0.035	51	0.24	-69
		1000	0.63	172	4.36	75	0.058	54	0.18	-76
		2000	0.67	151	2.19	52	0.099	49	0.21	-99
	50	100	0.46	-134	32.34	129	0.013	57	0.64	-42
		200	0.57	-158	19.19	110	0.018	51	0.40	-56
		500	0.64	-178	8.13	89	0.031	57	0.22	-62
		1000	0.65	170	4.17	74	0.053	58	0.19	-70
		2000	0.70	150	2.10	52	0.092	54	0.22	-97
10	5	100	0.74	-36	12.34	154	0.023	69	0.93	-15
		200	0.67	-71	10.56	135	0.040	54	0.81	-25
		500	0.59	-131	6.09	102	0.058	37	0.57	-36
		1000	0.58	-164	3.32	79	0.073	33	0.50	-44
		2000	0.60	164	1.67	48	0.098	32	0.49	-69
	10	100	0.60	-52	19.75	148	0.020	65	0.87	-21
		200	0.56	-95	15.30	127	0.032	49	0.69	-33
		500	0.56	-149	7.69	97	0.044	41	0.45	-41
		1000	0.58	-174	4.07	77	0.061	42	0.39	-47
		2000	0.61	159	2.03	50	0.095	40	0.39	-70
	30	100	0.44	-94	32.03	136	0.014	59	0.75	-31
		200	0.50	-135	20.76	115	0.021	49	0.52	-41
		500	0.57	-168	9.13	91	0.032	52	0.33	-43
		1000	0.59	175	4.71	75	0.052	54	0.29	-48
		2000	0.64	154	2.34	52	0.089	49	0.30	-72
	50	100	0.44	-117	33.56	129	0.012	59	0.68	-31
		200	0.52	-150	19.94	109	0.017	50	0.47	-36
		500	0.59	-174	8.52	89	0.028	56	0.34	-35
		1000	0.61	173	4.38	75	0.049	57	0.32	-43
		2000	0.66	152	2.21	51	0.083	52	0.34	-70