


# SAW FILTER

Type: **A0E** (TO-39), **A5E** (F-11)



## APPLICATION:

- Satellite receiver
- Wireless LAN
- Cordless telephone
- Digital camera
- Wireless remote
- Pager

## FEATURES:



- High reliability
- Tight stability
- Extended temperature available
- Suitable for all reflow methods

www.DataSheet4U.com

## Wide Band SAW filter For Wireless Communication & Satellite Program Receiver

Reference No.	Center Frequency (MHz)	Band Width (MHz)	Insertion loss(dB)	Package
A0E/A5E 400.000 6000	400	6	≤3.5	TO-39;F11
A0E/A5E 429.300 6000	429.3	6	≤3.5	TO-39;F11
A5E 465.000 6000	465	6	≤3.5	F11
A0E/A5E 841.000 M150	841	15	≤3.5	TO-39;F11
A0E/A5E 886.000 M150	886	15	≤3.5	TO-39;F11
A0E/A5E 868.350 M150	868.35	15	≤3.5	TO-39;F11
A0E/A5E 930.000 M150	930	15	≤3.5	TO-39;F11
A0E/A5E 936.000 M150	936	15	≤3.5	TO-39;F11
A0E 480.000M180	480	18	≤21	TO-39
A0E 480.000M270	480	27	≤21.5	TO-39
A0E 480.000M360	480	36	≤22.5	TO-39
A5E 479.500M270	479.5	27	≤21.5	F11
A0E 479.500M150	479.5	15	≤24/≤24	TO-39
A0E 479.500M270	479.5	27	≤24/≤24	TO-39
A0E 479.500M180	479.5	18	≤22.1/≤22.5	TO-39
A0E 479.500M270	479.5	27	≤22.1/≤22.5	TO-39
A0E 479.500M270	479.5	27	≤24.5/≤23.6	TO-39
A0E 479.500M360	479.5	36	≤24.5/≤23.6	TO-39
A0E 479.500M270	479.5	27	≤22.0/≤27.5	TO-39
A0E 479.500M540	479.5	54	≤22.0/≤27.5	TO-39

## Dimension

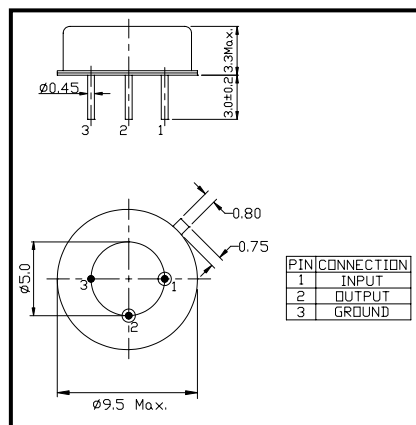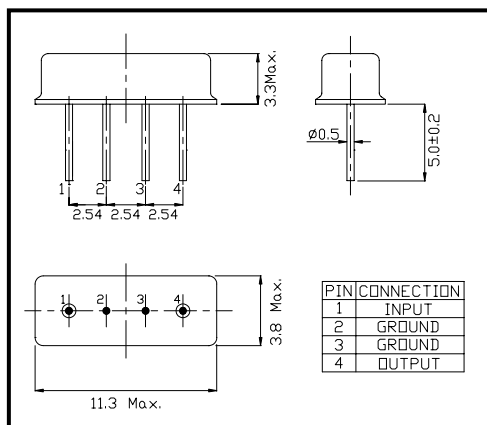

**Hong Kong X'tals Limited**  
**Hong Kong Automotive X'tals Limited**

UNIT H-1, 22/F., SHIELD INDUSTRIAL CENTRE, 84-92 CHAI WAN KOK STREET, TSUEN WAN, NEW TERRITORIES, HONG KONG  
 TEL: (852)-2412-0121 FAX: (852) 2498 5980 EMAIL: hkxtals@hongkongcrystal.com Web page: http://www.hongkongcrystal.com

