

#### **Product Features**

- 2-Way Splitter
- 30MHz-1200MHz
- Small size (3X3 mm)
- QFN SMD Type package
- Higher productivity
- Lower manufacturing cost
- -57dBc CSO 135 Channels @ +15dBmV/ch
- -62dBc CTB 135 Channels @ +15dBmV/ch
- -66dBc XMD 135 Channels @ +15dBmV/ch
- 3.5dB Typical Noise Figure
- 75ohm input and outputs

### **Applications**

- Multi Tuner Set-Top Boxes
- Home Gateways
- FTTx (G-PON, GE-PON)



Package Type: QFN 3X3

## **Description**

AD274 is designed as low cost Active Divider for many applications including FTTH, CATV System.

This MMIC is based on Gallium Arsenide Enhancement Mode pHEMT which shows low current draw and very low noise. The data in this spec sheet is valid only for 750hm application.

### **Electrical Specifications**

	PARAMETER	UNIT	MIN	TYP	MAX	Тур
	Frequency	MHz		-		
	Gain	dB	4.5	5.5	-	4
	Gain Flatness	dB		1.4	2	1.6
I	nput Return Loss	dB	-	-16	Ī	-12
0	utput Return Loss	dB	-	-20	Ī	-20
IN	&OUT Port Isolation	dB	-	-30	Ī	-30
OUT	&OUT Port Isolation	dB	-	-20	Ī	-20
	Output IP3	dBm	22	26	-	18
1dF	3 Compression Point	dBm	8	12	-	8
	Noise Figure	dB	-	3.5	4.5	3.3
CSO	50 ~ 870MHz	dBc	-	-57	1	-51
СТВ	CTB 135 channel@		-	-62	-	-58
XMOD Input Power +15dBmV/ch		dBc	-	-66	-	-56
	DC Current	mA	-	110	-	75
	Supply Voltage	V		5		3.3

#### Note

- 1. Test conditions unless otherwise noted. Test Freq = 500MHz, T=25  $^{\circ}$ C, Vdd=5V, 75 $\Omega$  system
- $2. \ OIP3 \ measured \ with \ 2 \ tones \ at \ an \ output \ power \ of \ +0 dBm/tone \ separated \ by \ 1 MHz, \ Test \ Freq = 500 MHz$

## **Absolute Maximum Ratings**

PARAMETER	UNIT	MIN	TYP	MAX
Device Voltage	VDC	-	5	5.5
Operating Case Temperature	$^{\circ}$	-40	-	85
Storage Temperature	$^{\circ}$	-40	-	150
ESD Human Body Model	-	-	Class 1A	-
Moisture sensitivity Level	-	-	MSL1	-
Junction temperature	°C	-	120	180
Thermal Resistance (Rth)	°C/W	=	70	-

Korean Facilities: 82-31-250-5078 / rfsales@rfhic.com


US Facilities: 919-77-8780 / sales@rfhicusa.com


1/6

Version 1.0




### **Application Circuit** @ 50 ~ 1000MHz, Vdd = +5V, 75ohm System

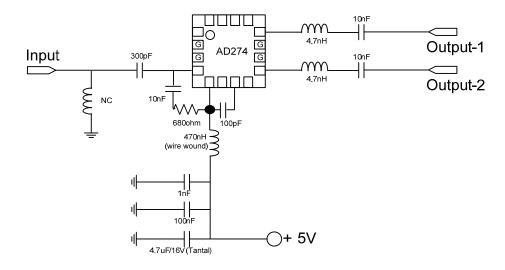

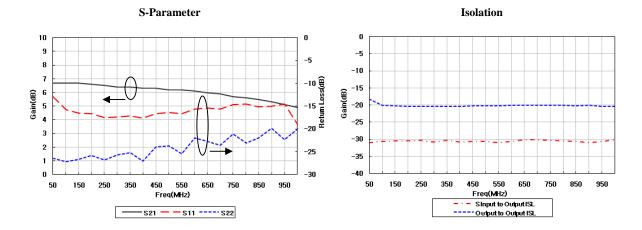


#### **Noise Figure**






### **Application Circuit** @ 50 ~ 1000MHz, +3.3V, 75ohm System

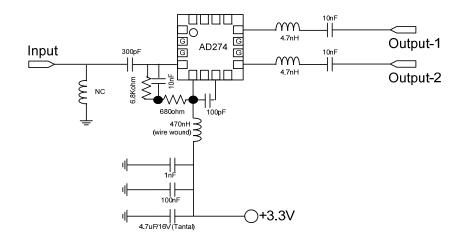


#### 10 9 8 Gain(dB) 5 -20 2 -25 50 150 250 350 450 550 650 750 850 950 Freq(MHz)

S-Parameter



## Noise Figure

-S21 — — S11 ----- S22





**Multi-Tone Test**: 135CH\_FLAT@Input Power +15dBmV/Ch, Sdd=+5V

Level: Input +15dBmV Tilt: 135CH										
FRQ	XMOD	CTB RAW	CTB COR	N-FLR	CSU RAW	CSU COR	CSU FRQ	CSL RAW	CSL COR	CSL FRQ
55.25	75.3	67.7	72.1	68.2	67.5	71.9	55.99	57.7	58.1	53.99
77.25	76.2	67.7	72	68.2	57.5	57.8	77.99	68.1	72.4	76.37
109.25	76.6	68	72.3	68.4	67.7	72	109.99	57.4	57.8	107.99
211.25	75.1	67.3	71.7	68.4	66.4	70.8	212.49	58.2	58.6	209.99
331.25	74.1	65.4	69.7	66.7	65.4	69.7	331.99	57.5	58	329.99
547.25	71.7	66.2	70.5	68.4	67.1	71.4	446.49	58.7	59.2	443.98
637.25	70.7	64.6	68.9	66.3	65.1	69.4	547.99	58.5	59.3	545.98
745.25	68.8	63.7	67.3	66.1	64.1	68.4	638.48	59.7	60.8	635.98
859.25	68.3	63.8	68.1	65.8	63.2	66.2	746.49	61.9	63.8	743.99
Min	66.7	62.7	67	64.6	57.5	57.8	55.99	57.4	57.8	53.99
Max	76.6	68	72.3	68.4	67.7	72	860.48	68.1	72.4	858.49


**Multi-Tone Test**: 135CH\_FLAT@Input Power +15dBmV/Ch, Vdd = +3.3V

	Level : Input +15dBmV Tilt : 135CH_FLAT									
FRQ	XMOD	CTB RAW	CTB COR	N-FLR	CSU RAW	CSU COR	CSU FRQ	CSL RAW	CSL COR	CSL FRQ
55.25	64.2	66.2	70.5	67.8	66.7	71	56	53.3	53.5	53.99
77.25	64.1	66.2	70.5	67.8	52.5	52.7	77.99	67.5	71.8	76.07
109.25	64.3	66.2	70.6	68.1	65.5	68.5	109.99	52.8	52.9	107.99
211.25	63.3	64	65.9	68.3	62.8	64	212.49	52.8	53	209.98
331.25	62.4	62.4	64.3	66.7	61.1	62.6	332.49	51.4	51.5	329.99
445.25	61	60.7	61.7	67.8	59	59.6	446.49	51	51	443.98
547.25	59.5	60.8	62.1	66.6	57.2	57.8	548.49	51.4	51.5	545.98
637.25	58.5	58.4	59.1	66.2	54.7	55	638.48	52.1	52.3	635.98
745.25	57.1	58.7	59.7	66	52.7	52.9	746.49	54.1	54.4	743.98
859.25	56.4	58.7	60	64.6	51.8	52.1	860.49	60.1	62	858.49
Min	56.4	58.4	59.1	64.6	51.8	52.1	56	51	51	53.99
Max	64.3	66.2	70.6	68.3	66.7	71	860.49	67.5	71.8	858.49



# Package Dimensions (Type: QFN3x3)

\* Unit: mm[inch] | Tolerance: ±0.2[.008]

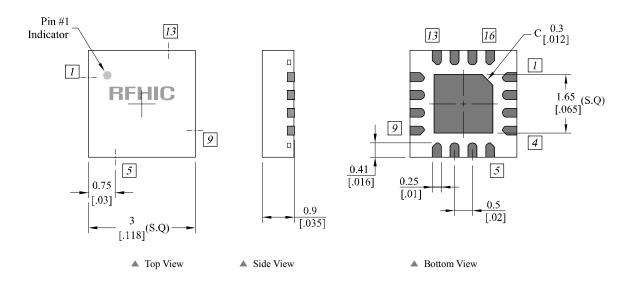

Pin Description									
Pin No	Function	Pin No	Function	Pin No	Function	Pin No	Function		
1	NC	5	Bias/Port1	9	Output-1	13	NC		
2	GND	6	NC	10	GND	14	NC		
3	GND	7	Port2	11	GND	15	NC		
4	Input	8	NC	12	Output-2	16	NC		

#### \* Mounting Configuration Notes

- 1. Ground / thermal via holes are critical for the proper performance of this device.
- 2. Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
- 3. Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via hole region contacts the heatsink.
- 4. Do not put solder mask on the backside of the PCB in the region where the board contacts the heatsink.
- 5. RF trace width depends upon the PCB material and construction.
- 6. Use 1 oz. Copper minimum.



### **Revision History**

Part Number	Release Date	Version	Modification	Data Sheet Status
AD274	2013.02.20	1.0	-	-
AD274	2013.01.08	0.2	Change by a new dimension form	Preliminary
AD274	2012.09.10	0.1	Change by a new document form	Preliminary

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-655-1121. For all other inquiries, please contact the International Sales Team at 82-31-250-5078.

Korean Facilities : 82-31-250-5078 / rfsales@rfhic.com

US Facilities : 919-77-8780 / sales@rfhicusa.com

6 / 6

Version 1.0