



**SPECIFICATION  
FOR  
LCD MODULE**

**MODULE NO: AFS240320TG-2.4-AD30001  
REVISION NO: 00**

Customer's Approval:

--

	SIGNATURE	DATE
PREPARED BY (RD ENGINEER)	FR. LI	JUN-27-2011
CHECKED BY	Y LH	JUN-27-2011
APPROVED BY	SEAN	JUN-27-2011

## **DOCUMENT REVISION HISTORY**

<b>Version</b>	<b>DATE</b>	<b>DESCRIPTION</b>	<b>CHANGED BY</b>
00	Jun-27-2011	First Issue	Fr.li

## **CONTENTS**

<b>1. Features &amp; Mechanical specifications</b>	<b>1</b>
<b>2. Dimensional Outline</b>	<b>2</b>
<b>3. Block Diagram</b>	<b>3</b>
<b>4. Pin Description</b>	<b>4</b>
<b>5. Absolute Maximum Ratings</b>	<b>5</b>
<b>6. Electrical Characteristics</b>	<b>5</b>
<b>7. Backlight Specification</b>	<b>5</b>
<b>8. Electro-Optical Characteristics</b>	<b>6</b>
<b>9. Instruction Description</b>	<b>9</b>
<b>10. AC Characteristics</b>	<b>12</b>
<b>11. Quality Specification</b>	<b>13</b>

## 1. Features & Mechanical Specifications

Item	Contents	Unit
	LCD	
LCD Type	TFT / Transmissive / Normal White	--
Viewing direction	12 O'clock	--
Backlight	3 Chip White LED in Series	--
Interface	8080-16bit parallel bus interface	--
Driver IC	HX8347D	--
Outline Dimension	42.72(W) × 59.46(H) × 3.0(T)	mm
Glass area (W×H×T)	40.32 × 52.46 / 56.26 × 1.0	mm
Active area (W×H)	36.72 × 48.96	mm
Number of Dots	240(RGB) × 320	--
Dot pitch (W×H)	0.051 × 0.153	mm
Pixel pitch (W×H)	0.153 × 0.153	mm
Operating Temperature	-20 ~ +70	°C
Storage temperature	-30 ~ +80	°C



### 3. Block Diagram

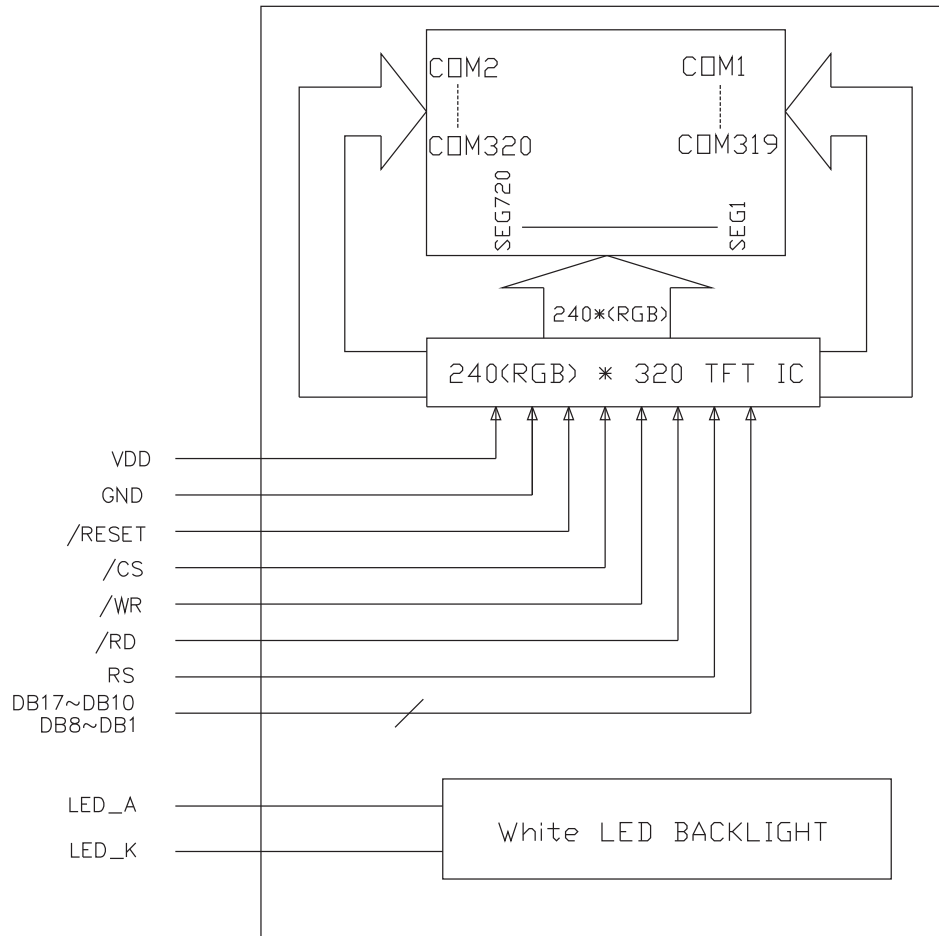


Figure 2. Block diagram

#### 4. Pin Description

PIN No.	SYMBOL	Function
1,2	NC	No connection
3	Fmark	Tearing effect output. If not used, please open this pin.
4,5	NC	No connection
6	/RESET	Reset pin. (Active Low)
7~10	NC	No connection
11~18	DB17~DB10	Data Bus
19	NC	No connection
20~27	DB8~DB1	Data Bus
28	NC	No connection
29	/RD	Read enable pin. (Active Low)
30	/WR	Write enable pin. (Active Low)
31	RS	Command / parameter or display data selection pin. “H”: parameter or display data “L”: Command
32	/CS	Chip select signal. (Active Low)
33	GND	Ground
34	VDD	Power supply
35	LED-K	Backlight LED Cathode
36	LED-A	Backlight LED Anode

#### Interface Note:

R1	R2	Interface Mode
NC	Short	8080-16bit interface: DB15~DB0 (default mode)
Short	NC	8080-8bit interface: DB15~DB8

1. Unused pins should connect to GND.
2. R1, R2 are SMT Components on the FPC.

## **5. Absolute Maximum Ratings**

Item	Symbol	Rating	Unit
Supply Voltage range	VCI	-0.3 to +4.6	V
Operating Temperature range	TOP	-20 to +70	°C
Storage Temperature range	TST	-30 to +80	°C

## **6. Electrical Characteristics**

### **DC Characteristics**

Item	Symbol	Min.	Type.	Max.	Unit
Logic Supply Voltage	VCI	2.3	2.8	3.3	V

## **7. Backlight Characteristics**

White LED × 4

(Ta = 25°C)

Item	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	VF	IF = 20mA	-	9.6	-	V
Uniformity	ΔBp	-	80	-	-	%
Luminance for LCD	Lv	IF = 20mA	2000	-	-	cd/m <sup>2</sup>



## 8. Electro-Optical Characteristics

Item	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Transmittance	T%	Viewing normal angle $\theta_x = \theta_y = 0^\circ$	-	5.0	-	%	All left side data are based on CMI's following condition - 1.LC : TN 2.Light Source :CMI LED BLU 3.Film : 日東 NPF TEG 1465DU 4.Machine : DMS 803
Contrast Ratio	CR		-	250	-		
Response Time (by Quick)	$T_{on} + T_{off}$		-	30	-	ms	
Viewing Angle	Hor.	$\theta_{x+}$	-	45	-	deg.	
		$\theta_x$	-	45	-		
	Ver.	$\theta_{y+}$	-	45	-		
		$\theta_y$	-	20	-		
CF only Color Chromaticity (CIE 1931)	Red	$X_R$	0.592	0.612	0.632	1.Under C light Simulation 2.NTSC 56%	
		$Y_R$	0.309	0.329	0.349		
	Green	$X_G$	0.279	0.299	0.319		
		$Y_G$	0.547	0.567	0.587		
	Blue	$X_B$	0.124	0.144	0.164		
		$Y_B$	0.090	0.110	0.130		
	White	$X_w$	0.288	0.308	0.328		
		$Y_w$	0.305	0.325	0.345		

\*Note (1) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L_{63} / L_0$$


L63: Luminance of gray level 63

L 0: Luminance of gray level 0


$$CR = CR (5)$$

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (5).

\*Note (2) Definition of Response Time ( $T_{on}$ ,  $T_{off}$ ):

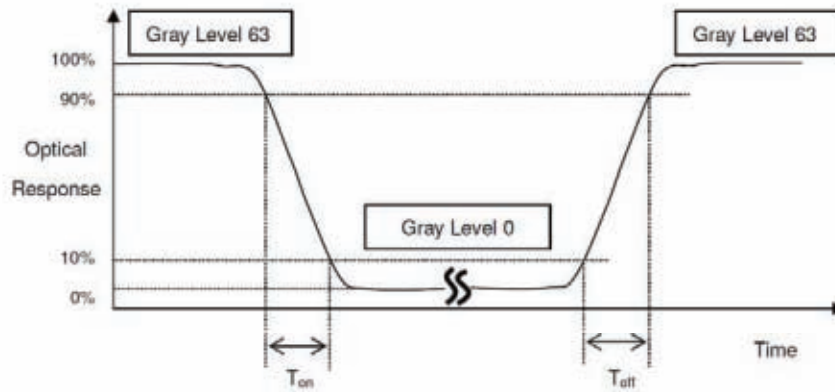


\*Note(3) Definition of Viewing Angle

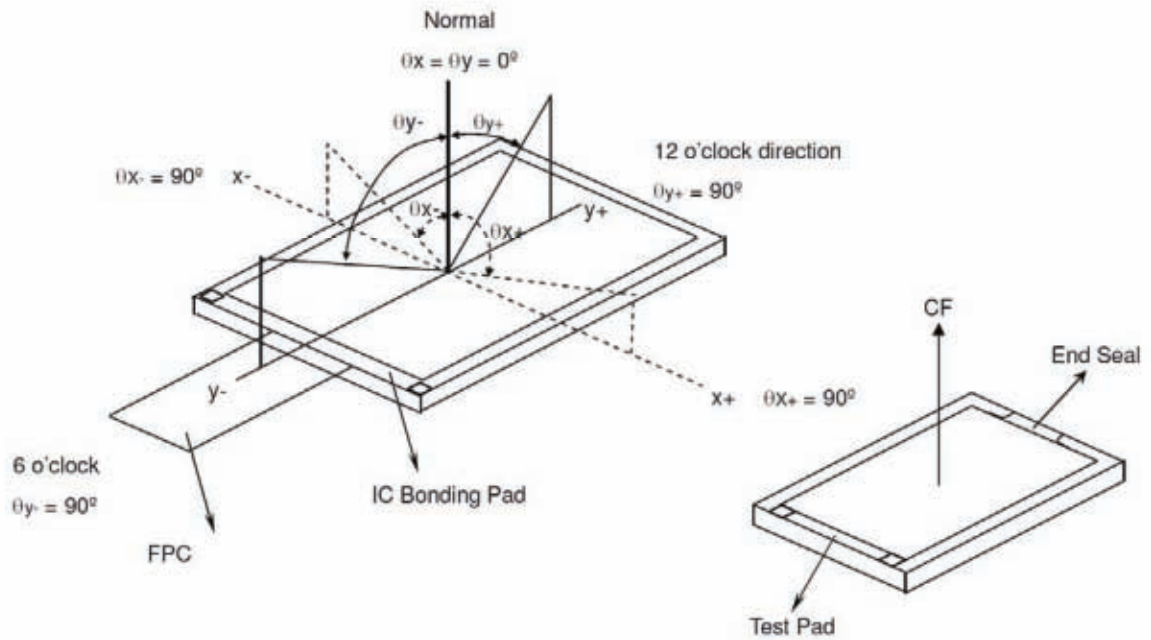


\*Note (4) Measurement Set-Up:

The LCD module should be stabilized at a given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 20 minutes in a windless room.

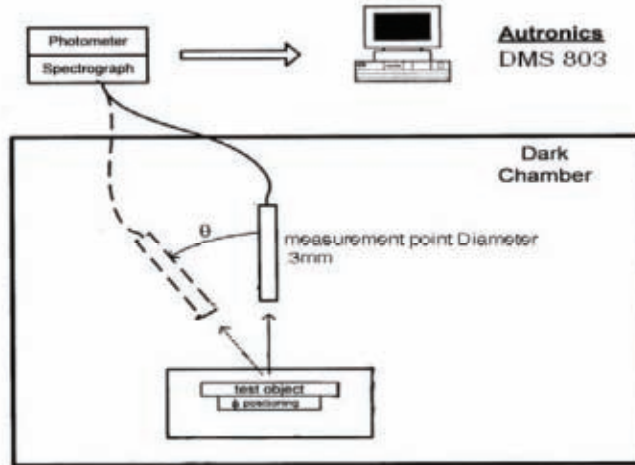

\*Note (5)

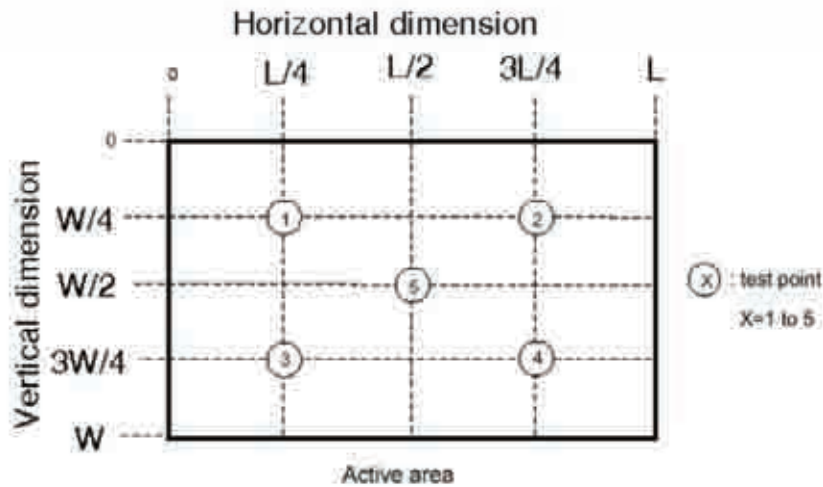


## 9. Instruction Description

(Hex)	Operation Code	W/R	Upper Code	Lower Code								Comment	
			D[17-8]	D7	D6	D5	D4	D3	D2	D1	D0		
00	Himax ID	R	-	0	1	0	0	0	1	1	1	-	
01	Display Mode control	W/R	-	DP_STB(0)	DP_STB_S(0)	-	-	SCRCL(0)	IDMCN(0)	INVON(0)	PTLON(0)	-	
02	Column address start 2	W/R	-	SC[15:8] (8'b0000_0000)								-	
03	Column address start 1	W/R	-	SC[7:0] (8'b0000_0000)								-	
04	Column address end 2	W/R	-	EC[15:8] (8'b0000_0000)								-	
05	Column address end 1	W/R	-	EC[7:0] (8'b1110_1111)								-	
06	Row address start 2	W/R	-	SP[15:8] (8'b0000_0000)								-	
07	Row address start 1	W/R	-	SP[7:0] (8'b0000_0000)								-	
08	Row address end 2	W/R	-	EP[15:8] (8'b0000_0001)								-	
09	Row address end 1	W/R	-	EP[7:0] (8'b0011_1111)								-	
0A	Partial area start row 2	W/R	-	PSL[15:8] (8'b0000_0000)								-	
0B	Partial area start row 1	W/R	-	PSL[7:0] (8'b0000_0000)								-	
0C	Partial area end row 2	W/R	-	PEL[15:8] (8'b0000_0001)								-	
0D	Partial area end row 1	W/R	-	PEL[7:0] (8'b0011_1111)								-	
0E	Vertical Scroll Top fixed area 2	W/R	-	TFA[15:8] (8'b0000_0000)								-	
0F	Vertical Scroll Top fixed area 1	W/R	-	TFA[7:0] (8'b0000_0000)								-	
10	Vertical Scroll height area 2	W/R	-	VSA[15:8] (8'b0000_0001)								-	
11	Vertical Scroll height area 1	W/R	-	VSA[7:0] (8'b0100_0000)								-	
12	Vertical Scroll Button area 2	W/R	-	BFA[15:8] (8'b0000_0000)								-	
13	Vertical Scroll Button area 1	W/R	-	BFA[7:0] (8'b0000_0000)								-	
14	Vertical Scroll Start address 2	W/R	-	VSP[15:8] (8'b0000_0000)								-	
15	Vertical Scroll Start address 1	W/R	-	VSP[7:0] (8'b0000_0000)								-	
16	Memory Access control	W/R	-	MY(0)	Mx(0)	MV(0)	ML(0)	BGR(0)	-	-	-	-	
17	COLMOD	W/R	-	CSEL[3:0] (4b'0110)				-	IFPF[2:0] (3b'110)				-
18	OSC Control 2	W/R	-	IPI_RADJ[3:0] (3b'0011)				N/P_RADJ[3:0] (4b'0100)				-	
19	OSC Control 1	W/R	-	-	-	-	-	-	-	-	OSC_EN(0)	-	
1A	Power Control 1	W/R	-	-	-	-	-	BT[2:0] (001)				-	
1B	Power Control 2	W/R	-	-	-	VRH[5:0] (01_1011)_4.8V					-		
1C	Power Control 3	W/R	-	-	-	-	-	AP[2:0] (011)				-	
1D	Power Control 4	W/R	-	-	I/PL_FS0[2:0] (100)			-	N/P_FS0[2:0] (100)			-	
1E	Power Control 5	W/R	-	-	I/PL_FS1[2:0] (100)			-	N/P_FS1[2:0] (100)			-	
1F	Power Control 6	W/R	-	GARB(1)	VCOM2(0)	-	PON(0)	DK(1)	XDK(0)	DDVCH_TRI(0)	STB(1)	-	
22	SRAM Write Control	W/R	-	SRAM Write								-	
23	VCOM Control 1	W/R	-	VMF[7:0] (1000_0000)								-	
24	VCOM Control 2	W/R	-	VMH[7:0] (0111_0001)								-	
25	VCOM Control 3	W/R	-	VML[7:0] (0010_1111)								-	
26	Display Control 1	W/R	-	-	-	-	-	ISC[3:0] (0001)				-	
27	Display Control 2	W/R	-	PT[1:0] (10)		PTV[1:0] (10)		-	-	PTG(1)	REF(1)	-	
28	Display Control 3	W/R	-	-	GON(1)	DTE(0)	D[1:0] (00)		-	-	-	-	

(Hex)	Operation Code	W/R	Upper Code	Lower Code								Comment
			D[17:8]	D7	D6	D5	D4	D3	D2	D1	D0	
29	Frame Rate control 1	W/R	-	I/PI_RTN[3:0](0010)				N/P_RTN[3:0](0010)				-
2A	Frame Rate Control 2	W/R	-	-	-	I/PI_DIV[1:0](00)		-	-	N/P_DIV[1:0](00)		-
2B	Frame Rate Control 3	W/R	-	N/P_DUM[7:0] (8b 0001_1100)								-
2C	Frame Rate Control 4	W/R	-	I/PI_DUM[7:0] (8b 0001_1100)								-
2D	Cycle Control 1	W/R	-	GDCN[7:0] (8b0000_1101)								-
2E	Cycle Control 2	W/R	-	GDOF[7:0] (8b0111_0000)								-
2F	Display inversion	W/R	-	I/PI_NW[2:0](3b 001)				N/P_NW[2:0] (3b 001)				-
31	RGB interface control 1	W/R	-	-	-	-	-	-	RCM[1:0](00)			-
32	RGB interface control 2	W/R	-	-	-	-	-	DPL (0)	HSPL (0)	VSPL (0)	EPL (0)	-
33	RGB interface control 3	W/R	-	HBP[7:0]								-
34	RGB interface control 4	W/R	-	HBP[9:8]				VBP[5:0]				-
36	Panel Characteristic	W/R	-	-	-	-	-	SS_P anel	GS_Pan el	REV_Pi nel	BGR_P anel	-
38	OTP Control 1	W/R	-	OTP_PTM[1:0]		OTP_VARD,[1:0]		OTP_POR	OTP_TPEN	OTP_PP ROG	OTP_P WE	-
39	OTP Control 2	W/R	-	-	-	-	-	OTP_Y A2	OTP_YA1	OTP_Y A0	-	
3A	OTP Control 3	W/R	-	-	-	-	OTP_X A4	OTP_X A3	OTP_X A2	OTP_XA1	OTP_XA0	-
3C	CABC Control 1	W/R	-	DBV[7:0](8'h00)								-
3D	CABC Control 2	W/R	-	-	-	BCTRL (0)	-	DD (0)	BL (0)	-	-	-
3E	CABC Control 3	W/R	-	-	-	-	-	-	-	C1 (0)	C0 (0)	-
3F	CABC Control 4	W/R	-	CMB[7:0](6'h00)								-
40	r1 Control (1)	W/R	-	-	-	-	-	VRP0[5:0] (6'b00_0001)				-
41	r1 Control (2)	W/R	-	-	-	-	-	VRP1[5:0] (6'b00_1110)				-
42	r1 Control (3)	W/R	-	-	-	-	-	VRP2[5:0] (6'b01_0001)				-
43	r1 Control (4)	W/R	-	-	-	-	-	VRP3[5:0] (6'b01_1010)				-
44	r1 Control (5)	W/R	-	-	-	-	-	VRP4[5:0] (6'b01_1000)				-
45	r1 Control (6)	W/R	-	-	-	-	-	VRP5[5:0] (6'b10_0100)				-
46	r1 Control (7)	W/R	-	-	-	-	-	PRP0[6:0] (7'b001_0101)				-
47	r1 Control (8)	W/R	-	-	-	-	-	PRP1[6:0] (7'b110_0101)				-
48	r1 Control (9)	W/R	-	-	-	-	-	PKP0[4:0] (5'b0_1011)				-
49	r1 Control (10)	W/R	-	-	-	-	-	PKP1[4:0] (5'b1_100)				-
4A	r1 Control (11)	W/R	-	-	-	-	-	PKP2[4:0] (5'b1_1001)				-
4B	r1 Control (12)	W/R	-	-	-	-	-	PKP3[4:0] (5'b1_1010)				-
4C	r1 Control (13)	W/R	-	-	-	-	-	PKP4[4:0] (5'b1_1000)				-
50	r1 Control (14)	W/R	-	-	-	-	-	VRN0[5:0] (6'b01_1011)				-
51	r1 Control (15)	W/R	-	-	-	-	-	VRN1[5:0] (6'b10_0111)				-
52	r1 Control (16)	W/R	-	-	-	-	-	VRN2[5:0] (6'b10_0101)				-
53	r1 Control (17)	W/R	-	-	-	-	-	VRN3[5:0] (6'b10_1110)				-
54	r1 Control (18)	W/R	-	-	-	-	-	VRN4[5:0] (8'b11_0001)				-
55	r1 Control (19)	W/R	-	-	-	-	-	VRN5[5:0] (6'b11_1110)				-
56	r1 Control (20)	W/R	-	-	-	-	-	PRN0[6:0] (7'b001_1010)				-
57	r1 Control (21)	W/R	-	-	-	-	-	PRN1[6:0] (7'b110_1010)				-
58	r1 Control (22)	W/R	-	-	-	-	-	PKN0[4:0] (5'b0_0111)				-
59	r1 Control (23)	W/R	-	-	-	-	-	PKN1[4:0] (5'b0_0101)				-
5A	r1 Control (24)	W/R	-	-	-	-	-	PKN2[4:0] (5'b0_0110)				-
5B	r1 Control (25)	W/R	-	-	-	-	-	PKN3[4:0] (5'b0_1011)				-
5C	r1 Control (26)	W/R	-	-	-	-	-	PKN4[4:0] (5'b1_0100)				-
5D	r1 Control (27)	W/R	-	CGMN1[1:0] (11)		CGMN0[1:0] (00)		CGMP1[1:0] (11)		CGMP0[1:0] (00)		-
80	TE Control	W/R	-	-	-	-	TE_mod e(0)	TEOE(0)	-	-	-	-
E4	Power saving 1	W/R	-	EQ_S1[7:0]								-
E5	Power saving 2	W/R	-	EQ_S2[7:0]								-
E6	Power saving 3	W/R	-	EQ_S3[7:0]								-
E7	Power saving 4	W/R	-	EQ_S4[7:0]								-
E8	Source CP control_Normal	W/R	-	OPON_N[7:0]								-

(Hex)	Operation Code	W/R	Upper Code	Lower Code							Comment	
			D[17:8]	D7	D6	D5	D4	D3	D2	D1		D0
E9	Source OP control_IDLE	W/R	-	OPON_[7:0]							-	
EA	Power control internal use (1)	W/R	-	STBA[15:8]							-	
EB	Power control internal use (2)	W/R	-	STBA[7:0]							-	
EC	Source control internal use (1)	W/R	-	PTBA[15:8]							-	
ED	Source control internal use (2)	W/R	-	PTBA[7:0]							-	
FF	Page select	W/R	-	-	-	-	-	-	-	-	PAGE_SEL[1:0] (00)	-

## 10. AC Characteristics

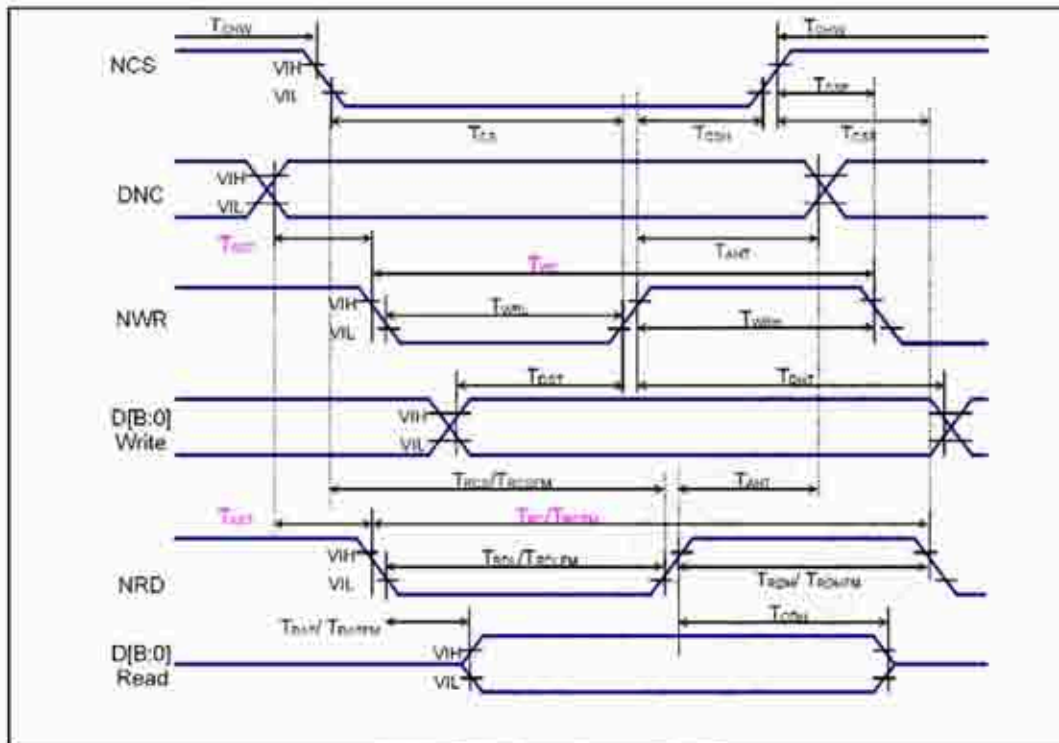

Parallel interface characteristics (8080-series MPU)

(VSSA=0V, IOVCC=1.65V to 3.3V, VCI=2.3V to 3.3V, T<sub>a</sub> = -30 to 70 °C)

Signal	Symbol	Parameter	Min.	Max.	Unit	Description
DNC_SCL	tAST	Address setup time	0	-	ns	-
	tAHT	Address hold time (Write/Read)	10	-	ns	-
NCS	tCHW	Chip select "H" pulse width	0	-	-	-
	tCS	Chip select setup time (Write)	15	-	-	-
	tRCS	Chip select setup time (Read ID)	45	-	ns	-
	tRCSFM	Chip select setup time (Read FM)	355	-	-	-
	tCSF	Chip select wait time (Write/Read)	10	-	-	-
	tCSH	Chip select hold time	10	-	-	-
NWR_SCL	tWC	Write cycle	66	-	-	-
	tWRH	Control pulse "H" duration	15	-	ns	-
NRD(ID)	tWRL	Control pulse "L" duration	15	-	-	-
	tRC	Read cycle (ID)	160	-	-	-
	tRDH	Control pulse "H" duration (ID)	90	-	ns	When read ID data
NRD(FM)	tRDL	Control pulse "L" duration (ID)	45	-	-	-
	tRCFM	Read cycle (FM)	450	-	-	-
	tRDHFM	Control pulse "H" duration (FM)	90	-	ns	When read from frame memory
DB17 to DB0	tRDLFM	Control pulse "L" duration (FM)	355	-	-	-
	tDST	Data setup time	10	-	-	-
	tDHT	Data hold time	10	-	-	For maximum CL=30pF
	tRAT	Read access time (ID)	-	40	ns	For minimum CL=8pF
	tRATFM	Read access time (FM)	-	340	-	-
	tODH	Output disable time	20	80	-	-

**Note:** The input signal rise time and fall time (tr, tf) is specified at 15 ns or less

Logic high and low levels are specified as 30% and 70% of IOVCC for input signals

## 11. Quality Specifications


All The raw material are Rohs compliant.

### 11.1 Standard of the product appearance test


Manner of appearance test: The inspection should be performed in using 20W x 2 fluorescent lamps.

Distance between LCM and fluorescent lamps should be 100 cm or more. Distance between LCM and inspector eyes should be 30 cm or more.

Viewing direction for inspection is  $45^\circ$  from vertical against LCM.

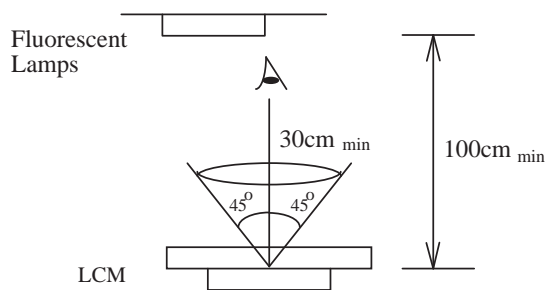

Definition of zone:



A Zone: viewing area

B Zone: outside viewing area

### 11.2 Specification of quality assurance

AQL inspection standard





Sampling method: MIL-STD-105E, Level II, single sampling



**Defect classification (Note: \* is not including)**




Classify	Item		Note	AQL
Major	Display state	Short or open circuit	1	0.65
		LC leakage		
		Flickering		
		No display		
		Wrong viewing direction		
		Contrast defect (dim, ghost)	2	
		Back-light	1,8	
	Non-display	Flat cable or pin reverse	10	
Wrong or missing component		11		
Minor	Display state	Background color deviation	2	1.0
		Black spot and dust	3	
		Line defect, Scratch	4	
		Rainbow	5	
		Chip	6	
		Pin hole	7	
		Polarizer	Protruded	
	Bubble and foreign material		3	
	Soldering	Poor connection	9	
	Wire	Poor connection	10	
	TAB	Position, Bonding strength	13	

**Note on defect classification**

No.	Item	Criterion																				
1	Short or open circuit	Not allow																				
	LC leakage																					
	Flickering																					
	No display																					
	Wrong viewing direction																					
	Wrong Back-light																					
2	Contrast defect	Refer to approval sample																				
	Background color deviation																					
3	Point defect, Black spot, dust (including Polarizer)  $\phi = (X+Y)/2$	 <table border="1" data-bbox="896 907 1317 1192"> <thead> <tr> <th>Point Size</th> <th>Acceptable Qty.</th> </tr> </thead> <tbody> <tr> <td><math>\phi \leq 0.10</math></td> <td>Disregard</td> </tr> <tr> <td><math>0.10 &lt; \phi \leq 0.20</math></td> <td>3</td> </tr> <tr> <td><math>0.20 &lt; \phi \leq 0.25</math></td> <td>2</td> </tr> <tr> <td><math>0.25 &lt; \phi \leq 0.30</math></td> <td>1</td> </tr> <tr> <td><math>\phi &gt; 0.30</math></td> <td>0</td> </tr> </tbody> </table> <p>Unit: mm</p>	Point Size	Acceptable Qty.	$\phi \leq 0.10$	Disregard	$0.10 < \phi \leq 0.20$	3	$0.20 < \phi \leq 0.25$	2	$0.25 < \phi \leq 0.30$	1	$\phi > 0.30$	0								
Point Size	Acceptable Qty.																					
$\phi \leq 0.10$	Disregard																					
$0.10 < \phi \leq 0.20$	3																					
$0.20 < \phi \leq 0.25$	2																					
$0.25 < \phi \leq 0.30$	1																					
$\phi > 0.30$	0																					
4	Line defect, Scratch	 <table border="1" data-bbox="836 1333 1334 1570"> <thead> <tr> <th colspan="2">Line</th> <th>Acceptable Qty.</th> </tr> <tr> <th>L</th> <th>W</th> <th></th> </tr> </thead> <tbody> <tr> <td>---</td> <td><math>0.015 \geq W</math></td> <td>Disregard</td> </tr> <tr> <td><math>3.0 \geq L</math></td> <td><math>0.03 \geq W</math></td> <td rowspan="2">2</td> </tr> <tr> <td><math>2.0 \geq L</math></td> <td><math>0.05 \geq W</math></td> </tr> <tr> <td><math>1.0 \geq L</math></td> <td><math>0.1 &gt; W</math></td> <td>1</td> </tr> <tr> <td>---</td> <td><math>0.05 &lt; W</math></td> <td>Applied as point defect</td> </tr> </tbody> </table> <p>Unit: mm</p>	Line		Acceptable Qty.	L	W		---	$0.015 \geq W$	Disregard	$3.0 \geq L$	$0.03 \geq W$	2	$2.0 \geq L$	$0.05 \geq W$	$1.0 \geq L$	$0.1 > W$	1	---	$0.05 < W$	Applied as point defect
Line		Acceptable Qty.																				
L	W																					
---	$0.015 \geq W$	Disregard																				
$3.0 \geq L$	$0.03 \geq W$	2																				
$2.0 \geq L$	$0.05 \geq W$																					
$1.0 \geq L$	$0.1 > W$	1																				
---	$0.05 < W$	Applied as point defect																				
5	Rainbow	Not more than two color changes across the viewing area.																				

No	Item	Criterion																																	
6	<p data-bbox="310 373 370 405">Chip</p> <p data-bbox="310 468 415 499">Remark:</p> <p data-bbox="362 506 483 562">X: Length direction</p> <p data-bbox="362 583 483 640">Y: Short direction</p> <p data-bbox="362 661 516 718">Z: Thickness direction</p> <p data-bbox="362 739 508 795">t: Glass thickness</p> <p data-bbox="362 816 516 873">W: Terminal Width</p>	<div data-bbox="602 405 943 573"> </div> <p data-bbox="964 405 1203 436">Acceptable criterion</p> <table border="1" data-bbox="964 436 1317 510"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><math>\leq 2</math></td> <td>0.5mm</td> <td><math>\leq t/2</math></td> </tr> </tbody> </table> <div data-bbox="587 699 919 867"> </div> <p data-bbox="954 684 1193 716">Acceptable criterion</p> <table border="1" data-bbox="954 716 1320 789"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><math>\leq 2</math></td> <td>0.5mm</td> <td><math>\leq t</math></td> </tr> </tbody> </table> <div data-bbox="594 940 911 1150"> </div> <p data-bbox="967 951 1206 982">Acceptable criterion</p> <table border="1" data-bbox="967 982 1320 1087"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><math>\leq 3</math></td> <td><math>\leq 2</math></td> <td><math>\leq t</math></td> </tr> <tr> <td colspan="2">shall not reach to ITO</td> <td></td> </tr> </tbody> </table> <div data-bbox="587 1266 954 1434"> </div> <p data-bbox="954 1293 1193 1325">Acceptable criterion</p> <table border="1" data-bbox="954 1325 1320 1398"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>Disregard</td> <td><math>\leq 0.2</math></td> <td><math>\leq t</math></td> </tr> </tbody> </table> <div data-bbox="594 1549 919 1717"> </div> <p data-bbox="954 1560 1193 1591">Acceptable criterion</p> <table border="1" data-bbox="954 1591 1292 1665"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><math>\leq 5</math></td> <td><math>\leq 2</math></td> <td><math>\leq t/3</math></td> </tr> </tbody> </table>	X	Y	Z	$\leq 2$	0.5mm	$\leq t/2$	X	Y	Z	$\leq 2$	0.5mm	$\leq t$	X	Y	Z	$\leq 3$	$\leq 2$	$\leq t$	shall not reach to ITO			X	Y	Z	Disregard	$\leq 0.2$	$\leq t$	X	Y	Z	$\leq 5$	$\leq 2$	$\leq t/3$
X	Y	Z																																	
$\leq 2$	0.5mm	$\leq t/2$																																	
X	Y	Z																																	
$\leq 2$	0.5mm	$\leq t$																																	
X	Y	Z																																	
$\leq 3$	$\leq 2$	$\leq t$																																	
shall not reach to ITO																																			
X	Y	Z																																	
Disregard	$\leq 0.2$	$\leq t$																																	
X	Y	Z																																	
$\leq 5$	$\leq 2$	$\leq t/3$																																	

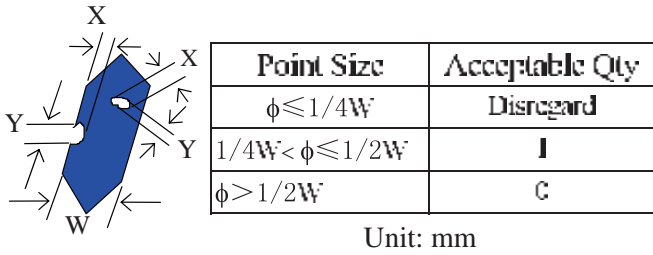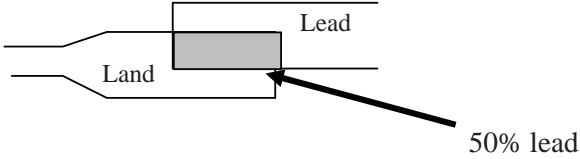No.	Item	Criterion								
7	Segment pattern $W = \text{Segment width}$ $\phi = (X+Y)/2$	(1) Pin hole $\phi < 0.10\text{mm}$ is acceptable.  <table border="1" data-bbox="885 541 1328 709"> <thead> <tr> <th>Point Size</th> <th>Acceptable Qty</th> </tr> </thead> <tbody> <tr> <td><math>\phi \leq 1/4W</math></td> <td>Disregard</td> </tr> <tr> <td><math>1/4W &lt; \phi \leq 1/2W</math></td> <td>I</td> </tr> <tr> <td><math>\phi &gt; 1/2W</math></td> <td>C</td> </tr> </tbody> </table> <p style="text-align: center;">Unit: mm</p>	Point Size	Acceptable Qty	$\phi \leq 1/4W$	Disregard	$1/4W < \phi \leq 1/2W$	I	$\phi > 1/2W$	C
Point Size	Acceptable Qty									
$\phi \leq 1/4W$	Disregard									
$1/4W < \phi \leq 1/2W$	I									
$\phi > 1/2W$	C									
8	Back-light	(1) The color of backlight should correspond its specification. (2) Not allow flickering								
9	Soldering	(1) Not allow heavy dirty and solder ball on PCB. (The size of dirty refer to point and dust defect) (2) Over 50% of lead should be soldered on Land. 								
10	Wire	(1) Copper wire should not be rusted (2) Not allow crack on copper wire connection. (3) Not allow reversing the position of the flat cable. (4) Not allow exposed copper wire inside the flat cable.								
11*	PCB	(1) Not allow screw rust or damage. (2) Not allow missing or wrong putting of component.								

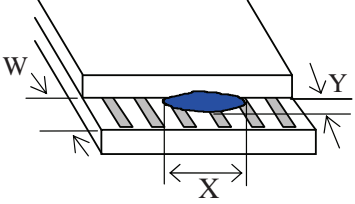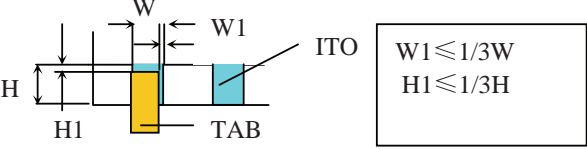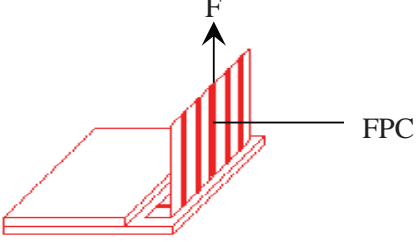No	Item	Criterion
12	Protruded W: Terminal Width	 <p>Acceptable criteria: <math>Y \leq 0.4</math></p>
13	TAB	<p>1. Position</p>  <p>2 FPC bonding strength test</p>  <p><math>P (=F/FPC \text{ bonding width}) \geq 650\text{gf/cm}</math> ,(speed rate: 1mm/min) 5pcs per SOA (shipment)</p>
14	Total no. of acceptable Defect	<p>A. Zone</p> <p>Maximum 2 minor non-conformities per one unit. Defect distance: each point to be separated over 10mm</p> <p>B. Zone</p> <p>It is acceptable when it is no trouble for quality and assembly in customer's end product.</p>

### 11.3 Reliability of LCM

Reliability test condition:

Item	Condition	Time (hrs)	Assessment
High temp. Storage	80°C	48	No abnormalities in functions and appearance
High temp. Operating	70°C	48	
Low temp. Storage	-30°C	48	
Low temp. Operating	-20°C	48	
Humidity	60°C/ 90%RH	48	
Temp. Cycle	-30°C ← 25°C → 80°C (60 min ← 5 min → 60min)	10cycles	

Recovery time should be 24 hours minimum. Moreover, functions, performance and appearance shall be free from remarkable deterioration within 50,000 hours under ordinary operating and storage conditions room temperature (20±8°C), normal humidity (below 65% RH), and in the area not exposed to direct sun light.

o

## 11.4 Precaution for using LCD/LCM

LCD/LCM is assembled and adjusted with a high degree of precision. Do not attempt to make any alteration or modification. The followings should be noted.

### General Precautions:

1. LCD panel is made of glass. Avoid excessive mechanical shock or applying strong pressure onto the surface of display area.
2. The polarizer used on the display surface is easily scratched and damaged. Extreme care should be taken when handling. To clean dust or dirt off the display surface, wipe gently with cotton, or other soft material soaked with isopropyl alcohol, ethyl alcohol or trichlorotrifluoroethane, do not use water, ketone or aromatics and never scrub hard.
3. Do not tamper in any way with the tabs on the metal frame.
4. Do not make any modification on the PCB without consulting Orient Display.
5. When mounting a LCM, make sure that the PCB is not under any stress such as bending or twisting. Elastomer contacts are very delicate and missing pixels could result from slight dislocation of any of the elements.
6. Avoid pressing on the metal bezel, otherwise the elastomer connector could be deformed and lose contact, resulting in missing pixels and also cause rainbow on the display.
7. Be careful not to touch or swallow liquid crystal that might leak from a damaged cell. Any liquid crystal adheres to skin or clothes, wash it off immediately with soap and water.

### Static Electricity Precautions:

1. CMOS-LSI is used for the module circuit; therefore operators should be grounded whenever he/she comes into contact with the module.
2. Do not touch any of the conductive parts such as the LSI pads; the copper leads on the PCB and the interface terminals with any parts of the human body.
3. Do not touch the connection terminals of the display with bare hand; it will cause disconnection or defective insulation of terminals.
4. The modules should be kept in anti-static bags or other containers resistant to static for storage.
5. Only properly grounded soldering irons should be used.
6. If an electric screwdriver is used, it should be grounded and shielded to prevent sparks.
7. The normal static prevention measures should be observed for work clothes and working benches.
8. Since dry air is inductive to static, a relative humidity of 50-60% is recommended.

### Soldering Precautions:

1. Soldering should be performed only on the I/O terminals.
2. Use soldering irons with proper grounding and no leakage.
3. Soldering temperature:  $280^{\circ}\text{C} \pm 10^{\circ}\text{C}$
4. Soldering time: 3 to 4 second.
5. Use eutectic solder with resin flux filling.
6. If flux is used, the LCD surface should be protected to avoid spattering flux.
7. Flux residue should be removed.

**Operation Precautions:**

1. The viewing angle can be adjusted by varying the LCD driving voltage  $V_o$ .
2. Since applied DC voltage causes electro-chemical reactions, which deteriorate the display, the applied pulse waveform should be a symmetric waveform such that no DC component remains. Be sure to use the specified operating voltage.
3. Driving voltage should be kept within specified range; excess voltage will shorten display life.
4. Response time increases with decrease in temperature.
5. Display color may be affected at temperatures above its operational range.
6. Keep the temperature within the specified range usage and storage. Excessive temperature and humidity could cause polarization degradation, polarizer peel-off or generate bubbles.
7. For long-term storage over 40°C is required, the relative humidity should be kept below 60%, and avoid direct sunlight.

**Limited Warranty**

Orient Display's LCDs and modules are not consumer products, but may be incorporated by Orient Display's customers into consumer products or components thereof, Orient Display does not warrant that its LCDs and components are fit for any such particular purpose.

1. The liability of Orient Display is limited to repair or replacement on the terms set forth below. Orient Display will not be responsible for any subsequent or consequential events or injury or damage to any personnel or user including third party personnel and/or user. Unless otherwise agreed in writing between Orient Display and the customer, Orient Display will only replace or repair any of its LCD which is found defective electrically or visually when inspected in accordance with Orient Display general LCD inspection standard. (Copies available on request)
2. No warranty can be granted if any of the precautions state in handling liquid crystal display above has been disregarded. Broken glass, scratches on polarizer mechanical damages as well as defects that are caused accelerated environment tests are excluded from warranty.
3. In returning the LCD/LCM, they must be properly packaged; there should be detailed description of the failures or defect.