

The documentation and process conversion measures necessary to comply with this document shall be completed by 6 February 2014.

INCH-POUND

MIL-PRF-19500/660E
6 December 2013
SUPERSEDING
MIL-PRF-19500/660D
11 February 2013

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, FIELD EFFECT RADIATION HARDENED
TRANSISTOR, P-CHANNEL SILICON, TYPES 2N7424, 2N7425, AND 2N7426,
JANTXVR, JANTXVF, JANSR, AND JANSF

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of
this specification sheet and [MIL-PRF-19500](#).

1. SCOPE

1.1 Scope. This specification covers the performance requirements for a P-channel, enhancement-mode, MOSFET, radiation hardened, power transistor. Two levels of product assurance are provided for each device type as specified in [MIL-PRF-19500](#), with avalanche energy maximum rating (E_{AS}) and maximum avalanche current (I_{AS}). See 6.5 for JANHC and JANKC die versions.

1.2 Physical dimensions. See [figure 1](#), TO-254AA.

1.3 Maximum ratings. Unless otherwise specified, $T_A = +25^\circ\text{C}$.

Type	P_T (1) $T_C = +25^\circ\text{C}$	P_T $T_A = +25^\circ\text{C}$	$R_{\theta JC}$ (2)	V_{DS}	V_{DG}	V_{GS}	I_{D1} (3) (4) $T_C = +25^\circ\text{C}$	I_{D2} (3)(4) $T_C = +100^\circ\text{C}$	I_S	I_{DM} (5)	T_J and T_{STG}
	<u>W</u>	<u>W</u>	$^\circ\text{C/W}$	<u>V dc</u>	<u>V dc</u>	<u>V dc</u>	<u>A dc</u>	<u>A dc</u>	<u>A dc</u>	<u>A (pk)</u>	$^\circ\text{C}$
2N7424	250	3.0	0.50	-60	-60	± 20	-35	-30	-35	-140	-55
2N7425	250	3.0	0.50	-100	-100	± 20	-35	-24	-35	-140	to
2N7426	250	3.0	0.50	-200	-200	± 20	-27	-17	-27	-108	+150

- (1) Derate linearly 2.0 W/ $^\circ\text{C}$ for $T_C > +25^\circ\text{C}$.
- (2) See [figure 2](#), thermal impedance curves.
- (3) The following formula derives the maximum theoretical I_D limit. I_D is limited by package and internal construction.

$$I_D = \sqrt{\frac{T_{JM} - T_C}{(R_{\theta JC}) \times (R_{DS(on)} \text{ at } T_{JM})}}$$

- (4) See [figure 3](#), maximum drain current graphs.
- (5) $I_{DM} = 4 \times I_{D1}$ as calculated in note 3.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at <https://assist.dla.mil>.

1.4 Primary electrical characteristics at $T_C = +25^\circ\text{C}$.

Type	Min $V_{(BR)DSS}$ $V_{GS} = 0$ $I_D = -1.0$ mA dc	$V_{GS(TH)1}$ $V_{DS} \geq V_{GS}$ $I_D = -1.0$ mA dc	Max I_{DSS1} $V_{GS} = 0$ $V_{DS} = 80$ percent of rated V_{DS}	Max $r_{DS(on)}$ (1) $V_{GS} = -12V$ $I_D = I_{D2}$		E_{AS}	
				$T_J = +25^\circ\text{C}$	$T_J = +150^\circ\text{C}$		
	<u>V dc</u>	<u>V dc</u> Min Max		<u>$\mu\text{A dc}$</u>	<u>Ω</u>	<u>Ω</u>	<u>mJ</u>
2N7424	-60	-2.0	-4.0	-25	0.050	0.105	500
2N7425	-100	-2.0	-4.0	-25	0.073	0.155	500
2N7426	-200	-2.0	-4.0	-25	0.160	0.340	500

(1) Pulsed (see 4.5.1).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

[MIL-PRF-19500](#) - Semiconductor Devices, General Specification for.


DEPARTMENT OF DEFENSE STANDARDS

[MIL-STD-750](#) - Test Methods for Semiconductor Devices.

* (Copies of these documents are available online at <http://quicksearch.dla.mil> or <https://assist.dla.mil/> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BL	.535	.545	13.59	13.84
CH	.249	.260	6.32	6.60
LD	.035	.045	0.89	1.14
LL	.510	.570	12.95	14.48
LO	.150 BSC		3.81 BSC	
LS	.150 BSC		3.81 BSC	
MHD	.139	.149	3.53	3.78
MHO	.665	.685	16.89	17.40
TL	.790	.800	20.07	20.32
TT	.040	.050	1.02	1.27
TW	.535	.545	13.59	13.84
Term 1	Drain			
Term 2	Source			
Term 3	Gate			

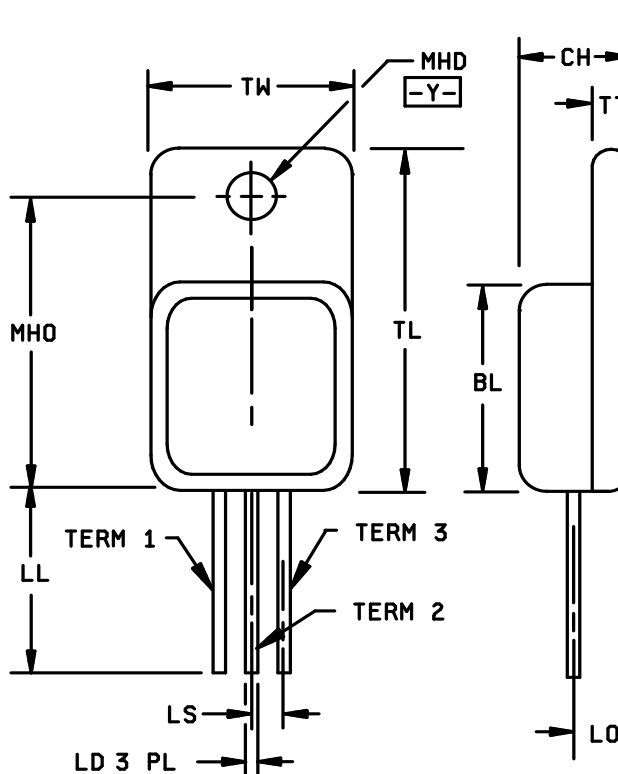

NOTES:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Refer to applicable symbol list.
4. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.
5. All terminals are isolated from case.

FIGURE 1. Physical dimensions for TO-254AA.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in [MIL-PRF-19500](#) and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see [4.2](#) and [6.3](#)).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in [MIL-PRF-19500](#) and as follows:

I_{AS}	Rated avalanche current, nonrepetitive
nC	nano coulomb.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in [MIL-PRF-19500](#), and [figure 1](#) (TO-254AA) herein. Methods used for electrical isolation of the terminals shall employ materials that contain a minimum of 90 percent Al_2O_3 (ceramic).

3.4.1 Lead material and finish. Lead material shall be Kovar or Alloy 52; a copper core or plated core is permitted. Lead finish shall be solderable as defined in [MIL-PRF-19500](#), [MIL-STD-750](#), and herein. Where a choice of terminal finish is desired, it shall be specified in the acquisition document (see [6.2](#)).

3.5 Electrostatic discharge protection. The devices covered by this specification require electrostatic discharge protection.

3.5.1 Handling. MOS devices must be handled with certain precautions to avoid damage due to the accumulation of static charge. However, the following handling practices are recommended (see [3.5](#)).

- a. Devices should be handled on benches with conductive handling devices.
- b. Ground test equipment, tools, and personnel handling devices.
- c. Do not handle devices by the leads.
- d. Store devices in conductive foam or carriers.
- e. Avoid use of plastic, rubber, or silk in MOS areas.
- f. Maintain relative humidity above 50 percent if practical.
- g. Care should be exercised during test and troubleshooting to apply not more than maximum rated voltage to any lead.
- h. Gate must be terminated to source, $R \leq$ or 100 k Ω , whenever bias voltage is applied drain to source.

3.6 Marking. Marking shall be in accordance with [MIL-PRF-19500](#). At the option of the manufacturer, marking of the country of origin may be omitted from the body of the transistor but shall be retained on the initial container.

3.7 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in [1.3](#), [1.4](#), and [table I](#).

3.8 Electrical test requirements. The electrical test requirements shall be as specified in [table I](#).

3.9 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

- a. Qualification inspection (see 4.2).
- b. Screening (see 4.3).
- c. Conformance inspection (see 4.4 and tables I and II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table III tests, the tests specified in table III herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.2.1.1 Single event effects (SEE). SEE shall be performed at initial qualification and after process or design changes which may affect radiation hardness (see table III and table IV). Upon qualification, manufacturers shall provide the verification test conditions from section 5 of method 1080 of MIL-STD-750 that were used to qualify the device for inclusion into section 6 of the slash sheet. End-point measurements shall be in accordance with table II. SEE characterization data shall be made available upon request of the qualifying or acquiring activity.

* 4.3 Screening (JANS and JANTXV). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table E-IV of MIL-PRF-19500) (1) (2)	Measurement	
	JANS	JANTXV
(3)	Gate stress test (see 4.3.1)	Gate stress test (see 4.3.1)
(3)	Method 3470 of MIL-STD-750, E _{AS} test (see 4.3.2)	Method 3470 of MIL-STD-750, E _{AS} test (see 4.3.2)
(3) 3c	Method 3161 of MIL-STD-750, thermal impedance (see 4.3.3)	Method 3161 of MIL-STD-750, thermal impedance (see 4.3.3)
9	Subgroup 2 of table I herein I _{DSS1} , I _{GSSF1} , and I _{GSSR1} as a minimum	Not applicable
10	Method 1042 of MIL-STD-750, test condition B	Method 1042 of MIL-STD-750, test condition B
11	I _{GSSF1} , I _{GSSR1} , I _{DSS1} , r _{DS(ON)1} , V _{GS(TH)1} Subgroup 2 of table I herein. ΔI _{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI _{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI _{DSS1} = ±10 μA dc or ±100 percent of initial value, whichever is greater.	I _{GSSF1} , I _{GSSR1} , I _{DSS1} , r _{DS(ON)1} , V _{GS(TH)1} Subgroup 2 of table I herein.
12	Method 1042 of MIL-STD-750, test condition A	Method 1042 of MIL-STD-750, test condition A
13	Subgroups 2 and 3 of table I herein ΔI _{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI _{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI _{DSS1} = ±10 μA dc or ±100 percent of initial value, whichever is greater. Δr _{DS(ON)1} = ±20 percent of initial value. ΔV _{GS(TH)1} = ±20 percent of initial value.	Subgroup 2 of table I herein ΔI _{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI _{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI _{DSS1} = ±10 μA dc or ±100 percent of initial value, whichever is greater. Δr _{DS(ON)1} = ±20 percent of initial value. ΔV _{GS(TH)1} = ±20 percent of initial value.
17	For TO-254AA packages: Method 1081 of MIL-STD-750 (see 4.3.4), Endpoints: Subgroup 2 of table I herein.	For TO-254AA packages: Method 1081 of MIL-STD-750 (see 4.3.4), Endpoints: Subgroup 2 of table I herein.

- (1) At the end of the test program, I_{GSSF1}, I_{GSSR1}, and I_{DSS1} are measured.
- (2) An out-of-family program to characterize I_{GSSF1}, I_{GSSR1}, I_{DSS1}, and V_{GS(TH)1} shall be invoked.
- (3) Shall be performed anytime after temperature cycling, screen 3a; JANTXV level does not need to be repeated in screening requirements.

MIL-PRF-19500/660E

4.3.1 Gate stress test. Apply $V_{GS} = -30$ V minimum for $t = 250$ μ s minimum.

4.3.2 Single pulse avalanche energy (E_{AS}).

- a. Peak current $I_{AS} = I_{D1}$.
- b. Inductance $L = (2 * E_{AS} / (I_{D1})^2) * (V_{BR} - V_{DD}) / V_{BR}$ mH minimum.
- c. Gate to source resistor..... $R_{GS}: 25 \leq R_{GS} \leq 200 \Omega$.
- d. Supply voltage $V_{DD} = -25$ V dc, except $V_{DD} = -50$ V dc for 2N7426.
- e. Initial case temperature..... $T_C = +25^\circ\text{C}, -5^\circ\text{C}, +10^\circ\text{C}$.
- f. Gate voltage $V_{GS} = -12$ V dc.
- g. Number of pulses to be applied 1 pulse minimum.

4.3.3 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3161 of [MIL-STD-750](#) using the guidelines in that method for determining I_M, I_H, t_H, t_{SW} , (and V_H where appropriate). Measurement delay time (t_{MD}) = 70 μ s max. See [table III](#), group E, subgroup 4 herein.

* 4.3.4 Dielectric withstanding voltage.

- a. Magnitude of test voltage.....900 V dc.
- b. Duration of application of test voltage.....15 seconds (min).
- c. Points of application of test voltage.....All leads to case (bunch connection).
- d. Method of connection.....Mechanical.
- e. Kilovolt-ampere rating of high voltage source.....1,200 V/1.0 mA (min).
- f. Maximum leakage current.....1.0 mA.
- g. Voltage ramp up time.....500 V/second.

4.4 Conformance inspection. Conformance inspection shall be in accordance with [MIL-PRF-19500](#).

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of [MIL-PRF-19500](#) and [table I](#) herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIA (JANS) and table E-VIB (JANTXV) of [MIL-PRF-19500](#), and as follows. Electrical measurements (end-points) shall be in accordance with [table I](#), subgroup 2 herein.

* 4.4.2.1 Group B inspection, table E-VIA (JANS) of [MIL-PRF-19500](#).

<u>Subgroup</u>	<u>Method</u>	<u>Condition</u>
B3	1051	Test condition G, 100 cycles.
B3	2077	SEM.
* B4	1042	Intermittent operation life, condition D. No heat sink or forced-air cooling on the device shall be permitted during the on cycle; $t_{on} = 30$ seconds minimum.
B5	1042	Accelerated steady-state gate bias, condition B, $V_{GS} = \text{rated}$; $T_A = +175^\circ\text{C}$, $t = 24$ hours minimum; or $T_A = +150^\circ\text{C}$, $t = 48$ hours minimum.
B5	1042	Accelerated steady-state reverse bias, condition A, $V_{DS} = \text{rated}$; $T_A = +175^\circ\text{C}$, $t = 120$ hours minimum; or $T_A = +150^\circ\text{C}$, $t = 240$ hours minimum.
B5	2037	Bond strength, test condition D.

* 4.4.2.2 Group B inspection, table E-VIB (JANTXV) of [MIL-PRF-19500](#).

<u>Subgroup</u>	<u>Method</u>	<u>Condition</u>
B2	1051	Test condition G, 25 cycles.
* B3	1042	Intermittent operation life, condition D. No heat sink or forced-air cooling on the device shall be permitted during the on cycle; $t_{on} = 30$ seconds minimum.

* 4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of [MIL-PRF-19500](#) and as follows. Electrical measurements (end-points) shall be in accordance with [table I](#), subgroup 2 herein.

<u>Subgroup</u>	<u>Method</u>	<u>Condition</u>
C2	2036	Test condition A; weight = 10 pounds; $t = 15$ seconds
C5	3161	See 4.3.3, $R_{\theta JC(\text{max})} = 0.50^\circ\text{C/W}$
* C6	1042	Intermittent operation life, condition D. No heat sink or forced-air cooling on the device shall be permitted during the on cycle; $t_{on} = 30$ seconds minimum.

4.4.4 Group D inspection. Group D inspection shall be conducted in accordance with table E-VIII of [MIL-PRF-19500](#) and [table II](#) herein.

4.4.5 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of [MIL-PRF-19500](#) and as specified in [table III](#) herein. Electrical measurements (end-points) shall be in accordance with [table I](#), subgroup 2 herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of [MIL-STD-750](#).

MIL-PRF-19500/660E

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Condition		Min	Max	
<u>Subgroup 1</u>						
Visual and mechanical inspection	2071					
<u>Subgroup 2</u>						
Thermal impedance 2/	3161	See 4.3.3	$Z_{\theta JC}$			°C/W
Breakdown voltage drain to source	3407	Bias condition C, $V_{GS} = 0$ V, $I_D = -1$ mA dc,	$V_{(BR)DSS}$			
2N7424				-60		V dc
2N7425				-100		V dc
2N7426				-200		V dc
Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS}$, $I_D = -1$ mA dc	$V_{GS(TH)1}$	-2.0	-4.0	V dc
Gate current	3411	Bias condition C, $V_{GS} = \pm 20$ V dc, $V_{DS} = 0$ V	I_{GSS1}		± 100	nA dc
Drain current	3413	Bias condition C, $V_{GS} = 0$ V dc, $V_{DS} = 80$ percent of rated V_{DS} ,	I_{DSS1}		-25	μ A dc
Static drain to source on-state resistance	3421	$V_{GS} = -12$ V dc, condition A, pulsed (see 4.5.1), $I_D = I_{D2}$	$r_{DS(ON)1}$			
2N7424					0.050	Ω
2N7425					0.073	Ω
2N7426					0.160	Ω
Static drain to source on-state resistance	3421	$V_{GS} = -12$ V dc, condition A, pulsed (see 4.5.1), $I_D = I_{D1}$	$r_{DS(ON)2}$			
2N7424					0.053	Ω
2N7425					0.075	Ω
2N7426					0.170	Ω
Forward voltage	4011	$V_{GS} = 0$ V dc, condition A, pulsed (see 4.5.1), $I_D = I_{D1}$	V_{SD}			
2N7424					-3.0	V dc
2N7425					-3.3	V dc
2N7426					-3.3	V dc
<u>Subgroup 3</u>						
High temperature operation:		$T_C = T_J = +125^\circ\text{C}$				
Gate current	3411	Bias condition C, $V_{GS} = \pm 20$ V dc, $V_{DS} = 0$ V	I_{GSS2}		± 200	nA dc

See footnotes at end of table.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Condition		Min	Max	
<u>Subgroup 3</u> - Continued						
Drain current	3413	Bias condition C, $V_{GS} = 0$ V dc, $V_{DS} = 80$ percent of rated V_{DS}	I_{DSS2}		-0.25	mA dc
Static drain to source on-state resistance	3421	$V_{GS} = -12$ V dc, condition A, pulsed (see 4.5.1), $I_D = I_{D2}$	$r_{DS(ON)3}$			
2N7424					0.090	Ω
2N7425					0.140	Ω
2N7426					0.315	Ω
Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS}$, $I_D = -1$ mA dc	$V_{GS(TH)2}$	-1.0		V dc
Low temperature operation:		$T_C = T_J = -55^\circ\text{C}$				
Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS(TH)3}$, $I_D = -1$ mA dc	$V_{GS(TH)3}$		-5.0	V dc
<u>Subgroup 4</u>						
Switching time test	3472	$I_D = I_{D1}$, $V_{GS} = -12$ V dc, $R_G = 2.35$ Ω , $V_{DD} = 50$ percent of rated V_{DS}				
Turn-on delay time			$t_{D(on)}$			
2N7424					35	ns
2N7425					35	ns
2N7426					37	ns
Rise time			t_r			
2N7424					150	ns
2N7425					170	ns
2N7426					83	ns
Turn-off delay time			$t_{D(off)}$			
2N7424					200	ns
2N7425					190	ns
2N7426					140	ns
Fall time			t_f			
2N7424					200	ns
2N7425					190	ns
2N7426					172	ns
Forward transconductance	3475	$I_D = \text{rated } I_{D2}$, $V_{DD} = 15$ V, see 4.5.1	g_{FS}			
2N7424				18		s
2N7425				15		s
2N7426				13		s

See footnotes at end of table.

TABLE I. Group A inspection - Continued.

Inspection <u>1/</u>	MIL-STD-750		Symbol	Limits		Unit
	Method	Condition		Min	Max	
<u>Subgroup 5</u>						
Safe operating area test (high voltage)	3474	See figure 4 $t_p = 10$ ms min. $V_{DS} = 80$ percent of maximum rated V_{DS}				
Electrical measurements		See table I , subgroup 2				
<u>Subgroup 6</u>						
Not applicable						
<u>Subgroup 7</u>						
Gate charge	3471	Condition B				
On-state gate charge			$Q_{G(ON)}$			
2N7424					260	nC
2N7425					290	nC
2N7426					300	nC
Gate to source charge			Q_{GS}			
2N7424					66	nC
2N7425					72	nC
2N7426					60	nC
Gate to drain charge			Q_{GD}			
2N7424					91	nC
2N7425					77	nC
2N7426					70	nC
Reverse recovery time	3473	$di/dt = -100$ A/ μ s, $V_{DD} \leq -50$ V $I_D = I_{D1}$	t_{rr}			
2N7424					270	ns
2N7425					300	ns
2N7426					600	ns

1/ For sampling plan, see [MIL-PRF-19500](#).

2/ This test required for the following end-point measurements only:
Group B, subgroups 3 and 4 (JANS).
Group B, subgroups 2 and 3 (JANTXV).
Group C, subgroups 2 and 6.
Group E, subgroup 1.

TABLE II. Group D inspection.

Inspection <u>1/ 2/ 3/</u>	MIL-STD-750		Symbol	Pre-irradiation limits		Post-irradiation limits				Unit
	Method	Conditions		R and F		R		F <u>4/</u>		
				Min	Max	Min	Max	Min	Max	
<u>Subgroup 1</u>										
Not applicable										
<u>Subgroup 2</u>		$T_C = +25^\circ\text{C}$								
Steady-state total dose irradiation (V_{GS} bias) <u>5/</u>	1019	$V_{GS} = -12\text{ V};$ $V_{DS} = 0\text{ V}$								
Steady-state total dose irradiation (V_{DS} bias) <u>5/</u>	1019	$V_{GS} = 0\text{ V};$ $V_{DS} = 80\text{ percent}$ of rated V_{DS} (pre-irradiation)								
End-point electricals:										
Breakdown voltage, drain to source	3407	Bias condition C; $V_{GS} = 0\text{ V};$ $I_D = -1\text{ mA}$	$V_{(BR)DSS}$							
2N7424				-60		-60		-60		V dc
2N7425				-100		-100		-100		V dc
2N7426				-200		-200		-200		V dc
Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS};$ $I_D = -1\text{ mA}$	$V_{GS(th)1}$							
2N7424				-2.0	-4.0	-2.0	-4.0	-2.0	-5.0	V dc
2N7425				-2.0	-4.0	-2.0	-4.0	-2.0	-5.0	V dc
2N7426				-2.0	-4.0	-2.0	-4.0	-2.0	-5.0	V dc
Gate current	3411	$V_{GS} = -20\text{ V};$ $V_{DS} = 0\text{ V};$ bias condition C	I_{GSSF1}		-100		-100		-100	nA dc
Gate current	3411	$V_{GS} = +20\text{ V};$ $V_{DS} = 0\text{ V};$ bias condition C	I_{GSSR1}		100		100		100	nA dc
Drain current	3413	$V_{GS} = 0\text{ V};$ $V_{DS} = 80\text{ percent}$ of rated V_{DS} (pre-irradiation); bias condition C	I_{DSS}		-25		-25		-25	$\mu\text{A dc}$

See footnotes at end of table.

TABLE II. Group D inspection - Continued.

Inspection <u>1/</u> <u>2/</u> <u>3/</u>	MIL-STD-750		Symbol	Pre-irradiation limits		Post-irradiation limits				Unit
	Method	Conditions		R and F		R		F <u>4/</u>		
				Min	Max	Min	Max	Min	Max	
<u>Subgroup 2 - Continued</u>		$T_C = +25^\circ\text{C}$								
Static drain to source on-state voltage	3405	Pulsed (see 4.5.1); $V_{GS} = -12\text{ V}$; $I_D = I_{D2}$; bias condition A	$V_{DS(on)}$							
2N7424					-1.50		-1.50		-1.50	V dc
2N7425					-		-		-1.752	V dc
2N7426					1.752 -2.72		1.752 -2.72		-2.72	V dc
Forward voltage source drain diode	4011	Bias condition C; $V_{GS} = 0\text{ V}$; $I_D = I_{D1}$	V_{SD}							
2N7424					-3.0		-3.0		-3.0	V dc
2N7425					-3.3		-3.3		-3.3	V dc
2N7426					-3.3		-3.3		-3.3	V dc

1/ For sampling plan see [MIL-PRF-19500](#).

2/ Group D qualification may be performed prior to lot formation. Wafers qualified to these group D QCI requirements may be used for any other specification utilizing the same die design.

3/ At the manufacturer's option, group D samples need not be subjected to the screening tests, and may be assembled in its qualified package or in any qualified package that the manufacturer has data to correlate the performance to the designated package.

4/ The F designation represents devices which pass end-points both R, and F designated total-ionizing-dose (TID) levels.

5/ Separate samples shall be pulled for each bias.

TABLE III. Group E inspection (all quality levels) for qualification or re-qualification only.

Inspection	MIL-STD-750		Sample plan
	Method	Conditions	
<u>Subgroup 1</u>			45 devices c = 0
Temperature cycling	1051	Test condition G, 500 cycles.	
Hermetic seal	1071		
Fine leak Gross leak			
Electrical measurements		See table I , subgroup 2.	
<u>Subgroup 2 1/</u>			45 devices c = 0
Steady-state gate bias	1042	Condition B, 1,000 hours.	
Electrical measurements		See table I , subgroup 2.	
Steady-state reverse bias	1042	Condition A, 1,000 hours.	
Electrical measurements		See table I , subgroup 2.	
<u>Subgroup 4</u>			sample size N/A
Thermal impedance curves		See MIL-PRF-19500 .	
<u>Subgroup 10</u>			22 devices c = 0
Commutating diode for safe operating area test procedure for measuring dv/dt during reverse recovery of power MOSFET transistors or insulated gate bipolar transistors	3476	Test conditions shall be derived by the manufacturer	
<u>Subgroup 11</u>			3 devices
SEE 2/ 3/	1080	See MIL-STD-750 method 1080 and 6.2 .	

[1/](#) A separate sample for each test shall be pulled.

[2/](#) Group E qualification of SEE effect testing may be performed prior to lot formation. Qualification may be extended to other specification sheets utilizing the same structurally identical die design.

[3/](#) Device qualification to a higher level LET is sufficient to qualify all lower level LETs.



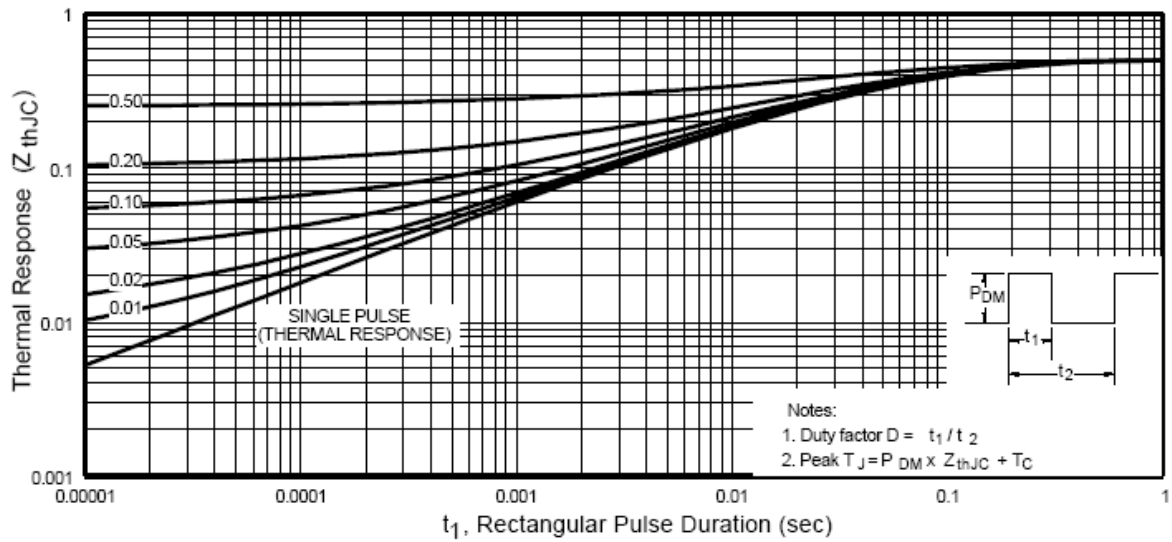



FIGURE 2. Thermal impedance curve.

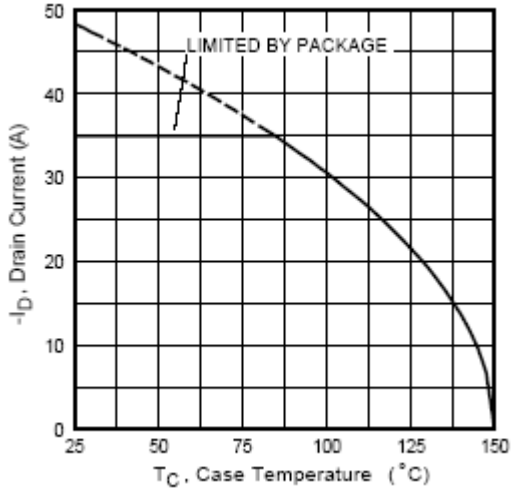

2N7424

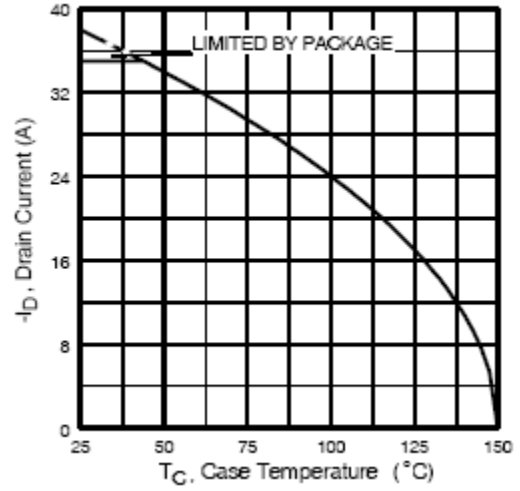

2N7425

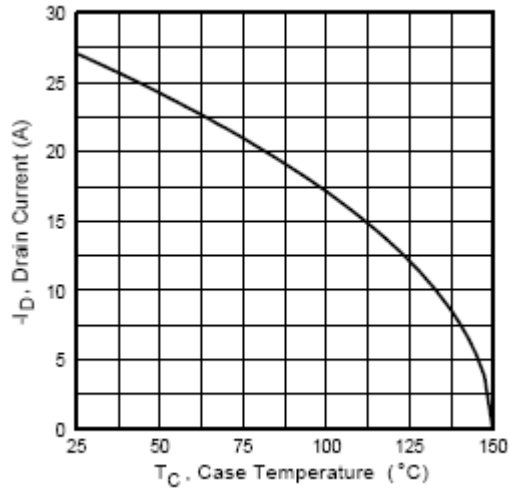

2N7426

FIGURE 3. Maximum drain current versus temperature graphs.

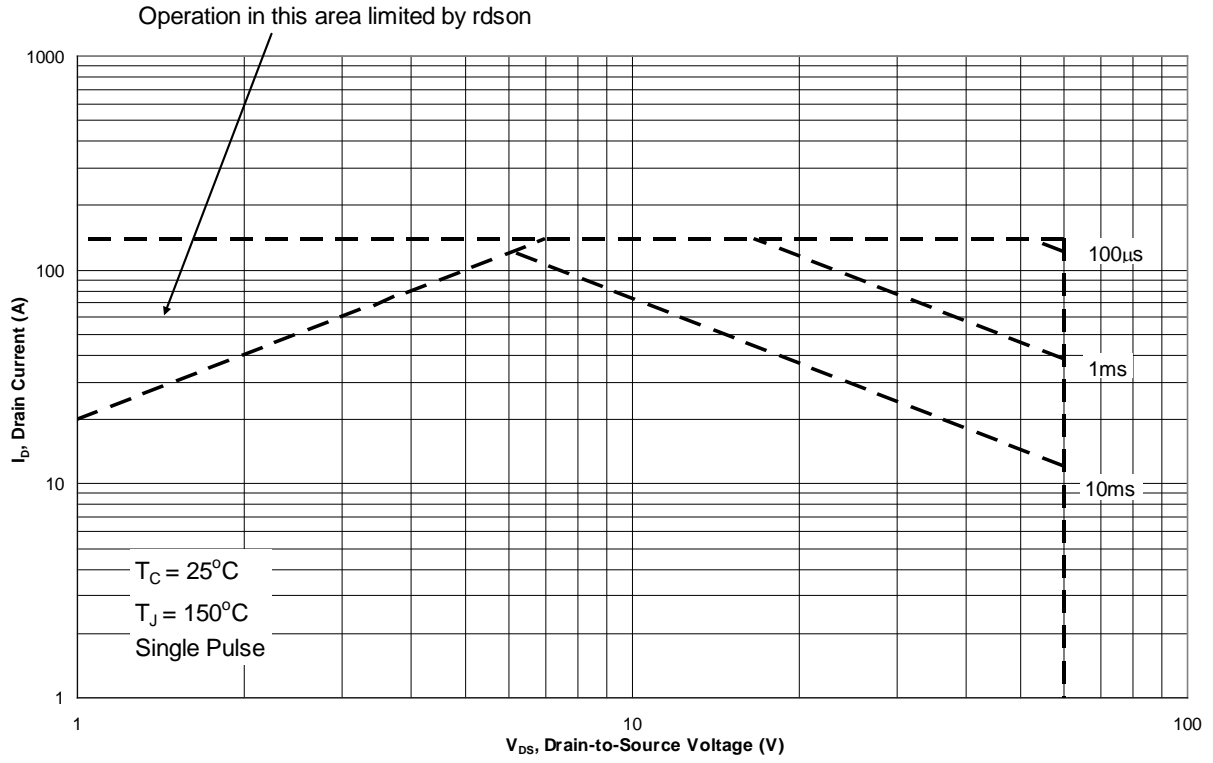


FIGURE 4. Safe operating area graph (2N7424).

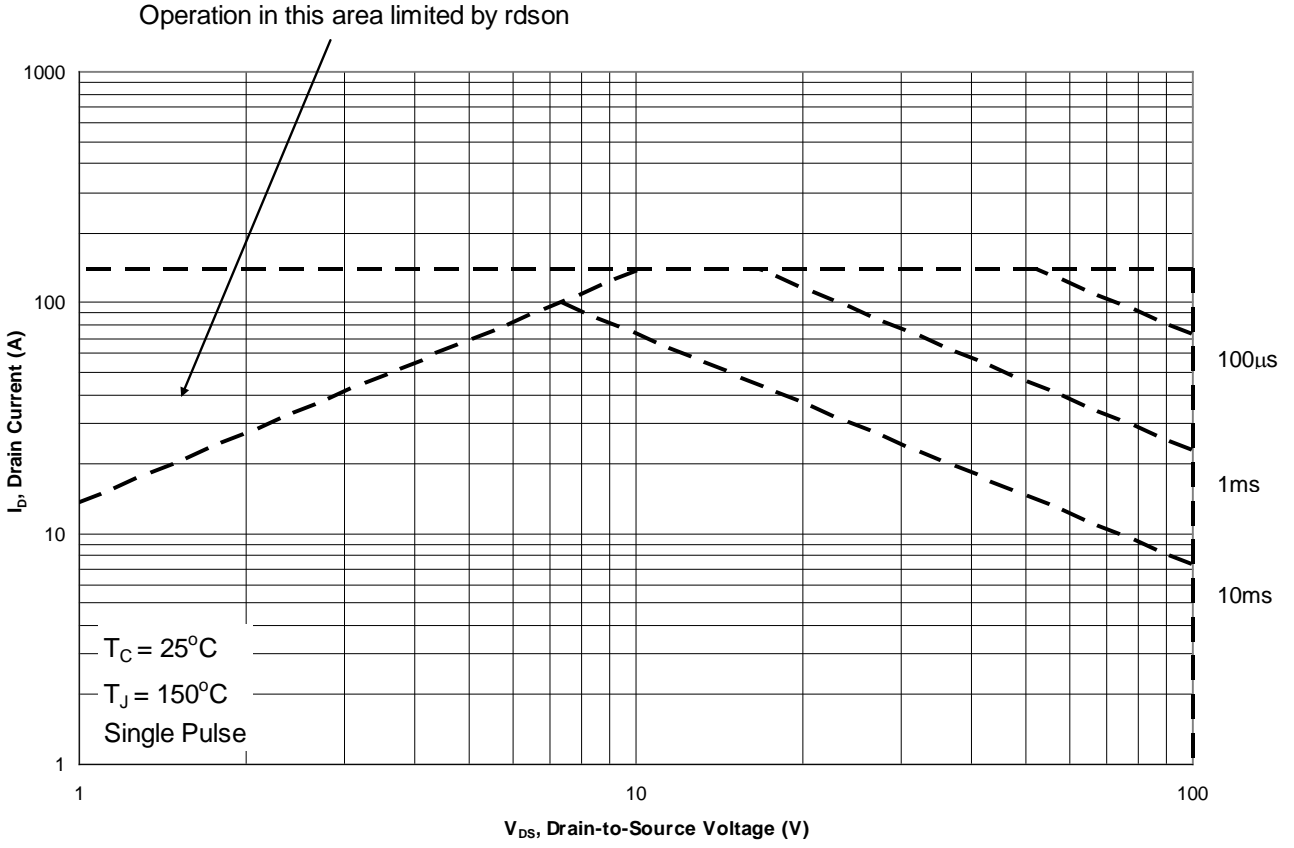


FIGURE 4. Safe operating area graph (2N7425).

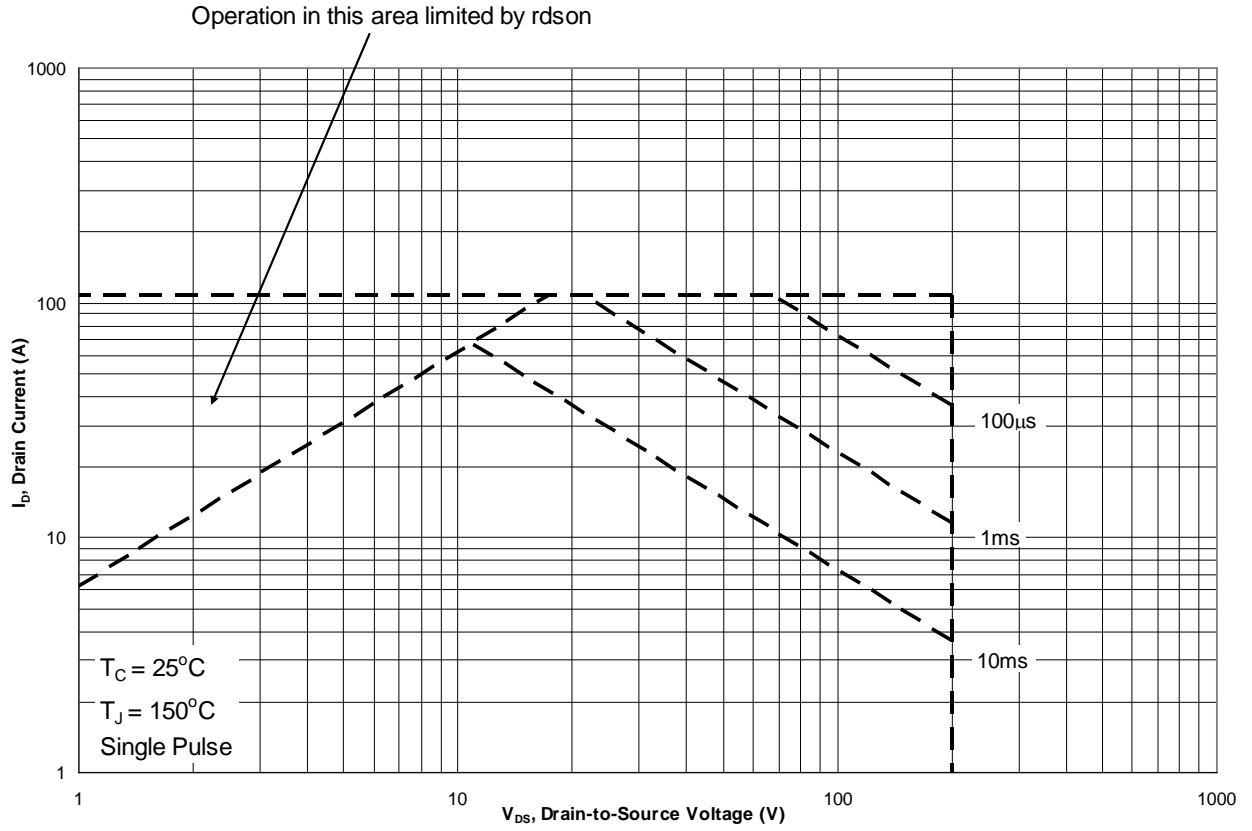


FIGURE 4. Safe operating area graph (2N7426).

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in [MIL-PRF-19500](#) are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

- a. Title, number, and date of this specification.
- b. Packaging requirements (see 5.1).
- c. Lead finish (see 3.4.1).
- d. Product assurance level and type designator.
- e. For acquisition of RHA designated devices, [table II](#), subgroup 1 testing of group D herein is optional. If subgroup 1 is desired, it should be specified in the contract.
- f. If specific SEE characterization conditions are desired (see section 6.6 and [table IV](#)), manufacturer's cage code should be specified in the contract or order.
- g. If SEE testing data is desired, it should be specified in the contract or order.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at <https://assist.dla.mil>.

6.4 Cross-reference list. The following table shows the generic P/N and its associated military P/N (without JAN and RHA prefix).

Generic P/N	Military P/N
IRHM9064	2N7424
IRHM9160	2N7425
IRHM9260	2N7426

6.5 JANC die versions. The JANHC and JANKC die versions of these devices are covered under specification sheet [MIL-PRF-19500/657](#).

6.6 Application data.

6.6.1 Manufacturer specific irradiation data. Each manufacturer qualified to this slash sheet has characterized its devices to the requirements of [MIL-STD-750](#) method 1080 and as specified herein. Since each manufacturer's characterization conditions can be different and can vary by the version of method 1080 qualified to, the [MIL-STD-750](#) method 1080 revision version date and conditions used by each manufacturer for characterization have been listed here (see [table IV](#)) for information only. SEE conditions and figures listed in section 6 are current as of the date of this specification sheet, please contact the manufacturer for the most recent conditions.

* TABLE IV. Manufacturers characterization conditions.

Manufactures cage	Inspection	MIL-STD-750		Sample plan
		Method	Conditions	
No manufacturers are currently qualified to the SEE requirements	SEE <u>1/</u> Electrical measurements	1080	See MIL-STD-750E method 1080 I_{GSSF1} , I_{GSSR1} , and I_{DSS1} in accordance with table I , subgroup 2	3 devices
	Electrical measurements		I_{GSSF1} , I_{GSSR1} , and I_{DSS1} in accordance with table I , subgroup 2	
Upon qualification, all manufacturers will provide the verification test conditions to be added to this table.				

1/ I_{GSSF1} , I_{GSSR1} , and I_{DSS1} was examined before and following SEE irradiation to determine acceptability for each bias condition. Other test conditions in accordance with [table I](#), subgroup 2, may be performed at the manufacturer's option.

6.7 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA
DLA - CC

Preparing activity:
DLA - CC

(Project 5961-2013-116)

Review activity:
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.