


isc Thyristors

2P6M

APPLICATIONS

- Electric blanket, electronic jar, various temperature control.
- Electric sewing machine, speed control of miniature type motor.
- Light display equipment, lamp dimmer such as a display for entertainment.
- Automatic gas lighter, battery charger.
- Solid state static switches etc.

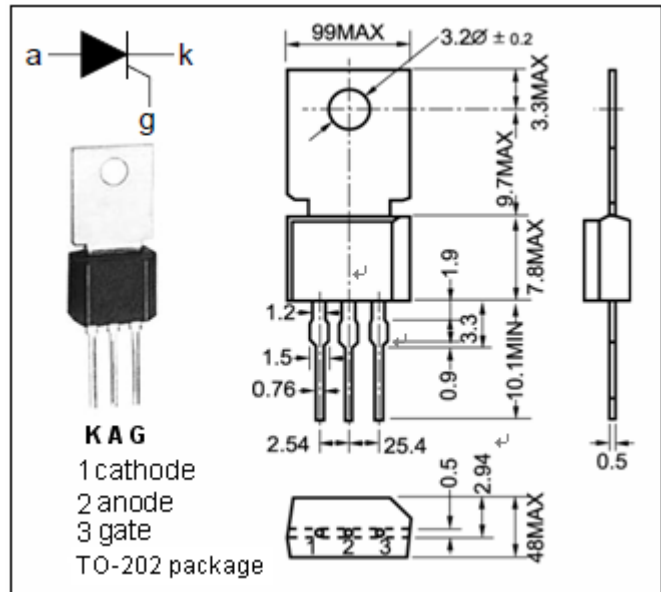

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

| SYMBOL | PARAMETER | MIN | UNIT |
|--------------------|---------------------------------------|---|------|
| V _{DRM} | Repetitive peak off-state voltage | 600 (note:R _{GK} =1k Ω) | V |
| V _{RRM} | Repetitive peak reverse voltage | 600 (note:R _{GK} =1k Ω) | V |
| I _{T(AV)} | On-state current | 2(T _c =77°C, θ =180° Single phase(1/2wave) | A |
| I _{TSM} | Surge non-repetitive on-state current | 20 | A |
| P _{GM} | Peak gate power dissipation | 0.5 (f ≥50Hz, Duty ≤10%) | W |
| P _{G(AV)} | Average gate power dissipation | 0.1 | W |
| I _{FGM} | Peak gate forward current | 0.2 (f ≥50Hz, Duty ≤10%) | A |
| V _{RGM} | Peak gate reverse voltage | 6 | V |
| T _j | Junction temperature | -40 to + 125 | °C |

ELECTRICAL CHARACTERISTICS (T_C=25°C unless otherwise specified)

| SYMBOL | PARAMETER | CONDITIONS | MIN | MAX | UNIT |
|----------------------|-----------------------------------|--|-----|-----|------|
| I _{RRM} | Repetitive peak reverse current | V _{RM} =V _{RRM} , T _j =125°C, R _{GK} =1k Ω | | 100 | μ A |
| I _{DRM} | Repetitive peak off-state current | V _{DM} =V _{DRM} , T _j =125°C, R _{GK} =1k Ω | | 100 | μ A |
| V _{TM} | On-state voltage | I _{TM} =4A | | 1.8 | V |
| I _{GT} | Gate-trigger current | V _{DM} =6V; R _L =100 Ω, R _{GK} =1k Ω | | 100 | μ A |
| V _{GT} | Gate-trigger voltage | V _{DM} =6V; R _L =100 Ω, R _{GK} =1k Ω | | 0.8 | V |
| V _{GD} | Gate non-trigger voltage | V _{DRM} =1/2V _{DRM} , T _j =125°C, R _{GK} =1k Ω | 0.2 | | V |
| I _H | Holding current | V _D =24V; R _{GK} =1k Ω, I _{TM} =4A | | 5 | mA |
| R _{th(j-c)} | Thermal resistance | Junction to case | | 10 | °C/W |