N-Channel 60-V (D-S) MOSFET

Key Features:


- Low r_{DS(on)} trench technology
- · Low thermal impedance
- · Fast switching speed

Typical Applications:

- White LED boost converters
- Automotive Systems
- Industrial DC/DC Conversion Circuits

	PRODUCT SUMMARY				
Vds	s (V)	$r_{DS(on)}(m\Omega)$	I⊳(A)		
6	50	3.8 @ V _{GS} = 10V	190 ^a		
	00	5.4 @ V _{GS} = 6V	190		





TO-263

Top View

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^{\circ}C$ UNLESS OTHERWISE NOTED)							
Parameter		Symbol	Limit	Units			
Drain-Source Voltage			60	V			
Gate-Source Voltage		V_{GS}	±20	v			
Continuous Drain Current ^a	T _C =25°C	I _D	190	А			
Pulsed Drain Current ^b		I _{DM}	700	~			
Continuous Source Current (Diode Conduction) ^a	T _C =25°C	ا _s	60	А			
Power Dissipation ^a	T _C =25°C	PD	300	W			
Operating Junction and Storage Temperature Range		T _J , T _{stg}	-55 to 175	°C			

THERMAL RESISTANCE RATINGS						
Parameter	Symbol	Maximum	Units			
Maximum Junction-to-Ambient °	R _{θJA}	62.5	°C/W			
Maximum Junction-to-Case	$R_{ extsf{ heta}JC}$	0.5	C/ VV			

Notes

- a. Package Limited
- b. Pulse width limited by maximum junction temperature
- c. Surface Mounted on 1" x 1" FR4 Board.


Electrical Characteristics

Parameter	Symbol	Test Conditions	Min	Тур	Max	Unit		
Static								
Gate-Source Threshold Voltage	V _{GS(th)}	$V_{DS} = V_{GS}, I_D = 250 \text{ uA}$	1			V		
Gate-Body Leakage	I _{GSS}	$V_{DS} = 0 V, V_{GS} = \pm 20 V$			±100	nA		
Zara Cata Maltaga Drain Comment		$V_{DS} = 48 \text{ V}, V_{GS} = 0 \text{ V}$			1	uA		
Zero Gate Voltage Drain Current	IDSS	$V_{DS} = 48 \text{ V}, V_{GS} = 0 \text{ V}, T_{J} = 55^{\circ}\text{C}$			10			
On-State Drain Current ^a	I _{D(on)}	$V_{DS} = 5 V, V_{GS} = 10 V$	237.5			Α		
Drain Course On Desistence a	r	$V_{GS} = 10 \text{ V}, \text{ I}_{D} = 20 \text{ A}$			3.8	.8 mΩ		
Drain-Source On-Resistance ^a	r _{DS(on)}	$V_{GS} = 4.5 \text{ V}, \text{ I}_{D} = 16 \text{ A}$	4.5 V, I _D = 16 A		5.4	11122		
Forward Transconductance ^a	g _{fs}	$V_{DS} = 30 \text{ V}, \text{ I}_{D} = 20 \text{ A}$		68		S		
Diode Forward Voltage ^a	V _{SD}	$I_{S} = 30 \text{ A}, V_{GS} = 0 \text{ V}$		0.84		V		
		Dynamic ^b						
Total Gate Charge	Qg	$V_{DS} = 30 \text{ V}, \text{ V}_{GS} = 6 \text{ V},$		51		nC		
Gate-Source Charge	Q_{gs}	$V_{DS} = 30 V, V_{GS} = 6 V,$ $I_{D} = 2 A$		17				
Gate-Drain Charge	Q_gd	10 - 2 A		22				
Turn-On Delay Time	t _{d(on)}	$V_{DS} = 30 \text{ V}, \text{ R}_1 = 15 \Omega,$		29		ns		
Rise Time	t _r	$V_{DS} = 30 V, K_{L} = 15 \Omega,$ $I_{D} = 2 A,$		28				
Turn-Off Delay Time	t _{d(off)}	$V_{\text{GEN}} = 10 \text{ V}, \text{ R}_{\text{GEN}} = 6 \Omega$		72				
Fall Time	t _f	$V_{\text{GEN}} = 10$ V, $N_{\text{GEN}} = 0.22$		104				
Input Capacitance	C _{iss}			4092				
Output Capacitance	C _{oss}	$V_{DS} = 30, V_{GS} = 0 V, f = 1 Mhz$		2162		pF		
Reverse Transfer Capacitance	C _{rss}			109				

Notes


- a. Pulse test: PW <= 300us duty cycle <= 2%.
- b. Guaranteed by design, not subject to production testing.

Analog Power (APL) reserves the right to make changes without further notice to any products herein. APL makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does APL assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in APL data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. APL does not convey any license under its patent rights nor the rights of others. APL products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the APL product could create a situation where personal injury or death may occur. Should Buyer purchase or use APL products for any such unintended or unauthorized application, Buyer shall indemnify and hold APL and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that APL was negligent regarding the design or manufacture of the part. APL is an Equal Opportunity/Affirmative Action Employer.

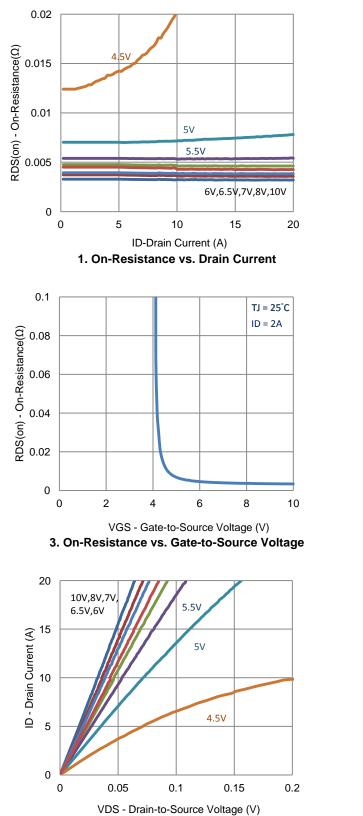


5. Output Characteristics

Typical Electrical Characteristics

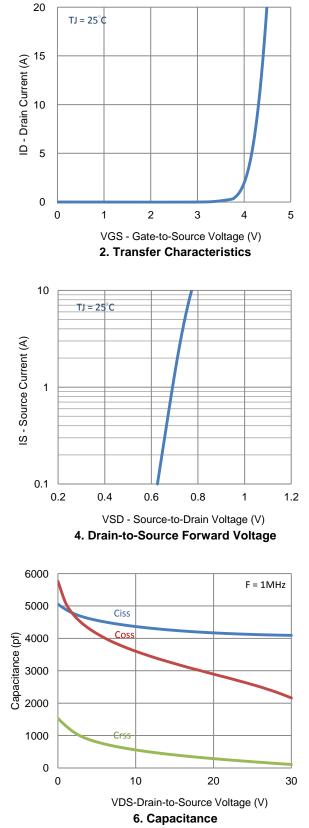


© Preliminary

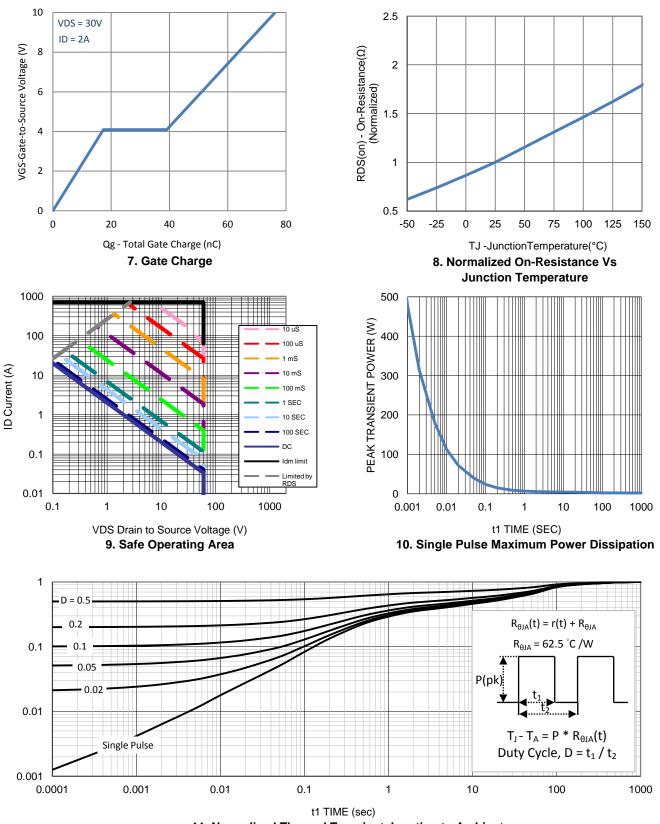



Typical Electrical Characteristics

11. Normalized Thermal Transient Junction to Ambient

Package Information







	DIMENSIONAL REQMIS			INCH	INCHES REQMTS			
SYMBOL	MIN	NDM	MAX	MIN	NDM	MAX		
A	4,30	4.57	4,72	0.169	0.180	0.186		
A1	0		0.25	0		0.010		
A2	2,47	2,57	2,67	0,097	0.101	0.105		
ø	0.69	0,813	0.94	0.027	0.032	0.037		
b2	1.17	1.27	1,45	0.046	0.050	0.057		
С	0.48	0,50	0,60	0.019	0.020	0.024		
c2	1,17	1.27	1.37	0.046	0.050	0,054		
D	9,80	10.05	10.30	0.386	0,396	0.406		
D1	8,64	8.78	9,65	0.340	0.346	0,380		
D2	7.12	7.37	7,62	0.280	0,290	0.300		
E	9,70	10.15	10.54	0,382	0.400	0.415		
E1	8,00	8,20	8,40	0,315	0,323	0.331		
e	2.	54 BSC		0.100 BSC				
н	14.99	15.24	15,49	0.590	0.600	0.610		
L	1.78	2,29	2,79	0.070	0.090	0.110		
L1	1,02	1.27	1.52	0.040	0.050	0.060		
L2			1.75			0.069		
L3		0,254			0.010			
θ	0°		8*	0*		8*		