

2PG402

Insulated Gate Bipolar Transistor

■ Features


- High breakdown voltage: $V_{CES} = 400V$
- Allowing to control large current: $I_{C(peak)} = 130A$
- Housed in the surface mounting package

■ Applications

- For flash-light for use in a camera

■ Absolute Maximum Ratings ($T_C = 25^\circ C$)

Parameter	Symbol	Rated	Unit	
Collector to emitter voltage	V_{CES}	400	V	
Gate to emitter voltage	V_{GES}	± 8	V	
Collector current	DC	I_C	5	A
	Pulse	I_{CP}	130	A
Allowable power dissipation	$T_C = 25^\circ C$	P_C	10	W
	$T_a = 25^\circ C$		1	
Channel temperature	T_{ch}	150	$^\circ C$	
Storage temperature	T_{stg}	-55 to +150	$^\circ C$	

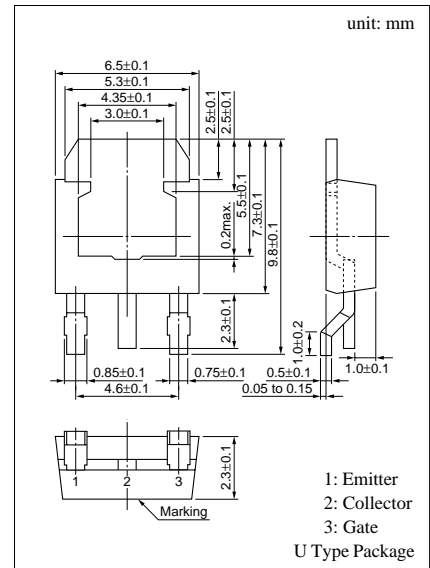

■ Electrical Characteristics ($T_C = 25^\circ C$)

Parameter	Symbol	Conditions	min	typ	max	Unit	
Collector to emitter cut-off current	I_{CES}	$V_{CE} = 320V, V_{GE} = 0$			10	μA	
Gate to emitter leakage current	I_{GES}	$V_{GE} = \pm 8V, V_{CE} = 0$			± 1	μA	
Collector to emitter breakdown voltage	V_{CES}	$I_C = 1mA, V_{GE} = 0$	400			V	
Gate threshold voltage	$V_{GE(th)}$	$V_{CE} = 10V, I_C = 1mA$	0.5		1.5	V	
Collector to emitter saturation voltage	$V_{CE(sat)}$	$V_{GE} = 5V, I_C = 5A$			2	V	
		$V_{GE} = 5V, I_C = 130A$			10		
Input capacitance (Common Emitter)	C_{ies}	$V_{CE} = 10V, V_{GE} = 0, f = 1MHz$		1930		pF	
Turn-on time (delay time)	$t_{d(on)}$	$V_{CC} = 300V, I_C = 130A$		130		ns	
Rise time	t_r			1.4		μs	
Turn-off time (delay time)	$t_{d(off)}$		$V_{GE} = 5V, R_g = 25\Omega$		350		ns
Fall time	t_f				1.5		μs

